MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR FRAME, TYPE IV, DUAL INLINE PACKAGE (DIP)

This specification is approved for use within Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of the following specification listed in that issue of the Department of Defense Index of Specifications (DODISS) specified in the solicitation: MIL-C-28754.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:53Z
Check the source to verify that this is the current version before use.

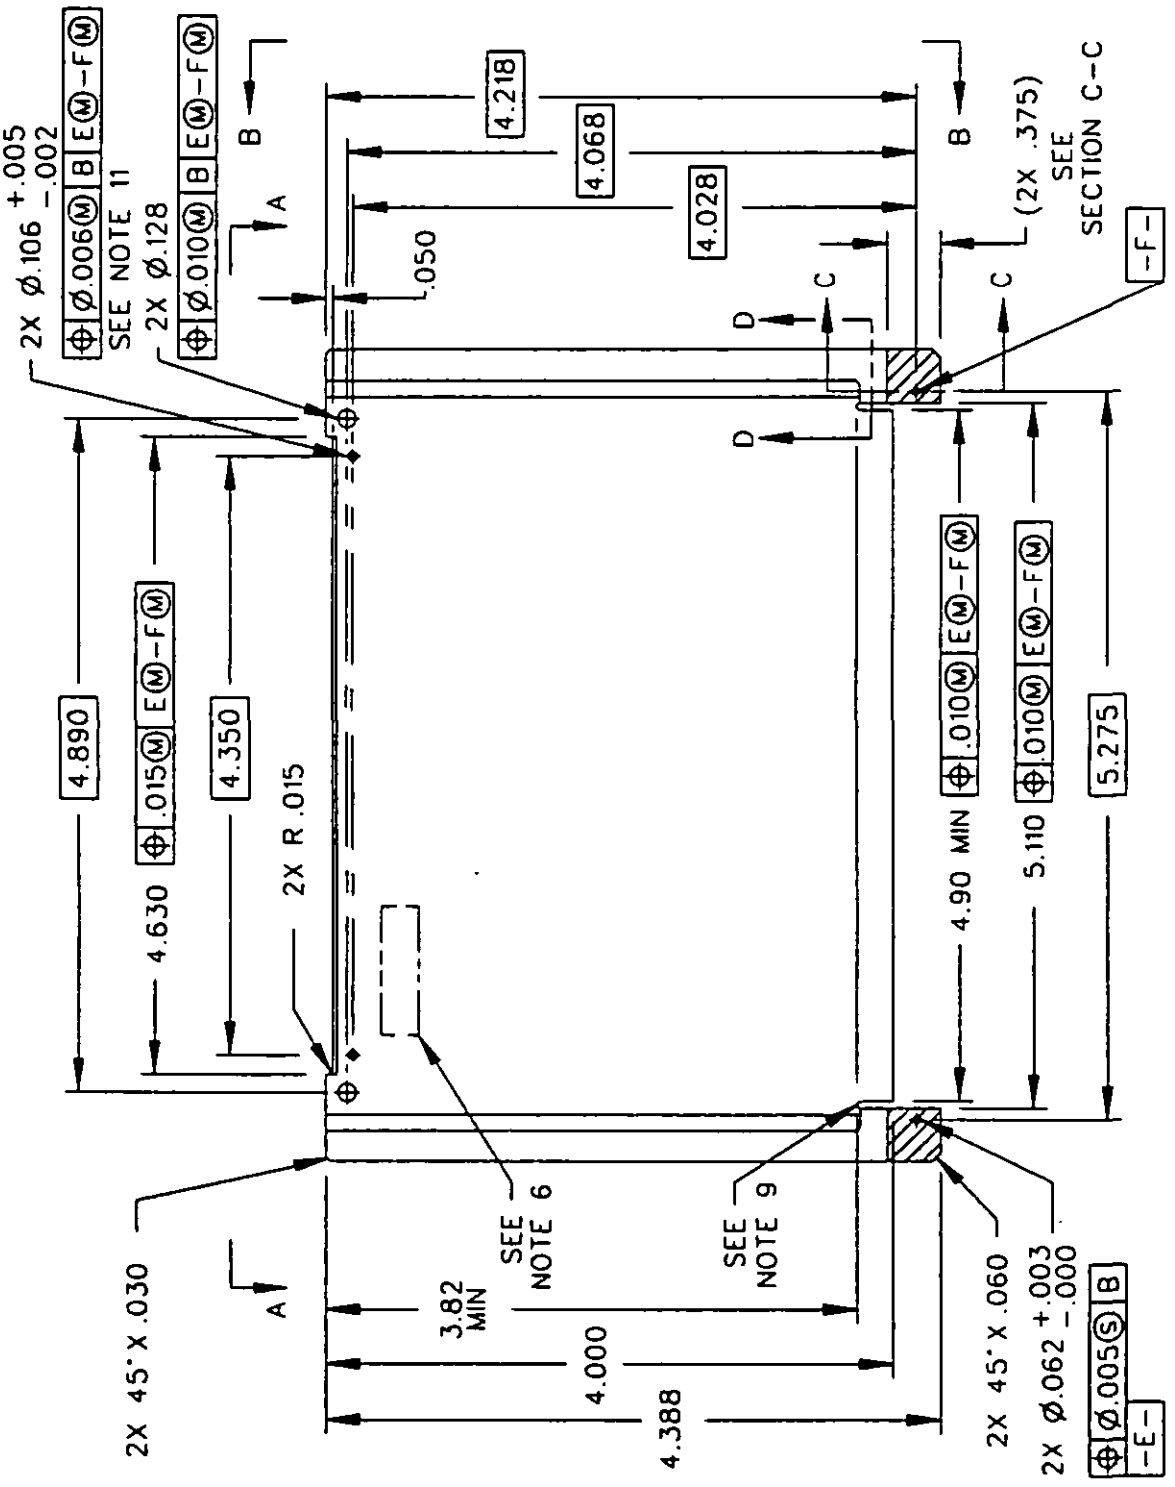


FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:53Z
Check the source to verify that this is the current version before use.

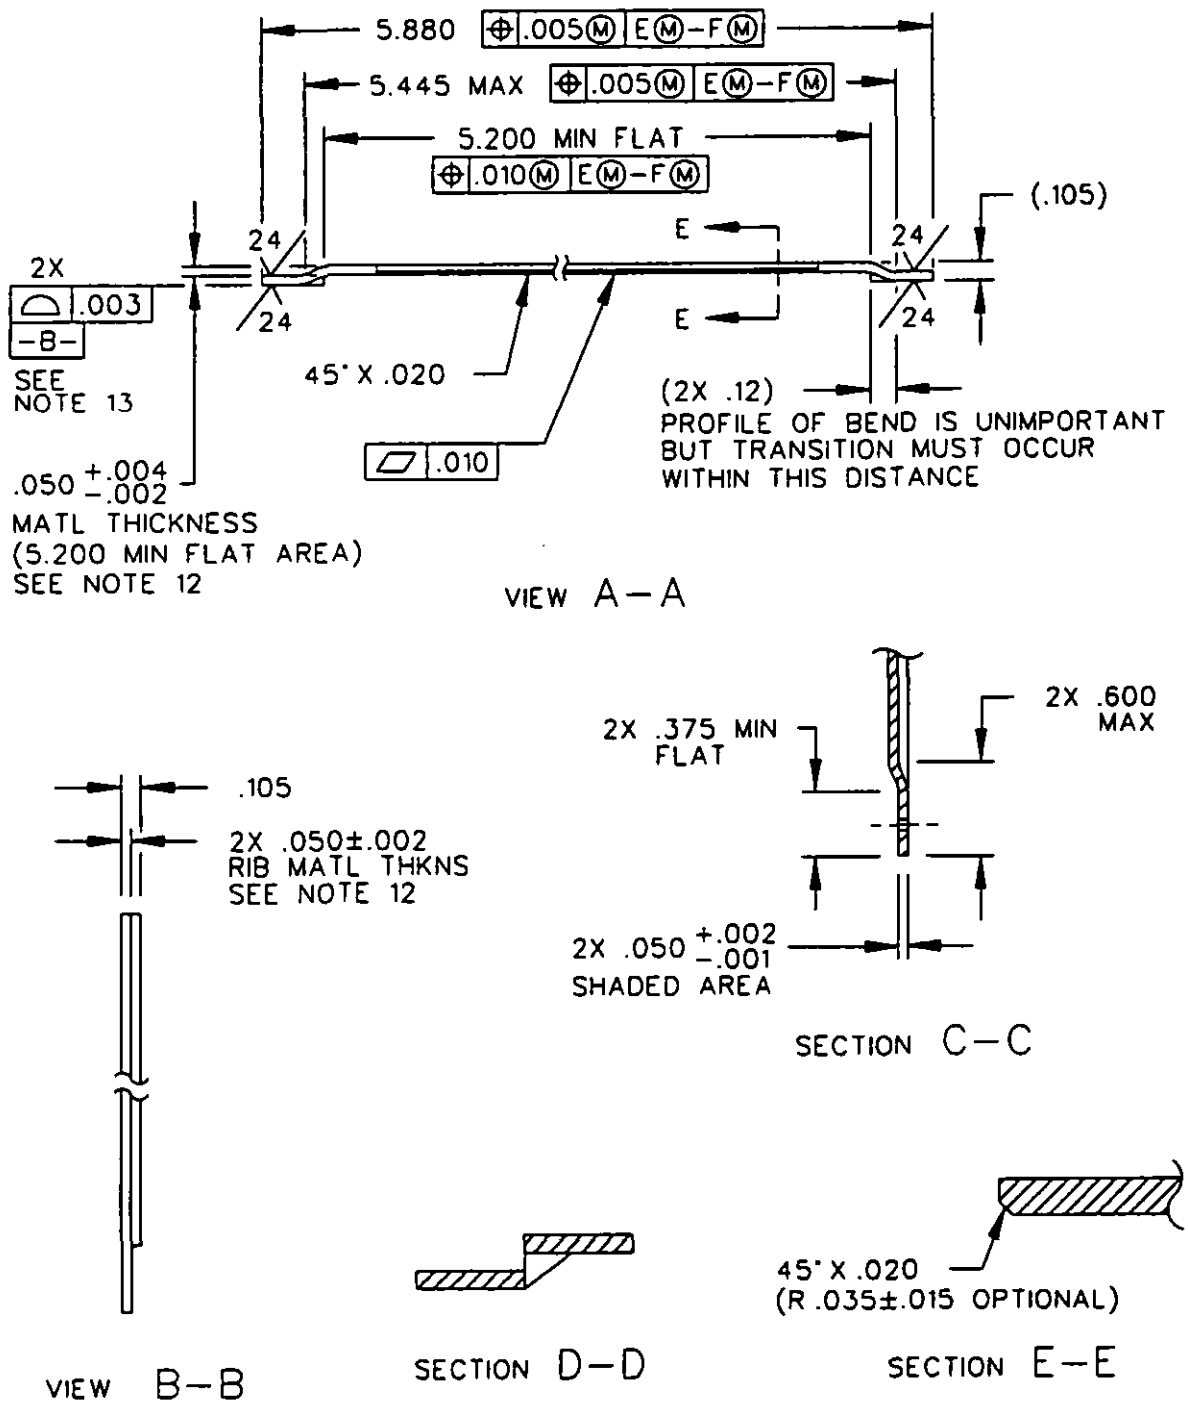


FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:53Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
0.000024	0.0006	0.030	0.76	0.172	4.37	4.630	117.60
0.001	0.03	0.035	0.89	0.375	9.53	4.890	124.21
0.002	0.05	0.050	1.27	0.600	15.24	4.900	124.46
0.003	0.08	0.060	1.52	3.820	97.03	5.110	129.79
0.004	0.10	0.062	1.58	4.000	101.60	5.200	132.08
0.005	0.13	0.073	1.85	4.028	102.31	5.275	133.99
0.006	0.15	0.105	2.67	4.068	103.33	5.445	138.30
0.010	0.25	0.106	2.69	4.218	107.14	5.880	149.35
0.015	0.38	0.120	3.05	4.350	110.49		
0.020	0.51	0.128	3.25	4.388	111.46		

NOTES:

1. Dimensions are in inches.

2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

3. Unless otherwise specified, tolerances are plus or minus 0.005 (0.13 mm) inch for three place decimals, plus or minus 0.01 (0.3 mm) inch for two place decimals and plus or minus 5° for angles.

4. Unless otherwise specified, all corner radii shall be 0.02 (0.51 mm) inch radius maximum.

5. Dimensional limits apply after plating.

6. Mark part number, revision letter, manufacturer's code ident and date code in 0.12 (3.0 mm) plus or minus 0.020 (0.51 mm) inch high gothic characters at approximate location shown. Use black epoxy ink per ink per MIL-I-43553. Mark in accordance with MIL-STD-130.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:53Z
Check the source to verify that this is the current version before use.

7. The frame must be straight and flat to meet the requirements of the drawing prior to plating. No straightening or bending is permitted after plating.

8. Break sharp edges 0.005 (0.13 mm) maximum and remove all burrs.

9. When fabricating all holes, slots and other cutouts in the frame material, care has to be taken to produce features that are not prone to fracture propagation, for example, all slots are to end in a smooth radius feature, and hole surfaces are to be smooth. Break all sharp edges and polish all edges, corners, and hole circumferences.

10. Each user shall specify locations and size of cutouts to accommodate components. All cutouts and holes shall be incorporated into the connector frame prior to stress relief and plating.

11. These holes are to be used as racking points for plating. The use of any other racking point is not permitted.

12. Thickness is that of the finished part including all platings and coatings.

13. Surfaces shall include the shaded areas (2 places).

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material: Copper C11000, H03 temper, per ASTM B152.

Finish: Surface roughness per ANSI B46.1. Plating shall be electroless nickel per MIL-C-26074, five percent phosphorous minimum, class 1, grade A, 0.0015 (0.04 mm) plus or minus 0.0005 (0.013 mm). Within four hours after plating, oven bake at 135, plus or minus 6°C for two hours for hydrogen relief and adhesion. Apply chromate conversion solution per MIL-C-5541, class 1A, yellow.

Examination: One frame from each plating lot shall be exposed to salt fog per MIL-STD-1344, Method 1001, test condition B, and one frame shall be exposed to oven bake at 190, plus or minus 6°C for 60 to 90 minutes. Examine each frame, using 6 to 10 power magnification, for loose or blistered coating. Examination results shall be delivered with each order. The examined frames shall be retained by the plater for a period of 6 months.

Stress relief: Frame shall receive the following bake cycle prior to plating and after all fabrication steps. (Bending, machining, deburring, etc.) 190, plus or minus 6°C for 90, plus or minus 10 minutes.

Military part number: M28754/86

Qualification information: The frame shall meet the following qualification tests of MIL-C-28754, table IV, type IV: Subgroup I, Visual and mechanical examination; Subgroup II, Vibration, Visual and Mechanical Inspection; Subgroup III, Salt spray, Visual and mechanical examination; Subgroup IV, Shock, Fin/header torque, Fin cantilever load, rib strength, Visual and Mechanical examination.

Number of units to be inspected: 12 units of each dash number to be qualified shall be inspected.

Supersession data: Supersedes Naval Sea Systems Command Drawing Number 5919381, Code Identification Number 53711.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:53Z
Check the source to verify that this is the current version before use.

Custodians:
NAVY - SH

User activities:
NAVY - AS

Agent:
NWSC, Crane

Preparing activity:
NAVY - SH

(Project: 5935-N336-08)

☆U.S. GOVERNMENT PRINTING OFFICE: 1989 - 604-033/12654

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:53Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-28754/86	Connectors, Electrical, Modular, Connector Frame, Type IV, Dip

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:53Z
Check the source to verify that this is the current version before use.