MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR FRAME, TYPE IV, CENTER


This specification is approved for use within Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-28754.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:53Z
Check the source to verify that this is the current version before use.

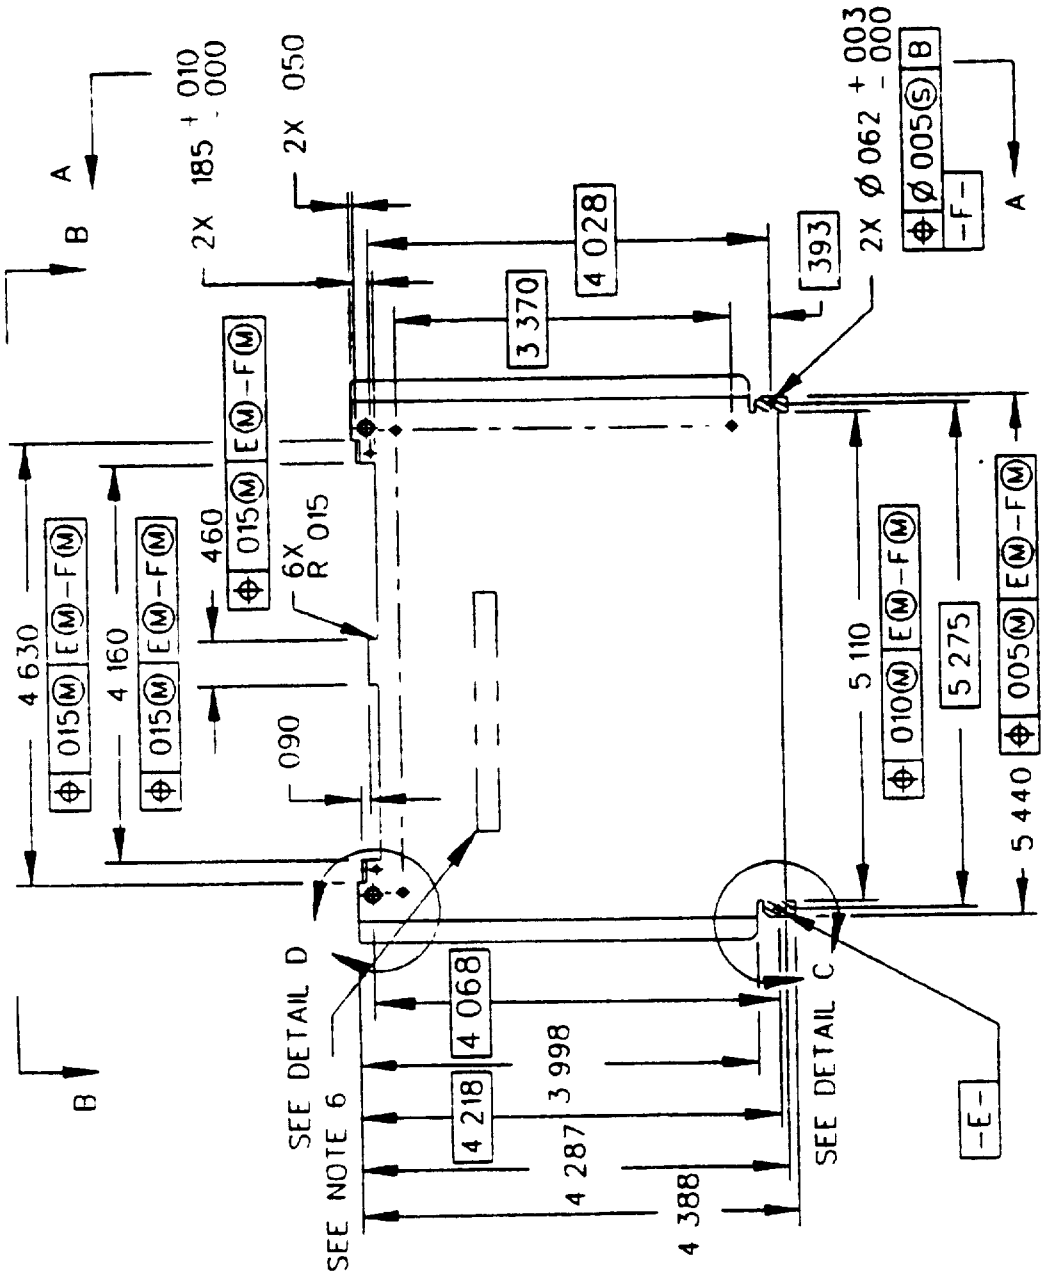

CUT-OUT CONFIGURATION FOR DASH NO 01

FIGURE 1 Dimensions and configuration


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:53Z
Check the source to verify that this is the current version before use.

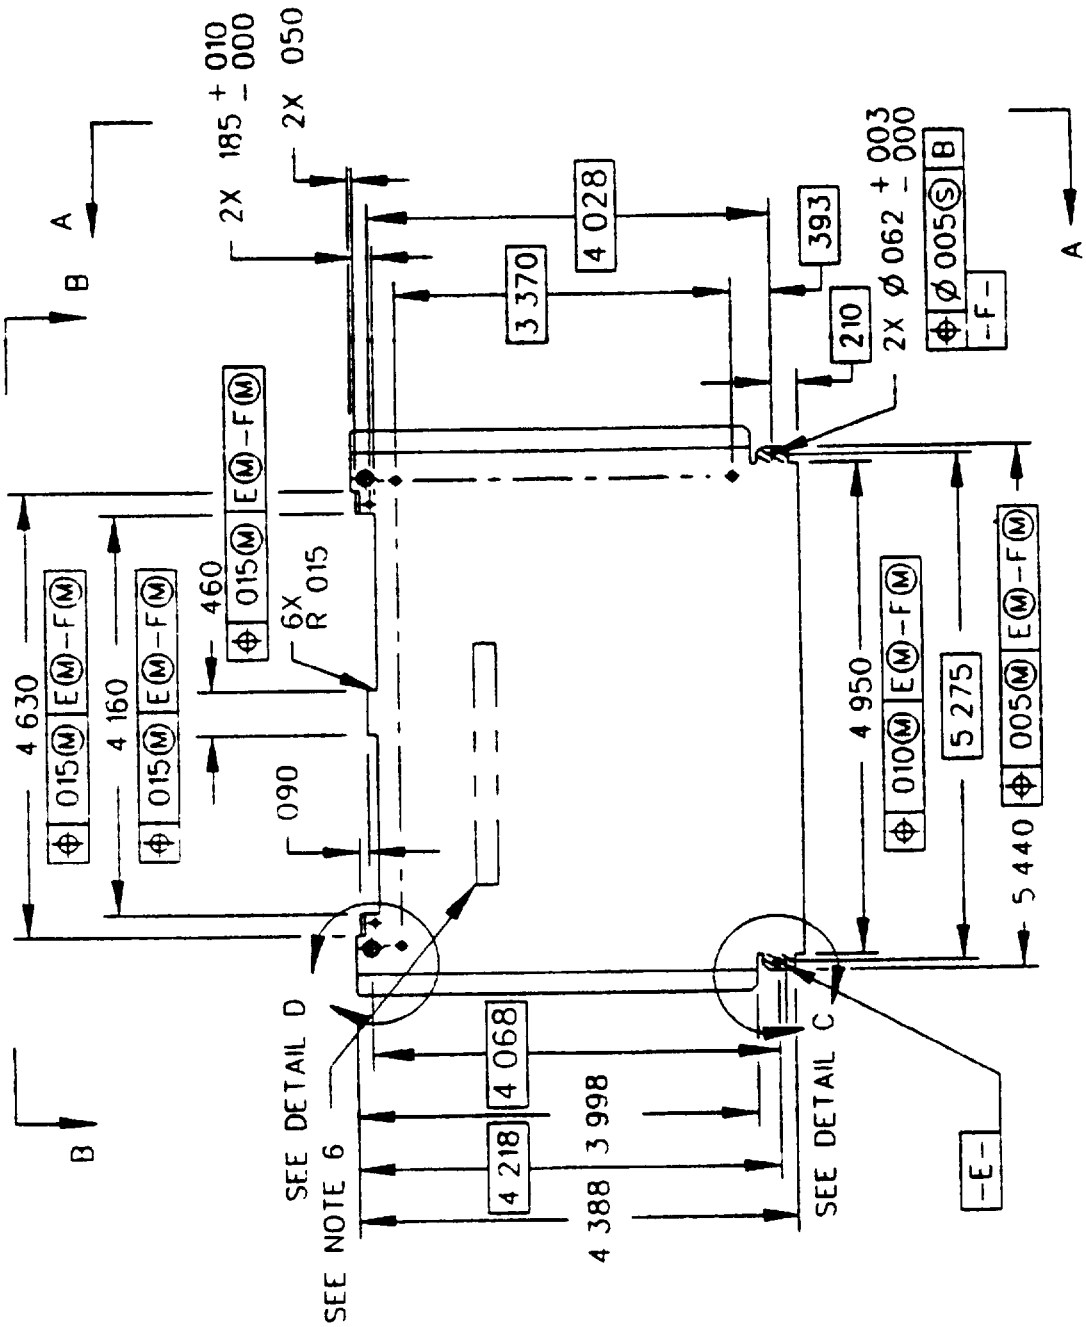


TAB CONFIGURATION FOR DASH NO 02

FIGURE 1 Dimensions and configuration - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:53Z
Check the source to verify that this is the current version before use.

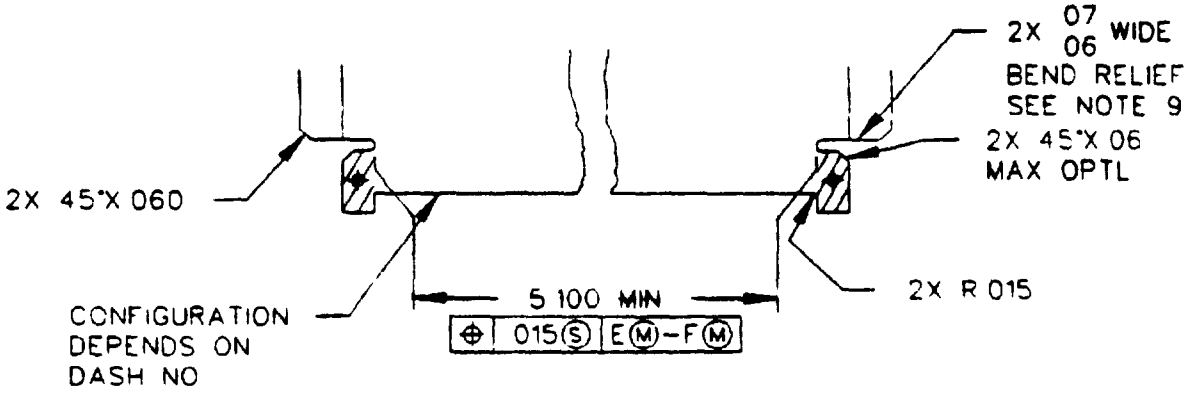


DETAIL C

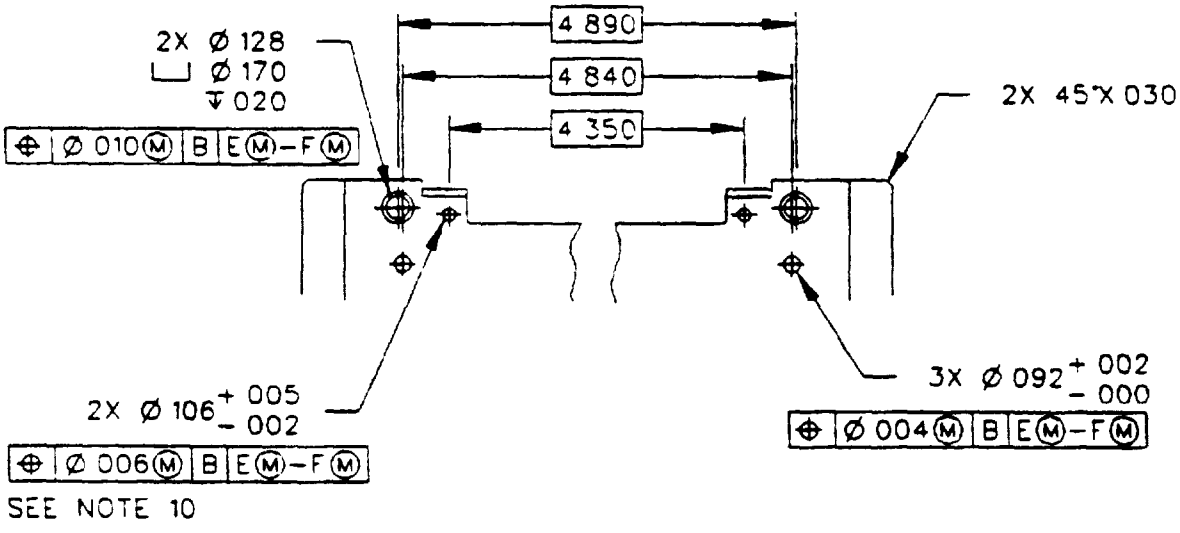


DETAIL D

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:53Z
Check the source to verify that this is the current version before use.

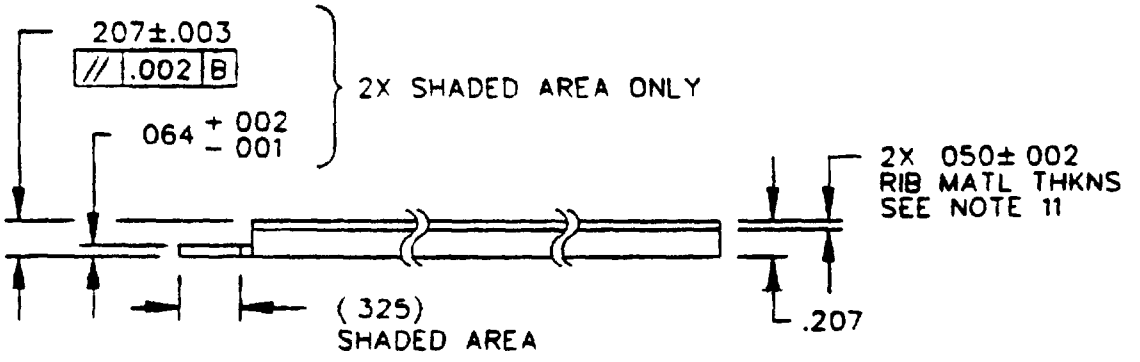

VIEW A–A
ROTATED 90° CW

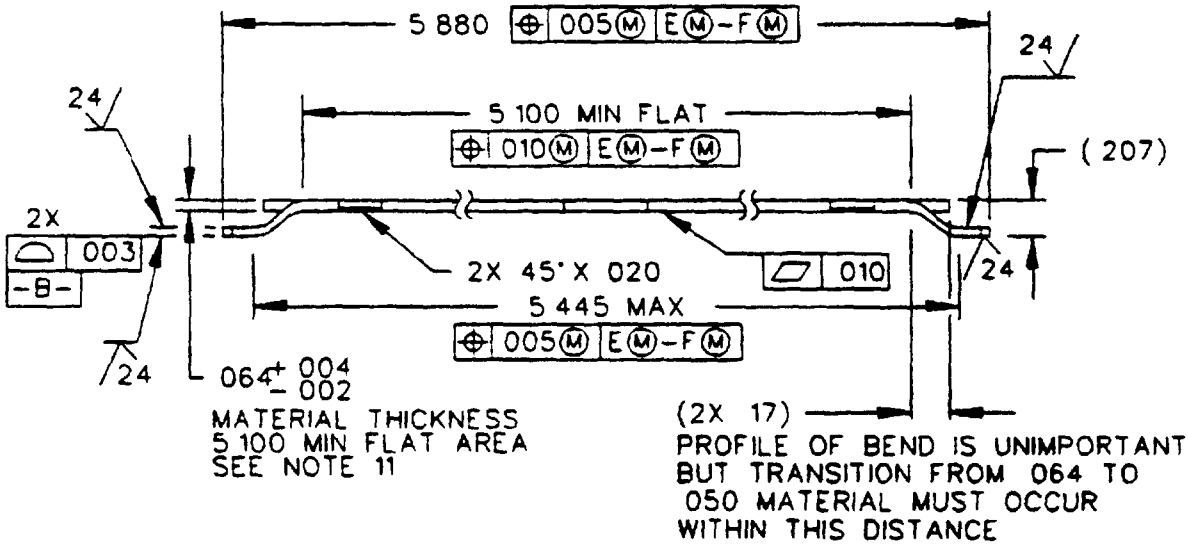

VIEW B–B

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:53Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
0.000024	0.0006	0.060	1.52	0.170	4.32	4.350	110.49
0.001	0.03	0.062	1.58	0.185	4.70	4.388	111.46
0.002	0.05	0.064	1.63	0.207	5.26	4.630	117.60
0.003	0.08	0.070	1.78	0.325	8.26	4.840	122.94
0.004	0.10	0.073	1.85	0.393	9.98	4.890	124.21
0.005	0.13	0.090	2.29	0.460	11.68	5.100	129.54
0.006	0.15	0.092	2.34	1.850	46.99	5.110	129.79
0.010	0.25	0.101	2.57	3.370	85.60	5.275	133.99
0.015	0.38	0.106	2.69	3.998	101.55	5.445	138.31
0.020	0.51	0.128	3.25	4.160	105.66	5.880	149.35
0.030	0.76	0.140	3.56	4.218	107.14		
0.050	1.27	0.150	3.81	4.287	108.89		

NOTES:

1. Dimensions are in inches.

2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

3. Unless otherwise specified, tolerances are plus or minus 0.005 (0.13 mm) inch for three place decimals, plus or minus 0.01 (0.3 mm) inch for two place decimals and plus or minus 5° for angles.

4. Unless otherwise specified, all corner radii shall be 0.02 (0.51 mm) inch radius maximum.

5. Dimensional limits apply after plating.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:53Z
Check the source to verify that this is the current version before use.

6. Mark part number, revision letter, manufacturer's code ident and date code in 0.12 (3.0 mm) plus or minus 0.020 (0.51 mm) inch high gothic characters at approximate location shown. Use black epoxy ink per MIL-I-43553. Mark in accordance with MIL-STD-130.

7. The frame must be straight and flat to meet the requirements of the drawing prior to plating. No straightening or bending is permitted after plating.

8 Break sharp edges 0.005 (0.13 mm) maximum and remove all burrs.

9. Break all sharp edges and polish all edges, corners, and hole circumferences, when fabricating all holes, slots and other cutouts in the frame material. Care has to be taken to produce features that are not prone to fracture propagation. For example, all slots are to end in a smooth radius feature, and hole surfaces to be smooth.

10. These holes are to be used as racking points for plating. The use of any other racking point is not permitted.

11. Thickness is that of the finished part including all platings and coatings.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material: Copper C11000, H03 temper, per ASTM B152.

Finish: Surface roughness per ANSI B46.1. Plating shall be electroless nickel per MIL-C-26074, five percent phosphorous minimum, Class 1, Grade A, 0.0015 (0.04 mm) plus or minus 0.0005 (0.013 mm). Within four hours after plating, oven bake at 135, plus or minus 6°C for two hours for hydrogen relief and adhesion. Apply chromate conversion solution per MIL-C-5541, Class 1A, yellow.

Examination: One frame from each plating lot shall be exposed to salt fog as specified in MIL-STD-1344, Method 1001, test condition B, and one frame shall be exposed to oven bake at 190, plus or minus 6°C for 60 to 90 minutes. Examine each frame, using 6 to 10 power magnification, for loose or blistered coating. Examination results shall be delivered with each order. The examined frames shall be retained by the plater for a period of 6 months.

Stress relief: Frame shall receive the following bake cycle prior to plating and after all fabrication steps (bending, machining, and deburring), 375, plus or minus 10°F (190, plus or minus 6°C) for 90, plus or minus 10 minutes.

Military part number: M28754/87- (Dash number from table I)

TABLE I. Dash numbers.

DASH NUMBER	MATERIAL	FINISH	CONFIGURATION
01	Copper	Nickel	CUT-OUT
02	Copper	Nickel	TAB

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:53Z
Check the source to verify that this is the current version before use.

Qualification information: The frame shall meet the following qualification tests of MIL-C-28754, table IV, type IV: Subgroup I, Visual and Mechanical examination; Subgroup II, Vibration, Visual and Mechanical examination; Subgroup III, Salt spray, Visual and Mechanical examination; Subgroup IV, Shock, Fin/header torque, Fin cantilever load, Rib strength, Visual and Mechanical examination.

Number of units to be inspected: 12 units of each dash number to be qualified shall be inspected.

Supersession data: Supersedes Naval Sea Systems Command Drawing Number 5516560, Code Identification Number 53711.

Custodians:
NAVY - SH

User activities:
NAVY - AS

Agent:
NWSC, Crane

Preparing activity:
NAVY - SH

(Project: 5935-N336-09)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:53Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FO[RM] CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-28754/87	Connectors, Electrical, Modular, Connector Frame, Type IV, Center

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS *(Street, City, State, ZIP Code)*

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)* _____

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:53Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 55Z3)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 55Z3)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:53Z
Check the source to verify that this is the current version before use.