MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR FRAME,
TYPE IV, DOUBLE SPAN, T-DIP

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-C-28754


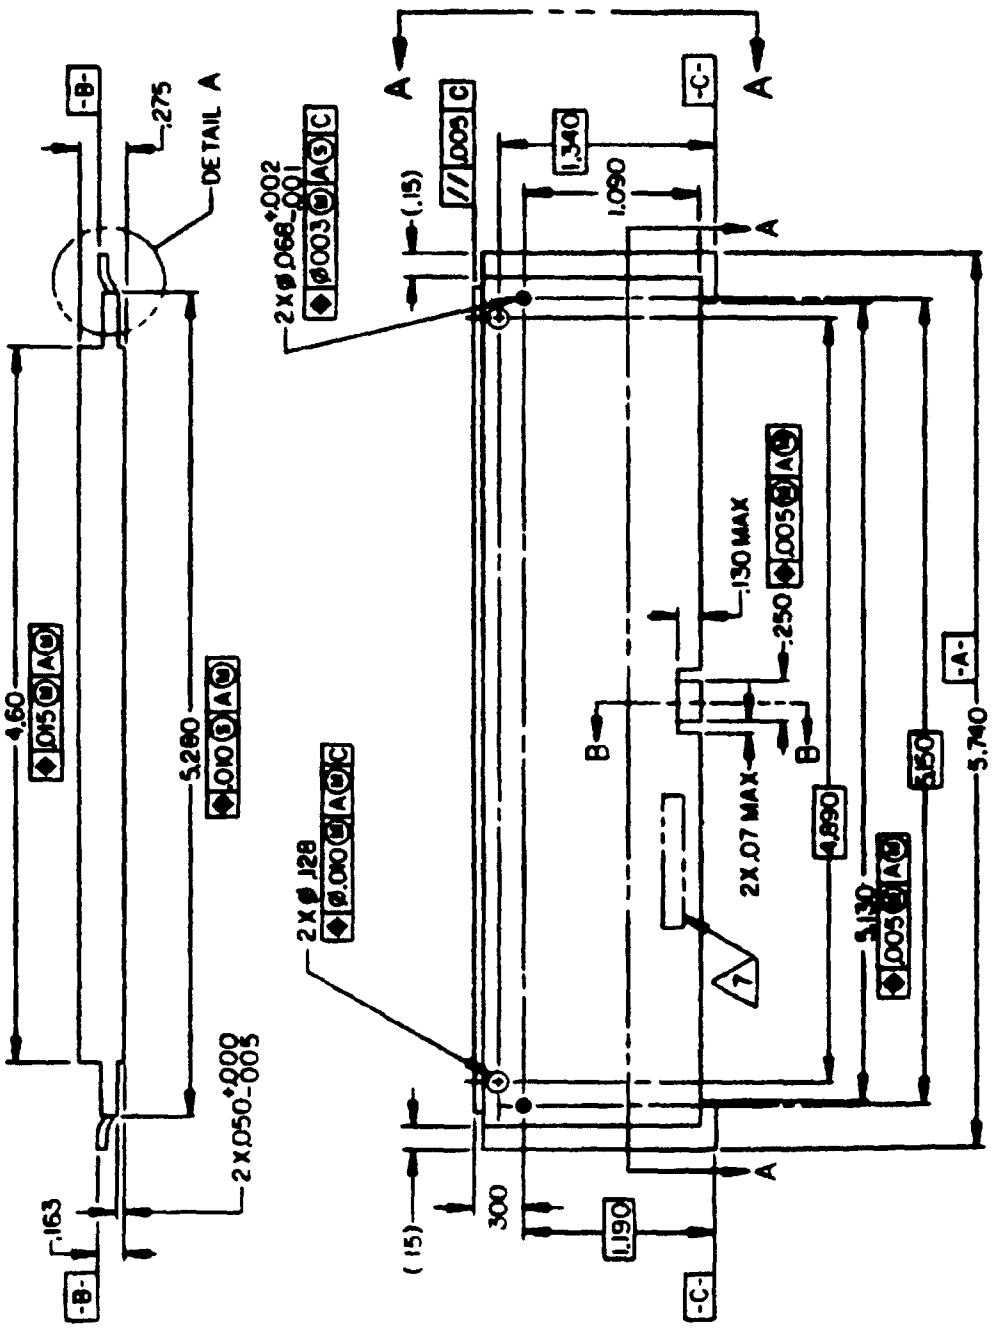



FIGURE 1. Dimensions and configurations




FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:49Z
Check the source to verify that this is the current version before use.

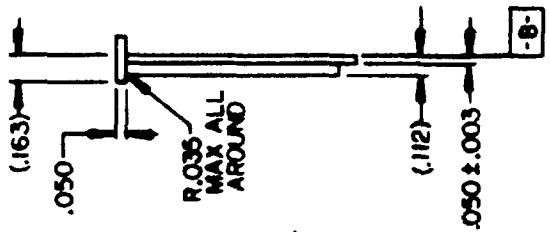



VIEW A-A

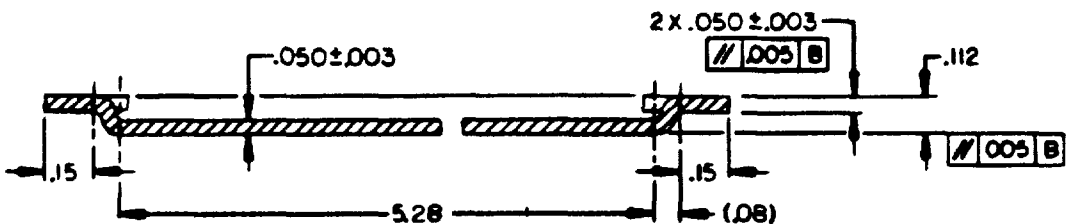



MINIMUM SUBSTRATE SURFACE

SECTION A-A

2 X PROFILE OF BEND IS UNIMPORTANT BUT TRANSITION MUST OCCUR WITHIN THIS DISTANCE

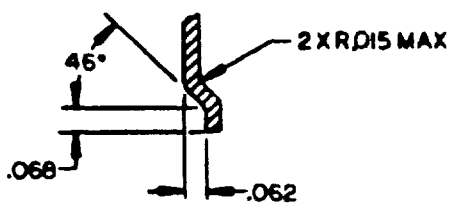



SECTION B-B

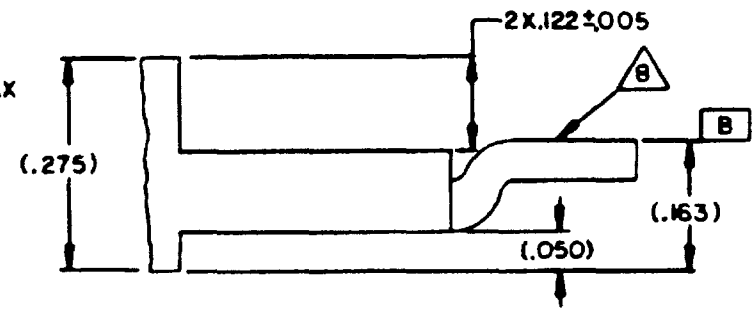


DETAIL A


CONFIGURATION 1

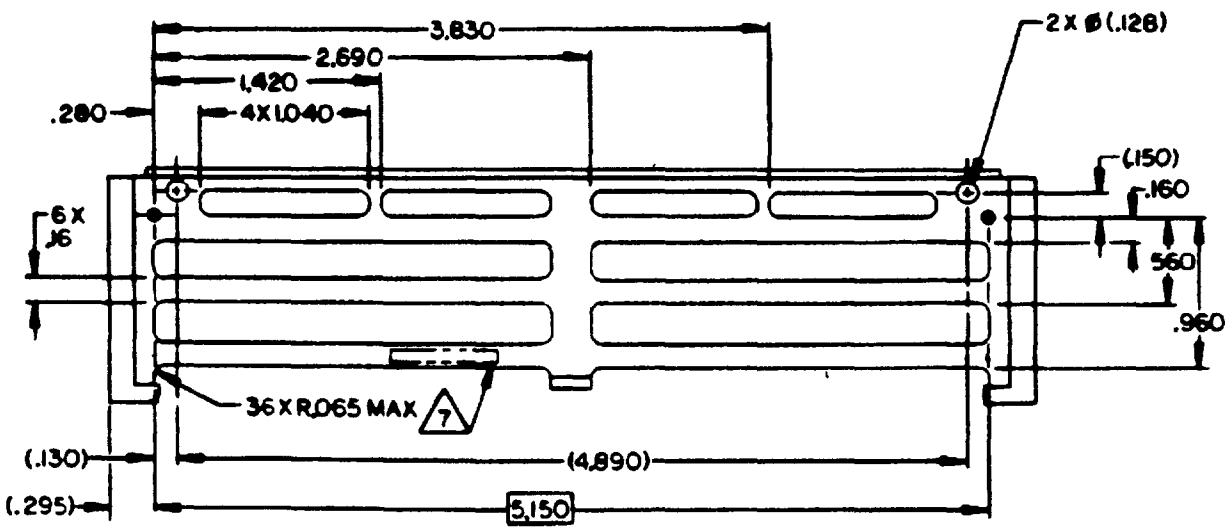



CONFIGURATION 2

FIGURE 1 Dimensions and configurations - continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:49Z
Check the source to verify that this is the current version before use.

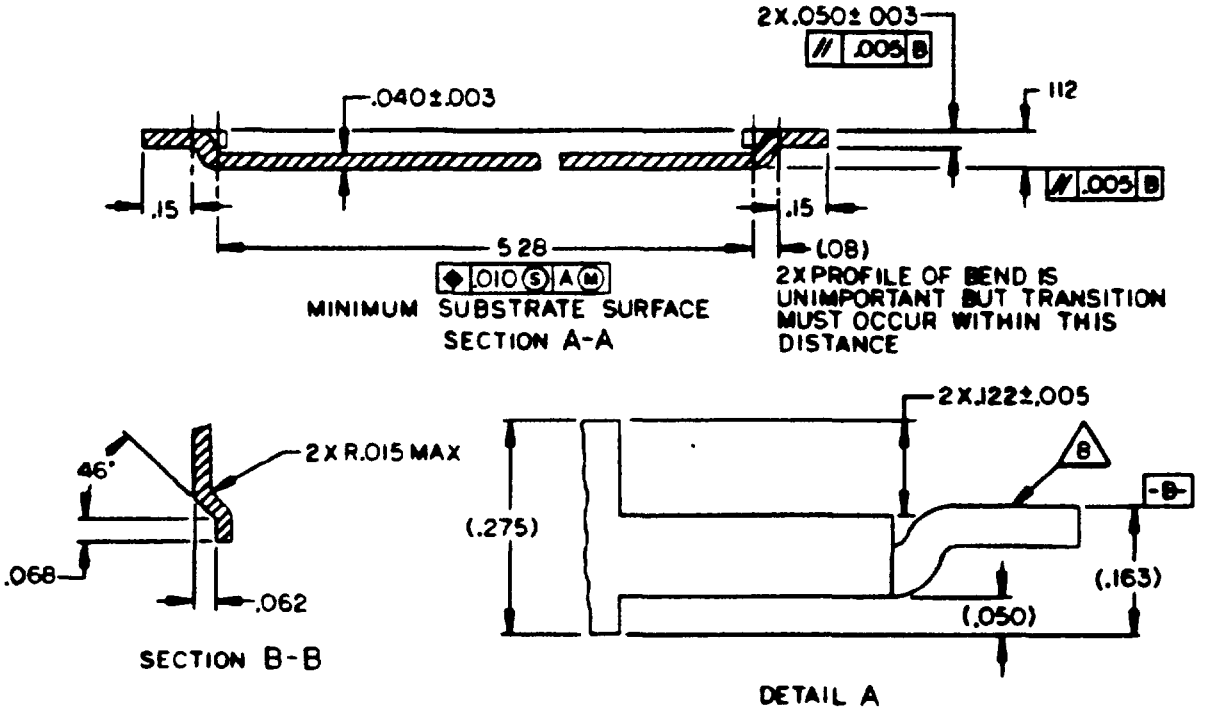


CONFIGURATION 3

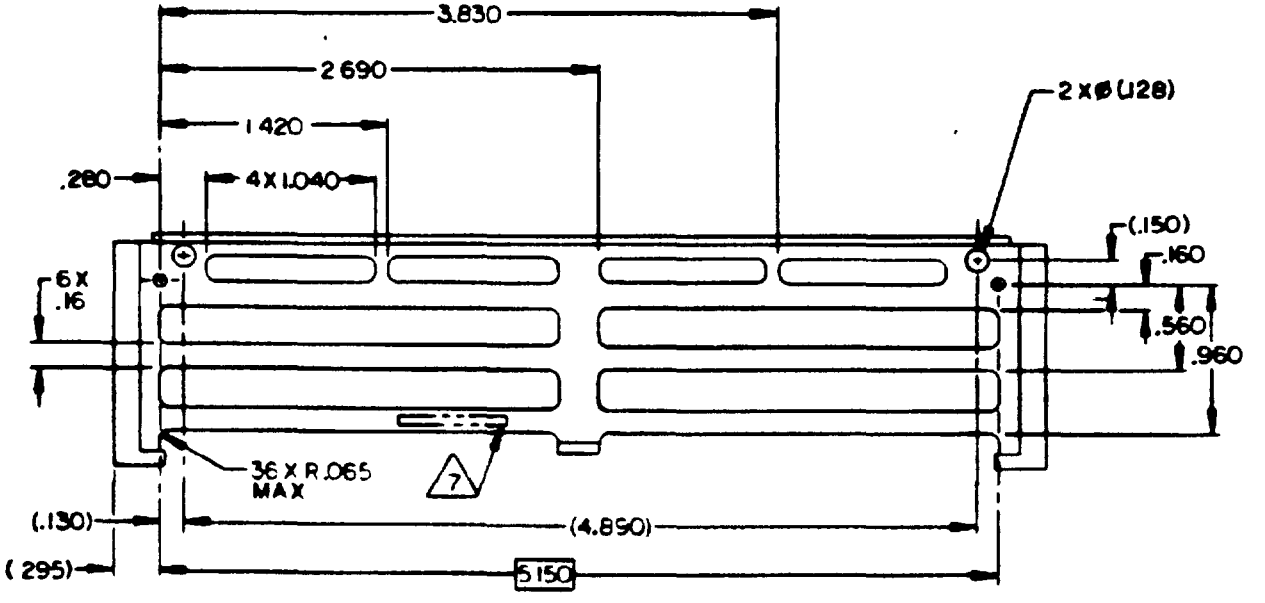


CONFIGURATION 4

FIGURE 1 Dimensions and configurations - continued



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:49Z
Check the source to verify that this is the current version before use.

| INCHES | MM | INCHES | MM | INCHES | MM | INCHES | MM | INCHES | MM |
|---|---|---|---|---|---|---|---|---|---|
| .001 | .03 | .062 | 1.58 | .150 | 3.81 | .960 | 24 39 | 4 890 | 124 21 |
| .002 | .05 | .065 | 1.65 | .160 | 4.06 | 1.040 | 26.42 | 5.130 | 130.30 |
| .003 | .08 | .068 | 1.73 | .163 | 4.14 | 1.090 | 27.69 | 5.150 | 130.81 |
| .005 | .13 | .070 | 1.77 | .250 | 6.35 | 1.190 | 30 27 | 5.280 | 134.11 |
| .010 | .25 | .080 | 2.03 | .275 | 6.99 | 1.340 | 34.04 | 5.740 | 145.80 |
| .015 | .38 | .112 | 2.85 | .280 | 7.11 | 1.420 | 36 07 | | |
| .035 | .89 | .122 | 3.10 | .295 | 7.49 | 2.690 | 68 33 | | |
| .040 | 1.02 | .128 | 3.25 | .300 | 7.62 | 3.830 | 97.28 | | |
| .050 | 1.27 | .130 | 3.30 | .560 | 14.22 | 4.600 | 116 84 | | |

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.005 (.13 mm) inch for three place decimals, ±.01 (.3 mm) inch for two place decimals and ±2° for angles.
4. Unless otherwise specified, all corner radii shall be 02 (.51 mm) inch rad max.
5. Configuration 1 (Part Number -01) defines basic module frame. Subsequent configurations (part dash numbers) are made from Configuration 1 and define module frames for specific applications.
6. Dimensional limits apply after plating.
7. Frame shall be marked in approximate location shown with part number, manufacturer's number and date code with contrasting ink in characters 06 (1.5 mm) inch high
8. This surface and the .122 dimension shall be flush to .005 maximum step

FIGURE 1. Dimensions and configurations - continued



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration. See Figure 1 and Table I.

Materials: For M28754/68-01, -02 and -03, aluminum alloy 6101, ASTM-B-317, T6 extrusion.

For M28754/68-04 and -05, copper C11000, H01 temper, per ASTM B152-81.

Finish For M28754/68-01 and -02, anodic coating, MIL-A-8625, Type II, Class 2, black.

For M28754/68-05 and -10, electroless nickel per MIL-C-26074, 5 percent phosphorous minimum, Class 1, Grade A, .0015 ± .0005 inch thick; MIL-C-5541, Class 1A, yellow Within 4 hours after plating, oven bake 275 ± 25°F, 1 hour, for hydrogen relief and adhesion.

Examination: One frame from each plating lot shall be exposed to salt fog per MIL-STD-810, Method 509, Procedure 1, 48 hours, and one frame shall be exposed to oven bake at 375 ± 10°F, 60-90 minutes. Examine each frame, using 6 to 10 power magnification, for loose or blistered coating. Examination results shall be delivered with each order. The examined frames shall be retained by the supplier for a period of 6 months.

Stress relief. For M28754/68-04, -05, -09 and -10, frames shall receive the following bake cycle prior to plating and after all fabrication steps, 375 ± 10°F for 90 ± 10 minutes.

Military part number M28754/68- (Dash Number from Table I)

TABLE I

| DASH NUMBER | MATERIAL | FINISH | CONFIGURATION |
|---|---|---|---|
| 01 | Aluminum Alloy | Anodize | 1 |
| 02 | Aluminum Alloy | Anodize | 2 |
| 03 | Aluminum Alloy | None | 1 |
| 04 | Copper | None | 1 |
| 05 | Copper | Nickel | 2 |
| 06 | Aluminum Alloy | Anodize | 3 |
| 07 | Aluminum Alloy | Anodize | 4 |
| 08 | Aluminum Alloy | None | 3 |
| 09 | Copper | None | 3 |
| 10 | Copper | Nickel | 4 |

Qualification information: The frame shall meet the following qualification tests of MIL-C-28754 Table IV, Type IV Subgroup I, Method Paragraph 4.7.1, Subgroup II, Method Paragraph 4.7.11 and 4.7.1; Subgroup III, Method Paragraph 4.7.13 and 4.7.1, Subgroup IV, Method Paragraph 4 7 12, 4.7.18, 4.7.19, 4.7.20 and 4 7.1

Number of units to be inspected: Twelve (12) units of Dash 2 will extend qualification to Dash 1 and 3, twelve (12) units of Dash 5 will extend qualification to Dash 4. Twelve (12) units of Dash 7 will extend qualification to Dash 6 and 8, twelve (12) units of Dash 10 will extend qualification to Dash 9. Evidence that Dash 1, 3, 6, 8 and 9 are manufactured must be provided with the qualification units.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:49Z
Check the source to verify that this is the current version before use.

Supersession data  Supersedes Naval Electronic Systems Command Drawing Number 0102-706-1, -2, -3, -4, -5 and -6, Code Identification Number 28687.

Custodians:
Navy - EC

Preparing Activity:
Navy - EC

(Project 5935-N252-15)

☆ U.S. GOVERNMENT PRINTING OFFICE 1985 -- 506 038/22484



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:49Z
Check the source to verify that this is the current version before use.