INCH-POUND

MIL-C-28754/74A
26 JULY 1991
SUPERSEDING
MIL-C-28754/74
29 APRIL 1985

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE IV, 100 CONTACT, DOUBLE SPAN, CENTER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connector-frame assembly described herein * shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-28754.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:50Z
Check the source to verify that this is the current version before use.

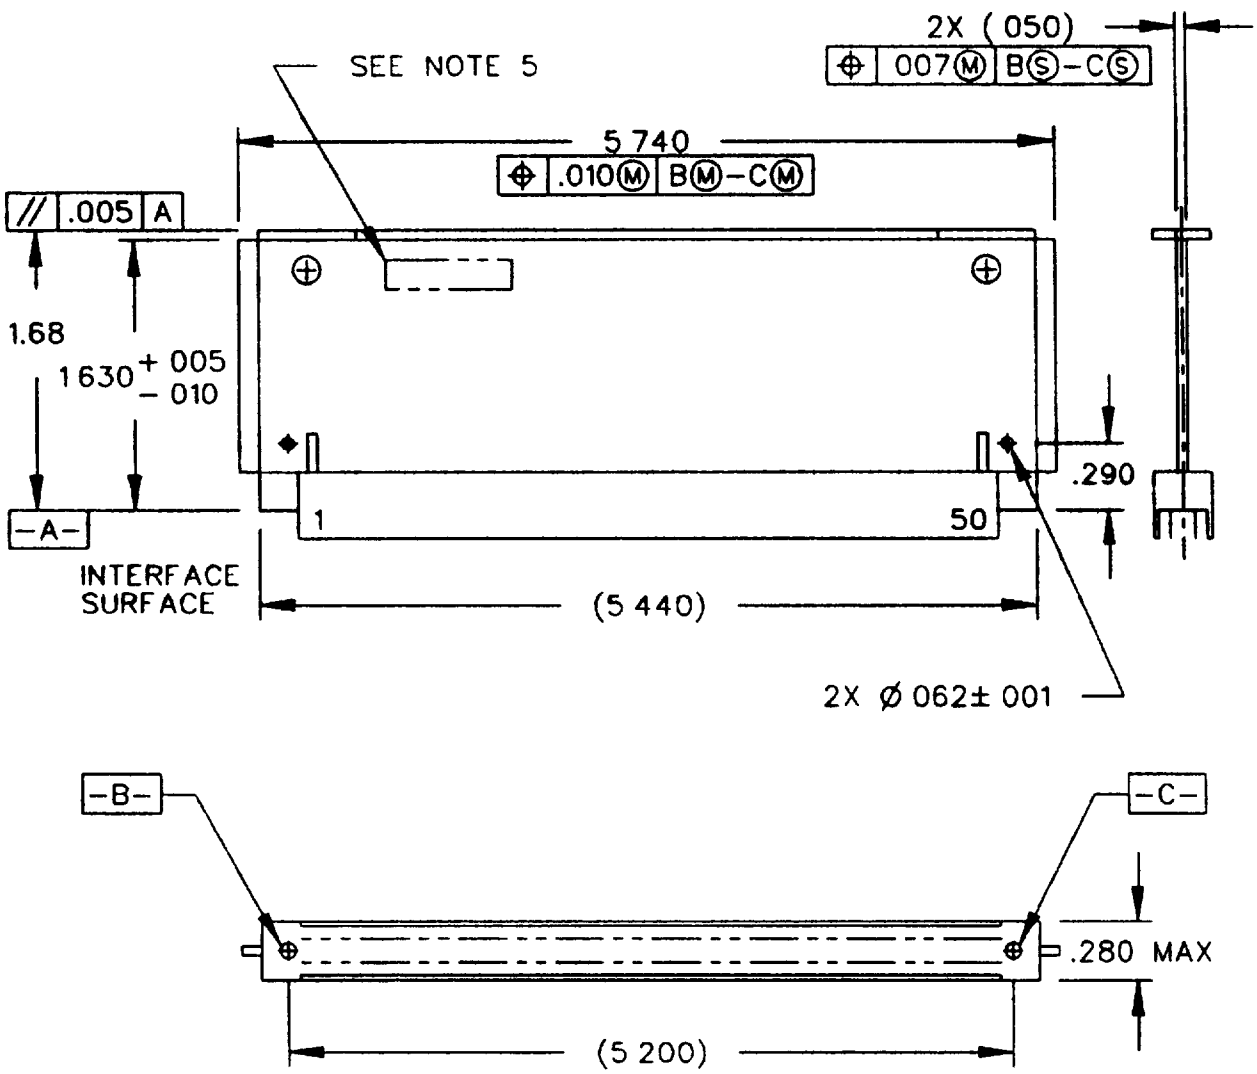


FIGURE 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:50Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM
0.001	0.03	0.062	1.58	5.440	137.16
0.005	0.13	0.280	7.11	5.740	145.80
0.007	0.18	0.290	7.37		
0.010	0.25	1.680	42.67		
0.050	1.27	5.200	132.08		

NOTES:

1. Dimensions are in inches.

2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

3. Unless otherwise specified, tolerances are plus or minus 0.005 inch (0.13 mm) for three place decimals, and plus or minus 0.01 inch (0.3 mm) for two place decimals.

4. The carrier strips supplied as part of connector MIL-C-28754/59- (applicable dash number) or connector MIL-C-28754/61- (applicable dash number) shall remain attached.

5. Assembly shall be marked, in approximate location shown, in accordance with MIL-C-28754 using contrasting ink and characters 0.12 inch (3.1 mm) high.

FIGURE 1. Dimensions and configurations - Continued. *

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:50Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1 and table I.

Separating force: The frame shall remain attached to the connector when subjected to a separating load of 40 pounds (178 N) applied for 30 seconds at a temperature of 257°F (125°C).

Military part number: M28754/74- (dash number from table I).

Qualification information: The connector assembly shall meet the qualification tests of MIL-C-28754 table IV, type IV, and this slash sheet.

Number of units to be inspected: 12 units each of -01, -02, -03, -04, -05, -06, -07, -08, -09, -10, -11, -12, -13, -14, -15, -16, -17 and -18, will qualify respective dash numbers of -19 thru -36 and -37 thru -54. To qualify additional dash numbers using the connector of the initial 12 units, only 4 units each shall be inspected. *

Supersession data: Supersedes Naval Electronic Systems Command Drawing Number 0102-708-1 thru -48, Code Identification Number 28687.

Changes from previous issue: The margins of this specification sheet are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:50Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number, connector and frame.

Dash number	Connector	Frame
01	MIL-C-28754/59-02	MIL-C-28754/67-01
02	MIL-C-28754/59-08	MIL-C-28754/67-01
03	MIL-C-28754/61-02	MIL-C-28754/67-01
04	MIL-C-28754/61-08	MIL-C-28754/67-01
05	MIL-C-28754/60-01	MIL-C-28754/67-01
06	MIL-C-28754/62-01	MIL-C-28754/67-01
07	MIL-C-28754/59-04	MIL-C-28754/67-01
08	MIL-C-28754/59-10	MIL-C-28754/67-01
09	MIL-C-28754/61-04	MIL-C-28754/67-01
10	MIL-C-28754/61-10	MIL-C-28754/67-01
11	MIL-C-28754/60-02	MIL-C-28754/67-01
12	MIL-C-28754/62-02	MIL-C-28754/67-01
13	MIL-C-28754/59-06	MIL-C-28754/67-01
14	MIL-C-28754/59-12	MIL-C-28754/67-01
15	MIL-C-28754/61-06	MIL-C-28754/67-01
16	MIL-C-28754/61-12	MIL-C-28754/67-01
17	MIL-C-28754/60-03	MIL-C-28754/67-01
18	MIL-C-28754/62-03	MIL-C-28754/67-01
19	MIL-C-28754/59-02	MIL-C-28754/67-02
20	MIL-C-28754/59-08	MIL-C-28754/67-02
21	MIL-C-28754/61-02	MIL-C-28754/67-02
22	MIL-C-28754/61-08	MIL-C-28754/67-02
23	MIL-C-28754/60-01	MIL-C-28754/67-02
24	MIL-C-28754/62-01	MIL-C-28754/67-02
25	MIL-C-28754/59-04	MIL-C-28754/67-02
26	MIL-C-28754/59-10	MIL-C-28754/67-02
27	MIL-C-28754/61-04	MIL-C-28754/67-02
28	MIL-C-28754/61-10	MIL-C-28754/67-02

Source: https://assist.dla.mil -- Downloaded: 202610-20T14:50Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number, connector and frame - Continued.

Dash number	Connector	Frame
29	MIL-C-28754/60-02	MIL-C-28754/67-02
30	MIL-C-28754/62-02	MIL-C-28754/67-02
31	MIL-C-28754/59-06	MIL-C-28754/67-02
32	MIL-C-28754/59-12	MIL-C-28754/67-02
33	MIL-C-28754/61-06	MIL-C-28754/67-02
34	MIL-C-28754/61-12	MIL-C-28754/67-02
35	MIL-C-28754/60-03	MIL-C-28754/67-02
36	MIL-C-28754/62-03	MIL-C-28754/67-02
37	MIL-C-28754/59-02	MIL-C-28754/67-03
38	MIL-C-28754/59-08	MIL-C-28754/67-03
39	MIL-C-28754/61-02	MIL-C-28754/67-03
40	MIL-C-28754/61-08	MIL-C-28754/67-03
41	MIL-C-28754/60-01	MIL-C-28754/67-03
42	MIL-C-28754/62-01	MIL-C-28754/67-03
43	MIL-C-28754/59-04	MIL-C-28754/67-03
44	MIL-C-28754/59-10	MIL-C-28754/67-03
45	MIL-C-28754/61-04	MIL-C-28754/67-03
46	MIL-C-28754/61-10	MIL-C-28754/67-03
47	MIL-C-28754/60-02	MIL-C-28754/67-03
48	MIL-C-28754/62-02	MIL-C-28754/67-03
49	MIL-C-28754/59-06	MIL-C-28754/67-03
50	MIL-C-28754/59-12	MIL-C-28754/67-03
51	MIL-C-28754/61-06	MIL-C-28754/67-03
52	MIL-C-28754/61-12	MIL-C-28754/67-03
53	MIL-C-28754/60-03	MIL-C-28754/67-03
54	MIL-C-28754/62-03	MIL-C-28754/67-03

Source: https://assist.dla.mil -- Downloaded: 20260-20T14:50Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - SH
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 99
DLA - ES

User activities:
Army - AR, MI
Navy - AS

Agent:
NW

Preparing activity: *
Navy - SH

(Project 5935-3770-07)

*

Source: https://assist.dla.mil -- Downloaded: 202610-20T14:50Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-C-28754/74A	2. DOCUMENT DATE (YYMMDD)

3. DOCUMENT TITLE: Connectors, Electrical, Modular, Connector Assembly, Type IV, 100 Contact, Double Span, Center

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
Technical Point of Contact (TPOC): Mr. Robert F. Dilger (Code 602A) PLEASE ADDRESS ALL CORRESPONDENCE AS FOLLOWS:	TPOC: 812-854-1528	88-482-1528
c. ADDRESS (Include Zip Code) Commanding Officer Naval Weapons Support Center ATTN: Robert F. Dilger, Bldg. 2940W, Code 602A Crane, Indiana 47522-5060	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-0-20T14:30Z
Check the source to verify that this is the current version before use.