MILITARY SPECIFICATION SHEET


CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR FRAME, TYPE IV, DIP, 0.4 PITCH, FORMAT C, D AND E

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connector frame described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-28754.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:55Z
Check the source to verify that this is the current version before use.

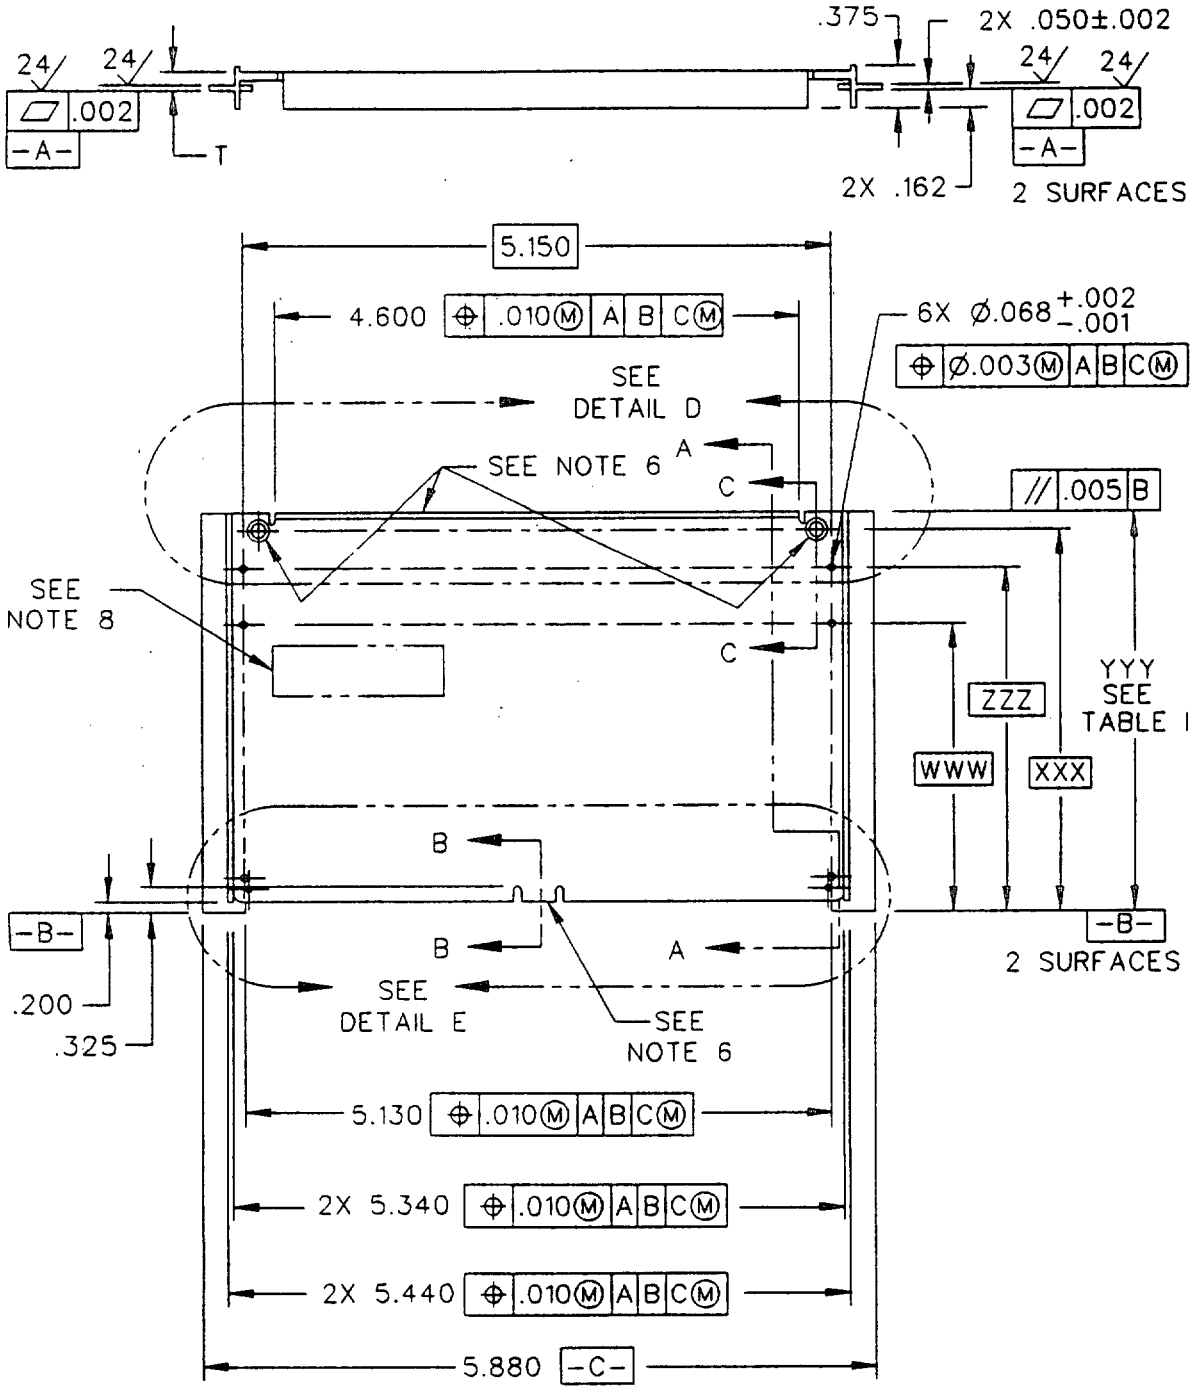

CONFIGURATION FOR DASH NOs. 1, 2, 5, 6, 9, 10

FIGURE 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:55Z
Check the source to verify that this is the current version before use.



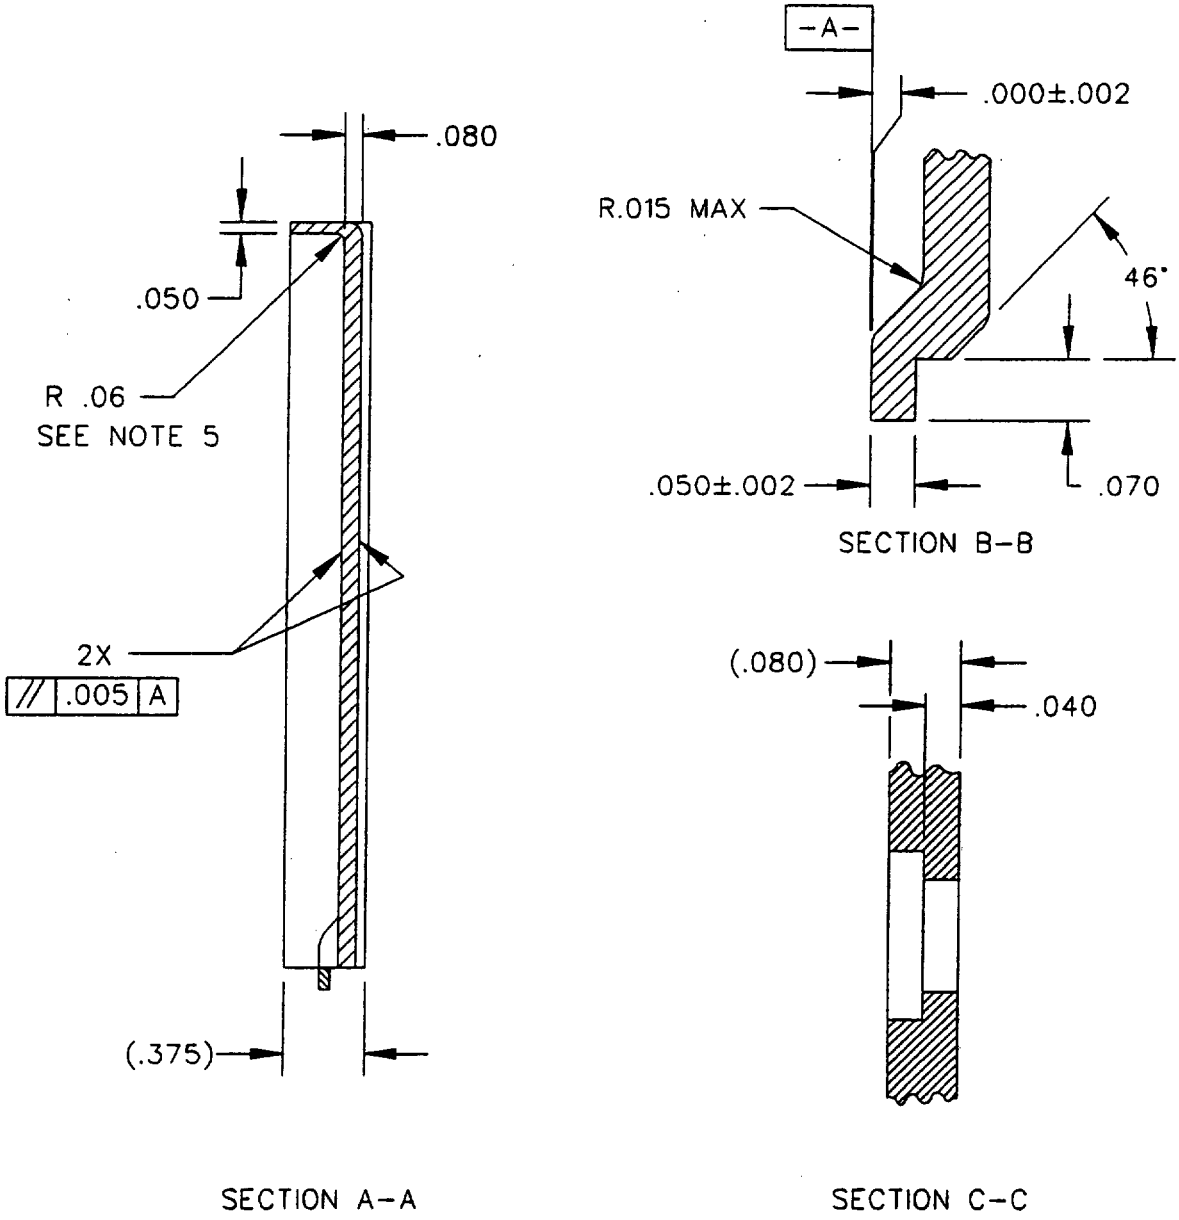


FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:55Z
Check the source to verify that this is the current version before use.

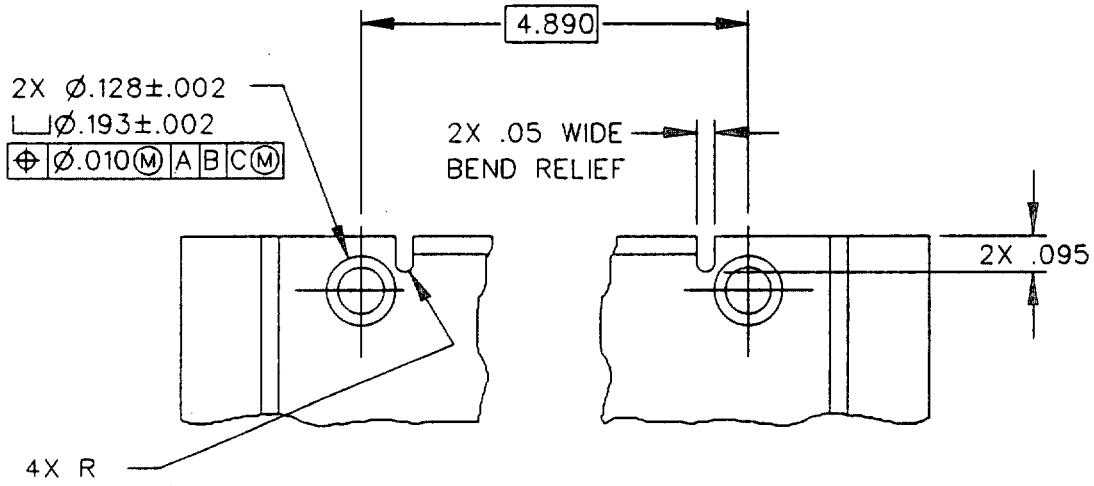


DETAIL D

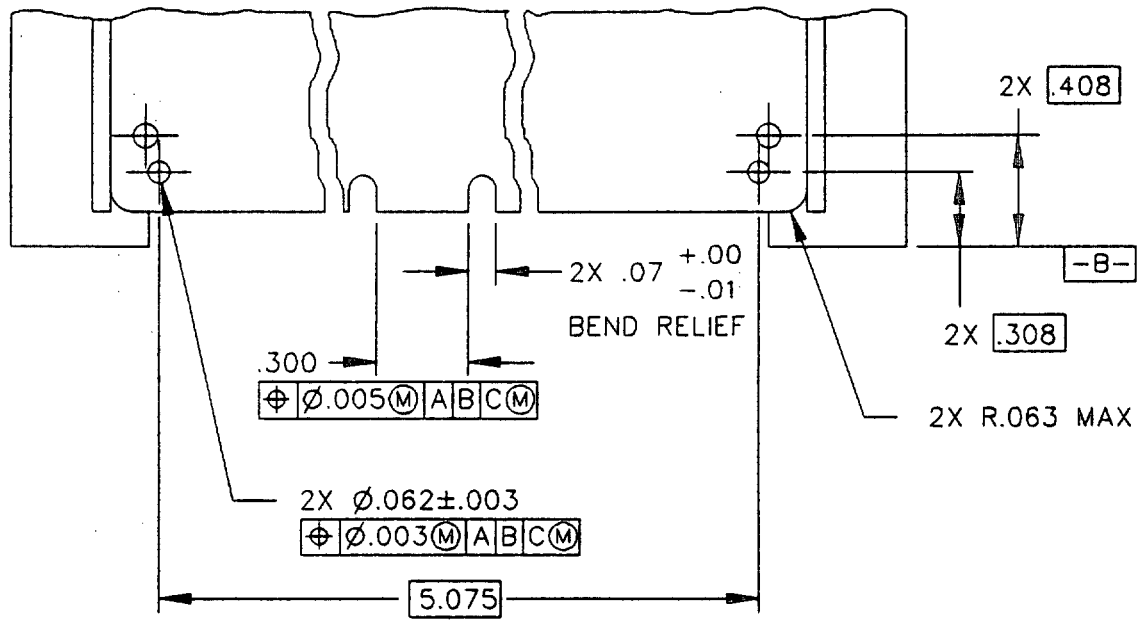

DETAIL E

FIGURE 1. Dimensions and configurations - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:55Z
Check the source to verify that this is the current version before use.

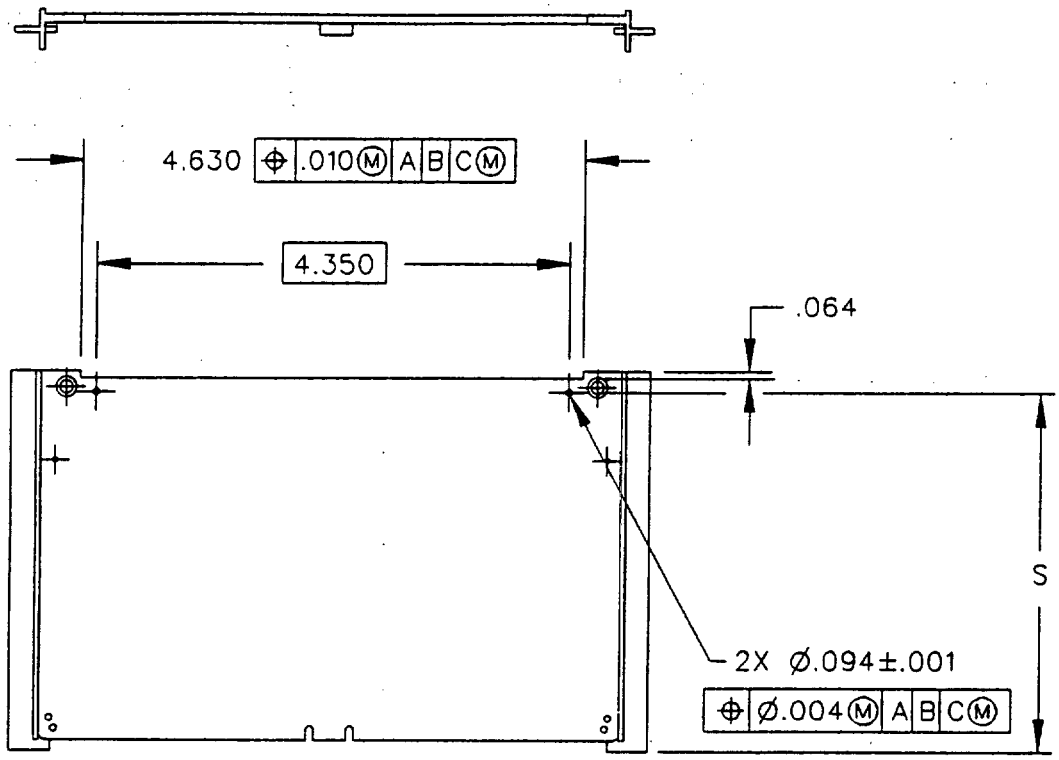


DASH NOs. 3, 4, 7, 8, 11 AND 12
IDENTICAL TO 1, 2, 5, 6, 9 AND 10
EXCEPT AS SHOWN

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:55Z
Check the source to verify that this is the current version before use.

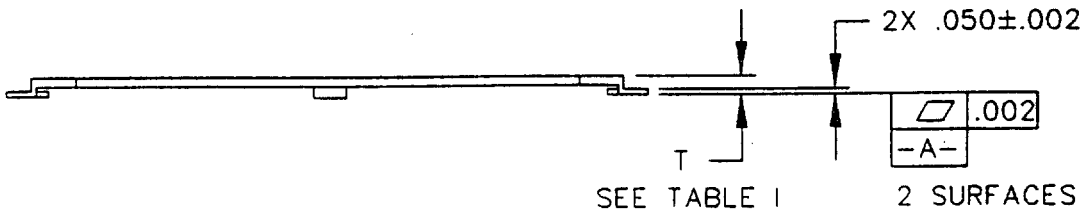

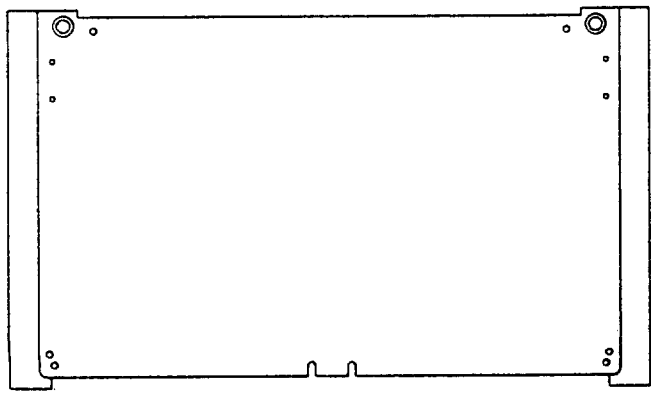

DASH NOs. 13 AND 14

IDENTICAL TO 3, 4, 7, 8, 11 AND 12

EXCEPT AS SHOWN

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:55Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
0.001	0.025	0.065	1.651	0.308	7.823	5.150	130.810
0.002	0.051	0.095	2.413	0.330	8.382	5.340	135.636
0.003	0.076	0.100	2.540	0.408	10.363	5.740	145.796
0.005	0.127	0.122	3.099	1.340	34.036		
0.010	0.254	0.128	3.251	1.490	37.846		
0.015	0.381	0.150	3.810	3.118	79.197		
0.030	0.762	0.162	4.115	4.600	116.840		
0.050	1.270	0.200	5.080	4.860	123.444		
0.062	1.575	0.275	6.985	4.890	124.206		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.40 mm.
3. Unless otherwise specified, tolerances are plus or minus 0.005 inch (0.127 mm) for three place decimals, plus or minus 0.01 inch (0.25 mm) for two place decimals and plus or minus 1° for angles.
4. Unless otherwise specified, all corner radii shall be 0.05 inch (1.27 mm) radius maximum.
5. Thickness transition in bend area.
6. These points are designated as racking points. Anodize on the base material is not required.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:55Z
Check the source to verify that this is the current version before use.

7. Use of this part will require an altered item drawing to be generated for the specific cutout required for the given application. The altered item drawing will call out the following finish:

   a. Surface roughness shall be in accordance with ANSI B46.1-1985.

   b. Plating shall be anodic coating MIL-A-8625, type III, class 2, dyed black.

   All dimensions on this drawing reflect the finished dimensions for the altered item part. Dimensional limits apply after plating.

8. Mark part number, revision letter, code ident CAGE and date code in 0.12 plus or minus 0.02 inch (3.05 mm plus or minus 0.51 mm) high gothic characters at approximate location shown. Use white epoxy ink, MIL-I-43553, B43553-II, and mark in accordance with MIL-STD-130.

9. Break all sharp corners and edges 0.005 inch maximum.

FIGURE 1. Dimensions and configurations - Continued.

REQUIREMENTS:

Dimensions and configurations: See figure 1 and table I.

Material: Aluminum Alloy 6101, ASTM B317, T6, Extrusion.

Finish: Anodic coating, MIL-A-8625, type III, class 2, black.

Military part number: M28754/94- (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:55Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers.

DASH NO	T	S	TOP CONFIGURATION	FORMAT	XXX	YYY	ZZZ	WWW
-1	0.147	N/A	FOLDED	C	3.450	3.600	N/A	N/A
-2	0.167							
-3	0.147	3.406	CUT					
-4	0.167							
-5	0.147	N/A	FOLDED	D	4.220	4.370	3.888	N/A
-6	0.167							
-7	0.147	4.176	CUT					
-8	0.167							
-9	0.147	N/A	FOLDED	E	6.070	6.220	5.738	3.118
-10	0.167							
-11	0.147	6.026	CUT					
-12	0.167							
-13	0.147	6.026	CUT NO CROSS PIECE	E	6.070	6.220	5.738	3.118
-14	0.167							

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:55Z
Check the source to verify that this is the current version before use.

Qualification information: The frame shall meet the following qualification tests of MIL-C-28754, table IV, type IV: Subgroup I, Visual and Mechanical inspection; Subgroup II, Vibration, Visual and Mechanical inspection; Subgroup III, Salt Spray, Visual and Mechanical inspection; Subgroup IV, Shock, Fin/Header torque, Fin cantilever load, Rib strength, Visual and Mechanical inspection.

Number of units to be inspected: Twelve (12) units of each dash number to be qualified shall be inspected. See MIL-C-28754 Appendix for exceptions when qualifying similar parts, or contact the qualification activity.

Compatibility: This frame may be used with the connectors described in MIL-C-28754/97.

Supersession data: Supersedes Naval Air Systems Command Drawing Number SK-MEL-4821-1, -2, -5, -6, Code Identification Number 30003, and SK-MEL-4831, -1, -2, -3, -4.

Custodian:
Navy - SH

User activity:
Navy - AS

Agent:
NWSC, Crane

Preparing activity:
Navy - SH

(Project 5935-N346-05)

*U.S. GOVERNMENT PRINTING OFFICE: 1990--704-034/30218

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:55Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-28754/94(SH)	Connectors, Electrical, Modular, Connector Frame, Type IV, Dip, 0.4 Pitch, Format C, D and E

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:55Z
Check the source to verify that this is the current version before use.