MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, RIGHT ANGLE, PIN CONTACTS, 32 or 64 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-55302.


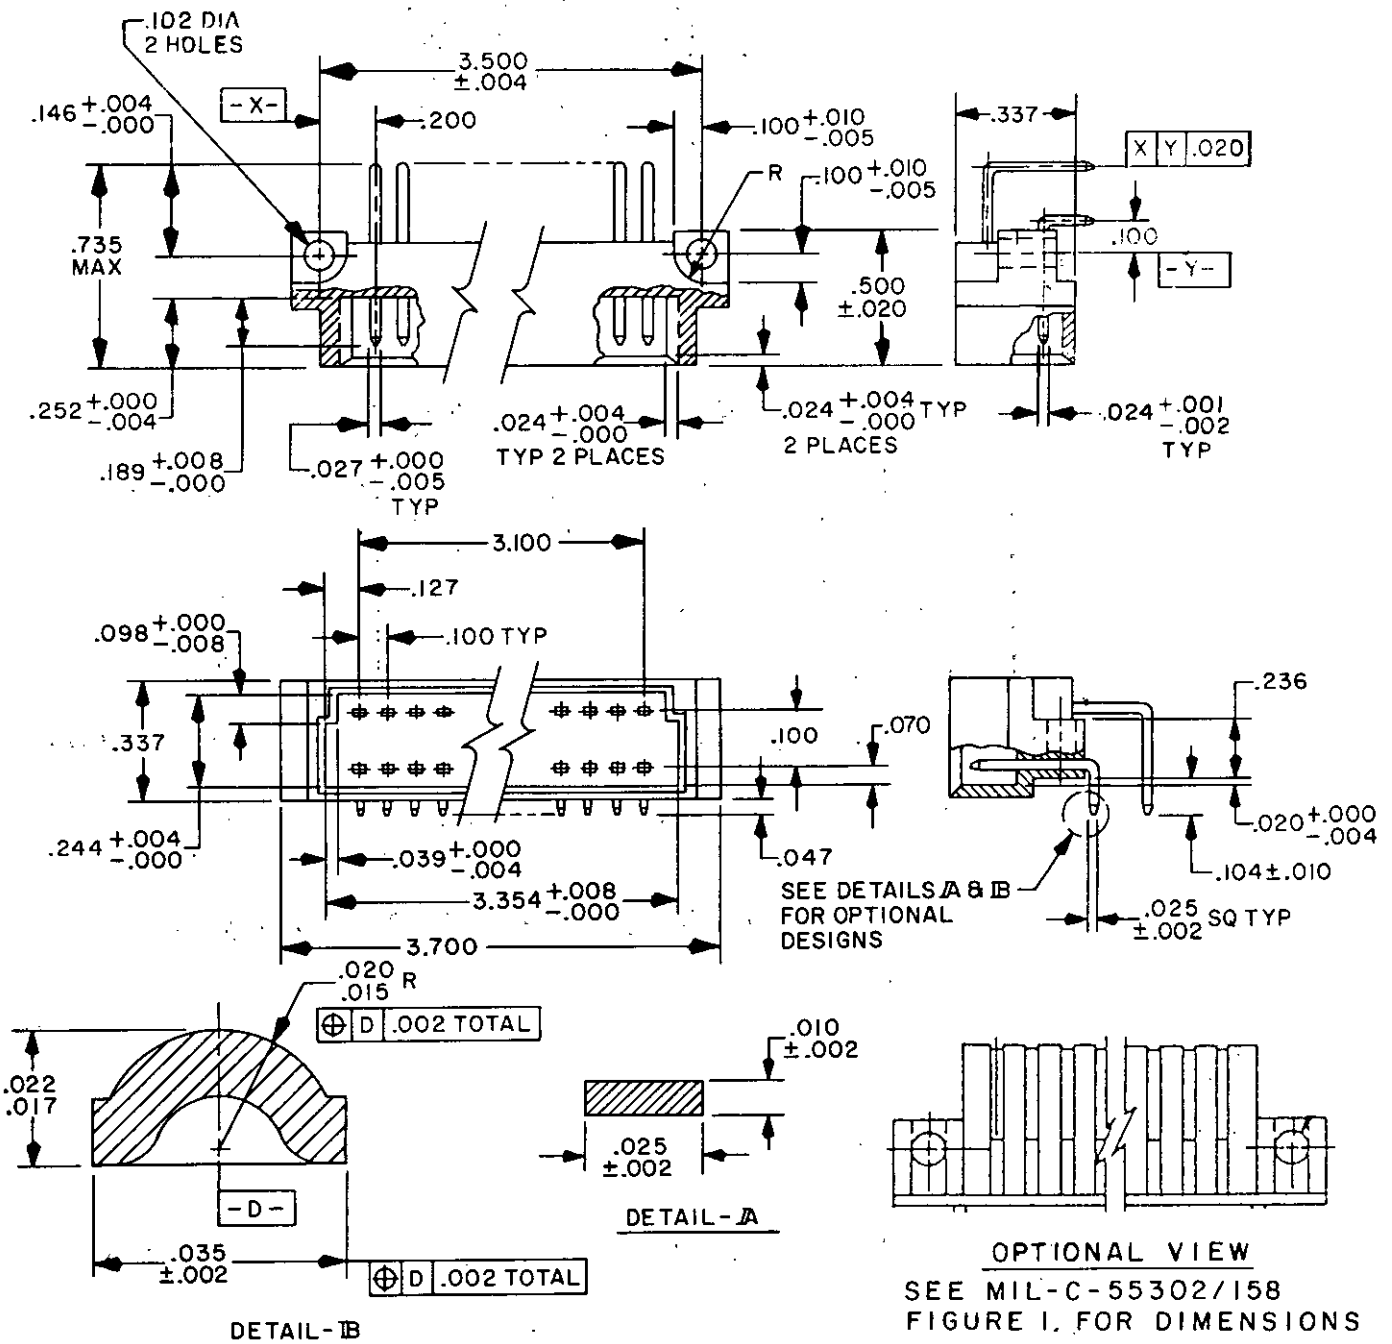



FIGURE 1. Connector, plug, .100 (2.54 mm) spacing.

Ⓐ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

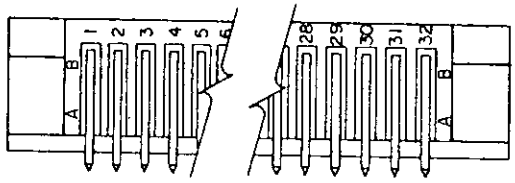

VIEW FROM TERMINATION END
CONNECTOR MARKING

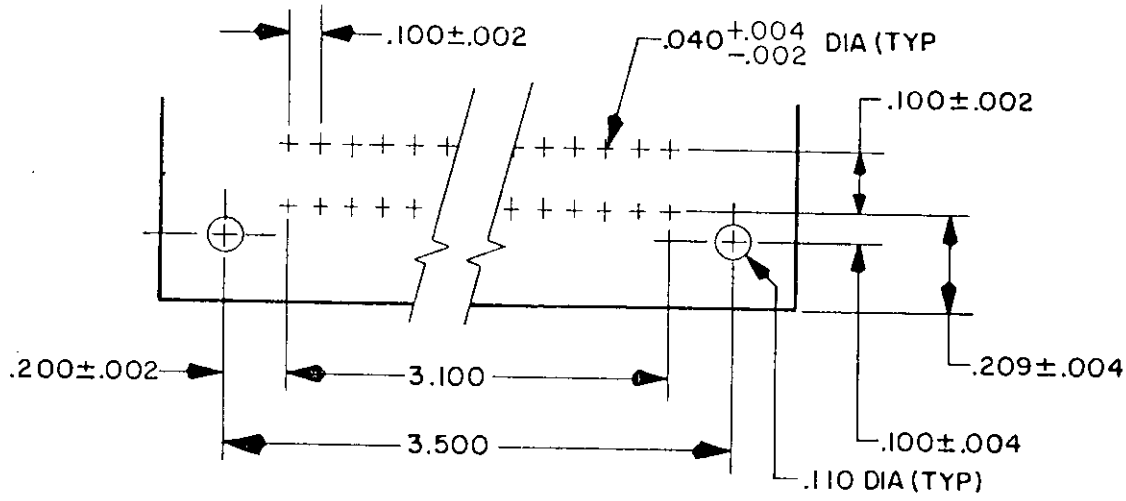

RECOMMENDED MOUNTING PATTERN 64 CONTACTS

FIGURE 1. Connector, plug, .100 (2.54 mm) spacing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

Part number	Number of contacts	Type of termination
M55302/133-01	64	Printed circuit tails
M55302/133-02 1/	32	Printed circuit tails
M55302/133-03 2/	32	Printed circuit tails

1/ These connectors have row A contacts excluded.

2/ These connectors have row B contacts excluded.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.001	0.03	.024	0.61	.102	2.59	.337	8.59
.002	0.05	.025	0.64	.104	2.64	.343	8.71
.004	0.10	.027	0.69	.110	2.79	.433	11.00
.005	0.13	.035	0.89	.127	3.23	.500	12.70
.008	0.20	.039	0.99	.146	3.71	.735	18.67
.010	0.25	.040	1.02	.189	4.80	3.100	78.74
.015	0.38	.047	1.19	.200	5.08	3.354	85.19
.017	0.43	.070	1.78	.209	5.31	3.500	88.90
.020	0.51	.098	2.49	.236	5.99	3.700	93.98
.022	0.56	.100	2.54	.252	6.40		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, toerance is ±.005 (.13 mm).
4. These connectors mate with connectors specified in MIL-C-55302/134.

FIGURE 1. Connector, plug, .100 (2.54 mm) spacing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Materials and finish:

Contact plating: The plating in the engagement area for .170 inch minimum length from the tip of the contact shall be gold per MIL-G-45204, type II, grade C or D, class 1, over nickel plating per QQ-N-290, class 2, 30 to 150 microinches. The plating on the contact termination end for .170 inch minimum length from the end of the contact shall be tin lead per paragraph 3.3.3.4.3 section D of MIL-C-55302. (A)

Nonfunctional areas: Any portion of the contact other than the contact mating area or termination area can be plated in accordance with paragraph 3.3.3.4.3 section C of MIL-C-55302. (A)

Contact identification: See figure 1.

Mating and unmating: The maximum mating force, in pounds, shall not exceed a value equal to .25 times the number of contacts, and the withdrawal force, in pounds, shall be a minimum of .025 times the number of contacts and shall not exceed the measured insertion force, when the housing is loaded with contacts and mated with connector specified in MIL-C-55302/134.

Contact rating: 3.0 amperes maximum per contact.

Contact resistance: No individual contact pair shall have a resistance exceeding .020 ohm.

Contact retention: 3 pounds minimum per contact.

Dielectric withstanding voltage:

Sea level - 1,000 volts rms, 50 or 60 hertz.

High altitude - 300 volts rms, 50 or 60 hertz.

Oversize pin exclusion - Not applicable. (A)

Part number: See figure 1.

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI, AV, AT
Navy - SH, AS, OS
Air Force - 11, 85, 99
DLA - ES

User activities:
Army - ME, AT, AV, WC, AR
Navy - MC
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3496-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.