INCH-POUND
MIL-PRF-49450/11(CR)
10 March 2000

PERFORMANCE SPECIFICATION SHEET

BATTERY, RECHARGEABLE, NICKEL-CADMIUM, VENTED, AIRCRAFT, BB-476/A

This specification is approved for use by the USACECOM, Department of Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-49450(CR)

1. Performance.

Voltage. The voltage of the battery shall be 24 Vdc (nominal).

Capacity. The battery capacity shall be 13 ampere hours.

Weight. The weight of the battery shall be 28 pounds (Max.)

Connector (J1). The main power connector shall be a quick disconnect type that meets the dimensional and interface requirements of MS3509.

Cells. The battery shall be constructed using 19 BB-475/A cells in series.

DRAWING NOTES:

All dimensions are in inches, unless specified otherwise.

Vent Pipes The battery shall have two vent pipes shown in figures 1, 2 and 3. The vent pipes shall be of the same material as the battery case.

Main power receptacle (J1). The battery shall utilize a two-pin receptacle conforming to the interface requirements of MS3509. The J1 receptacle shall be located as shown in figure 1.

AMSC N/A FSC 6140

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.

Bottom flange mounting The battery shall have bottom flange on each side of the battery as shown in figures 1, 2 and 3. The flange shall extend the full length of battery.

Battery Container: The body and cover shall be made of the same alkali-resistant material. The dimensions of the container and the dimensions and locations of the receptacles, flanges and mounting holes shall conform to figures 1, 2 and 3.

Color. The color of the container and cover except latches, hold-down hooks, other external hardware, pads, and identification markings and safety labels shall conform to FED-STD-595 within the range of blue color chips 15090 to 15193.

REQUIREMENTS:

Nomenclature:	BB-476/A Battery, Rechargeable
Rated capacity:	13 ampere-hours
Voltage (Nominal):	24 Volts
Weight (Maximum):	28 pounds
Connector:	one 2 pin connector that meets the interface and dimensional requirements of MS3509(J1)

Test	Discharge Rate(Amps)	Cut Off Voltage(V)	Capacity(AH) Minimum
Capacity	8.7	18	13
Cycle Life			
Normal Rate	13	18	11.7
High Rate	130	14.4	8.5
Vibration	13	18	13
Temperature Shock	13	18	13
Altitude	13	18	11
Humidity and Charge Retention	13	18	9.75
High Rate			
Discharge and Low Temperature	130	13	6.5
High Rate			
Discharge and Operating Position	130	14.4	8.5
Shock	13	18	13

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.

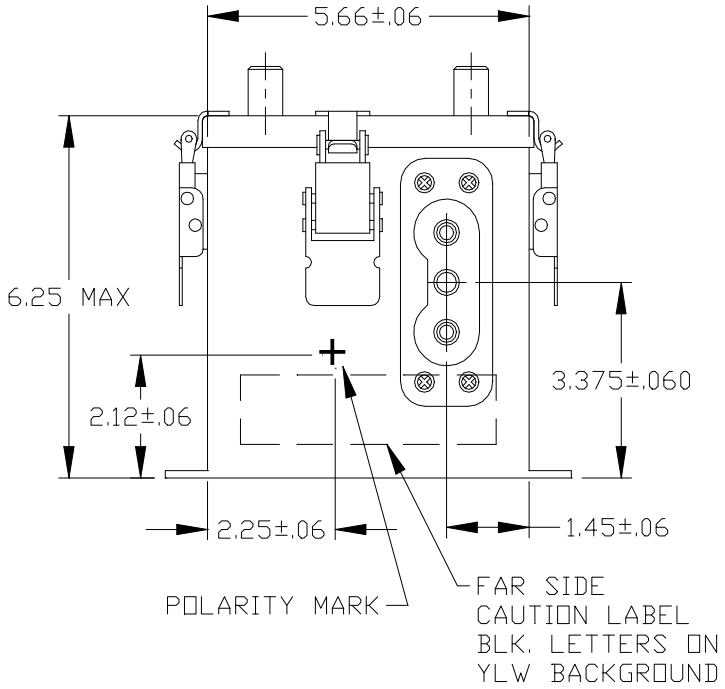

FIGURE 1: BATTERY BB-476/A SIDE VIEW

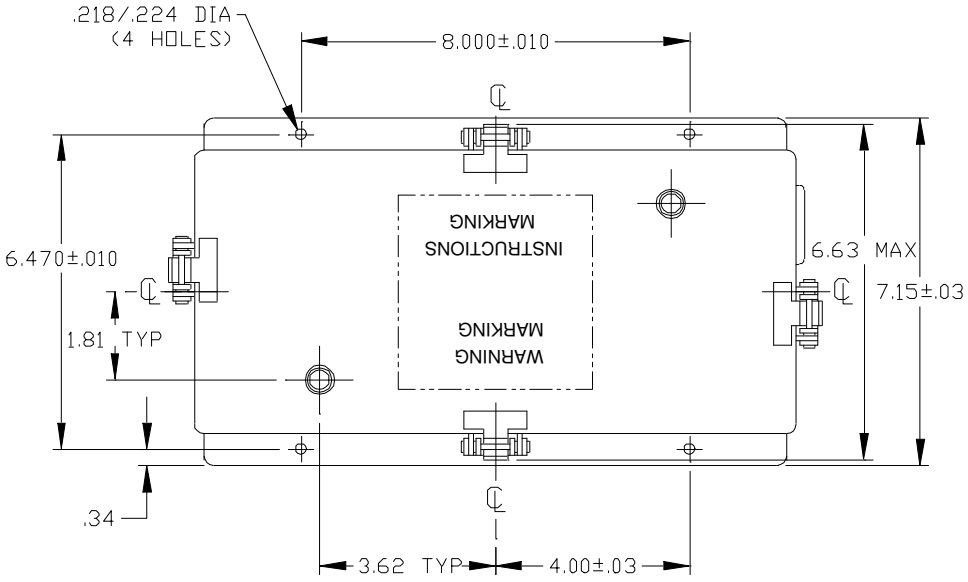

FIGURE 2: BATTERY BB-476/A TOP VIEW

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.

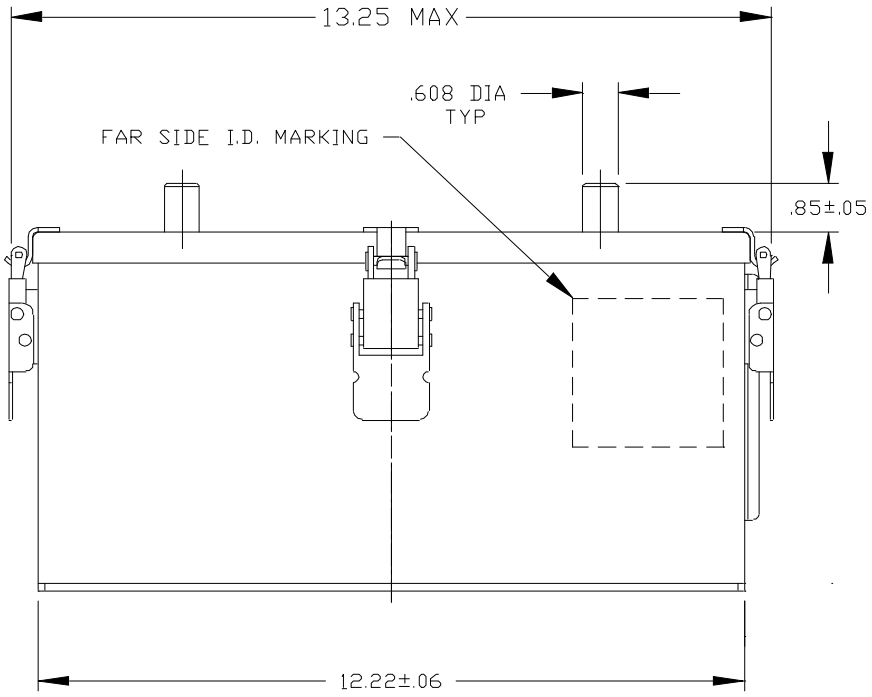

FIGURE 3: BATTERY BB-476/A FRONT VIEW

Custodian:
Army - CR

Preparing activity
Army - CR

(Project 6140-A917-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.