MILITARY SPECIFICATION SHEET

BATTERY, RECHARGEABLE, NICKEL-CADMIUM, VENTED, AIRCRAFT, BB-716/A, INTERCELL CONNECTORS

This specification is approved for use within Laboratory Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the intercell connectors described herein shall consist of this document and the latest issue in effect of Specification MIL-B-49450(ER).

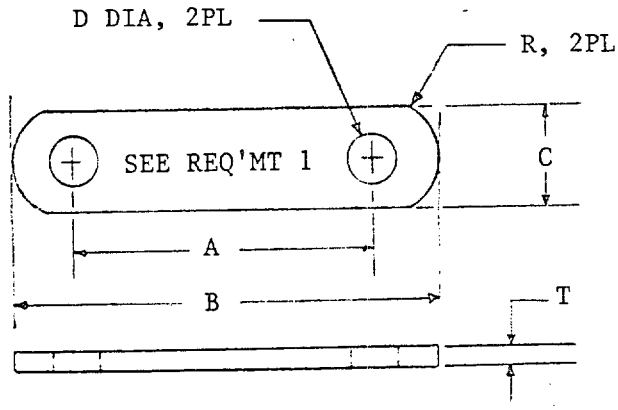

CONNECTOR DIMENSIONS

PART NUMBER	A ±.015	B ±.015	C ±.015	D ±.010	R ±.031	T ±.010
M49450/1-1	.940	1.315	.375	.209	.281	.062
M49450/1-2	1.015	1.390	.375	.209	.281	.062
M49450/1-3	.980	1.355	.375	.209	.281	.062

FSC 6140

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Part number shall be stamped using .125 inch characters,

2. Strap shall be constructed of copper alloy conforming to QQ-C-576 or QQ-C-502.

3. Strap shall be plated in accordance with QQ-N-290, Class 1, Grade E.

DRAWING NOTES:

1. All dimensions are in inches, unless otherwise specified.

Preparing Activity:
Army-ER

(Project 6140-A601-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.