INCH-POUND

MIL-PRF-49450/1B(CR)
9 October 1997
SUPERSEDING
MIL-B-49450/1A (ER)
8 November 1994

PERFORMANCE SPECIFICATION SHEET

BATTERY, RECHARGEABLE, NICKEL-CADMIUM, VENTED, AIRCRAFT, BB-716/A, INTERCELL CONNECTIONS

This specification is approved for use by the USACECOM, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-PRF-49450 in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

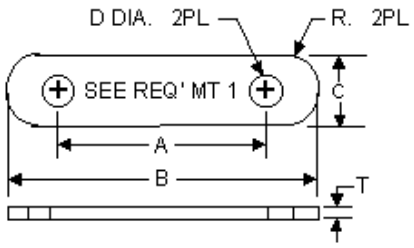

Connector dimensions.

PART	A	B	C	D	R	T
NUMBER	±.015	±.015	±.015	±.010	±.031	±.010
M49450/1-1	.940	1.315	.375	.209	.281	.062
M49450/1-2	1.015	1.390	.375	.209	.281	.062
M49450/1-3	.980	1.355	.375	.209	.281	.062

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Part number shall be stamped using .125 inch characters, .005 inch deep minimum before plating.

DRAWING NOTES:

1. All dimensions are in inches, unless otherwise specified.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian
Army-CR

Preparing Activity:
Army-CR
(Project 6140-A829)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.