INCH-POUND

MIL-PRF-49450/2B(CR)
9 October 1997
SUPERSEDING
MIL-B-49450/2A(ER)
8 November 1994

PERFORMANCE SPECIFICATION SHEET

BATTERY, RECHARGEABLE, NICKEL-CADMIUM, VENTED, AIRCRAFT, BB-716/A, DIODE ASSEMBLY

This specification is approved for use by the USACECOM, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-PRF-49450 in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

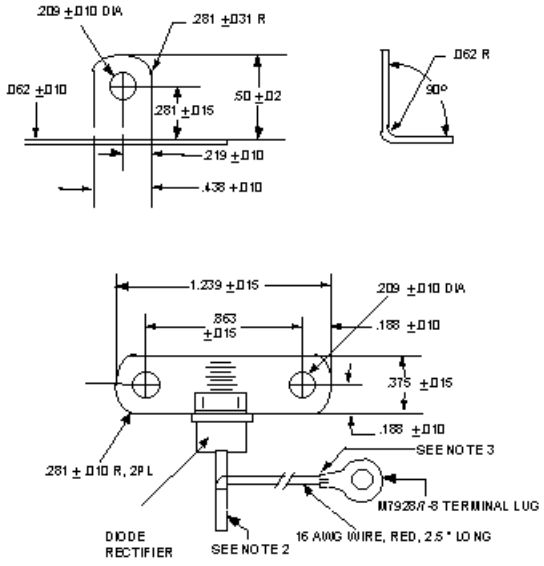

FIGURE 1. Configuration and dimensions.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. The diode mounting connector shall be formed with no evidence of visible cracks.

2. The torque range for the 10-32 hexagonal head shall be 20 to 24 in-lbs.

3. The diode mounting scheme shown in the figure is preferred. Alternate mounting configurations may be used upon one time approval by the Government.

DRAWING NOTES:

1. All dimensions are in inches, unless otherwise specified.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian
Army - CR

Preparing Activity:
Army-CR
(Project 6140-A830)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.