INCH-POUND

MIL-PRF-49450/4A(CR)
9 October 1997
SUPERSEDING
MIL-B-49450/4 (ER)
16 January 1987

PERFORMANCE SPECIFICATION SHEET

BATTERY, RECHARGEABLE, NICKEL-CADMIUM, VENTED, AIRCRAFT,
BB-716/A, CELL VENT ASSEMBLY

This specification is approved for use by the USACECOM, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-PRF-49450 in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

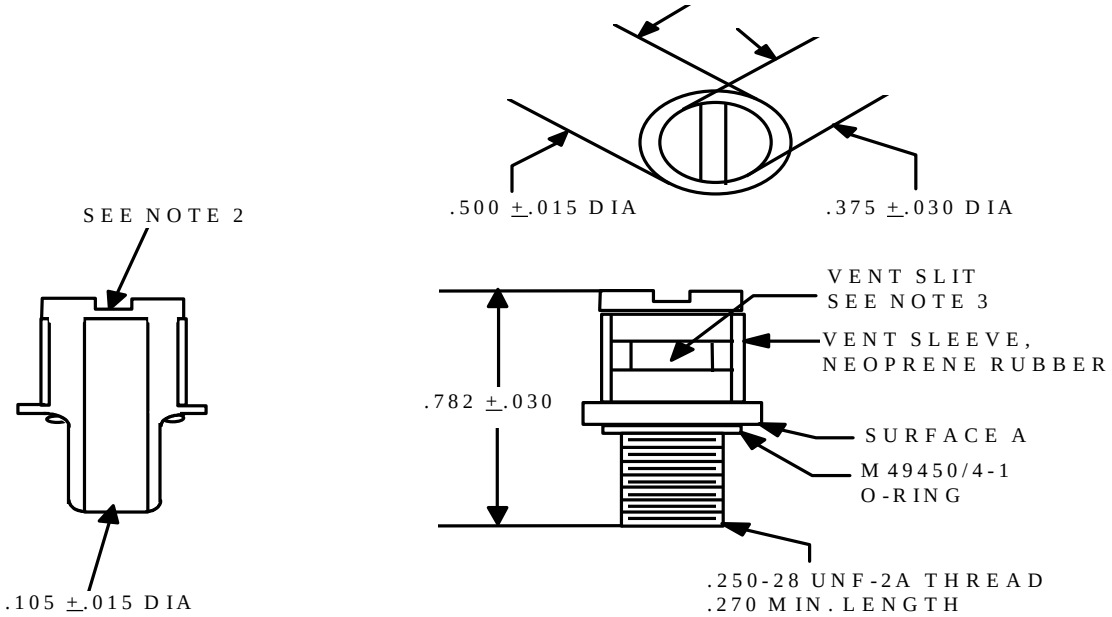

Figure 1. M49450/4 vent assembly.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. The vent plug shall be made of Polyamide or equal material. The Polyamide material shall be compounded to be static proof and shall conform to ASTM D4066-82, Class PA811. The vent shall be colored neutral.

2. The vent shall open at 6 ± 4 psi.

3. The vent plug shall withstand 7 in-lb of torque with no damage and provide an airtight seal for the cell at a torque of 3.0 ± 1.0 in-lb.

4. The O-Ring shall be made of Ethylene Propylene Rubber or equal material.

DRAWING NOTES:

1. All dimensions are in inches, unless specified otherwise.

2. Slot dimensions - .050 ± .010 in. wide and .090 ± .010 in. deep.

3. Slit dimensions (minimum) -.060 in. high and .300 in. across.

4. Distance from end of thread to surface A shall be .035 ± .010 inch.

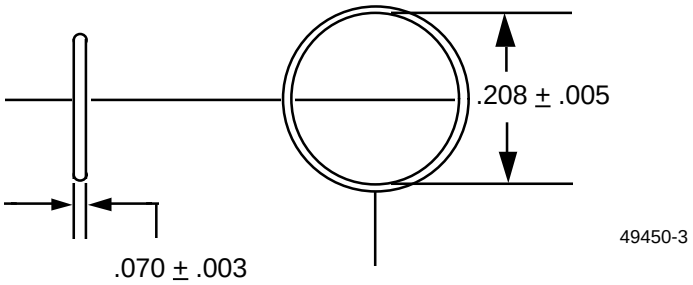

FIGURE 2. M49450/4-1 0-Ring.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian
Army-CR

Preparing Activity:
Army-CR
(Project 6140-A832)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.