INCH-POUND

MIL-PRF-49450/6B(CR)
9 October 1997
SUPERSEDING
MIL-B-49450/6A(ER)
16 January 1987

PERFORMANCE SPECIFICATION SHEET

BATTERY, RECHARGEABLE, NICKEL-CADMIUM, VENTED, AIRCRAFT
BB-716/A, LOW CAPACITY CELL

This specification is approved for use within CECOM, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-PRF-49450 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

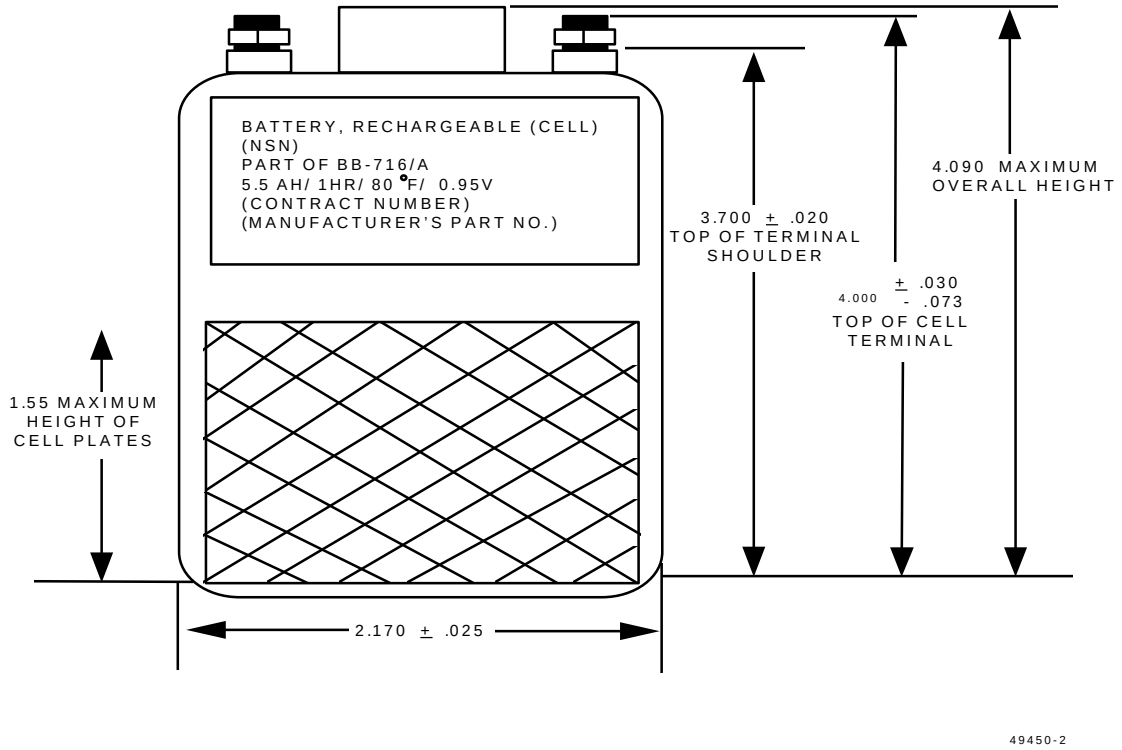

FIGURE 1. Dimensions and markings of cell.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.

DRAWING NOTES:

1. All dimensions shown in figure are in inches, unless specified otherwise.

2. The cell shall use two threaded stud type terminals. The stud terminals shall have 10-32 threading and shall be UNF-2A, Grade 1018 or L1018 cold rolled steel per AMS-5069 ASTM-A-108 with M212 finish.

3. Per stud terminal - 10-32, 5/16 inch hexagonal nuts and one Belleville spring in accordance with MIL-PRF-49450/3A(CR).

4. The entire cell top shall be permanently dyed black.

5. Position of the cell label is optional.

6. Baffle position shall be located such that the requirements of 3.4.9.2 are met.

7. The manufacturer's name or symbol shall be added to the cell cover as shown by embossing or equivalent letter size shall be 3/32 ± 1/32 inch.

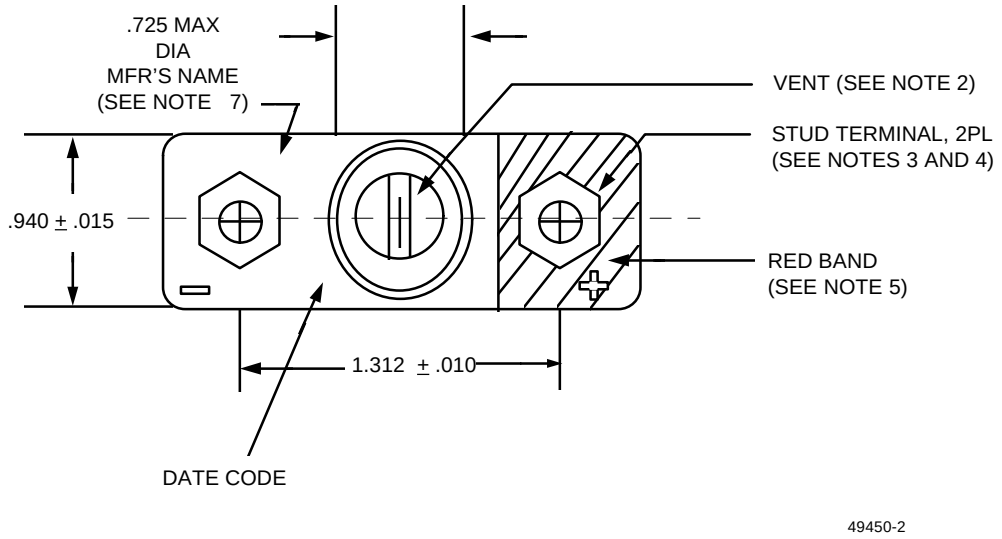

Figure 2. Top view of cell.

Source: https://assist.dla.mil Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Nomenclature:	Battery, Rechargeable, Cell
Rated Capacity:	3.6 ampere-hours
Voltage (Nominal)	1.2 volts

Test	Discharge Rate (Amps)	Cut Off Voltage (V)	Capacity (AH) Minimum	Capacity (AH) Maximum
Capacity	5.5	0.95	3.6	4.4
Cycle Life				
Normal Rate	5.5	0.95	3.0	4.4
High Rate	55.0	0.60	1.83[1/]	---
Vibration	1.1	1.00	3.6	---
Temperature Shock	5.5	0.95	3.6	---
Altitude	5.5	0.95	2.8	---
Humidity and Charge Retention	5.5	0.95	2.4	3.7
High Rate Discharge and Low Temperature[1/]	55.0	0.50	1.6	---
High Rate Discharge and Operating Position[1/]	55.0	0.50	2.3	3.7

NOTES: 1/ Discharge on cycling test limited to 2 minutes.

Changes from previous issue. Marginal notation are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian
Army-CR

Preparing Activity:
Army-CR
(Project 6140-A834)

Source: https://assist.dla.mil Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.