INCH-POUND

MIL-PRF-49450/7B(CR)
9 October 1997
SUPERSEDING
MIL-B-9450/7A (ER)
18 June 1987

PERFORMANCE SPECIFICATION SHEET

BATTERY, RECHARGEABLE, NICKEL-CADMIUM, VENTED, AIRCRAFT
BB-716/A, CELL

This specification is approved for use within CECOM, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-PRF-49450 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

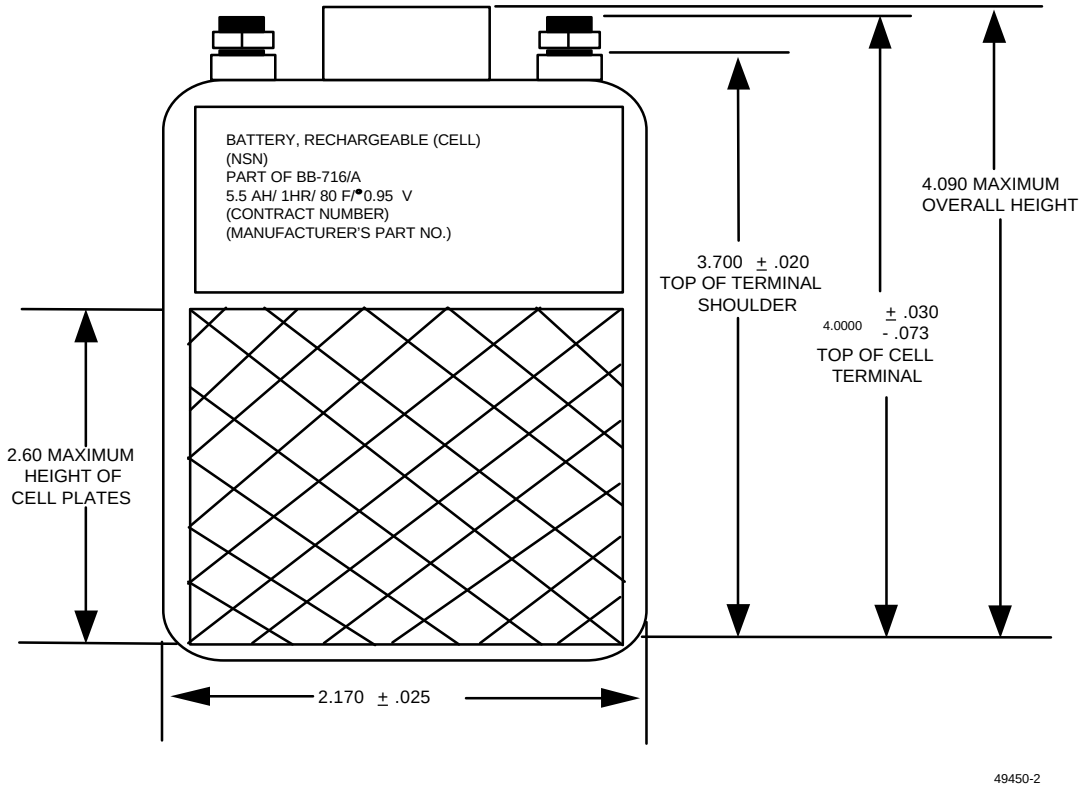

FIGURE 1. Markings and dimensions of cell.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.

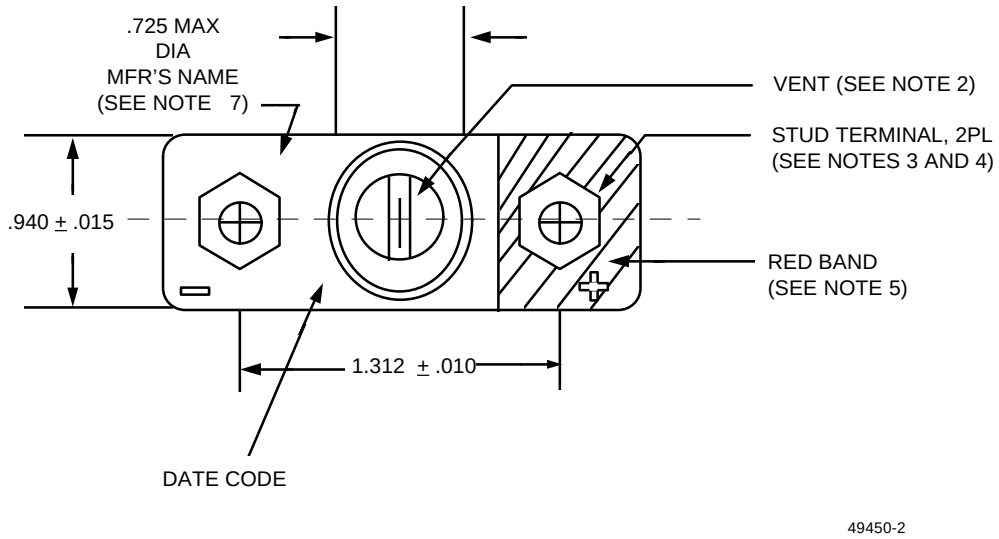

FIGURE 2. Top view of cell (method 1).

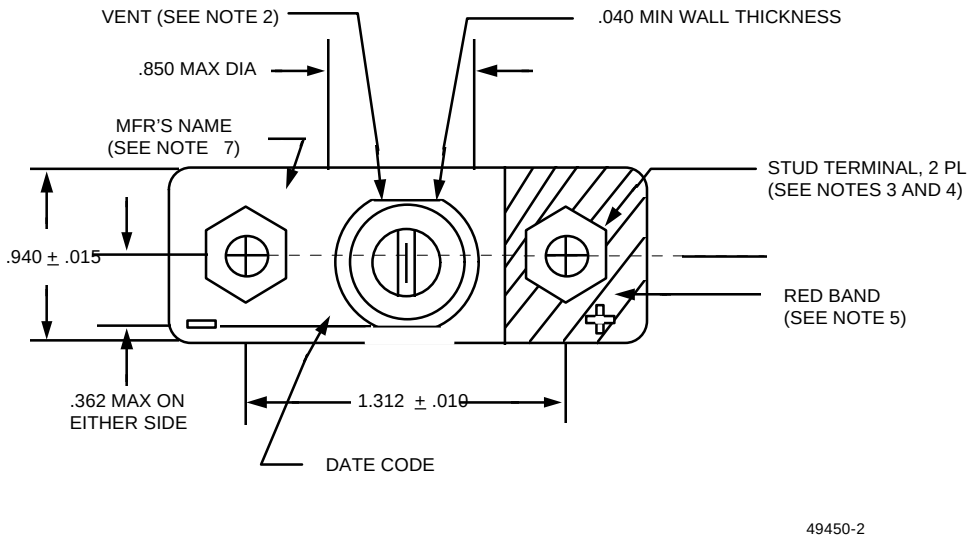

FIGURE 3. Top view of cell (method 2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.

DRAWING NOTES:

1. All dimensions shown in figure are in inches, unless specified otherwise.

2. The cell shall use two threaded stud type terminals.

3. Per stud terminal - 10-32, 5/16 inch hexagonal nuts and one Belleville spring.

4. The positive half of the cell cover shall be permanently dyed red. Minimum width of red band shall be no less than 0.5 inches.

5. Position of the cell label is optional.

6. The manufacturer's name or symbol shall be added to the cell cover as shown by embossing or equivalent. Letter size shall be 3/32 ± 1/32 inch.

REQUIREMENTS:

Nomenclature:	Battery, Rechargeable, Cell
Rated Capacity:	5.5 ampere-hours
Voltage (Nominal)	1.2 volts

Test	Discharge Rate (Amps)	Cut Off Voltage (V)	Capacity (AH) Minimum
Capacity	5.5	0.958	5.5
Cycle Life			
Normal Rate	5.5	0.958	5.0
High Rate	55.0	0.765	1.83[1/]
Vibration	1.1	1.0	5.5
Altitude	5.5	0.958	4.6
Humidity and Charge Retention	5.5	0.958	4.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.

Test	Discharge Rate (Amps)	Cut Off Voltage (V)	Capacity (AH) Minimum
High Rate Discharge and Low Temperature 1/	55.0	0.68	2.75
High Rate Discharge and Operating Position 1/	55.0	0.76	4.6

NOTES: 1/ Discharge on cycling test limited to 2 minutes.

Changes from previous issue. Marginal notation are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian
Army-CR

Preparing Activity:
Army-CR
(Project 6140-A835)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.