The documentation and process conversion measures necessary to comply with this revision shall be completed by 08 October 1999.

INCH-POUND

MIL-PRF-19500/127N
09 July 1999
SUPERSEDING
MIL-S-19500/127M
14 March 1994

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICES, DIODE, SILICON, VOLTAGE REGULATOR,
TYPES 1N4370A-1 THROUGH 1N4372A-1, AND 1N746A-1 THROUGH 1N759A-1, 1N4370AUR-1 THROUGH 1N4372AUR-1 AND 1N746AUR-1 THROUGH 1N759AUR-1, 1N4370C-1 THROUGH 1N4372C-1, AND 1N746C-1 THROUGH 1N759C-1, 1N4370CUR-1 THROUGH 1N4372CUR-1 AND 1N746CUR-1 THROUGH 1N759CUR-1, 1N4370D-1, THROUGH 1N4372D-1, AND 1N746D-1 THROUGH 1N759D-1, 1N4370DUR-1 THROUGH 1N4372DUR-1 AND 1N746DUR-1 THROUGH 1N759DUR-1,
JAN, JANTX, JANTXV, JANHC, AND JANKC

JANS level (see 6.3).

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for 500 milliwatt, silicon, voltage regulator diodes with voltage tolerances of 5, 2, and 1 percent. Three levels of product assurance are provided for each device type as specified in MIL-PRF-19500. Two level of product assurance is provided for die.

1.2 Physical dimensions. See 3.3 and figure 1 (similar to DO-35) and figure 2 (similar to DO-213AA), and figures 3 and 4 for die.

1.3 Maximum ratings. Maximum ratings are as shown in column 4 table II herein and as follows:

P_T = 500 mW, (DO-35) at T_L = +50°C, L = .375 inch (9.53 mm); both ends of case or diode body to heat sink at L = .375 inch (9.53 mm). Derate I_Z to 0.0 mA dc at +175°C.
P_T = 500 mW, (DO-213AA) at T_{EC} = +125°C, derate to 0 at +175°C.
-65°C ≤ T_J ≤ +175°C; -65°C ≤ T_{STG} ≤ +175°C

1.4 Primary electrical characteristics. Primary electrical characteristics are as shown in columns 2, 9, 12, and 14 table II herein and as follows:

2.4 V dc ≤ V_Z ≤ 12 v dc
1N4370A-1 through 1N4372A-1 and 1N746A-1 through 1N759A-1 are ±5 percent voltage tolerance.
1N4370C-1 through 1N4372C-1 and 1N746C-1 through 1N759C-1 are ±2 percent voltage tolerance.
1N4370D-1 through 1N4372D-1 and 1N746D-1 through 1N759D-1 are ±1 percent voltage tolerance.


Thermal resistance:

$R_{\theta JL}$ = 250°C/W maximum at L = .375 inch (9.53 mm) (D0-35).
$R_{\theta JEC}$ = 100°C/W maximum. Junction to end-caps (D0-213AA).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Defense Supply Center Columbus, ATTN: DSCC-VAC, 3990 East Broad St., Columbus, OH 43216-5000, by using the addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5961
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

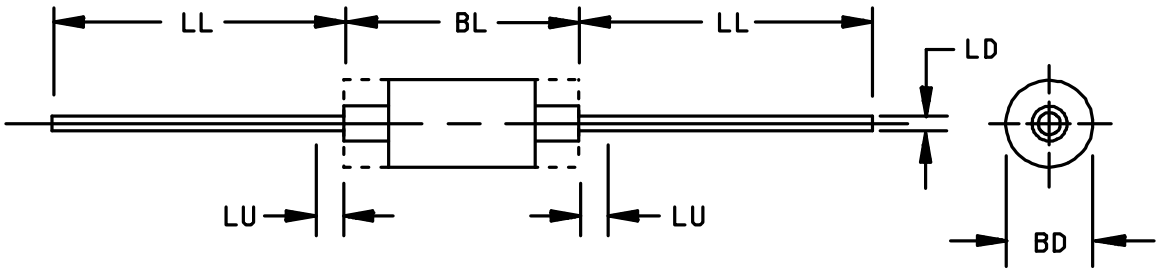


Symbol	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
BD	0.055	0.090	1.40	2.29	3
BL	0.120	0.200	3.05	5.08	
LD	0.018	0.023	0.46	0.56	
LL	1.000	1.500	25.40	38.10	
LU		0.050		1.27	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Symbol BD shall be measured at the largest diameter.
4. Within LU lead diameter may vary to allow for flash, lead finish build-up, and minor irregularities other than heat slugs.
5. In accordance with ANSI Y14.5M, diameters are equivalent to ϕX symbology.

FIGURE 1. Physical dimensions for types 1N4370A-1 through 1N4372A-1, 1N4370C-1 through 1N4372C-1, 1N4370D-1 through 1N4372D-1, 1N746A-1 through 1N759A-1, 1N746C-1 through 1N759C-1, and 1N746D-1 through 1N759D-1 (D0-35).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

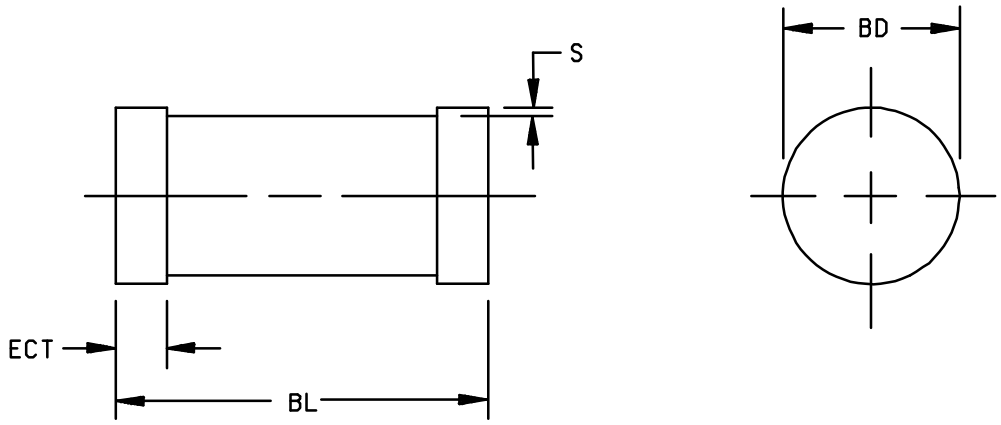


Symbol	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
BL	.130	.146	3.30	3.70
BD	.063	.067	1.60	1.70
ECT	.016	.022	0.41	0.55
S	.001 min		0.03 min	

NOTES:
1. Dimensions are in inches.
2. Metric equivalent are given for general information only.
3. In accordance with ANSI Y14.5M, diameters are equivalent to ϕX symbology.

FIGURE 2. Physical dimensions for types 1N4370AUR-1 through 1N4372AUR-1, 1N4370CUR-1 through 1N4372CUR-1, 1N4370DUR-1 through 1N4372DUR-1, 1N746AUR-1 through 1N759AUR-1, 1N746CUR-1 through 1N759CUR-1, and 1N746DUR-1 through 1N759DUR-1 (D0-213AA).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

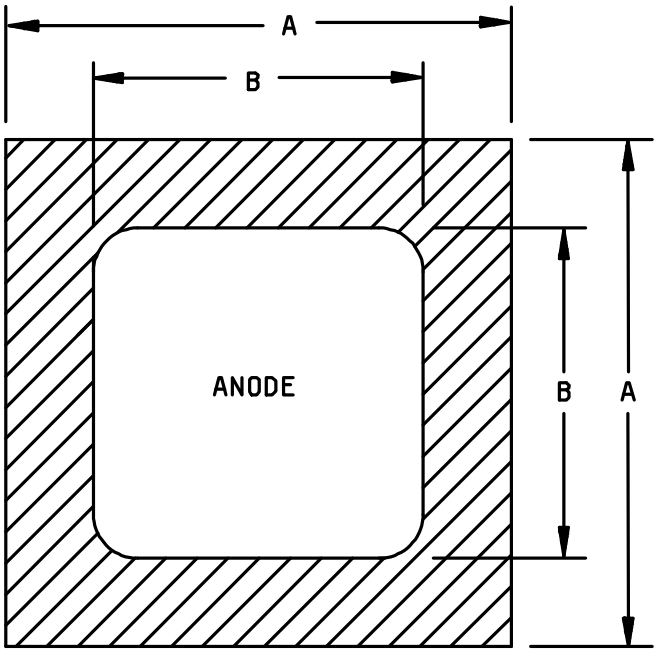


(A – version)

Ltr	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
A	.021	.025	0.53	0.63
B	.013	.017	0.33	0.43

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The physical characteristics of the die thickness are .010 ±.002 (0.25 mm). Metallization is top = (anode)-AL, back: (cathode)-AU. AL thickness = 25000 Å minimum, AU thickness = 4000 Å minimum.
4. Circuit layout data: For zener operation, cathode must be operated positive with respect to anode.

FIGURE 3. Physical dimensions (JANHCA and JANKCA die dimensions).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

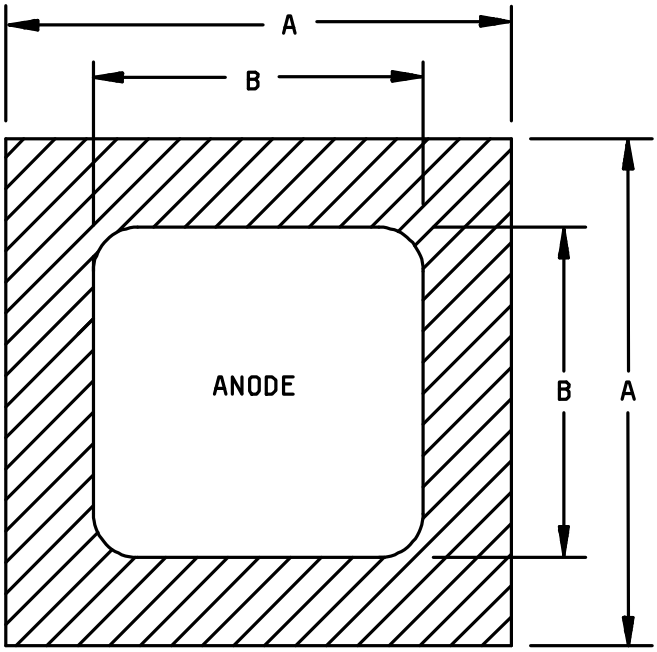

(B – version)

Ltr	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
A	.024	.028	0.61	0.71
B	.017	.021	0.43	0.53

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The physical characteristics of the die thickness are .010 ±.002 (0.25 mm). Metallization is top = (anode)-AL, back: (cathode)-AU. AL thickness = 40000 Å minimum, AU thickness = 5000 Å minimum.
4. Circuit layout data: For zener operation, cathode must be operated positive with respect to anode.

FIGURE 4. Physical dimensions (JANHCB and JANKCB die dimensions) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

STANDARD

DEPARTMENT OF DEFENSE

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Defense Automated Printing Service, 700 Robbins Avenue, Building 4D (DPM-DODSSP), Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated specifications or specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Associated specification. The individual item requirements shall be in accordance with MIL-PRF-19500, and as specified herein.

3.2 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-PRF-19500, and as follows.

EC - - - - end-caps

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

3.3 Interface requirements and physical dimensions. The Interface requirements and physical dimensions shall be as specified in MIL-PRF-19500 and figures 1 and 2 (similar to D0-35 and D0-213AA) and figures 3 and 4 (die) herein.

3.3.1 Lead finish. Lead finish shall be solderable as defined in MIL-PRF-19500, MIL-STD-750, and herein.

3.3.2 Dash one construction. Dash one (-1) devices shall be metallurgically bonded double plug construction in accordance with the requirements of category I, II, or III (see MIL-PRF-19500).

3.4 Marking. Devices shall be marked in accordance with MIL-PRF-19500. At the option of the manufacturer, the DO-35 version may leave off "-" portion of the type designator (example: JANTX1N4370A1).

3.4.1 Marking of UR-1 version devices. For UR-1 version devices only, all marking (except polarity) may be omitted from the body, but shall be retained on the initial container.

3.5 Selection of tight tolerance devices. The C and D suffix devices shall be selected from JAN, JANTX, or JANTXV, devices, which have successfully completed all applicable screening, and groups A, B, and C testing as 5 percent tolerance devices. All sublots of C and D suffix devices shall pass group A, subgroup 2, at tightened tolerances. Tighter tolerances for mounting clip temperature shall be maintained for reference purpose to establish correlation. For C and D tolerance levels,
T_L = +25°C ±2°C at 0.375 inch from body or equivalent.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I.

3.7 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table I herein.

3.8 Qualification. Devices furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified manufacturers list before contract award (see 4.2 and 6.2).

4. VERIFICATION

4.1 Classification of Inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3)

c. Conformance inspection (see 4.4).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.2.1 JANHC and JANKC devices. JANHC and JANKC devices shall be qualified in accordance with appendix G of MIL-PRF-19500.

4.2.2 Construction verification. Cross sectional photos from three devices shall be submitted in the qualification report.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

4.3 Screening (JAN, JANTX, and JANTXV levels only). Screening shall be in accordance with MIL-PRF-19500 (table IV) and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see table IV of MIL-PRF-19500)	Measurement	
	JANTX and JANTXV levels	JAN level
3a	Temperature cycling	Temperature cycling (per MIL-PRF-19500 JANTX level)
3c 1/	Thermal impedance (see 4.5.5)	Thermal impedance (see 4.5.5)
9	Not applicable	Not applicable
11	I_{R1} and V_{Z2}	Not applicable
12	See 4.3.2, t = 48 hours	Not applicable
13 2/	$\Delta I_{R1} \leq$ 100 percent of initial reading or 50 nA dc, whichever is greater. $\Delta V_Z \leq \pm$2percent initial reading. Subgroup 2 of table I herein.	Not applicable

1/ Thermal impedance shall be performed any time after sealing provided temperature cycling is performed in accordance with MIL-PRF-19500, screen 3 prior to this thermal test.
2/ PDA = 5 percent for screen 13 applies to ΔI_{R1} and ΔV_{Z2}, and I_{R1} and V_{Z2}. Thermal impedance ($Z_{\Theta JX}$) is not required in screen 13.

4.3.1 Screening (JANHC and JANKC). Screening of JANHC and JANKC die shall be in accordance with MIL-PRF-19500, appendix G.

4.3.2 Power burn-in conditions. Power burn-in conditions are as follows: I_Z = column 8 of table II minimum; mounting conditions in accordance with MIL-STD-750, method 1038, test condition B, T_{EC} = +75°C to +125°C for surface mount devices. To better utilize burn-in equipment, higher values of I_Z shall be permitted provided:

a. The junction temperature does not exceed +175°C.

b. The power dissipation does not exceed 500 mW (see figure 5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500 and as specified herein. Group A inspection shall be performed on each sublot.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500, and table I herein. Electrical measurements (end-points) shall be in accordance with the applicable inspections of table I, group A, subgroup 2 herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VIb (JAN, JANTX, and JANTXV) of MIL-PRF-19500 and paragraph 4.4.2.1 herein. Electrical measurements (end-points) shall be in accordance with the applicable inspections of table I, group A, subgroup 2 herein. ($Z_{\theta JX}$ applies to B3 only.)

4.4.2.1 Group B inspection, table VIb (JAN, JANTX and JANTXV) of MIL-PRF-19500.

Subgroup	Method	Condition
B2	4066	See 4.5.1
B3	1027	I_Z = column 8 of table II, see 4.3.2
B4	2075	See 4.5.7
B5		Not applicable
B6	1032	T_A = 175°C

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VII of MIL-PRF-19500, and as follows. Electrical measurements (end-points) shall be in accordance with table I, group A, subgroup 2 herein. ($Z_{\theta JX}$ applies to C6 only.)

Subgroup	Method	Condition
C2	2036	Tension: Test condition A; weight = 4 pounds, t = 15 seconds. Lead fatigue: Test condition E. (Tension and lead fatigue are not required for UR-1 suffix devices)
C3		Not applicable.
C6	1026	I_Z = column 8 of table II, see 4.3.2
C7	4071	I_Z = 7.5 mA dc, T_1 = +25°C ±5°C, T_2 = +125°C ±5°C. (Max limit per columns 13 and 14 of table II). Sample size = 22, 0 rejects allowed

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

4.4 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in table IX of MIL-PRF-19500 and as follows. Electrical measurements (end points) and shall be in accordance with group A subgroup 2 herein.

Subgroup	Method	Condition	Sampling plan
E1	1051	500 cycles	22 devices, c = 0
E2	1037	6,000 cycles, I_{ZM} = Col. 8 $t_{off} = t_{on}$ = 30 seconds minimum	22 devices, c = 0
E3		Not applicable	
E4	3101 or 4081	$R_{\theta JEC}$ = 100°C/W (max) at zero lead length. +25°C ≤ T_{EC} ≤ +35°C, see 4.5.6	22 devices, c = 0
		$R_{\theta JL}$ = 250°C/W (max) at .375 inches. Lead length +25°C ≤ T_L ≤ +35°C, see 4.5.6	22 devices, c = 0

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Surge current (I_{ZSM}). The peak currents shown in column 10 of table II shall be applied in the reverse direction and these shall be superimposed on the current (I_Z = 20 mA dc) a total of 5 surges at 1-minute intervals. Each individual surge shall be one-half square-wave-pulse of one one-hundred twenty second duration or an equivalent one-half sine wave with the same effective rms current. T_A = +25°C ±5°C.

4.5.2 Regulator voltage measurements. The test current shall be applied until thermal equilibrium is attained (20 ±2 seconds) prior to reading the breakdown voltage. For this test, the diode shall be suspended by its leads with mounting clips whose inside edge is located at 0.375 inch (9.53 mm) from the body (UR version = 0 lead length) and the mounting clips shall be maintained at a temperature of +25°C +8°C, and -2°C. This measurement may be performed after a shorter time following application of the test current than that which provides thermal equilibrium if correlation to stabilized readings can be established to the satisfaction of the Government. JANHC and JANKC shall be pulse tested at 10 ms maximum.

4.5.3 Voltage regulation V_Z (reg). Voltage regulation shall be determined by the difference of the regulator voltage measured at different currents as specified in table I, group A, subgroup 7. Both test shall be performed at thermal equilibrium. This ΔV_Z shall not exceed column 7 of table II.

4.5.4 Temperature coefficient of regulator voltage (αV_Z). The device shall be temperature stabilized with current applied prior to reading regulator voltage at the specified ambient temperature as specified in paragraph 4.5.4, group C, subgroup 7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

4.5.5 Thermal impedance ($Z_{\theta JX}$). The $Z_{\theta JX}$ measurements shall be performed in accordance with MIL-STD-750 , method 3101 to remove atypical devices. The maximum limit shall not exceed the group A subgroup 2 limit. If a lot exhibits an out of control condition, the entire lot shall be removed from the line and held for engineering evaluation and disposition.

a. I_M measurement current .....1 mA - 10 mA

b. I_H forward heating current .....5 A - 1.0 A

c. t_H heating time .....10 ms

d. t_{MD} measurement delay time .....70 µs maximum

4.5.6 Thermal resistance. Thermal resistance measurement shall be performed in accordance with MIL-STD-750, method 3101 or 4081. Forced moving air or draft shall not be permitted across the device during test. The maximum limit for $R_{\theta JL}$ under these test conditions shall be $R_{\theta JL(max)}$ = 250°C/W or $R_{\theta JEC(max)}$ = 100°C/W. The following conditions shall apply when using method 3101:


a. I_M .....1 mA to 10 mA

b. I_H .....200 mA to 400 mA

c. t_H .....25 seconds minimum

d. t_{MD} .....70 µs maximum

LS = Lead spacing = .375 inch as defined on figure 5 below:
LS = 0 inch for "UR" suffix devices.

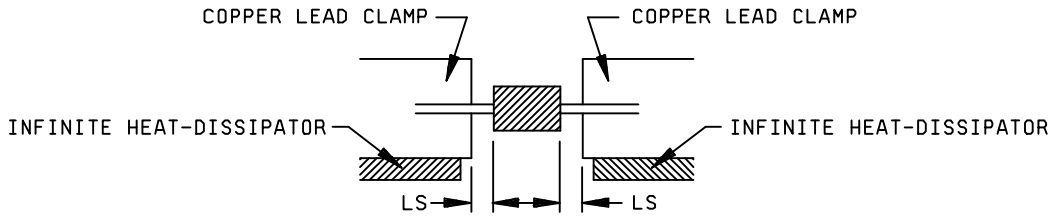

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 5. Mounting conditions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Forward voltage	4011	I_F = 200 mA dc	V_F		1.1	V dc
Reverse current	4016	DC method, V_R = column 11 of table II	I_{R1}		Col. 12	µA dc
Regulator voltage (see 4.5.2)	4022	I_{Z1} = 250 µA dc	V_{Z1}	Col. 9	Col. 4	V dc
Regulator voltage (see 4.5.2)	4022	I_{Z2} = 20 mA dc	V_{Z2}	Col. 3	Col. 4	V dc
Thermal impedance –1 suffix	3101	See 4.5.5 Not applicable for JANHC and JANKC	$Z_{\theta JX}$		25	°C/W
Subgroup 3						
High temperature operation		T_A = 150°C				
Reverse current	4016	DC method, V_R = column 11 of table II	I_{R2}		Col. 5	µA dc
Subgroup 4						
Small-signal reverse breakdown impedance	4051	I_Z = 20 mA dc, I_{SIG} = 10 % of I_Z ac	Z_Z		Col. 6	Ω
Subgroups 5						
Not applicable						
Subgroup 6						
Surge	4066	See 4.5.1				
Subgroup 7						
Voltage regulation (see 4.5.3)		I_{Z3} = 2 mA dc I_{Z4} = 20 mA dc	V_Z (reg)		Col. 7	V dc

1/ For sampling plan, see MIL-PRF-19500.
2/ Column references are to table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

4.5.6.1 For initial qualification and requalification. Read and record data in accordance with group E herein and shall be included in the qualification report.

4.5.7 Decap internal visual scribe and break. Scratch glass at cavity area with diamond scribe. Carefully snap open. Using 30X magnification examine the area where die (or bonding material) are in contact with the plugs, verify metallurgical bonding area. If the verification of the metallurgical bonding area is in question, the test method 3101 and test condition; and limits herein ($Z_{\Theta JX}$) shall be used to determine suitability for use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Points' packaging activity within the Military Department or Defense Agency, or within the Military Departments' System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical characteristics (5 percent tolerance diodes)

Col 1	Col 2	Col 3	Col 4	Col 5	Col 6	Col 7	Col 8	Col 9	Col 10	Col 11	Col 12	Col 13	Col 14
Type	V_{Z2} nom at I_Z = 20 mA	V_{Z2} min	V_{Z1} and V_{Z2} max	I_{R2} at T_A = +150°C V_R = col 11	Z_Z at I_Z = 20 mA	V_Z (reg)	I_{ZM}	V_{Z1} (min)	I_{ZSM}	V_R	I_{R1} at T_A = +25°C V_R = col 11	αVZ neg. limit	αVZ pos. limit
	Volts	Volts	Volts	µA	Ω	Volts	mA	Volts	mA	Volts	µA	%/°C	%/°C
1N4370A-1	2.4	2.28	2.52	200	30	1.0	155	1.1	1000	1.0	100	-0.085	0
1N4371A-1	2.7	2.57	2.83	150	30	1.0	140	1.2	1000	1.0	60	-0.080	0
1N4372A-1	3.0	2.85	3.15	100	29	1.0	125	1.3	1000	1.0	30	-0.075	0
1N746A-1	3.3	3.14	3.46	30	24	1.0	120	1.5	1000	1.0	5	-0.070	0
1N747A-1	3.6	3.42	3.78	30	22	1.0	110	1.8	1000	1.0	3	-0.065	0
1N748A-1	3.9	3.71	4.09	30	20	1.0	100	2.0	1000	1.0	2	-0.060	0
1N749A-1	4.3	4.09	4.51	50	18	1.0	90	2.4	990	1.0	2	-0.055	+.020
1N750A-1	4.7	4.47	4.93	50	15	1.0	85	2.8	980	1.5	5	-0.043	+.025
1N751A-1	5.1	4.85	5.35	50	14	0.8	75	3.3	960	2.0	5	-0.030	+.030
1N752A-1	5.6	5.32	5.88	50	8	0.8	70	4.3	950	2.5	5	-0.028	+.036
1N753A-1	6.2	5.89	6.51	50	3	0.6	65	5.2	910	3.5	5	0	+.045
1N754A-1	6.8	6.46	7.14	50	3	0.4	60	6.0	870	4.0	2	0	+.050
1N755A-1	7.5	7.13	7.87	50	4	0.4	55	6.6	810	5.0	2	0	+.058
1N756A-1	8.2	7.79	8.61	50	5	0.4	50	7.5	740	6.0	1	0	+.062
1N757A-1	9.1	8.65	9.55	50	6	0.5	45	8.4	650	7.0	1	0	+.068
1N758A-1	10.0	9.50	10.50	50	7	0.7	40	9.1	540	8.0	1	0	+.076
1N759A-1	12.0	11.40	12.60	50	10	1.0	35	11.0	400	9.0	1	0	+.08

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

TABLE II. ~~Electrical characteristics (2 percent tolerance diodes)~~ - Continued.

Col 1	Col 2	Col 3	Col 4	Col 5	Col 6	Col 7	Col 8	Col 9	Col 10	Col 11	Col 12	Col 13	Col 14
Type	V_{Z2} nom at I_Z = 20 mA	V_{Z2} min	V_{Z1} and V_{Z2} max	I_{R2} at T_A = +150°C V_R = col 11	Z_Z at I_Z = 20 mA	V_Z (reg)	I_{ZM}	V_{Z1} (min)	I_{ZSM}	V_R	I_{R1} at T_A = +25°C V_R = col 11	αVZ neg. limit	αVZ pos. limit
	Volts	Volts	Volts	µA	Ω	Volts	mA	Volts	mA	Volts	µA	%/°C	%/°C
1N4370C-1	2.4	2.352	2.448	200	30	1.0	155	1.1	1000	1.0	100	-0.085	0
1N4371C-1	2.7	2.646	2.754	150	30	1.0	140	1.2	1000	1.0	60	-0.080	0
1N4372C-1	3.0	2.94	3.06	100	29	1.0	125	1.3	1000	1.0	30	-0.075	0
1N746C-1	3.3	3.234	3.366	30	24	1.0	120	1.5	1000	1.0	5	-0.070	0
1N747C-1	3.6	3.528	3.672	30	22	1.0	110	1.8	1000	1.0	3	-0.065	0
1N748C-1	3.9	3.822	3.978	30	20	1.0	100	2.0	1000	1.0	2	-0.060	0
1N749C-1	4.3	4.214	4.386	50	18	1.0	90	2.4	990	1.0	2	-0.055	+.020
1N750C-1	4.7	4.606	4.794	50	15	1.0	85	2.8	980	1.5	5	-0.043	+.025
1N751C-1	5.1	4.998	5.202	50	14	0.8	75	3.3	960	2.0	5	-0.030	+.030
1N752C-1	5.6	5.488	5.712	50	8	0.8	70	4.3	950	2.5	5	-0.028	+.036
1N753C-1	6.2	6.076	6.324	50	3	0.6	65	5.2	910	3.5	5	0	+.045
1N754C-1	6.8	6.664	6.936	50	3	0.4	60	6.0	870	4.0	2	0	+.050
1N755C-1	7.5	7.357	7.650	50	4	0.4	55	6.6	810	5.0	2	0	+.058
1N756C-1	8.2	8.036	8.364	50	5	0.4	50	7.5	740	6.0	1	0	+.062
1N757C-1	9.1	8.918	9.282	50	6	0.5	45	8.4	650	7.0	1	0	+.068
1N758C-1	10.0	9.80	10.20	50	7	0.7	40	9.1	540	8.0	1	0	+.076
1N759C-1	12.0	11.76	12.24	50	10	1.0	35	11.0	400	9.0	1	0	+.08

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical characteristics (1 percent tolerance diodes)– Continued.

Col 1	Col 2	Col 3	Col 4	Col 5	Col 6	Col 7	Col 8	Col 9	Col 10	Col 11	Col 12	Col 13	Col 14
Type	V_{Z2} nom at I_Z = 20 mA	V_{Z2} min	V_{Z1} and V_{Z2} max	I_{R2} at T_A = +150°C V_R = col 11	Z_Z at I_Z = 20 mA	V_Z (reg)	I_{ZM}	V_Z (min)	I_{ZSM}	V_R	I_{R1} at T_A = +25°C V_R = col 11	αVZ neg. limit	αVZ pos. limit
	Volts	Volts	Volts	µA	Ω	Volts	mA	Volts	mA	Volts	µA	%/°C	%/°C
1N4370D-1	2.4	2.376	2.424	200	30	1.0	155	1.1	1000	1.0	100	-0.085	0
1N4371D-1	2.7	2.673	2.727	150	30	1.0	140	1.2	1000	1.0	60	-0.080	0
1N4372D-1	3.0	2.970	3.030	100	29	1.0	125	1.3	1000	1.0	30	-0.075	0
1N746D-1	3.3	3.267	3.333	30	24	1.0	120	1.5	1000	1.0	5	-0.070	0
1N747D-1	3.6	3.564	3.636	30	22	1.0	110	1.8	1000	1.0	3	-0.065	0
1N748D-1	3.9	3.861	3.939	30	20	1.0	100	2.0	1000	1.0	2	-0.060	0
1N749D-1	4.3	4.257	4.343	50	18	1.0	90	2.4	990	1.0	2	-0.055	+.020
1N750D-1	4.7	4.653	4.747	50	15	1.0	85	2.8	980	1.5	5	-0.043	+.025
1N751D-1	5.1	5.049	5.151	50	14	0.8	75	3.3	960	2.0	5	-0.030	+.030
1N752D-1	5.6	5.544	5.656	50	8	0.8	70	4.3	950	2.5	5	-0.028	+.036
1N753D-1	6.2	6.138	6.262	50	3	0.6	65	5.2	910	3.5	5	0	+.045
1N754D-1	6.8	6.732	6.868	50	3	0.4	60	6.0	870	4.0	2	0	+.050
1N755D-1	7.5	7.425	7.575	50	4	0.4	55	6.6	810	5.0	2	0	+.058
1N756D-1	8.2	8.118	8.282	50	5	0.4	50	7.5	740	6.0	1	0	+.062
1N757D-1	9.1	9.009	9.191	50	6	0.5	45	8.4	650	7.0	1	0	+.068
1N758D-1	10.0	9.90	10.10	50	7	0.7	40	9.1	540	8.0	1	0	+.076
1N759D-1	12.0	11.88	12.12	50	10	1.0	35	11.0	400	9.0	1	0	+.08

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-PRF-19500 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Issue of DODISS to be cited in the solicitation and, if required, the specific issue of individual documents referenced (see 2.2.1).

b. Lead finish (see 3.3.1).

c. Type designation and product assurance level.

d. Packaging requirements (see 5.1).

6.3 Cross reference substitution list. JANS level will no longer be built to MIL-PRF-19500/127N. Devices in stock are acceptable provided the date code is prior 14 June 1994. Devices required for space flight applications are found in MIL-PRF-19500/533. Existing supplies of parts can be used until existing supplies are exhausted. A PIN for PIN replacement table follows, and these devices are directly interchangeable:

JANS superseded PIN	JANS superseding PIN
1N4370A-1, C-1 or D-1	1N6309, C, D
1N4371A-1, C-1 or D-1	1N6310, C, D
1N4372A-1, C-1 or D-1	1N6311, C, D
1N746A-1, C-1 or D-1	1N6312, C, D
1N747A-1, C-1 or D-1	1N6313, C, D
1N748A-1, C-1 or D-1	1N6314, C, D
1N749A-1, C-1 or D-1	1N6315, C, D
1N750A-1, C-1 or D-1	1N6316, C, D
1N751A-1, C-1 or D-1	1N6317, C, D
1N752A-1, C-1 or D-1	1N6318, C, D
1N753A-1, C-1 or D-1	1N6319, C, D
1N754A-1, C-1 or D-1	1N6320, C, D
1N755A-1, C-1 or D-1	1N6321, C, D
1N756A-1, C-1 or D-1	1N6322, C, D
1N757A-1, C-1 or D-1	1N6323, C, D
1N758A-1, C-1 or D-1	1N6324, C, D
1N759A-1, C-1 or D-1	1N6326, C, D

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

6.5 Suppliers of JANHC and JANKC die. The qualified JANHC and JANKC die suppliers with the applicable letter version (example JANHCA1N4370A) will be identified on the QML.

JANHC ordering information 1/ 2/		
PIN	Manufacture CAGE	
	55801	12954
1N4370	JANHCA1N4370	JANHCB1N4370
1N4371	JANHCA1N4371	JANHCB1N4371
1N4372	JANHCA1N4372	JANHCB1N4372
1N746	JANHCA1N746	JANHCB1N746
1N747	JANHCA1N747	JANHCB1N747
1N748	JANHCA1N748	JANHCB1N748
1N749	JANHCA1N749	JANHCB1N749
1N750	JANHCA1N750	JANHCB1N750
1N751	JANHCA1N751	JANHCB1N751
1N752	JANHCA1N752	JANHCB1N752
1N753	JANHCA1N753	JANHCB1N753
1N754	JANHCA1N754	JANHCB1N754
1N755	JANHCA1N755	JANHCB1N755
1N756	JANHCA1N756	JANHCB1N756
1N757	JANHCA1N757	JANHCB1N757
1N758	JANHCA1N758	JANHCB1N758
1N759	JANHCA1N759	JANHCB1N759

1/ Suffixes can be “A”, ”C”, or “D”.
2/ Replace “HC” with “KC” when ordering JANKC die.

6.5 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

6.6 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List QML-19500 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center Columbus, DSCC-VQE, Columbus, OH 43216.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Army – AR, AV, MI, SM
Air Force – 13, 19
Navy – AS, CG, MC

(Project 5961-2146)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7, and send to preparing activity.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-PRF-19500/127N	2. DOCUMENT DATE *(YYYYMMDD)*

3. DOCUMENT TITLE SEMICONDUCTOR DEVICE, DIODE, SILICON, VOLTAGE REGULATOR, TYPES 1N4370A-1 THROUGH 1N4372A-1, AND 1N746A-1 THROUGH 1N759A-1, 1N4370AUR-1 THROUGH 1N4372AUR-1 AND 1N746AUR-1 THROUGH 1N759AUR-1, 1N4370C-1 THROUGH 1N4372C-1, AND 1N746C-1 THROUGH 1N759C-1, 1N4370CUR-1 THROUGH 1N4372CUR-1 AND 1N746CUR-1 THROUGH 1N759CUR-1, 1N4370D-1, THROUGH 1N4372D-1, AND 1N746D-1 THROUGH 1N759D-1, 1N4370DUR-1 THROUGH 1N4372DUR-1 AND 1N746DUR-1 THROUGH 1N759DUR-1, JAN, JANTX, JANTXV, JANHC, AND JANKC

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) DSN *(If applicable)*	7. DATE SUBMITTED *(YYYYMMDD)*

8. PREPARING ACTIVITY

a. NAME Alan Barone	b. TELEPHONE *(Include Area Code* (1) Commercial 614-692-0510	(2) DSN 850-0510
c. ADDRESS *(Include Zip Code)* DSCC-VAC 3990 East Broad Street Columbus, Ohio 43216-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Standardization Program Office (DLSC-LM) 8725 John J. Kingman Road, Suite 2533 Fort Belvoir, Virginia 22060-6221 Telephone (703)767-6888 DSN 427-6888	

DD Form 1426, FEB 1999 (EG) PREVIOUS EDITIONS ARE OBSOLETE.
WHS/DIOR, Feb 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.