The documentation and process conversion measures necessary to comply with this revision shall be completed by 19 November 2005.

INCH-POUND

MIL-PRF-19500/127R
19 August 2005
SUPERSEDING
MIL-PRF-19500/127P
3 May 2004

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICES, DIODE, SILICON, VOLTAGE REGULATOR,
TYPES 1N4370A-1 THROUGH 1N4372A-1 AND 1N746A-1 THROUGH 1N759A-1, 1N4370AUR-1 THROUGH 1N4372AUR-1 AND 1N746AUR-1 THROUGH 1N759AUR-1, 1N4370C-1 THROUGH 1N4372C-1 AND 1N746C-1 THROUGH 1N759C-1, 1N4370CUR-1 THROUGH 1N4372CUR-1 AND 1N746CUR-1 THROUGH 1N759CUR-1, 1N4370D-1 THROUGH 1N4372D-1 AND 1N746D-1 THROUGH 1N759D-1, 1N4370DUR-1 THROUGH 1N4372DUR-1 AND 1N746DUR-1 THROUGH 1N759DUR-1,
JAN, JANTX, JANTXV, JANHC, AND JANKC

JANS level (see 6.4).

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for 500 milliwatt, silicon, voltage regulator diodes with voltage tolerances of 5, 2, and 1 percent. Three levels of product assurance are provided for each encapsulated device type as specified in MIL-PRF-19500. Two level of product assurance is provided for each unencapsulated device .

1.2 Physical dimensions. See 3.4 and figure 1 (similar to DO-35), figure 2 (similar to DO-213AA), and figures 3 and 4 for die.

* 1.3 Maximum ratings. Maximum ratings are as shown in maximum and primary test ratings (see 3.9) herein and as follows:

$P_{TL}$ = 500 mW, (DO-35) at $T_L$ = +50°C, L = .375 inch (9.53 mm); both ends of case or diode body to heat sink at L = .375 inch (9.53 mm). Derate $I_Z$ to 0.0 mA dc at +175°C.
$P_{TEC}$ = 500 mW, (DO-213AA) at $T_{EC}$ = +125°C, derate to 0 at +175°C. -65°C ≤ $T_J$ ≤ +175°C; -65°C ≤ $T_{STG}$ ≤ +175°C.
$P_{T(PCB)}$ = 400 mW, $T_A$ = 55°C.

* Comments, suggestions, or questions on this document should be addressed to Defense Supply Center, Columbus, ATTN: DSCC-VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dscc.dla.mil Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

* 1.4 Primary electrical characteristics. Primary electrical characteristics are as shown in maximum and primary test ratings (see 3.9) herein and as follows:

2.4 V dc ≤ $V_Z$ ≤ 12 v dc.
1N4370A-1 through 1N4372A-1 and 1N746A-1 through 1N759A-1 are ±5 percent voltage tolerance.
1N4370C-1 through 1N4372C-1 and 1N746C-1 through 1N759C-1 are ±2 percent voltage tolerance.
1N4370D-1 through 1N4372D-1 and 1N746D-1 through 1N759D-1 are ±1 percent voltage tolerance.
Thermal resistance:
$R_{\theta JL}$ = 250°C/W maximum at L = .375 inch (9.53 mm) (D0-35).
$R_{\theta JEC}$ = 100°C/W maximum. Junction to end-caps (D0-213AA).
$R_{\theta JA}$ = 300°C/W junction to ambient including PCB see note (1).

(1) See figures 5, 6, and 7 for derating curves. $T_A$ = +75°C for both axial and MELF (US) on printed circuit board (PCB), PCB = FR4 .0625 inch (1.59 mm) 1-layer 1-Oz Cu, horizontal, still air, pads (US) = .067 inch (1.70 mm) x .105 inch (2.67 mm); pads (axial) = .092 inch (2.34 mm) diameter, strip = .030 inch (0.762 mm) x 1 inch (25.4 mm) long, axial lead length L ≤ .187 inch (≤ 4.75 mm); $R_{\theta JA}$ with a defined thermal resistance condition included is measured at $I_Z$ = as defined in table IV herein.

## 2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, or 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, or 5 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS


MIL-STD-750 - Test Methods for Semiconductor Devices.

* (Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

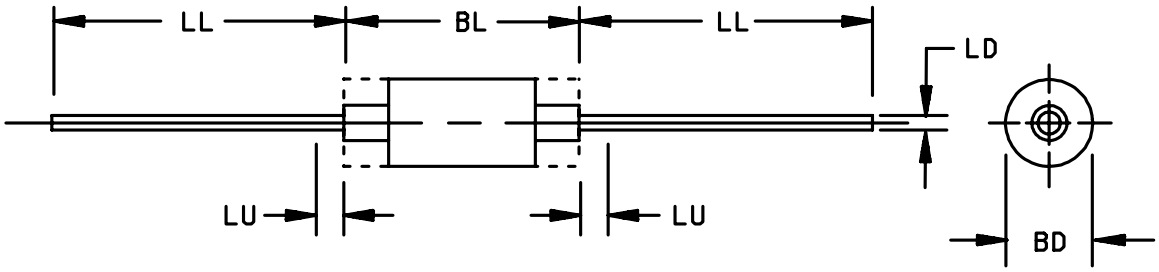



| Symbol | Dimensions | | | | Notes |
|---|---|---|---|---|---|
| | Inches | | Millimeters | | |
| | Min | Max | Min | Max | |
| BD | .055 | .090 | 1.40 | 2.29 | 3 |
| BL | .120 | .200 | 3.05 | 5.08 | 4 |
| LD | .018 | .023 | 0.46 | 0.58 | |
| LL | 1.000 | 1.500 | 25.40 | 38.10 | |
| LU | | .050 | | 1.27 | 5 |

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. Dimension BD shall be measured at the largest diameter.
4. The BL dimension shall include the entire body including slugs.
5. Dimension LU shall include the sections of the lead over which the diameter is uncontrolled. This uncontrolled area is defined as the zone between the edge of the diode body and extending .050 inch (1.27 mm) onto the leads.
6. In accordance with ASME Y14.5M, diameters are equivalent to $\phi$X symbology.

* FIGURE 1. Physical dimensions for types 1N4370A-1 through 1N4372A-1, 1N4370C-1 through 1N4372C-1, 1N4370D-1 through 1N4372D-1, 1N746A-1 through 1N759A-1, 1N746C-1 through 1N759C-1, and 1N746D-1 through 1N759D-1 (DO-35).



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

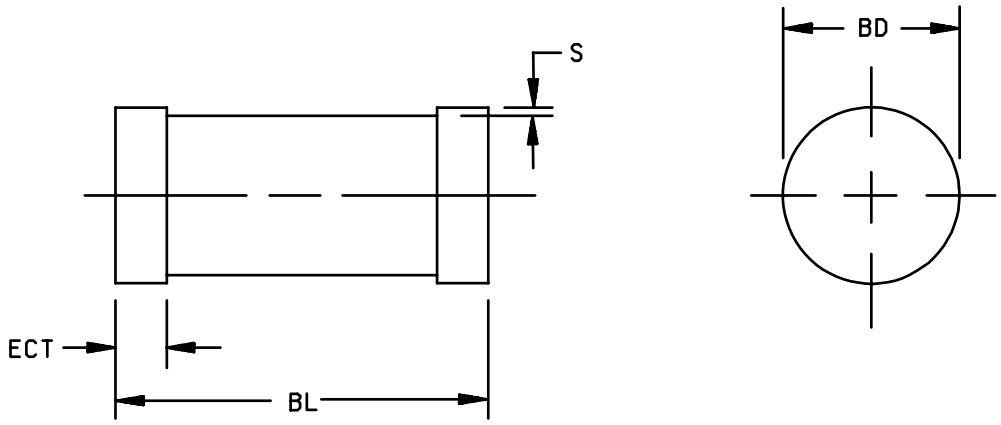



| Symbol | Dimensions | | | |
|---|---|---|---|---|
| | Inches | | Millimeters | |
| | Min | Max | Min | Max |
| BL | .130 | .146 | 3.30 | 3.71 |
| BD | .063 | .067 | 1.60 | 1.71 |
| ECT | .016 | .022 | 0.41 | 0.56 |
| S | .001 min | | 0.03 min | |

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. In accordance with ASME Y14.5M, diameters are equivalent to ϕX symbology.

FIGURE 2. Physical dimensions for types 1N4370AUR-1 through 1N4372AUR-1, 1N4370CUR-1 through 1N4372CUR-1, 1N4370DUR-1 through 1N4372DUR-1, 1N746AUR-1 through 1N759AUR-1, 1N746CUR-1 through 1N759CUR-1, and 1N746DUR-1 through 1N759DUR-1 (DO-213AA).



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

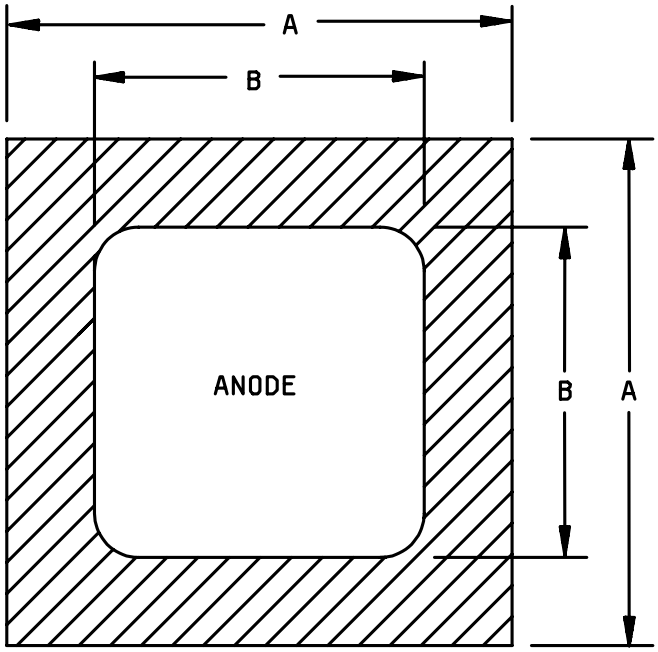


(A – version)


| Ltr | Dimensions | | | |
|---|---|---|---|---|
| | Inches | | Millimeters | |
| | Min | Max | Min | Max |
| A | .021 | .025 | 0.53 | 0.63 |
| B | .013 | .017 | 0.33 | 0.43 |

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. The physical characteristics of the die thickness are .010 ±.002 (0.25 mm ±0.051 mm). Metallization is top = (anode)-AL, back: (cathode)-AU. AL thickness = 25,000 Å minimum, AU thickness = 4,000 Å minimum.
4. Circuit layout data: For zener operation, cathode must be operated positive with respect to anode.

FIGURE 3. Physical dimensions (JANHCA and JANKCA die dimensions).



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

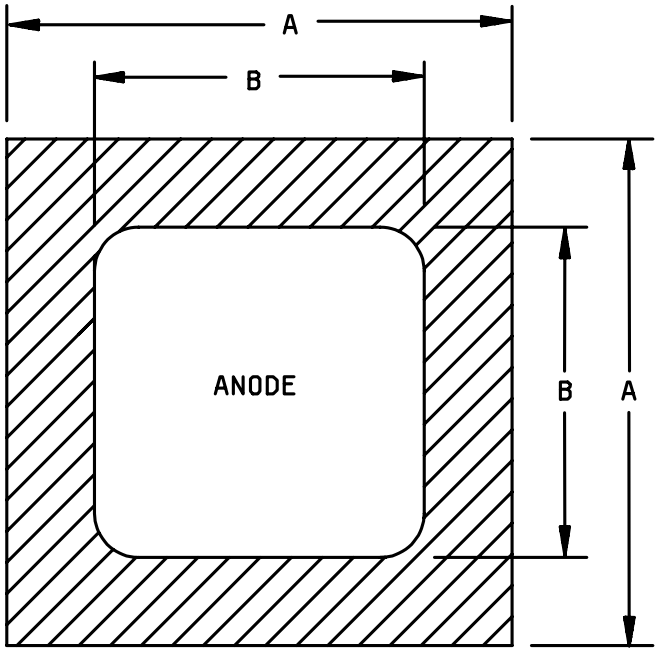


(B – version)

| Ltr | Dimensions | | | |
|---|---|---|---|---|
| | Inches | | Millimeters | |
| | Min | Max | Min | Max |
| A | .024 | .028 | 0.61 | 0.71 |
| B | .017 | .021 | 0.43 | 0.53 |

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. The physical characteristics of the die thickness are .010 ±.002 (0.25 mm ±0.051 mm). Metallization is top = (anode)-AL, back: (cathode)-AU. AL thickness = 40,000 Å minimum, AU thickness = 5,000 Å minimum.
4. Circuit layout data: For zener operation, cathode must be operated positive with respect to anode.

FIGURE 4. Physical dimensions (JANHCB and JANKCB die dimensions).



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturer's list (QML) before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-PRF-19500, and as follows.

EC - - - - end-caps

3.4 Interface and physical dimensions. The interface and physical dimensions shall be specified in MIL-PRF-19500 and figures 1 and 2 (similar to DO-35 and DO-213AA), and figures 3 and 4 (die) herein.

3.4.1 Lead finish. Lead finish shall be solderable as defined in MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.4.2 Diode construction. All devices shall be metallurgically bonded double plug construction in accordance with the requirements of category I, II, or III (see MIL-PRF-19500).

3.5 Marking. Devices shall be marked in accordance with MIL-PRF-19500. At the option of the manufacturer, the DO-35 version may leave off "-" portion of the type designator (example: JANTX1N4370A1).

3.5.1 Marking of UR-1 version devices. For UR-1 version devices only, all marking (except polarity) may be omitted from the body, but shall be retained on the initial container.

3.6 Selection of tight tolerance devices. The C and D suffix devices shall be selected from JAN, JANTX, or JANTXV devices, which have successfully completed all applicable screening, and groups A, B, and C testing as 5 percent tolerance devices. All sublots of C and D suffix devices shall pass table I, subgroup 2, at tightened tolerances. Tighter tolerances for mounting clip temperature shall be maintained for reference purpose to establish correlation. For C and D tolerance levels, $T_L$ = +25°C ±2°C at .375 inch (9.53 mm) from body or equivalent.

3.7 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, table I and table II.

3.8 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table I herein.

3.9 Maximum and primary test ratings. Maximum and primary test ratings for voltage regulator diodes are specified in table IV herein.

3.10 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

* 4.2.1 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not request the performance of table II tests, the tests specified in table II herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.

4.2.2 JANHC and JANKC devices. JANHC and JANKC devices shall be qualified in accordance with appendix G of MIL-PRF-19500.

4.2.3 Construction verification. Cross sectional photos from three devices shall be submitted in the qualification report.

* 4.3 Screening (JAN, JANTX, and JANTXV levels only). Screening shall be in accordance with table IV of MIL-PRF-19500 and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

| Screen (see table IV of MIL-PRF-19500) | Measurement |
|---|---|
| | JANTX and JANTXV levels |
| 3a | Temperature cycling |
| (1) 3c | Thermal impedance (see 4.3.2) |
| 7a<br>7b | Not applicable<br>Optional |
| 9 | Not applicable |
| 11 | $I_{R1}$ and $V_{Z2}$ |
| 12 | See 4.3.3, t = 48 hours |
| (2) 13 | $\Delta I_{R1} \leq$ 100 percent of initial reading or 50 nA dc, whichever is greater.<br>$\Delta V_{Z2} \leq \pm 2$ percent initial reading.<br>Subgroup 2 of table I herein. |
| 14a<br>(3) 14b | Not applicable<br>Required |

(1) Thermal impedance shall be performed any time after sealing provided temperature cycling is performed in accordance with MIL-PRF-19500, screen 3 prior to this thermal test.
(2) PDA = 5 percent for screen 13 applies to $\Delta I_{R1}$ and $\Delta V_{Z2}$, and $I_{R1}$ and $V_{Z2}$. Thermal impedance ($Z_{\theta JX}$) is not required in screen 13 of 4.3 herein.
(3) For clear glass diodes, the hermetic seal (gross leak) may be performed at anytime after temperature cycling.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

4.3.1 Screening (JANHC and JANKC). Screening of JANHC and JANKC die shall be in accordance with appendix G of MIL-PRF-19500.

* 4.3.1.1 JAN product. JAN product will have temperature cycling and thermal impedance testing performed in accordance with MIL-PRF-19500, JANTX level screening requirements.

* 4.3.2 Thermal impedance. The thermal impedance measurements shall be performed in accordance with method 3101 of MIL-STD-750 using the guidelines in that method for determining $I_M$, $I_H$, $t_H$, $t_{MD}$ (and $V_C$ where appropriate). The thermal impedance limit shall comply with the thermal impedance graph on figures 8, 9, and 10 (less than or equal to the curve value at the same $t_H$ time) and shall be less than the process determined statistical maximum limit as outlined in method 3101 or 4081. (table II, subgroup 4). See figure 11 for mounting conditions.

* 4.3.3 Power burn-in conditions. Power burn-in conditions are as follows: $I_{ZPCB}$ (min) = column 10 of table IV; $T_A$ = 75°C maximum. Test conditions in accordance with method 1038 of MIL-STD-750, condition B (see 4.5.5).

Adjust $I_Z$ or $T_A$ to achieve the required $T_J$. $T_J$ = 125°C minimum; apply $I_Z$ = $I_{ZPCB}$.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500 and as specified herein. Group A inspection shall be performed on each sublot.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500, and table I herein.

* 4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VIb (JAN, JANTX, and JANTXV) of MIL-PRF-19500 and 4.4.2.1 herein. Electrical measurements (end-points) shall be in accordance with the applicable inspections of table I, subgroup 2 herein. ($Z_{\theta JX}$ applies to B2 and B3 only).



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

* 4.4.2.1 Group B inspection, table VIb (JAN, JANTX and JANTXV) of MIL-PRF-19500.

| Subgroup | Method | Condition |
|---|---|---|
| B2 | 1056 | 0°C to +100°C, 10 cycles. |
| B2 | 1051 | -55°C to +175°C, 25 cycles. |
| B2 | 4066 | See 4.5.1. |
| B3 | 1027 | $I_{ZM}$ = Column 8 of table IV minimum. Adjust $I_{ZM}$ or $T_A$ to ensure a $T_J$ = 150°C (minimum) (see 4.5.5). |
| B4 | 2075 | |
| B4 | 2101 | Decap analysis, scribe and break only. |
| B6 | 1032 | $T_A$ = 175°C. |

* 4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VII of MIL-PRF-19500, and as follows. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein. ($Z_{\theta JX}$ applies to C2 and C6 only).

| Subgroup | Method | Condition |
|---|---|---|
| C2 | 1056 | 0°C to +100°C, 10 cycles. |
| C2 | 1051 | -55°C to +175°C, 25 cycles. |
| C2 | 2036 | Tension: Test condition A; weight = 4 pounds, t = 15 seconds.<br>Lead fatigue: Test condition E. (Tension and lead fatigue are not required for UR-1 suffix devices). |
| C2 | 1071 | Test condition E. |
| C3 | | Not applicable. |
| C5 | 4081 | See 4.3.2 herein. |
| C6 | 1027 | $I_{ZM}$ = Column 8 of table IV minimum. Adjust $I_{ZM}$ or $T_A$ to ensure a $T_J$ = 150°C (minimum) (see 4.5.5). |
| C7 | | Not applicable. |
| C8 | 4071 | $I_Z$ = 7.5 mA dc, $T_1$ = +25°C ±5°C, $T_2$ = +125°C ±5°C. (Max limit in accordance with columns 13 and 14 of table IV). Sample size = 22, 0 rejects allowed. |

* 4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in table IX of MIL-PRF-19500 and table II herein. Electrical measurements (end-points) shall be in accordance with the applicable inspections of table I, subgroup 2 herein.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Surge current ($I_{ZSM}$). The peak currents shown in column 10 of table IV shall be applied in the reverse direction and these shall be imposed on the current ($I_Z$ = 20 mA dc) a total of 5 surges at 1 minute intervals. Each individual surge shall be one-half square-wave-pulse of one one-hundred twenty second duration or an equivalent one-half sine wave with the same effective rms current. $T_A$ = +25°C ±5°C.

4.5.2 Regulator voltage measurements. The test current shall be applied until thermal equilibrium is attained (20 ±2 seconds) prior to reading the breakdown voltage. For this test, the diode shall be suspended by its leads with mounting clips whose inside edge is located at .375 inch (9.53 mm) from the body (UR version = 0 lead length) and the mounting clips shall be maintained at a temperature of +25°C +8°C, and -2°C. This measurement may be performed after a shorter time following application of the test current than that which provides thermal equilibrium if correlation to stabilized readings can be established to the satisfaction of the Government. JANHC and JANKC shall be pulse tested at 10 ms maximum.

4.5.3 Voltage regulation $V_Z$ (reg). Voltage regulation shall be determined by the difference of the regulator voltage measured at different currents as specified in table I, subgroup 7. Both test shall be performed at thermal equilibrium. This $\Delta V_Z$ shall not exceed column 7 of table IV.

4.5.4 Temperature coefficient of regulator voltage ($\alpha V_Z$). The device shall be temperature stabilized with current applied prior to reading regulator voltage at the specified ambient temperature as specified in 4.4.3 herein, group C, subgroup 8.

* 4.5.5 Free air burn-in and life tests. The use of a current limiting or ballast resistor is permitted provided that each DUT still sees the full $P_t$ (minimum) and that the minimum applied voltage, where applicable, is maintained throughout the burn-in period. Use method 3100 of MIL-STD-750 to measure $T_J$.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

* TABLE I. Group A inspection.

| Inspection 1/ | MIL-STD-750 | | Symbol | Limits 2/ | | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 1 | | | | | | |
| Visual and mechanical examination | 2071 | | | | | |
| Subgroup 2 | | | | | | |
| Forward voltage | 4011 | $I_F$ = 200 mA dc. | $V_F$ | | 1.1 | V dc |
| Reverse current | 4016 | DC method, $V_R$ = column 11 of table IV. | $I_{R1}$ | | Col. 12 | µA dc |
| Regulator voltage (see 4.5.2) | 4022 | $I_{Z1}$ = 250 µA dc. | $V_{Z1}$ | Col. 9 | Col. 4 | V dc |
| Regulator voltage (see 4.5.2) | 4022 | $I_{Z2}$ = 20 mA dc. | $V_{Z2}$ | Col. 3 | Col. 4 | V dc |
| Thermal impedance -1 suffix | 3101 | See 4.3.2, not applicable for JANHC and JANKC. | $Z_{\theta JX}$ | | | °C/W |
| Subgroup 3 | | | | | | |
| High temperature operation | | $T_A$ = 150°C | | | | |
| Reverse current | 4016 | DC method, $V_R$ = column 11 of table IV. | $I_{R2}$ | | Col. 5 | µA dc |
| Subgroup 4 | | | | | | |
| Small-signal reverse breakdown impedance | 4051 | $I_Z$ = 20 mA dc, $I_{SIG}$ = 10 percent of $I_Z$ ac. | $Z_Z$ | | Col. 6 | ohm |
| Subgroups 5 | | | | | | |
| Not applicable | | | | | | |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

* TABLE I. Group A inspection - Continued.

| Inspection 1/ | MIL-STD-750 | | Symbol | Limits 2/ | | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 6 | | | | | | |
| Surge | 4066 | See 4.5.1 | | | | |
| Electrical measurements | | See table I, subgroup 2. | | | | |
| Surge | 4066 | See 4.5.1 | | | | |
| Subgroup 7 | | | | | | |
| Voltage regulation (see 4.5.3) | | $I_{Z3}$ = 2 mA dc; $I_{Z4}$ = 20 mA dc | $V_Z$ (reg) | | Col. 7 | V dc |

1/ For sampling plan, see MIL-PRF-19500.
2/ Column references are to table IV.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

* TABLE II. Group E inspection qualification and requalification (all product assurance levels).

| Inspection | MIL-STD-750 | | Qualification conformance inspection (sampling plan) |
|---|---|---|---|
| | Method | Conditions | |
| Subgroup 1 | | | 45 devices, c = 0 |
| Temperature cycling | 1051 | 500 cycles, -55°C to +175°C. | |
| Hermetic seal | 1071 | | |
| Electrical measurements | | See table I, subgroup 2 and table III, step 1. | |
| Subgroup 2 | | | 22 devices, c = 0 |
| Intermittent operation life | 1037 | 6,000 cycles. $I_Z$ = column 8 of table IV. | |
| Electrical measurements | | See table I, subgroup 2 and table III, step 1. Provide read and record $\Delta Z_{\theta JX}$ data to the qualifying activity. | |
| Subgroup 4 | | | N/A |
| Thermal impedance curves | | Each supplier shall submit a thermal impedance ($Z_{\theta JX}$) histogram of the qual lot and thermal impedance curves of the best device and the qual lot average. A histogram of thermal resistance ($R_{\theta JX}$) is also required (116 devices). In addition, the optimal test conditions and thermal impedance limit shall be provided to the qualifying activity in the qualification report for approval. The approved thermal impedance conditions and limit for $Z_{\theta JX}$ shall be used by the supplier in screening and for endpoint measurements as applicable. The approved thermal impedance conditions for $R_{\theta JX}$ shall be used by the supplier for conformance inspection. | |
| Subgroups 5 and 6 | | | |
| Not applicable | | | |
| Subgroup 8 | | | 45 devices |
| Resistance to glass cracking | 1057 | Condition B. Cool down after solder immersion is permitted. Test until failure occurs on all devices with the chosen sample or to a maximum of 25 cycles, whichever comes first. | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

* TABLE III. Group B, C, and E delta requirements. 1/ 2/ 3/

| Step | Inspection | MIL-STD-750 | | Symbol | Limits | | Unit |
|---|---|---|---|---|---|---|---|
| | | Method | Conditions | | Min | Max | |
| 1. | Thermal impedance | 3101 | See 4.3.2 | $\Delta Z_{\theta JX}$ | | 10 percent of initial value max. | °C/W |

1/ The electrical measurements for table VIb of MIL-PRF-19500 are as follows:
   a. Subgroup 2, see table III herein, step 1.
   b. Subgroup 3, see table III herein, step 1.

2/ The electrical measurements for table VII of MIL-PRF-19500 are as follows:
   a. Subgroup 2, see table III herein, step 1.
   b. Subgroup 6, see table III herein, step 1.

3/ The electrical measurements for table IX of MIL-PRF-19500 are as follows: subgroup 1, see table III herein, step 1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

* TABLE IV. Electrical characteristics (5 percent tolerance diodes).

| Col 1 | Col 2 | Col 3 | Col 4 | Col 5 | Col 6 | Col 7 | Col 8 | Col 9 | Col 10 | Col 11 | Col 12 | Col 13 | Col 14 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Type | $V_{Z2}$ nom at $I_Z$ = 20 mA | $V_{Z2}$ min | $V_{Z1}$ and $V_{Z2}$ max | $I_{R2}$ at $T_A$ = +150°C $V_R$ = col 11 | $Z_Z$ at $I_Z$ = 20 mA | $V_Z$ (reg) | $I_{ZM}$ | $V_{Z1}$ (min) | $I_{ZPCB}$ | $V_R$ | $I_{R1}$ at $T_A$ = +25°C $V_R$ = col 11 | αVZ neg. limit | αVZ pos. limit |
| | Volts | Volts | Volts | µA | Ω | Volts | mA | Volts | mA | Volts | µA | %/°C | %/°C |
| 1N4370A-1 | 2.4 | 2.28 | 2.52 | 200 | 30 | 1.0 | 155 | 1.1 | 1000 | 1.0 | 100 | -0.085 | 0 |
| 1N4371A-1 | 2.7 | 2.57 | 2.83 | 150 | 30 | 1.0 | 140 | 1.2 | 1000 | 1.0 | 60 | -0.080 | 0 |
| 1N4372A-1 | 3.0 | 2.85 | 3.15 | 100 | 29 | 1.0 | 125 | 1.3 | 1000 | 1.0 | 30 | -0.075 | 0 |
| 1N746A-1 | 3.3 | 3.14 | 3.46 | 30 | 24 | 1.0 | 120 | 1.5 | 1000 | 1.0 | 5 | -0.070 | 0 |
| 1N747A-1 | 3.6 | 3.42 | 3.78 | 30 | 22 | 1.0 | 110 | 1.8 | 1000 | 1.0 | 3 | -0.065 | 0 |
| 1N748A-1 | 3.9 | 3.71 | 4.09 | 30 | 20 | 1.0 | 100 | 2.0 | 1000 | 1.0 | 2 | -0.060 | 0 |
| 1N749A-1 | 4.3 | 4.09 | 4.51 | 50 | 18 | 1.0 | 90 | 2.4 | 990 | 1.0 | 2 | -0.055 | +.020 |
| 1N750A-1 | 4.7 | 4.47 | 4.93 | 50 | 15 | 1.0 | 85 | 2.8 | 980 | 1.5 | 5 | -0.043 | +.025 |
| 1N751A-1 | 5.1 | 4.85 | 5.35 | 50 | 14 | 0.8 | 75 | 3.3 | 960 | 2.0 | 5 | -0.030 | +.030 |
| 1N752A-1 | 5.6 | 5.32 | 5.88 | 50 | 8 | 0.8 | 70 | 4.3 | 950 | 2.5 | 5 | -0.028 | +.036 |
| 1N753A-1 | 6.2 | 5.89 | 6.51 | 50 | 3 | 0.6 | 65 | 5.2 | 910 | 3.5 | 5 | 0 | +.045 |
| 1N754A-1 | 6.8 | 6.46 | 7.14 | 50 | 3 | 0.4 | 60 | 6.0 | 870 | 4.0 | 2 | 0 | +.050 |
| 1N755A-1 | 7.5 | 7.13 | 7.87 | 50 | 4 | 0.4 | 55 | 6.6 | 810 | 5.0 | 2 | 0 | +.058 |
| 1N756A-1 | 8.2 | 7.79 | 8.61 | 50 | 5 | 0.4 | 50 | 7.5 | 740 | 6.0 | 1 | 0 | +.062 |
| 1N757A-1 | 9.1 | 8.65 | 9.55 | 50 | 6 | 0.5 | 45 | 8.4 | 650 | 7.0 | 1 | 0 | +.068 |
| 1N758A-1 | 10.0 | 9.50 | 10.50 | 50 | 7 | 0.7 | 40 | 9.1 | 540 | 8.0 | 1 | 0 | +.076 |
| 1N759A-1 | 12.0 | 11.40 | 12.60 | 50 | 10 | 1.0 | 35 | 11.0 | 400 | 9.0 | 1 | 0 | +.08 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

* TABLE IV. Electrical characteristics (2 percent tolerance diodes) – Continued.

| Col 1 | Col 2 | Col 3 | Col 4 | Col 5 | Col 6 | Col 7 | Col 8 | Col 9 | Col 10 | Col 11 | Col 12 | Col 13 | Col 14 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Type | $V_{Z2}$ nom at $I_Z$ = 20 mA | $V_{Z2}$ min | $V_{Z1}$ and $V_{Z2}$ max | $I_{R2}$ at $T_A$ = +150°C $V_R$ = col 11 | $Z_Z$ at $I_Z$ = 20 mA | $V_Z$ (reg) | $I_{ZM}$ | $V_{Z1}$ (min) | $I_{ZPCB}$ | $V_R$ | $I_{R1}$ at $T_A$ = +25°C $V_R$ = col 11 | αVZ neg. limit | αVZ pos. limit |
| | Volts | Volts | Volts | μA | Ω | Volts | mA | Volts | mA | Volts | μA | %/°C | %/°C |
| 1N4370C-1 | 2.4 | 2.352 | 2.448 | 200 | 30 | 1.0 | 155 | 1.1 | 1000 | 1.0 | 100 | -0.085 | 0 |
| 1N4371C-1 | 2.7 | 2.646 | 2.754 | 150 | 30 | 1.0 | 140 | 1.2 | 1000 | 1.0 | 60 | -0.080 | 0 |
| 1N4372C-1 | 3.0 | 2.94 | 3.06 | 100 | 29 | 1.0 | 125 | 1.3 | 1000 | 1.0 | 30 | -0.075 | 0 |
| 1N746C-1 | 3.3 | 3.234 | 3.366 | 30 | 24 | 1.0 | 120 | 1.5 | 1000 | 1.0 | 5 | -0.070 | 0 |
| 1N747C-1 | 3.6 | 3.528 | 3.672 | 30 | 22 | 1.0 | 110 | 1.8 | 1000 | 1.0 | 3 | -0.065 | 0 |
| 1N748C-1 | 3.9 | 3.822 | 3.978 | 30 | 20 | 1.0 | 100 | 2.0 | 1000 | 1.0 | 2 | -0.060 | 0 |
| 1N749C-1 | 4.3 | 4.214 | 4.386 | 50 | 18 | 1.0 | 90 | 2.4 | 990 | 1.0 | 2 | -0.055 | +.020 |
| 1N750C-1 | 4.7 | 4.606 | 4.794 | 50 | 15 | 1.0 | 85 | 2.8 | 980 | 1.5 | 5 | -0.043 | +.025 |
| 1N751C-1 | 5.1 | 4.998 | 5.202 | 50 | 14 | 0.8 | 75 | 3.3 | 960 | 2.0 | 5 | -0.030 | +.030 |
| 1N752C-1 | 5.6 | 5.488 | 5.712 | 50 | 8 | 0.8 | 70 | 4.3 | 950 | 2.5 | 5 | -0.028 | +.036 |
| 1N753C-1 | 6.2 | 6.076 | 6.324 | 50 | 3 | 0.6 | 65 | 5.2 | 910 | 3.5 | 5 | 0 | +.045 |
| 1N754C-1 | 6.8 | 6.664 | 6.936 | 50 | 3 | 0.4 | 60 | 6.0 | 870 | 4.0 | 2 | 0 | +.050 |
| 1N755C-1 | 7.5 | 7.357 | 7.650 | 50 | 4 | 0.4 | 55 | 6.6 | 810 | 5.0 | 2 | 0 | +.058 |
| 1N756C-1 | 8.2 | 8.036 | 8.364 | 50 | 5 | 0.4 | 50 | 7.5 | 740 | 6.0 | 1 | 0 | +.062 |
| 1N757C-1 | 9.1 | 8.918 | 9.282 | 50 | 6 | 0.5 | 45 | 8.4 | 650 | 7.0 | 1 | 0 | +.068 |
| 1N758C-1 | 10.0 | 9.80 | 10.20 | 50 | 7 | 0.7 | 40 | 9.1 | 540 | 8.0 | 1 | 0 | +.076 |
| 1N759C-1 | 12.0 | 11.76 | 12.24 | 50 | 10 | 1.0 | 35 | 11.0 | 400 | 9.0 | 1 | 0 | +.08 |




Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

* TABLE IV. Electrical characteristics (1 percent tolerance diodes) – Continued.

| Col 1 | Col 2 | Col 3 | Col 4 | Col 5 | Col 6 | Col 7 | Col 8 | Col 9 | Col 10 | Col 11 | Col 12 | Col 13 | Col 14 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Type | $V_{Z2}$ nom at $I_Z$ = 20 mA | $V_{Z2}$ min | $V_{Z1}$ and $V_{Z2}$ max | $I_{R2}$ at $T_A$ = +150°C $V_R$ = col 11 | $Z_Z$ at $I_Z$ = 20 mA | $V_Z$ (reg) | $I_{ZM}$ | $V_Z$ (min) | $I_{ZPCB}$ | $V_R$ | $I_{R1}$ at $T_A$ = +25°C $V_R$ = col 11 | αVZ neg. limit | αVZ pos. limit |
| | Volts | Volts | Volts | μA | Ω | Volts | mA | Volts | mA | Volts | μA | %/°C | %/°C |
| 1N4370D-1 | 2.4 | 2.376 | 2.424 | 200 | 30 | 1.0 | 155 | 1.1 | 1000 | 1.0 | 100 | -0.085 | 0 |
| 1N4371D-1 | 2.7 | 2.673 | 2.727 | 150 | 30 | 1.0 | 140 | 1.2 | 1000 | 1.0 | 60 | -0.080 | 0 |
| 1N4372D-1 | 3.0 | 2.970 | 3.030 | 100 | 29 | 1.0 | 125 | 1.3 | 1000 | 1.0 | 30 | -0.075 | 0 |
| 1N746D-1 | 3.3 | 3.267 | 3.333 | 30 | 24 | 1.0 | 120 | 1.5 | 1000 | 1.0 | 5 | -0.070 | 0 |
| 1N747D-1 | 3.6 | 3.564 | 3.636 | 30 | 22 | 1.0 | 110 | 1.8 | 1000 | 1.0 | 3 | -0.065 | 0 |
| 1N748D-1 | 3.9 | 3.861 | 3.939 | 30 | 20 | 1.0 | 100 | 2.0 | 1000 | 1.0 | 2 | -0.060 | 0 |
| 1N749D-1 | 4.3 | 4.257 | 4.343 | 50 | 18 | 1.0 | 90 | 2.4 | 990 | 1.0 | 2 | -0.055 | +.020 |
| 1N750D-1 | 4.7 | 4.653 | 4.747 | 50 | 15 | 1.0 | 85 | 2.8 | 980 | 1.5 | 5 | -0.043 | +.025 |
| 1N751D-1 | 5.1 | 5.049 | 5.151 | 50 | 14 | 0.8 | 75 | 3.3 | 960 | 2.0 | 5 | -0.030 | +.030 |
| 1N752D-1 | 5.6 | 5.544 | 5.656 | 50 | 8 | 0.8 | 70 | 4.3 | 950 | 2.5 | 5 | -0.028 | +.036 |
| 1N753D-1 | 6.2 | 6.138 | 6.262 | 50 | 3 | 0.6 | 65 | 5.2 | 910 | 3.5 | 5 | 0 | +.045 |
| 1N754D-1 | 6.8 | 6.732 | 6.868 | 50 | 3 | 0.4 | 60 | 6.0 | 870 | 4.0 | 2 | 0 | +.050 |
| 1N755D-1 | 7.5 | 7.425 | 7.575 | 50 | 4 | 0.4 | 55 | 6.6 | 810 | 5.0 | 2 | 0 | +.058 |
| 1N756D-1 | 8.2 | 8.118 | 8.282 | 50 | 5 | 0.4 | 50 | 7.5 | 740 | 6.0 | 1 | 0 | +.062 |
| 1N757D-1 | 9.1 | 9.009 | 9.191 | 50 | 6 | 0.5 | 45 | 8.4 | 650 | 7.0 | 1 | 0 | +.068 |
| 1N758D-1 | 10.0 | 9.90 | 10.10 | 50 | 7 | 0.7 | 40 | 9.1 | 540 | 8.0 | 1 | 0 | +.076 |
| 1N759D-1 | 12.0 | 11.88 | 12.12 | 50 | 10 | 1.0 | 35 | 11.0 | 400 | 9.0 | 1 | 0 | +.08 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

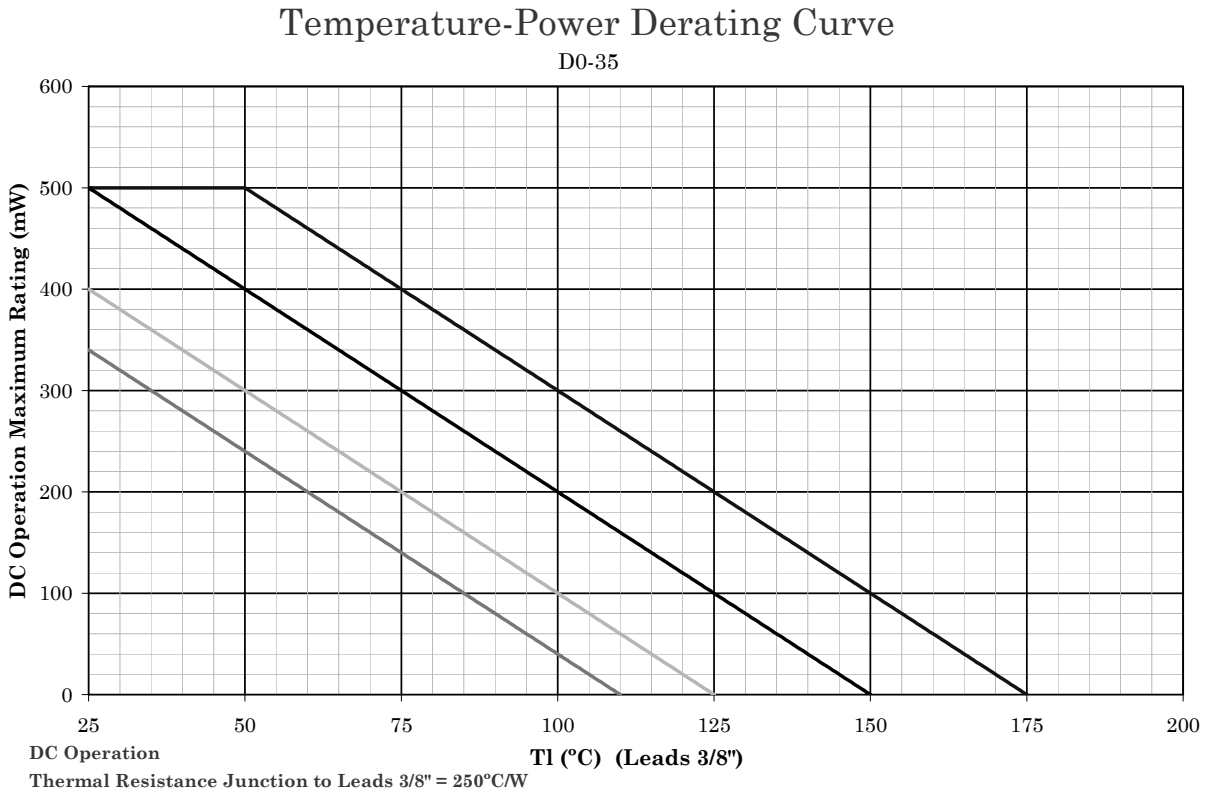



NOTES:

1. This is the true inverse of the worst case thermal resistance value. All devices are capable of operating at ≤ $T_J$ specified on this curve. Any parallel line to this curve will intersect the appropriate power for the desired maximum $T_J$ allowed.
2. Derate design curve constrained by the maximum junction temperature ($T_J$ ≤ 175°C) and power rating specified. (See 1.3 herein.)
3. Derate design curve chosen at $T_J$ ≤ 150°C, where the maximum temperature of electrical test is performed.
4. Derate design curves chosen at $T_J$ ≤, 125°C, and 110°C to show power rating where most users want to limit $T_J$ in their application.

* FIGURE 5. Temperature-power derating curve (junction to lead).



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

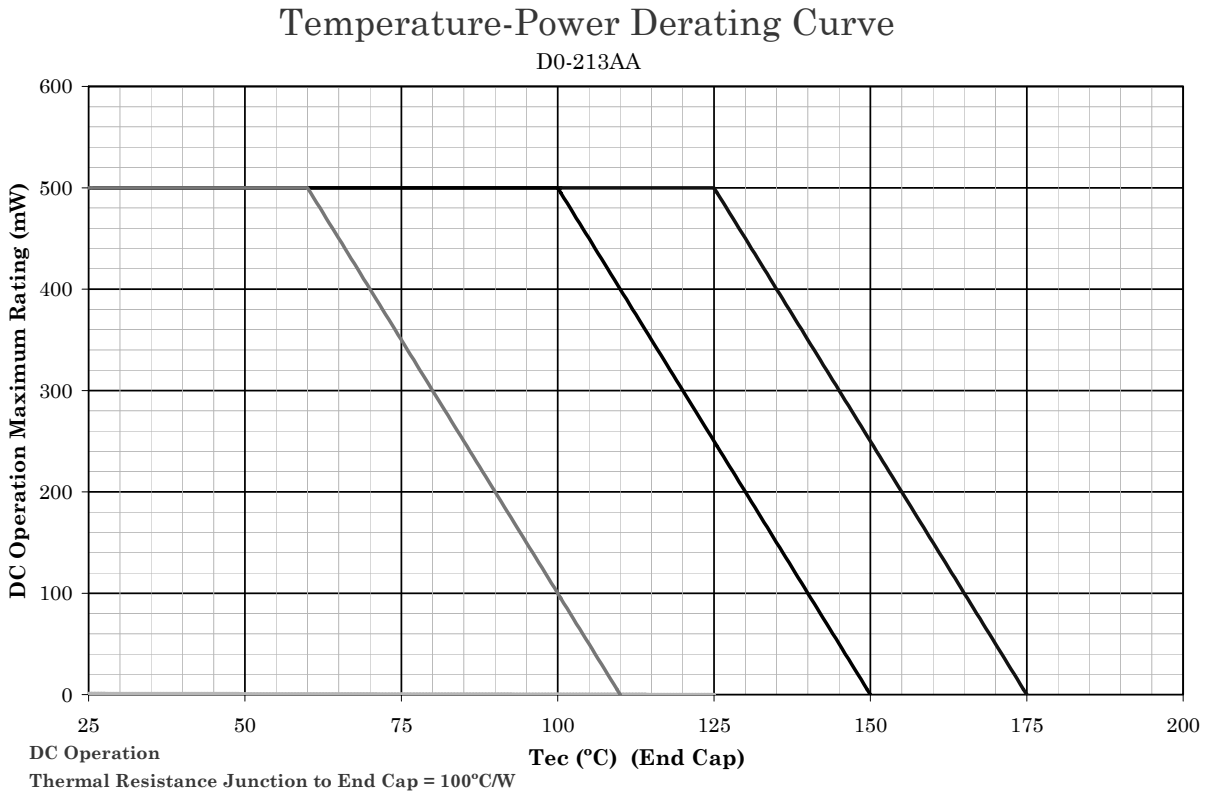



NOTES:

1. This is the true inverse of the worst case thermal resistance value. All devices are capable of operating at ≤ $T_J$ specified on this curve. Any parallel line to this curve will intersect the appropriate power for the desired maximum $T_J$ allowed.
2. Derate design curve constrained by the maximum junction temperature ($T_J$ ≤ 175°C) and power rating specified. (See 1.3 herein.)
3. Derate design curve chosen at $T_J$ ≤ 150°C, where the maximum temperature of electrical test is performed.
4. Derate design curves chosen at $T_J$ ≤, 125°C, and 110°C to show power rating where most users want to limit $T_J$ in their application.

* FIGURE 6. Temperature-power derating curve (junction to end-cap).



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

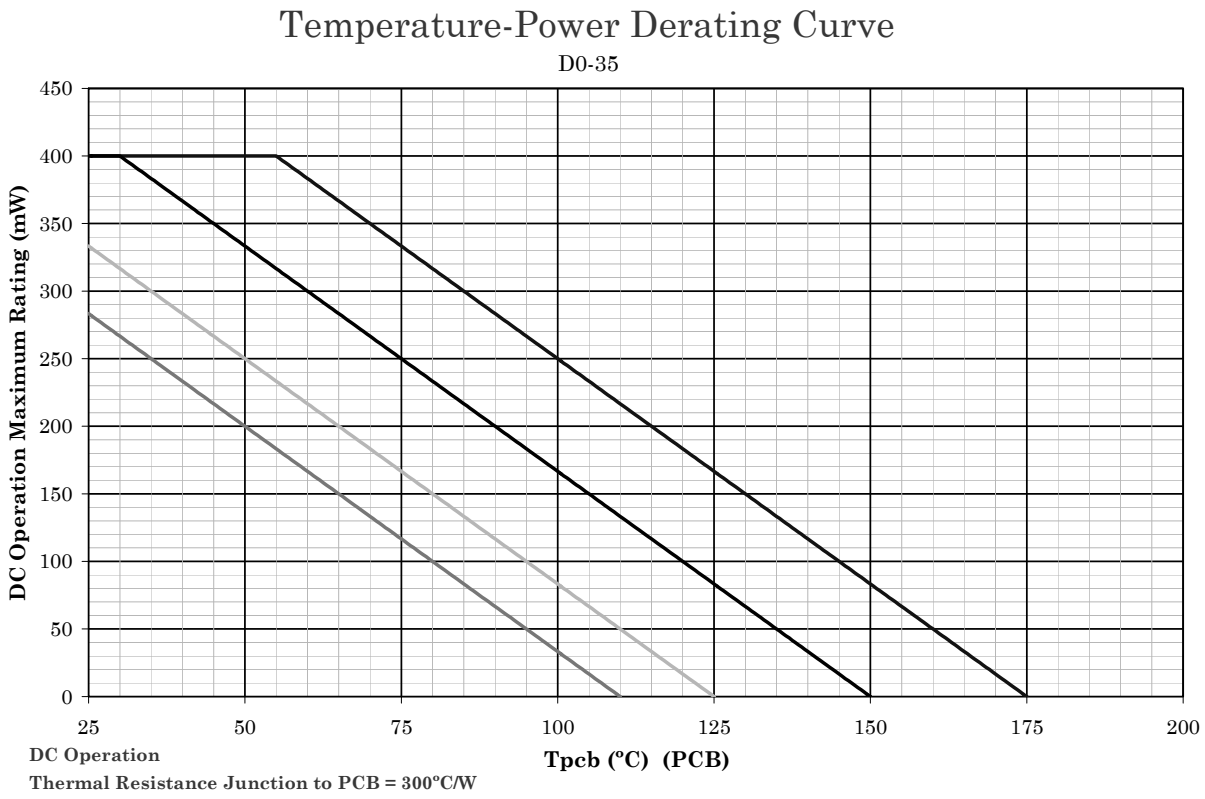



NOTES:

1. This is the true inverse of the worst case thermal resistance value. All devices are capable of operating at ≤ $T_J$ specified on this curve. Any parallel line to this curve will intersect the appropriate power for the desired maximum $T_J$ allowed.
2. Derate design curve constrained by the maximum junction temperature ($T_J$ ≤ 175°C) and power rating specified. (See 1.3 herein.)
3. Derate design curve chosen at $T_J$ ≤ 150°C, where the maximum temperature of electrical test is performed.
4. Derate design curves chosen at $T_J$ ≤, 125°C, and 110°C to show power rating where most users want to limit $T_J$ in their application.

* FIGURE 7. Temperature-power derating curve (junction to PCB).



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

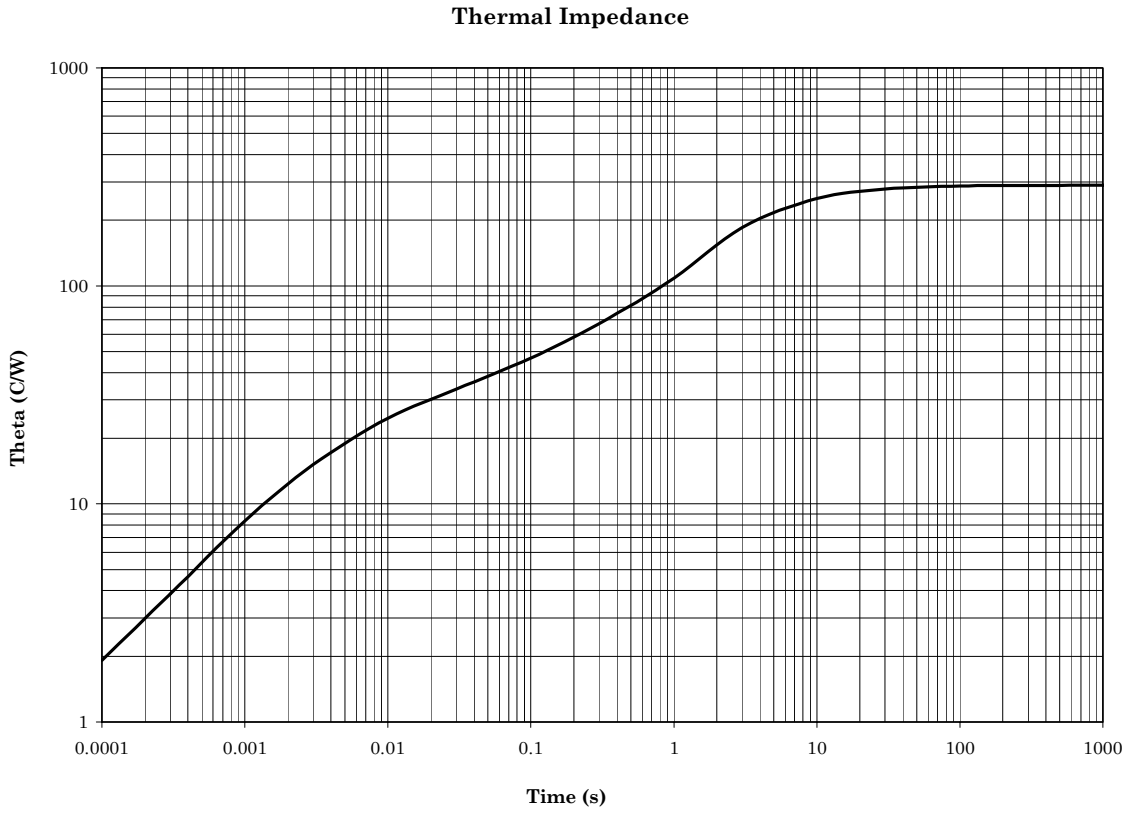



Mount, FR4, 1oz Cu, 50x87mil pad (MELF) and 92mil diameter (axial with .125 inch (3.18 mm) lead length) at $T_A$ =25°C.
Thermal resistance = 300°C/W. Maximum power rating = 400 mW at $T_A$ =55°C.

* FIGURE 8. Thermal impedance DO-35 (PCB mount, FR4).



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

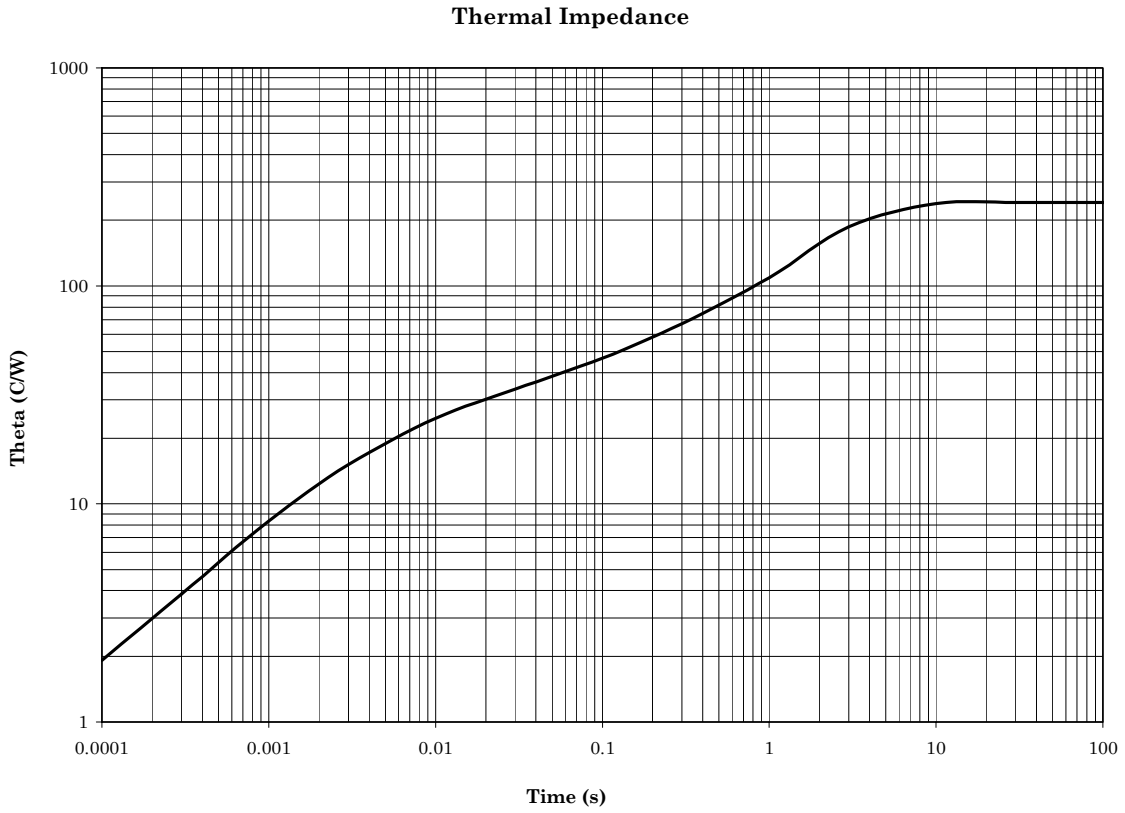



$T_L$ = 25°C at .375 inch (9.53 mm) from body.
Thermal resistance = 250°C/W. Maximum power rating = 500 mW at $T_L$ = 50°C.

* FIGURE 9. Thermal impedance DO-35 axial leaded.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

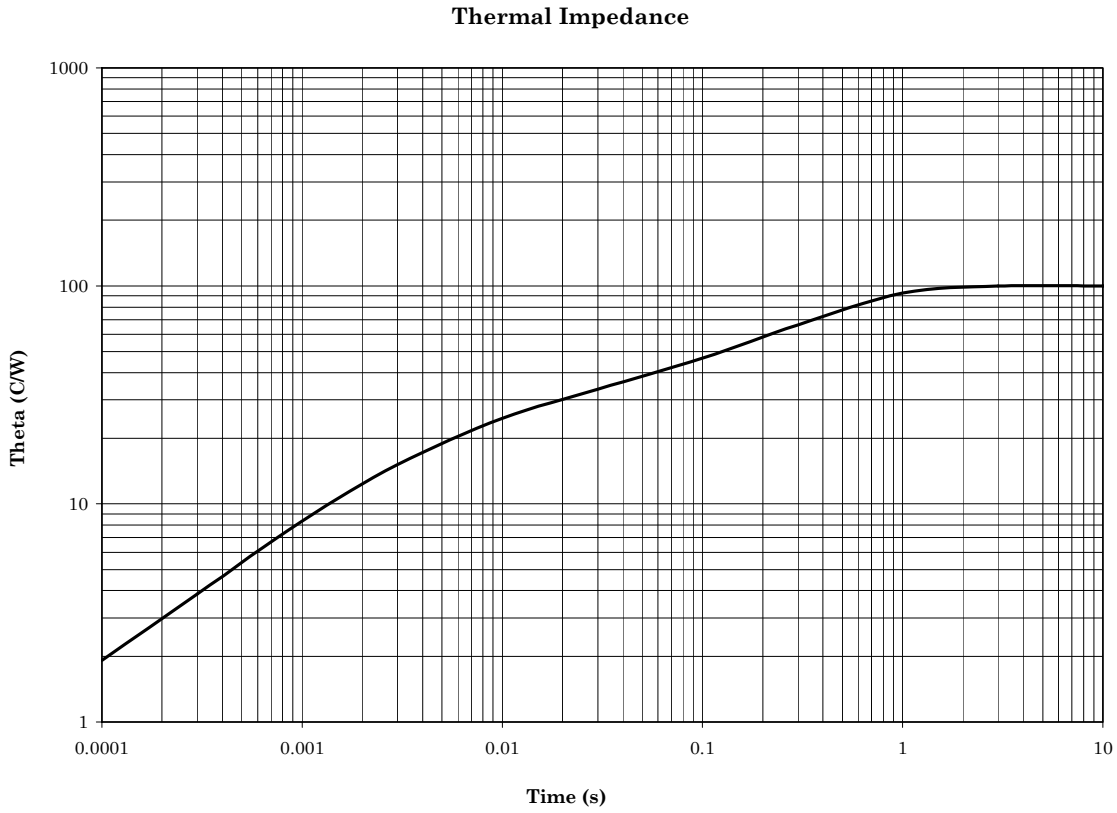


Tec=25°C.
Thermal resistance = 100°C/W. Power rating = 500 mW at Tec = 125°C.

* FIGURE 10. Thermal Impedance DO-35 MELF.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

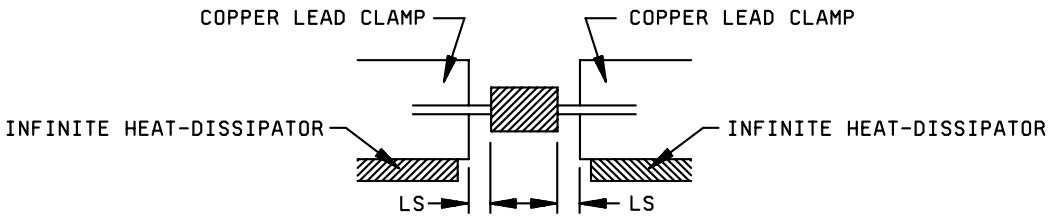



FIGURE 11. Mounting conditions.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The notes specified in MIL-PRF-19500 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Packaging requirements (see 5.1).

c. Lead finish (see 3.4.1).

d. Product assurance level and type designator.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML 19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center, Columbus, ATTN: DSCC/VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

6.4 Cross reference substitution list. Devices required for space flight applications are found in MIL-PRF-19500/533. Existing supplies of parts can be used until existing supplies are exhausted. A PIN for PIN replacement table follows, and these devices are directly interchangeable:

| JANS superseded PIN | JANS superseding PIN |
|---|---|
| 1N4370A-1, C-1 or D-1 | 1N6309, C, D |
| 1N4371A-1, C-1 or D-1 | 1N6310, C, D |
| 1N4372A-1, C-1 or D-1 | 1N6311, C, D |
| 1N746A-1, C-1 or D-1 | 1N6312, C, D |
| 1N747A-1, C-1 or D-1 | 1N6313, C, D |
| 1N748A-1, C-1 or D-1 | 1N6314, C, D |
| 1N749A-1, C-1 or D-1 | 1N6315, C, D |
| 1N750A-1, C-1 or D-1 | 1N6316, C, D |
| 1N751A-1, C-1 or D-1 | 1N6317, C, D |
| 1N752A-1, C-1 or D-1 | 1N6318, C, D |
| 1N753A-1, C-1 or D-1 | 1N6319, C, D |
| 1N754A-1, C-1 or D-1 | 1N6320, C, D |
| 1N755A-1, C-1 or D-1 | 1N6321, C, D |
| 1N756A-1, C-1 or D-1 | 1N6322, C, D |
| 1N757A-1, C-1 or D-1 | 1N6323, C, D |
| 1N758A-1, C-1 or D-1 | 1N6324, C, D |
| 1N759A-1, C-1 or D-1 | 1N6326, C, D |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

6.5 Suppliers of JANHC and JANKC die. The qualified JANHC and JANKC die suppliers with the applicable letter version (example JANHCA1N4370A) will be identified on the QML.

| JANHC ordering information (1) (2) | | |
|---|---|---|
| PIN | Manufacture CAGE | |
| | 43611 | 12954 |
| 1N4370 | JANHCA1N4370 | JANHCB1N4370 |
| 1N4371 | JANHCA1N4371 | JANHCB1N4371 |
| 1N4372 | JANHCA1N4372 | JANHCB1N4372 |
| 1N746 | JANHCA1N746 | JANHCB1N746 |
| 1N747 | JANHCA1N747 | JANHCB1N747 |
| 1N748 | JANHCA1N748 | JANHCB1N748 |
| 1N749 | JANHCA1N749 | JANHCB1N749 |
| 1N750 | JANHCA1N750 | JANHCB1N750 |
| 1N751 | JANHCA1N751 | JANHCB1N751 |
| 1N752 | JANHCA1N752 | JANHCB1N752 |
| 1N753 | JANHCA1N753 | JANHCB1N753 |
| 1N754 | JANHCA1N754 | JANHCB1N754 |
| 1N755 | JANHCA1N755 | JANHCB1N755 |
| 1N756 | JANHCA1N756 | JANHCB1N756 |
| 1N757 | JANHCA1N757 | JANHCB1N757 |
| 1N758 | JANHCA1N758 | JANHCB1N758 |
| 1N759 | JANHCA1N759 | JANHCB1N759 |

(1) Suffixes can be “A”, ”C”, or “D”.
(2) Replace “HC” with “KC” when ordering JANKC die.

6.6 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Army – AR, AV, MI, SM
Navy – AS, MC
Air Force – 19

(Project 5961-2971)

* NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:20Z
Check the source to verify that this is the current version before use.