INCH-POUND

MIL-PRF-19500/144U
w/AMENDMENT 3
27 August 2025
SUPERSEDING
MIL-PRF-19500/144U
w/AMENDMENT 2
17 January 2024

The documentation and process conversion measures necessary to comply with this document shall be completed by 28 November 2025.

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, DIODE, SILICON, SWITCHING,
TYPES 1N4454-1, 1N3064, 1N4532, THROUGH HOLE, SURFACE MOUNT AND UNENCAPSULATED DIE,
QUALITY LEVELS JAN, JANTX, JANTXV, JANHC, AND JANKC

Device types 1N3064 and 1N4532 are inactive for new design (see 6.6).

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for silicon, diffused, switching diodes. Three levels of product assurance are provided for each encapsulated device type as specified in MIL-PRF-19500. Two levels of product assurance are provided for each unencapsulated device type.

1.2 Package outlines and die topography. The device package for the encapsulated device type are as follows: Axial in accordance with figure 1, surface mount version UR in accordance with figure 2, and cavity package surface mount versions UB in accordance with figure 3 and UD in accordance with figure 4. The dimensions and topography for JANHC and JANKC unencapsulated die are as follows: A version die in accordance with figure 5, B version die in accordance with figure 6.

1.3 Maximum ratings. Unless otherwise specified T_A = +25°C.

Type	V_{BR}	V_{RWM}	$I_{O(PCB)}$ T_A = 75°C (1) (2)	I_{FSM} 8.3ms	$R_{\theta JL}$ L = 3/8 inch (9.53 mm)(3)	$R_{\theta JEC}$ (UR) (3)	$R_{\theta JA(PCB)}$ (2) (3) (4)	$R_{\theta JSP}$ (UB/UD) (3) (4)	T_J & T_{STG}
	V dc	V (pk)	mA	A (pk)	°C/W	°C/W	°C/W	°C/W	°C
1N4454-1	75	50	200	2	250		325		-55 to +175
1N4454UR-1						100	325		
1N4454UB, 1N4454UBCA, 1N4454UBCC, 1N4454UBD								120	-55 to +200
1N4454UD								80	
1N3064					250 (leaded)		325		-55 to +175
1N4532							325		

See note at end.

Comments, suggestions, or questions on this document should be addressed to DLA Land and Maritime, ATTN: VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

FSC 5961

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:23Z
Check the source to verify that this is the current version before use.

1.3 Maximum ratings. Unless otherwise specified T_A = +25°C. Continued.

(1) For temperature-current derating curves, see figures 7 and 8.
(2) T_A = +75°C for both axial leaded and metal electrode leadless face diodes (MELF) (UR) on printed circuit board (PCB), PCB = FR4 - .0625 inch (1.59 mm) 1-layer 1-Oz Cu, horizontal, in still air; pads for (UR) = .061 inch (1.55 mm) x.105 inch (2.67 mm); pads for axial = .092 inch (2.34 mm) diameter, strip = .030 inch (0.76 mm) x 1 inch (25.4 mm) long, lead length L ≤ .187 inch (≤ 4.75 mm); $R_{\theta JA}$ with a defined PCB thermal resistance condition included, is measured at I_O = 200 mA dc.
(3) See figure 9, 10, 11 , and 12 for thermal impedance curves.
(4) $R_{\theta JSP}$ refers to thermal resistance from junction to the solder pads of the UB and UD package.

1.4 Primary electrical characteristics. Unless otherwise specified, at T_A = +25°C.

Limits (1)	V_{F1} I_F = 10 mA dc	I_{R1} V_R = 50 V dc	C_O V_R = 0 f = 1 MHz	t_{rr} I_F = I_R = 10 mA dc R_L = 100 Ω	t_{fr} V_{fr} = 5.0 V(pk) I_F = 100 mA dc
Max	0.8 V dc	0.1 µA dc	2 pF	4.0 ns	30 ns

(1) Primary electrical characteristics for surface mount devices are equivalent to the corresponding non-surface mount devices unless otherwise specified.

1.5 Part or Identifying Number (PIN). The PIN is in accordance with MIL-PRF-19500, and as specified herein. See 6.4 for PIN construction example, 6.5 for a list of available PINs, and 6.6 for supersession information,

1.5.1 JAN certification mark and quality level.

1.5.1.1 Quality level designators for encapsulated devices. The quality level designators for encapsulated devices that are applicable for this specification sheet from the lowest to the highest level are as follows: The quality level "JAN", "JANTX" and "JANTXV".

1.5.1.2 Quality level designators for unencapsulated devices (die). The quality level designators for unencapsulated devices (die) that are applicable for this specification sheet from the lowest to the highest level are as follows: "JANHC" and "JANKC".

1.5.2 Device type. The designation system for the device types covered by this specification sheet are as follows.

1.5.2.1 First number and first letter symbols. The diodes of this specification sheet use the first number and letter symbols "1N".

1.5.2.2 Second number symbols. The second number symbols for the diodes covered by this specification sheet are as follows: "4454", "3064", and "4532".

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:23Z
Check the source to verify that this is the current version before use.

1.5.3 Suffix symbols. The following suffix letters are incorporated in the PIN as applicable:

	A blank first suffix symbol indicates an axial through-hole mount DO-7, or DO-34 package (see figure 1).
-1	Indicates an axial through-hole mount (DO-35) package (see figure 1).
UR-1	Indicates a surface mount, round endcap DO-213AA package (see figure 2).
UB	Cavity style, 3 terminal 4 solder pad surface mount package with diode configuration included (see figure 3).
UD	Cavity style, 2 terminal 3 solder pad surface mount package (see figure 4).

1.5.4 Die identifiers for unencapsulated devices (manufacturers and critical interface identifiers). The manufacturer die identifiers that are applicable for this specification sheet are "A" and "B".

1.5.5 Lead finish. The lead finishes applicable to this specification sheet are listed on QPDSIS-19500.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Copies of these documents are available online at https://quicksearch.dla.mil.)


2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturers list (QML-19500) before contract award (see 4.2 and 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:23Z
Check the source to verify that this is the current version before use.

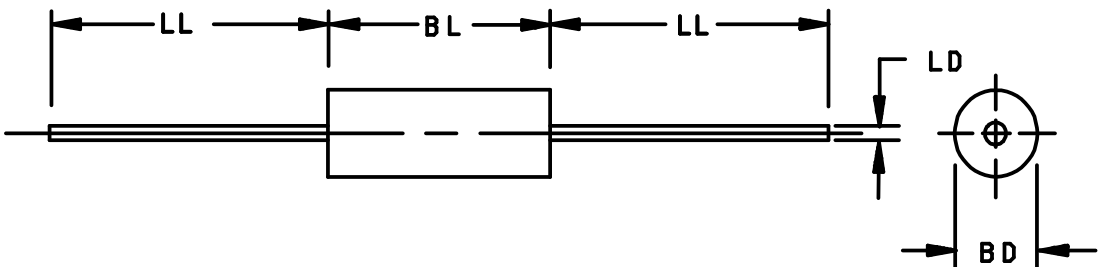


Types 1N4454-1, 1N3064, 1N4532

Types	Symbol	Dimensions			
		in	in	mm	mm
		Min	Max	Min	Max
1N4454-1 (DO-35)	BD	.056	.075	1.42	1.91
	BL	.140	.180	3.56	4.57
	LD	.018	.022	0.46	0.56
	LL	1.000	1.500	25.40	38.10
1N3064 (DO-7)	BD	.078	.107	1.98	2.72
	BL	.195	.300	4.96	7.62
	LD	.018	.022	0.46	0.56
	LL	1.000	1.500	25.40	38.10
1N4532 (DO-34)	BD	.050	.075	1.27	1.91
	BL	.080	.120	2.03	3.05
	LD	.018	.022	0.46	0.56
	LL	1.000	1.500	25.40	38.10

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. Dimensions are pre-solder dip.
3. Dimension BD shall be measured at the largest diameter.
4. Package contour optional within dimension BD and length dimension BL.

FIGURE 1. Physical dimensions for DO-7, DO-34 and DO-35 axial leaded packages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:23Z
Check the source to verify that this is the current version before use.

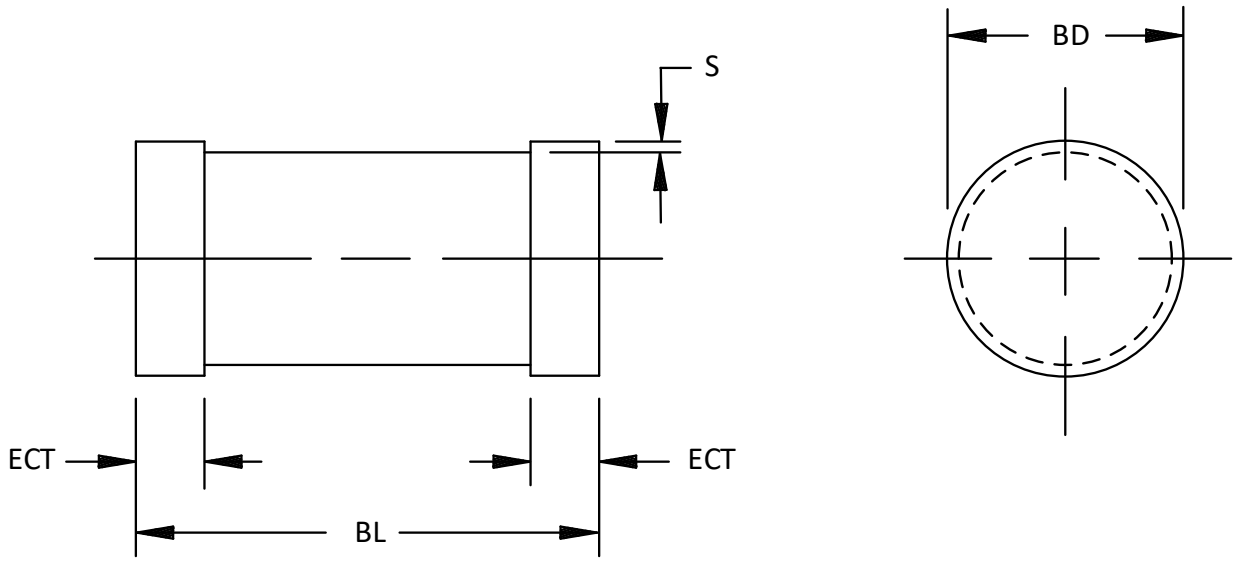


Type 1N4454UR-1


Symbol	Dimensions				
	in	In	mm	mm	Note
	Min	Max	Min	Max	
BD	.063	.067	1.60	1.70	
BL	.130	.146	3.30	3.71	
ECT	.016	.022	0.41	0.56	
S					3


NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. Dimensions are pre-solder dip.
3. Dimension S is optional however the glass body diameter shall not exceed endcap diameter.


FIGURE 2. Physical dimensions of round end cap, DO-213AA (UR) surface mount package.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:23Z
Check the source to verify that this is the current version before use.

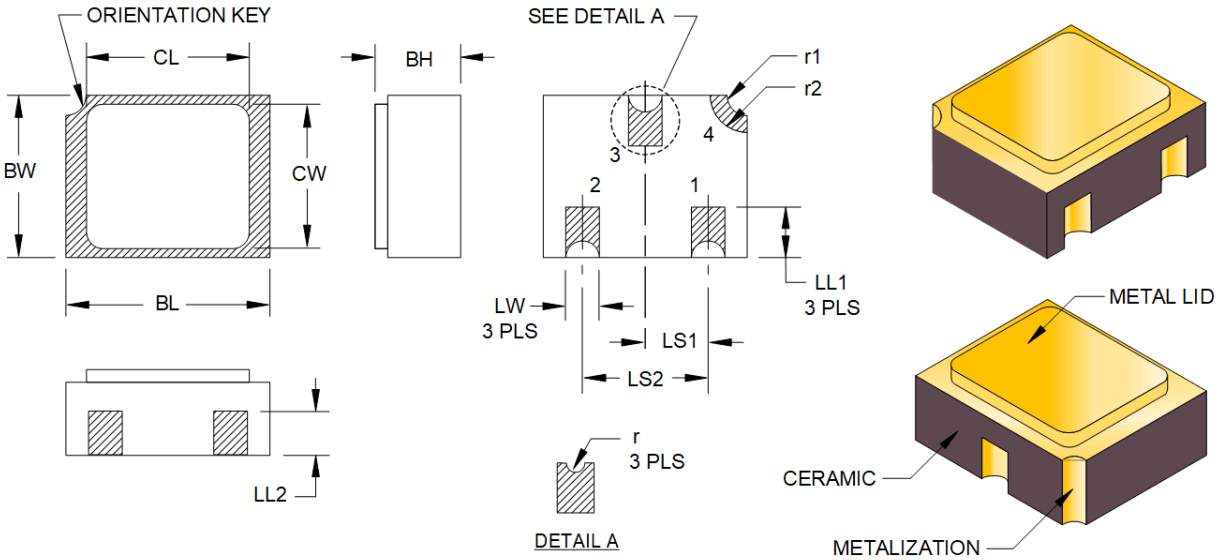










Symbol	Dimensions				Symbol	Dimensions			
	in	in	mm	mm		in	in	mm	mm
	Min	Max	Min	Max		Min	Max	Min	Max
BW	.085	.108	2.16	2.74	LW	.016	.024	0.41	0.61
BH	.040	.056	1.02	1.42	LS1	.035	.040	0.89	1.02
BL	.115	.128	2.92	3.25	LS2	.071	.079	1.80	2.01
CL		.128		3.25	r		.008		0.20
CW		.108		2.74	r1		.012		0.31
LL1	.022	.038	0.56	0.97	r2		.022		0.56
LL2	.017	.035	0.43	0.89					

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. Ceramic package only.
3. Hatched areas on package denote metallized areas. Pad 4 = shielding, connected to the lid.

FIGURE 3. Physical dimensions for UB metal lid surface mount package.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:23Z
Check the source to verify that this is the current version before use.

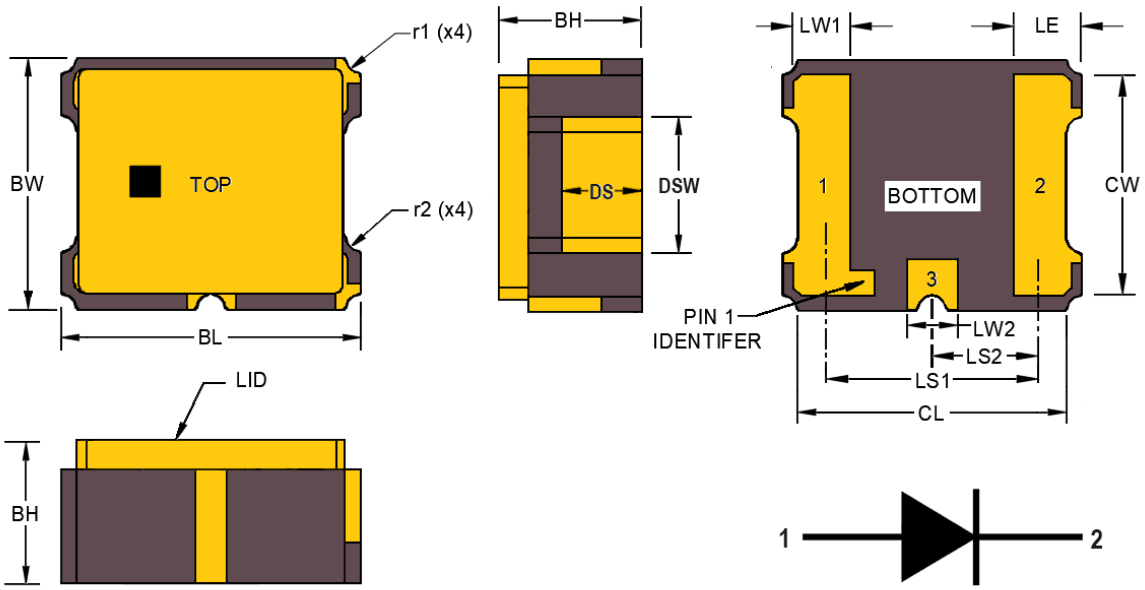


Symbol	Inches	Inches	mm	mm	Symbol	Inches	Inches	mm	mm
	Min	Max	Min	Max		Min	Max	Min	Max
BH	0.078	0.092	1.979	2.329	LE	0.021	0.033	0.540	0.840
BL	0.112	0.128	2.850	3.250	LS1	0.085	0.093	2.160	2.360
BW	0.092	0.108	2.340	2.740	LS2	0.043	0.047	1.080	1.180
CL	0.103	0.113	2.620	2.880	LW1	0.019	0.027	0.490	0.690
CW	0.083	0.093	2.120	2.360	LW2	0.019	0.021	0.490	0.530
DS	0.028	0.034	0.720	0.880	r1		0.006		0.150
DSW	0.051	0.057	1.330	1.430	r2		0.006		0.150

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. Pad 3 is connected to the lid braze ring for shielding.
3. Cathode marked with a square.
4. Pads 1 and 2 layout is equivalent to those for 1N4454UR-1.
5. Diode outline shown in ISO third angle projection.

FIGURE 4. Physical dimensions of UD surface mount package.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:23Z
Check the source to verify that this is the current version before use.

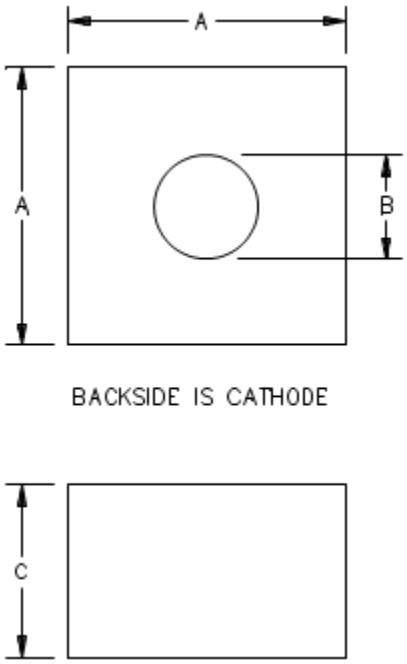


Letter	Dimensions			
	in	in	mm	mm
	Min	Max	Min	Max
A	.014	.018	.360	.460
B	.005	.007	.120	.180
C	.008	.012	0.20	0.30

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. The metallization characteristics of the die are:
   Top (anode): Al
   Back (cathode): Au
   Al thickness: 25,000 Å minimum.
   Gold thickness: 4,000 Å minimum.

FIGURE 5. Physical dimensions, JANHCA and JANKCA die.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:23Z
Check the source to verify that this is the current version before use.

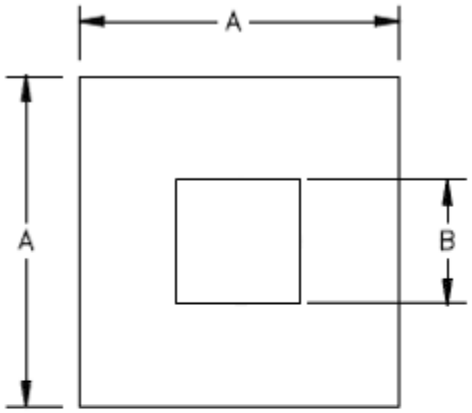

Letter	Dimensions			
	in	in	mm	mm
	Min	Max	Min	Max
A	.015	.019	.381	.483
B	.004	.006	.102	.152
C	.006	.010	.152	.254

NOTES

1. Dimensions are in inches. Millimeters are given for general information only.
2. The metallization characteristics of the die are as follows:
   Top (anode): Al-Si
   Back (cathode): Au

Al-Si thickness: 14,400 Å minimum.
Au thickness: 5,800 Å minimum.

FIGURE 6. JANHCB and JANKCB (B-version) die dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:23Z
Check the source to verify that this is the current version before use.

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500 and as follows.

$R_{\theta JBB}$	Thermal resistance junction to burn-in board.
SP	Solder pad on UB devices.
UB	Hermetic unleaded 3 terminal leadless chip carrier (LCC) package type.
UR	Unleaded round package type designation.
Vfr	Forward recovery voltage. Specified maximum forward voltage used to determine forward recovery time.

3.4 Interface and physical dimensions. Interface and physical dimensions shall be as specified in MIL-PRF-19500, and on figures 1 (axial leads), 2 (DO-213AA), 3 (UB), 4 (UD) and figures 5 and 6 for un-encapsulated die.

3.4.1 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.4.2 Diode construction.

3.4.2.1 Axial leaded and UR surface mount. The axial leaded and round end cap surface mount devices shall be constructed utilizing non-cavity double plug construction with high temperature metallurgical bonding between both sides of the silicon die and terminal pins. All glass diodes shall be designed with sufficient thermal compensation in the axial direction to optimize tensile and compressive stresses. Dimensional analysis is required of all materials used to achieve axial thermal compensation. Dimensional tolerances and corresponding coefficient of thermal expansion (CTE) shall be documented on the DLA Land and Maritime Design and construction Form 36D and shall be approved by the qualifying activity to maintain qualification. Dimensional tolerances shall be sufficiently tight enough to prevent excessive stresses due to the inherent CTE mismatch. The UR version shall be structurally identical to the axial leaded versions except for end-cap lead attachment.

3.4.2.2 Bottom solder pad surface mount. The UB and UD version devices die shall be eutectically mounted and wire bonded in a cavity style ceramic package.

3.5 Marking. Marking shall be in accordance with MIL-PRF-19500. Initial container package marking shall be in accordance with MIL-PRF-19500. The prefixes JAN, JANTX, and JANTXV may be abbreviated as J, JX, and JV, respectively. The part number may be reduced to J4454, JX4454, or JV4454. No color coding shall be permitted for part numbering (Example: The PIN for an axial leaded device may be reduced from JANTXV1N4454UR-1 to JV4454). All marking which is omitted from the body of the device, except for polarity, shall appear on the initial container.

3.5.1 Axial leaded devices. For axial leaded versions only, the manufacturer's identification and date code shall be marked on the devices. The polarity shall be indicated with a contrasting color band to denote the cathode end. No color coding shall be permitted for part identification.

3.5.2 UR devices. For 'UR' version devices only, all marking, except polarity, may be omitted from the body, but shall be retained on the initial container. Polarity marking of 'UR' devices shall consist as a minimum, a band or three contrasting dots around the periphery of the cathode. At the option of the manufacturer, 'UR' devices may include laser marking on an end-cap, to include PIN and lot date code for all levels.

3.5.3 UB devices. 'UB' devices do not require polarity marking.

3.5.4 UD devices. The 'UD' devices shall mark the cathode with a square symbol on the lid.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:23Z
Check the source to verify that this is the current version before use.

3.7 Electrical test requirements. The electrical test requirements shall be as specified in table I herein.

3.8 Workmanship. Devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4).

d. Element evaluation (see 4.6).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.2.1 JANHC and JANKC qualification. JANHC and JANKC qualification inspection shall be in accordance with MIL-PRF-19500.

4.2.2 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not require the performance of table II tests, the tests specified in table II herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.

4.3 Screening (JANTX and JANTXV levels). Screening shall be in accordance with table E-IV of MIL-PRF-19500 and as specified herein. Specified electrical measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screening	Measurements for JANTXV and JANTX levels
(1) 3c	Thermal impedance (see 4.3.1)
9	Not required
10	Method 1038 of MIL-STD-750, condition A
(2) 11	I_{R1} and V_{F1}
12	Method 1038 of MIL-STD-750, condition B, see 4.3.2
(3) (4) 13	Subgroup 2 of table I herein; ΔI_{R1} = 100 percent of initial value or 25 nA dc, whichever is greater; ΔV_{F1} = 25 mV dc.
14a (5) 14b	Not applicable Required

(1) Thermal impedance shall be performed any time after sealing provided temperature cycling is performed in accordance with MIL-PRF-19500, screen 3 prior to this thermal test.
(2) Test within 24 hours after removal from test.
(3) When thermal impedance is performed prior to screen 13, it is not required to be repeated in screen 13.
(4) PDA ≤ 5 percent.
(5) For clear glass diodes, the hermetic seal (gross leak) test may be performed any time after temperature cycling, fine and gross leak required for UB and UD package.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:23Z
Check the source to verify that this is the current version before use.

4.3.1 Thermal impedance measurements. The thermal impedance measurements shall be performed in accordance with method 3101 or 4081 of MIL-STD-750, as applicable, using the guidelines in that method for determining I_H and I_M. t_{MD} shall be 70 µs maximum, t_H shall be 10 ms maximum. The thermal impedance limit shall comply with the thermal impedance graphs on figures 9, 10, 11 and 12 (less than or equal to the curve value at the same t_H time) and shall be less than the process determined statistical maximum limit as outlined in method 3101 or 4081 of MIL-STD-750, as applicable. See group E, subgroup 4 of table II herein.

4.3.2 Power burn-in conditions. Power burn-in conditions are as follows (see 4.5.2): V_R = rated V_{RWM}; f = 50 to 60 Hz; $I_{O(min)} = I_F = I_{O(PCB)}$. T_A = 75°C maximum. The maximum current density of small die shall be submitted to the qualifying activity for approval. With approval of the qualifying activity and preparing activity, alternate burn-in criteria (hours, bias conditions, mounting conditions, etc.) may be used for JANTX and JANTXV quality levels. A justification demonstrating equivalence is required. In addition, the manufacturing site's burn-in data and performance history will be essential criteria for burn-in modification approval.

4.3.3 JAN testing. JAN level product will have temperature cycling and thermal impedance testing performed in accordance with MIL-PRF-19500, JANTX level screening level requirements. Electrical testing shall be in accordance with table I, subgroup 2 herein.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with table E-V of MIL-PRF-19500, table I herein, and as specified herein. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VIb (JAN, JANTX, and JANTXV) of MIL-PRF-19500 and herein. Leaded samples from the same lot may be used in lieu of 'UR' suffix sample for life test.

Subgroup	Method	Conditions
B2	1056	0°C to +100°C, 10 cycles.
B2	1051	-55°C to +175°C, 45 cycles, including screening.
B2	2005	I_F = 100 mA, axial tensile stress = 8 lbs (3.6 kg), T_A = +150°C; (not applicable to UR, UB and UD package).
B3	1027	V(pk) = rated V_{RWM}; f = 50 to 60 Hz; I_O = 200 mA dc minimum; adjust T_A or I_O to obtain a minimum T_J of +150°C. (See 4.5.2.)
B4	2101	Decap analysis; (Scribe and break not applicable for UB and UD packages)
B6	1032	T_A = +175°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:23Z
Check the source to verify that this is the current version before use.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VII of MIL-PRF-19500, and as follows.

Subgroup	Method	Conditions
C2	1056	0°C to + 100°C, 10 cycles.
C2	1051	-55°C to + 175°C, 45 cycles including screening.
C2	2036	Tension = condition A; weight = 10 pounds (4.54 kg), t = 15 s; Lead fatigue = condition E (not applicable to UR, UB, and UD suffix types).
C5	4081	L = .375 inch (9.53 mm), $R_{\theta JL}$ = 250°C/W maximum; $R_{\theta JEC}$ = 100°C/W; (see 4.3.1), 22 devices, c = 0.
C6	1026	1,000 hours minimum, $V_{(pk)}$ = rated V_{RWM}; f = 50 to 60 Hz; I_O = 200 mA dc minimum; adjust T_A or I_O to obtain a minimum T_J of +150°C. (See 4.5.2.)

4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the tests and conditions specified for subgroup testing in table E-IX of MIL-PRF-19500, and table II herein.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurements shall be as specified in section 4 of MIL-STD-750.

4.5.2 Free air power burn-in and life tests. The use of a current limiting or ballast resistor is permitted provided that each device under test still sees the full P_T (minimum) and that the minimum applied voltage, where applicable, is maintained throughout the burn-in period. Method 3100 of MIL-STD-750 shall be used to measure T_J.

4.5.3 Forward recovery voltage and time. Forward recovery shall be measured as the time interval between zero time and the point where the pulse has decreased to 110 percent of the steady-state value of V_F when I_F = 100 mA dc. The maximum rise time of the response detector shall be 1 ns.

4.5.4 Scope display evaluation. The reverse characteristics shall be inspected and evaluated in accordance with condition A of method 4023 of MIL-STD-750. Each device shall evaluated only for the following 4 commonly observed faults: drift, unstable (jitter), snap back collapsing $V_{(BR)}$ and floater. Any instance of any of these 4 faults in the trace shall be cause for rejection.

4.6 Element evaluation of un-encapsulated die. The element evaluation of unencapsulated die shall be in accordance with appendix G of MIL-PRF-19500. As a minimum, die shall be 100-percent probed to ensure compliance with table I, subgroup 2. Burn-in duration for the JANKC level follows JANS requirements; the JANHC follows JANTX requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:23Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/ 2/ 3/	MIL-STD-750		Symbol	Limit	Limit	Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Thermal impedance 4/	3101	See 4.3.1	$Z_{\theta JX}$			°C/W
Forward voltage	4011	Condition B, I_F = 10 mA dc (pulsed, see 4.5.1)	V_{F1}		.8	V dc
Breakdown voltage	4021	I_R = 5 µA dc	V_{BR1}	75		V dc
Reverse current	4016	Condition A or B, DC method, V_R = 50 V dc	I_{R1}		100	nAdc
Subgroup 3						
High temperature operation:		T_A = +150°C				
Reverse current	4016	Condition A or B, DC method, V_R = 50 V dc	I_{R2}		100	µA dc
Forward voltage	4011	Condition B, I_F = 10 mA dc (pulsed, see 4.5.1)	V_{F2}		.7	V dc
Low temperature operation:		T_A = -55°C				
Breakdown voltage	4021	I_R = 10 µA dc	V_{BR2}	75		V dc
Subgroup 4						
Capacitance	4001	V_R = 0 V dc, f = 1 MHz, V_{sig} = 50 mVp-p maximum	C		2.0	pF
Reverse recovery time	4031	Condition A, I_F = I_{RM} = 10 mA dc	t_{rr}		4	ns
Scope display evaluation	4023	See 4.5.4				
Subgroup 5						
Not applicable						

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:23Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/ 2/ 3/	MIL-STD-750		Symbol	Limit	Limit	Unit
	Method	Conditions		Min	Max	
Subgroup 6						
Surge current	4066	Condition A (sine wave), $i_{f(surge)}$ = 2 A(pk), I_O = 0, V_{RM} = 0, 10 surges, 8.3 ms width each, one surge per minute, T_A = +25°C or Condition B (square wave), $I_{F(surge)}$ = 4 A (pk) 10 surges, 1 µs width each, duty factor = 0.0055 percent, T_A = 25°C				
Electrical measurements		See table I, subgroup 2				
Subgroup 7						
Forward recovery voltage and time	4026	I_F = 100 mA dc, $t_r \leq$ 1 ns (see 4.5.3.)	V_{peak} t_{fr}		5.00 30	V (pk) ns


1/ For sampling plan, see MIL-PRF-19500.
2/ UBCA, UBCC, and UBD devices are to have each diode tested individually.
3/ Electrical characteristics for all surface mount versions are identical to the corresponding axial leaded versions unless otherwise specified.
4/ This test required for the following end-point measurements only:
Group B, subgroups 2 and 3 (JAN, JANTX, JANTXV).
Group C, subgroups 2 and 6.
Group E, subgroup 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:23Z
Check the source to verify that this is the current version before use.

TABLE II. Group E inspection (all quality levels) for qualification and requalification only.

Inspection	MIL-STD-750		Sample plan
	Method	Conditions	
Subgroup 1			n = 45, c = 0
Thermal shock (glass strain)	1056	100 cycles 0°C to 100C.	
Temperature cycling	1051	500 cycles, -65°C to +175°C.	
Hermetic seal	1071	Gross leak only for axial leaded and UR. Fine and gross leak required for UB and UD.	
Electrical measurement		See table I, subgroup 2.	
Subgroup 2			n = 45, c = 0
Intermittent operating life	1037	10,000 cycles; I_f = 300 mA dc, t_{on} = t_{off} = 1 minute.	
Electrical measurements		See table I, subgroup 2.	
Subgroup 4			
Thermal resistance	3131	$R_{\theta JSP}$ can be calculated but shall be measured once in the same package with a similar die size to confirm calculations (may apply to multiple specification sheets).	n = 15, c = 0
Thermal impedance curves		See MIL-PRF-19500.	Sample size N/A
Subgroup 5			
Not applicable			
Subgroup 6			
ESD	1020		
Subgroup 8			
Resistance to glass cracking	1057	Test condition B. Test until failure occurs or to a maximum of 25 cycles, whichever comes first.	n = 45
Subgroup 9			n = 22, c = 0
Monitored mission temperature cycling	1055	Not required for UB and UD suffix devices.	
Electrical measurements		See table I, subgroup 2.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:23Z
Check the source to verify that this is the current version before use.

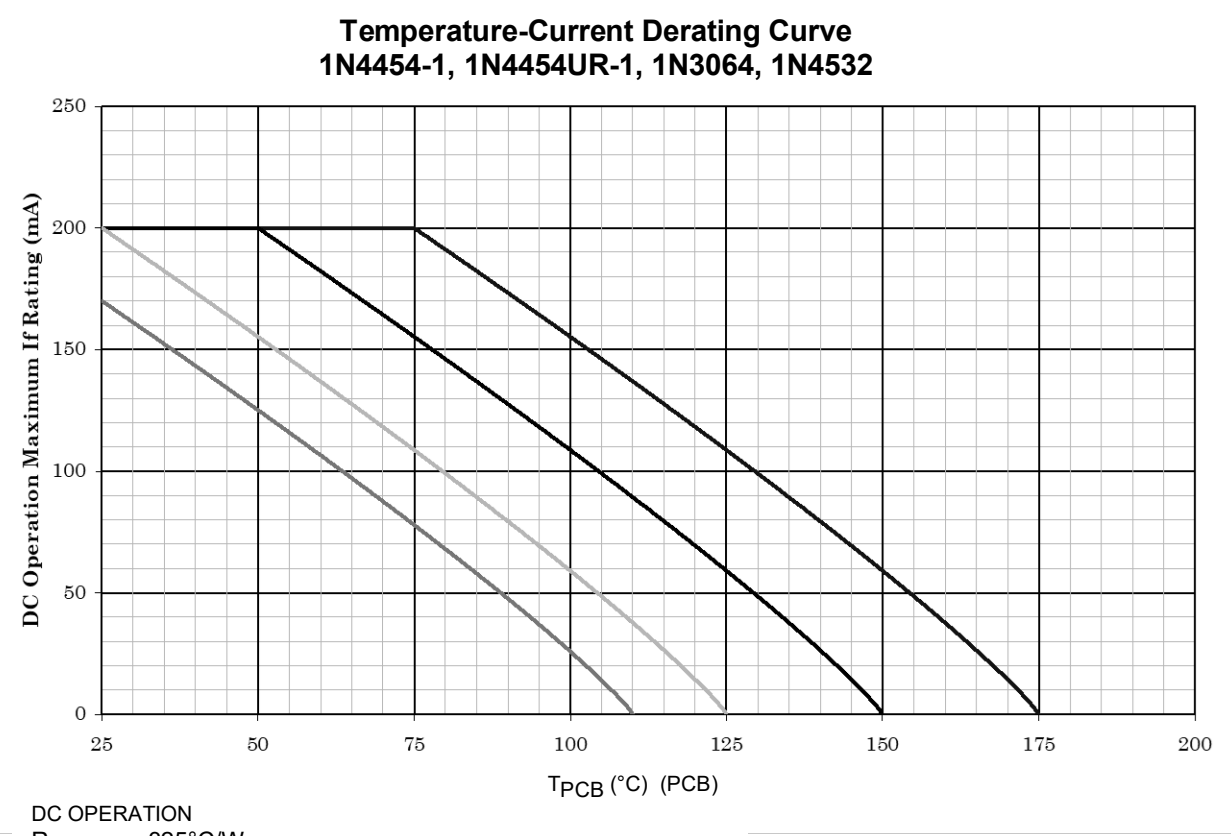


NOTES:

1. All devices are capable of operating at ≤ T_J specified on this curve. Any parallel line to this curve will intersect the appropriate power for the desired maximum T_J allowed.
2. Derate design curve constrained by the maximum junction temperature (T_J ≤ 175°C) and current rating specified (see 1.3).
3. Derate design curve chosen at T_J ≤ 150°C, where the maximum temperature of electrical test is performed.
4. Derate design curves chosen at T_J ≤ 125°C, and 110°C to show current rating where most users want to limit T_J in their application.

FIGURE 7. Temperature-current derating graph (axial leaded and MELF surface mount devices).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:23Z
Check the source to verify that this is the current version before use.

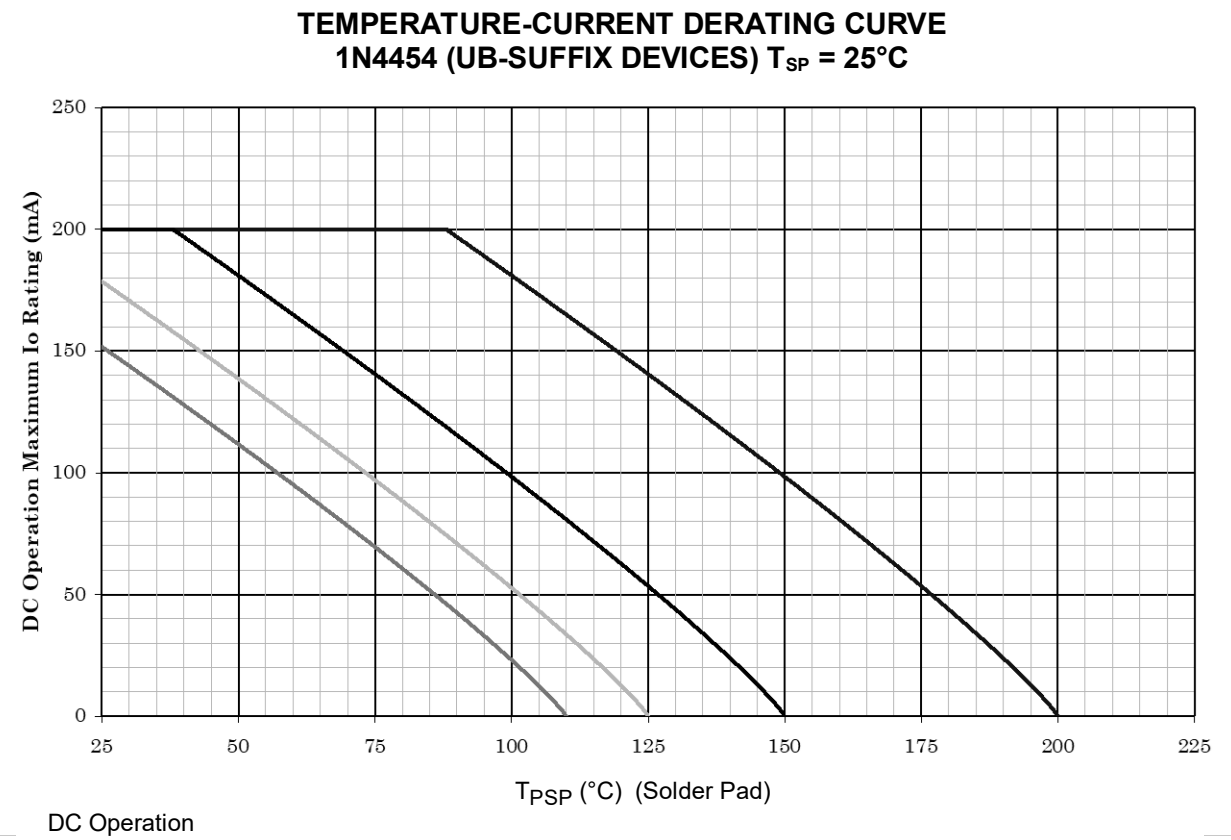

DC Operation
$R_{\theta JSP}$ = 120°C/W


NOTES:

1. This is the true inverse of the worst case thermal resistance value. All devices are capable of operating at ≤ T_J specified on this curve. Any parallel line to this curve will intersect the appropriate current for the desired maximum T_J allowed.
2. Derate design curve constrained by the maximum junction temperature (T_J ≤ +200°C) and current rating specified (see 1.3).
3. Derate design curve chosen at T_J ≤ +150°C, where the maximum temperature of electrical test is performed.
4. Derate design curves chosen at T_J ≤ +125°C, and +110°C to show current rating where most users want to limit T_J in their application.

FIGURE 8. Temperature-current derating graph (UB-suffix devices).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:23Z
Check the source to verify that this is the current version before use.

Maximum Thermal Impedance Plots
1N4454-1, 1N4532 (DO-35 Axial) T_L = 25°C

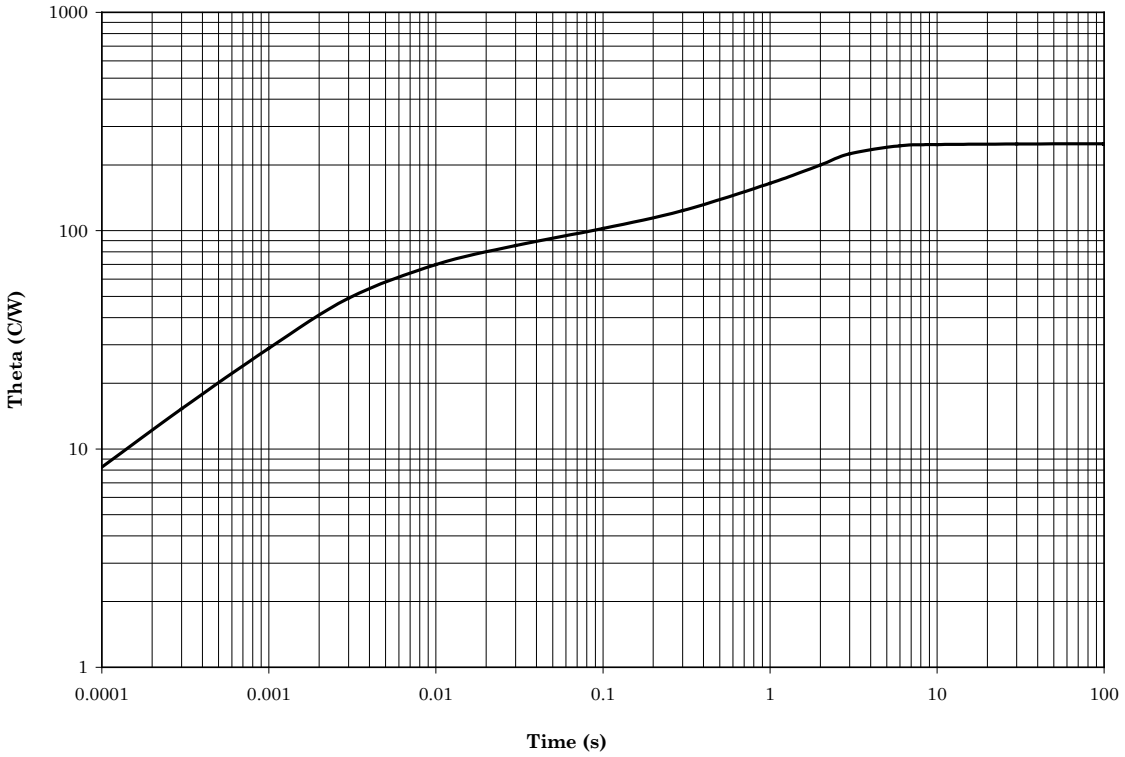


$R_{\theta JL}$ = 250°C/W

NOTE: $Z_{\theta JX}$ = 70°C/W maximum at t_H = 10ms.

FIGURE 9. Thermal impedance (axial leaded devices).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:23Z
Check the source to verify that this is the current version before use.

Maximum Thermal Impedance Plots
1N4454UR-1 (DO-213AA) T_{EC} = 25°C

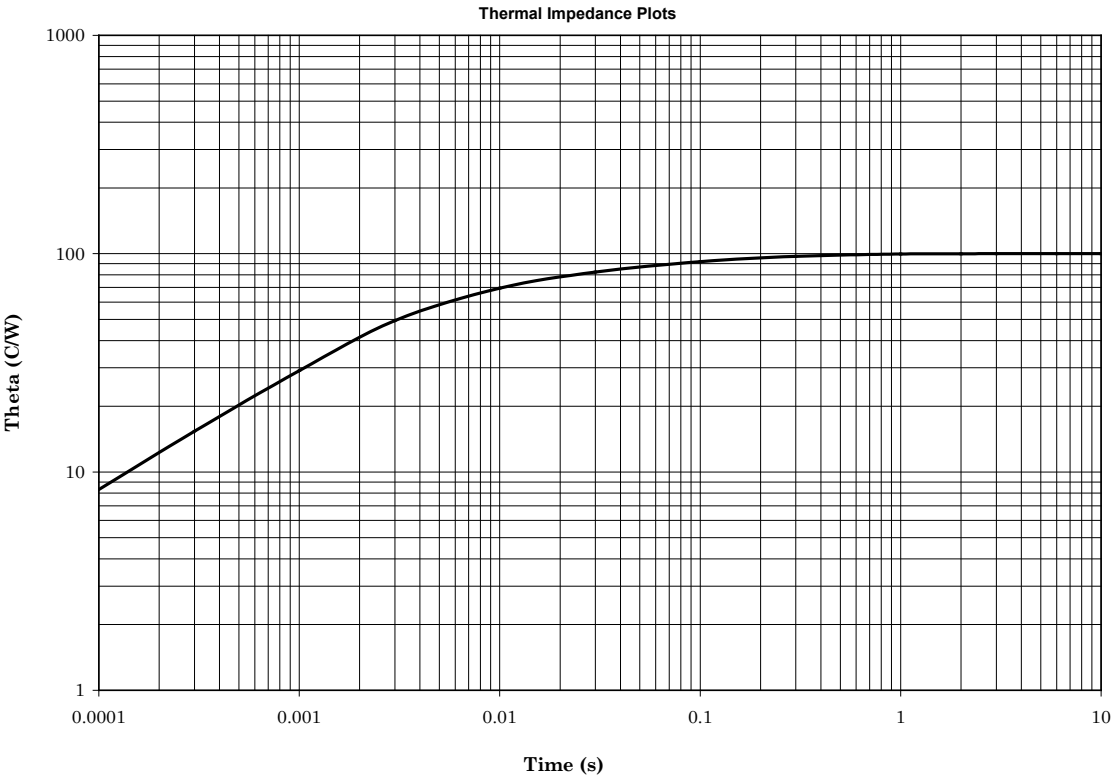


$R_{\theta JEC}$ = 100°C/W

NOTE: $Z_{\theta JX}$ = 70°C/W maximum at t_H = 10ms.

FIGURE 10. Thermal impedance (MELF surface mount devices).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:23Z
Check the source to verify that this is the current version before use.

Maximum Thermal Impedance Plots
1N4454UB, T_{SP} = 25°C

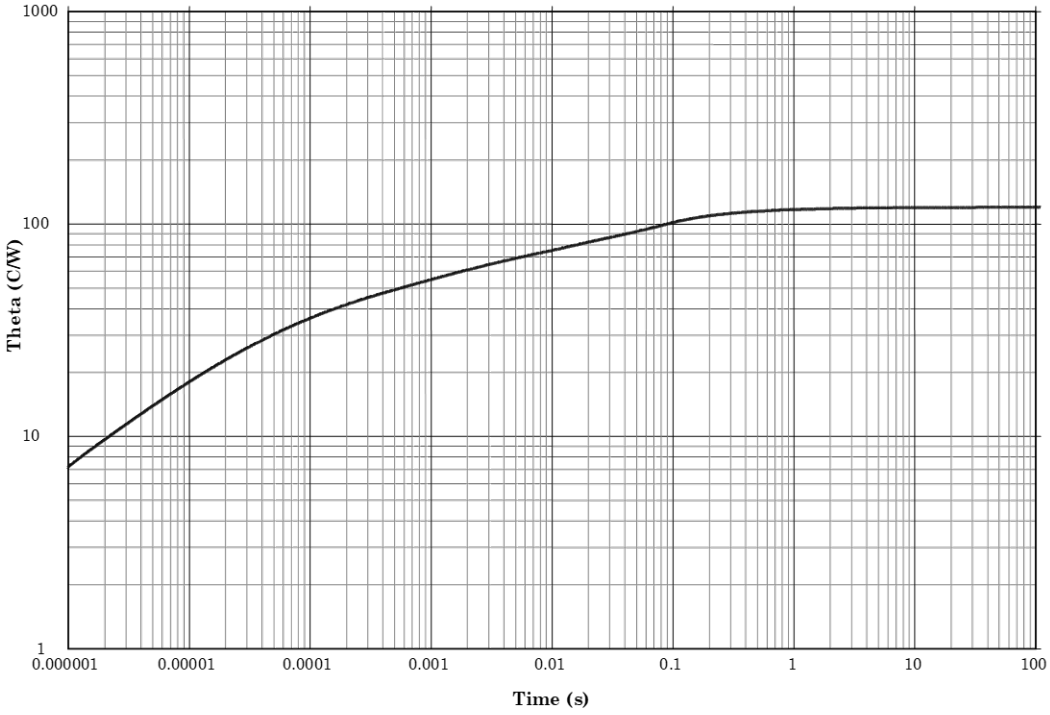


$R_{\theta JSP}$ = 120°C/W

NOTE: $Z_{\theta JX}$ = 75°C/W maximum at t_H = 10ms.

FIGURE 11. Thermal impedance (UB-suffix devices).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:23Z
Check the source to verify that this is the current version before use.

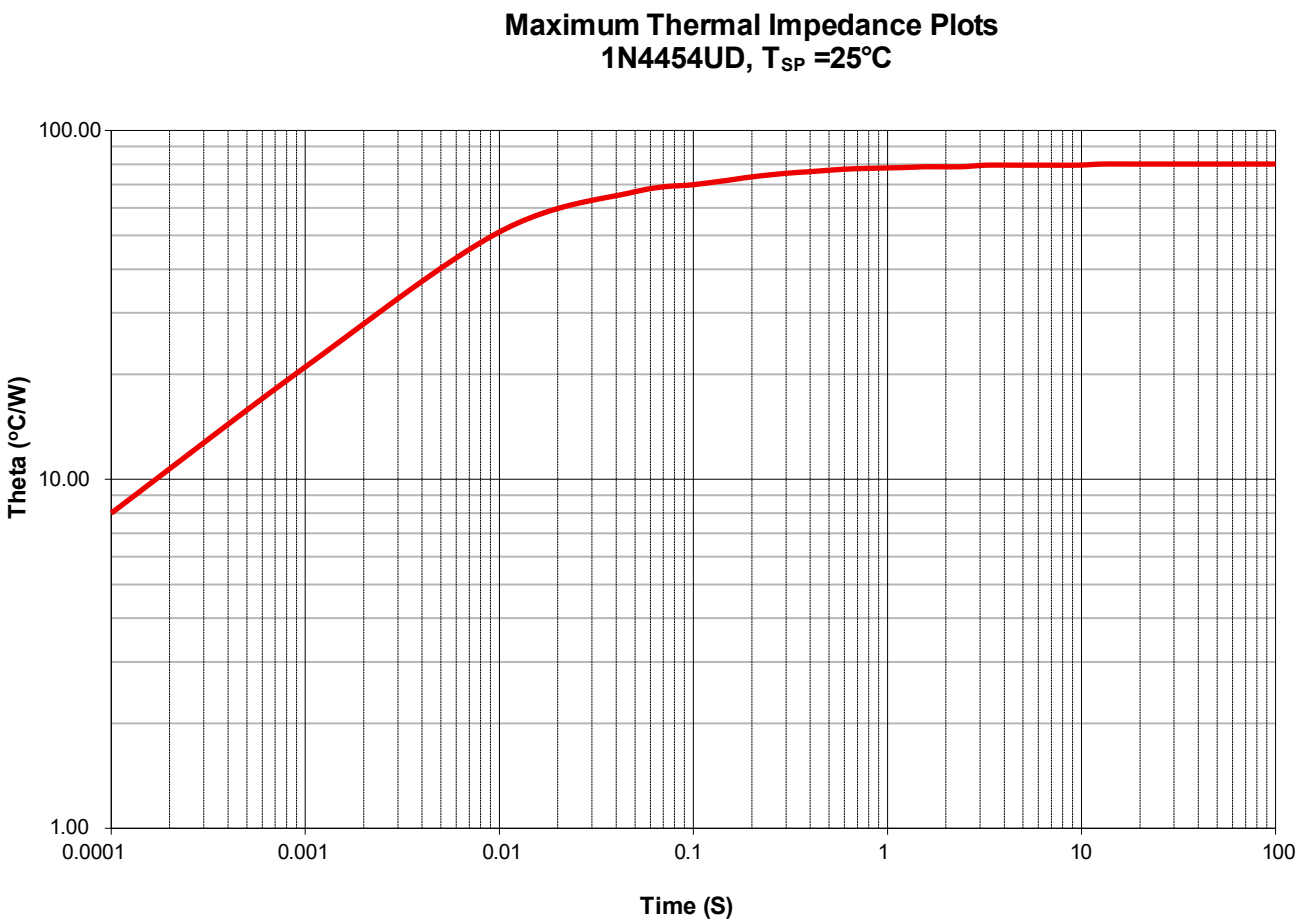

$R_{\theta JSP}$ = 80°C/W

NOTE: $Z_{\theta JX}$ = 51°C/W maximum at t_H = 10ms.

FIGURE 12. Thermal impedance (UD-suffix devices).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:23Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL-PRF-19500 are applicable to this specification.)

6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Packaging requirements (see 5.1).

c. Lead finish (see 3.4.1).


d. The complete PIN, see 1.5 and 6.5.

e. Destructive physical analysis when requested.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML 19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Land and Maritime, ATTN: VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://qpldocs.dla.mil.


6.4 PIN construction example.

6.4.1 PIN construction example. The PINs for encapsulated devices are constructed using the following form.

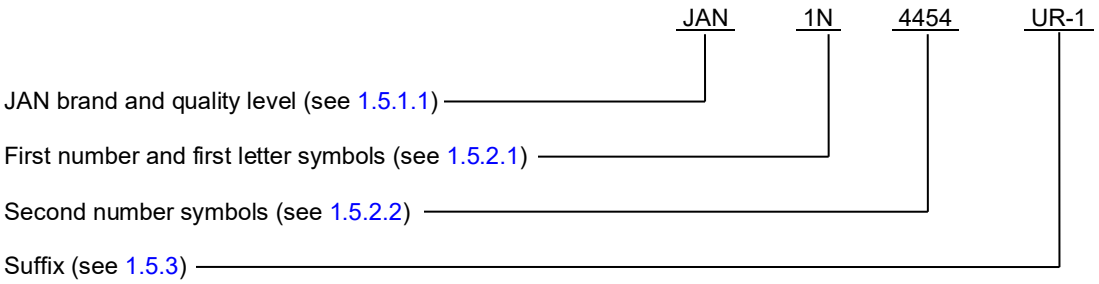

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:23Z
Check the source to verify that this is the current version before use.

6.4.2 Unencapsulated devices. The PINs for un-encapsulated devices are constructed using the following form.

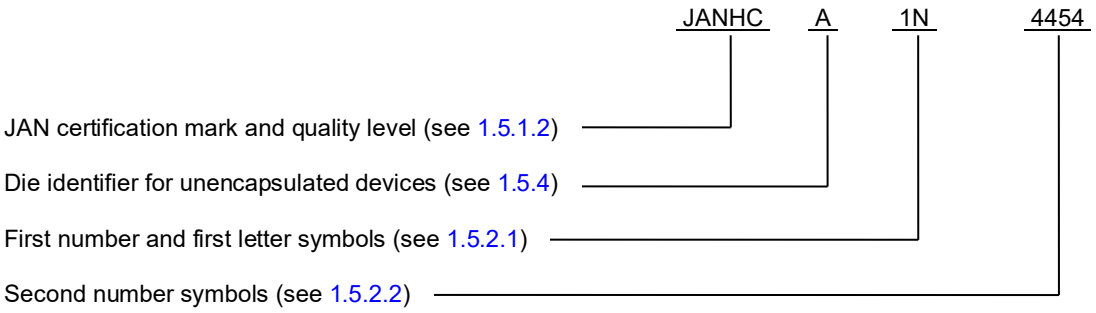

6.5 List of PINs.

6.5.1 List of PINs for encapsulated devices. The following is a list of possible PINs available on this specification sheet for encapsulated devices.

PINs for devices of the base quality level	PINs for devices of the "TX" quality level	PINs for devices of the "TXV" quality level
JAN1N4454-1	JANTX1N4454-1	JANTXV1N4454-1
JAN1N4454UR-1	JANTX1N4454UR-1	JANTXV1N4454UR-1
JAN1N4454UB	JANTX1N4454UB	JANTXV1N4454UB
JAN1N4454UBCA	JANTX1N4454UBCA	JANTXV1N4454UBCA
JAN1N4454UBCC	JANTX1N4454UBCC	JANTXV1N4454UBCC
JAN1N4454UBD	JANTX1N4454UBD	JANTXV1N4454UBD
JAN1N4454UD	JANTX1N4454UD	JANTXV1N4454UD
JAN1N3064	JANTX1N3064	JANTXV1N3064
JAN1N4532	JANTX1N4532	JANTXV1N4532

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:23Z
Check the source to verify that this is the current version before use.

6.5.2 List of PINs for unencapsulated devices. The following is a list of possible PINs available on this specification sheet for unencapsulated die. The qualified JANHC and JANKC suppliers with the applicable letter version (example, JANHCA1N4454) will be identified on the QML.

JANHC and JANKC ordering information	
PIN	Manufacturer
	52GC4
1N3064	JANHCA1N3064, JANKCA1N3064 JANHCB1N3064, JANKCB1N3064
1N4454	JANHCA1N4454, JANKCA1N4454 JANHCB1N4454, JANKCB1N4454
1N4532	JANHCA1N4532, JANKCA1N4532 JANHCB1N4532, JANKCB1N4532

6.6 Cross reference substitution list. Dash-one devices are a direct substitute for non dash-one devices and are preferred. The 1N4454-1 is directly interchangeable for 1N3064. There will be no support for the DO-7 package. Device types 1N3064 and 1N4532 are inactive for new design. The table shows supersession information.

Superseded PIN	Superseding PIN
1N3064	1N4454-1
1N4454	1N4454-1
1N4532	1N4454-1

6.7 Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Army − CR
Navy − SH
Air Force − 85
NASA − NA
DLA − CC

Review activities:
Army − AR, MI, SM
Navy − AS, MC
Air Force − 19

Preparing activity:
DLA − CC

(Project 5961−2025−033)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:23Z
Check the source to verify that this is the current version before use.