MILITARY SPECIFICATION

SEMICONDUCTOR DEVICE, TRANSISTOR, PNP, GERMANIUM
TYPE 2N1411

This amendment forms a part of Military Specification MIL-S-19500/133A(EL) 1/, dated 12 August 1970, and is approved for use by Army Electronics Research and Development Command, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 3

* 3.4: Delete "Tables I, II, and III" and substitute "table I".

* 4.2, delete and substitute the following:

"4.2 Qualification and Quality Conformance Inspection. Qualification inspection shall not be required. Quality conformance inspection shall consist of the tests specified in group A on a 100 percent basis."

* 4.2.1, 4.2.2, and 4.2.3: Delete in their entirety.

PAGE 4

* 4.2.4, 4.3.2, and 4.3.3: Delete in their entirety.

PAGES 5 AND 6

* TABLE I, LTPD column: Delete.

PAGES 7, 8, 9, 10, AND 11

* TABLES II, and III: Delete.

PAGE 12

FIGURE 1: Delete and substitute new figure 1 as printed on page 2 of this amendment.

The margins of this amendment are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

1/ For FSC 5961, Army EL is now ER.

Custodian:
Army - ER

Agent:
DLA - ES


Preparing activity:
Army - ER

(Project 5961-A819-3)



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:21Z
Check the source to verify that this is the current version before use.

| LTR | DIMENSIONS | | | | NOTES |
|---|---|---|---|---|---|
| | INCHES | | MILLIMETERS | | |
| | Min | Max | Min | Max | |
| A | .195 | .230 | 4.95 | 5.84 | |
| B | .155 | .180 | 3.94 | 4.57 | |
| C | .375 | .475 | 9.53 | 12.07 | |
| D | 1.500 | 1.750 | 38.10 | 44.45 | |
| E | --- | .160 | --- | 4.06 | 2 |
| F | .016 | .019 | .41 | .48 | 3,5 |
| G | 1.450 | 1.638 | 36.83 | 41.61 | 4 |
| H | .007 | .025 | .18 | .64 | 4 |
| J | .028 | .048 | .71 | 1.22 | 4 |
| K | .028 | .042 | .71 | 1.07 | 4 |
| L | 120° Nom | | | | |
| M | .070 Nom | | 1.78 Nom | | |

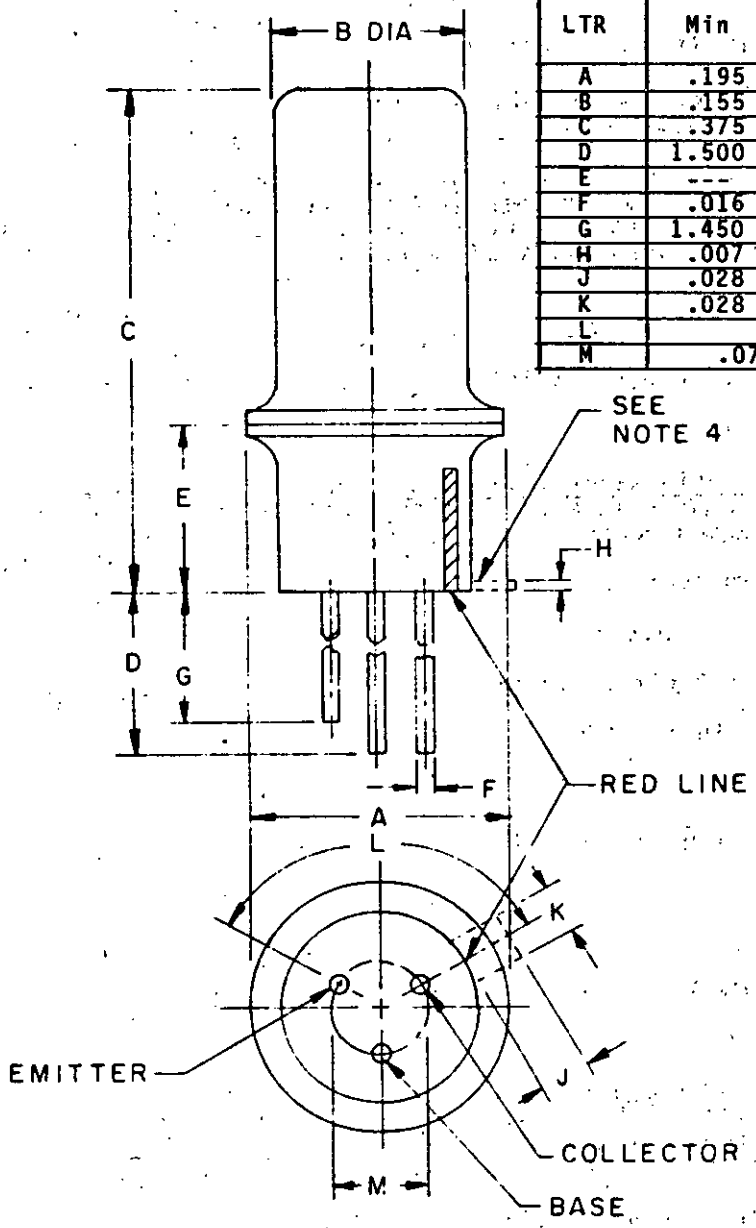


NOTES:
1. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
2. Flange position not controlled within this range.
3. All leads electrically isolated from case.
4. Tab optional. When tab is included, the red line indicator is not applicable and the lead lengths may be equal length. (Per D dimensions).
5. All three leads.

FIGURE 1. Physical dimensions of transistor type 2N1411



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:21Z
Check the source to verify that this is the current version before use.