MILITARY SPECIFICATION

SEMICONDUCTOR DEVICE, TRANSISTOR, PNP, GERMANIUM
TYPE 2N695

INACTIVE FOR NEW DESIGN AFTER 27 APRIL 1983.

This amendment forms a part of MIL-S-19500/135A(NAVY), dated 18 December 1968, and is approved for use within the Space and Naval Warfare Systems Command, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

Following title, add inactivation note as printed above.

PAGE 2

* 4.2, delete and substitute:

"4.2 Qualification inspection. Qualification inspection shall not be required."

* 4.3.1, delete and substitute:

"4.3.1 Group A inspection. Group A inspection shall consist of the examinations and tests specified in table I on a 100 percent basis."

* TABLE I: Delete LTPD column in its entirety.

PAGE 3


* TABLE I: Delete LTPD column in its entirety.

AMSC N/A FSC 5961

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:21Z
Check the source to verify that this is the current version before use.

FIGURE 1, delete and substitute:

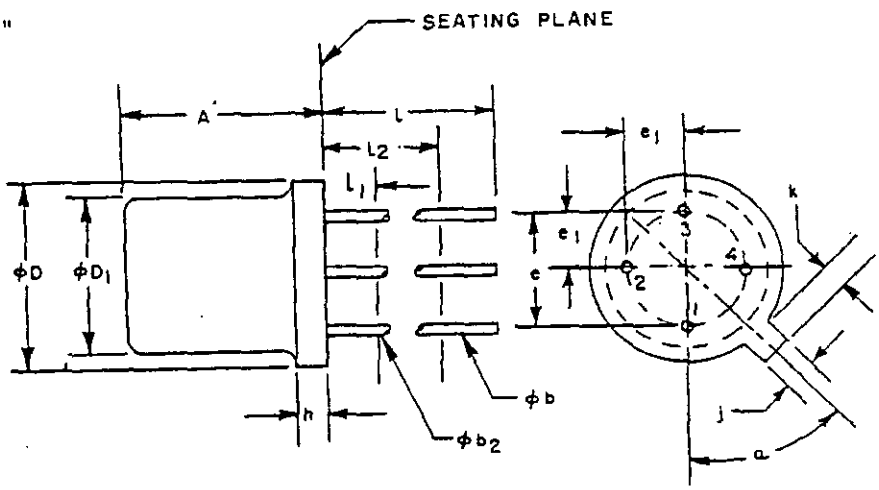

NOTES:
1. Metric equivalents are given for general information only.
2. (Four leads). Maximum number of leads omitted in this outline, "none" (0). The number and position of leads actually present are indicated in the product registration. Outline designation determined by the location and minimum angular or linear spacing of any two adjacent leads.
3. (All leads) ϕb_2 applies between L_1 and L_2. ϕb applies between L_2 and .500 inch (12.70 mm) from seating plane. Diameter is uncontrolled in L_1 and beyond .500 inch (12.70 mm) from seating plane.
4. Measured from maximum diameter of the product.
5. Leads having maximum diameter .019 inch (0.438 mm) measured in gauging plane .054 inch (1.37 mm) +.001 inch (0.025 mm) - .000 inch (0.000 mm) below the seating plane of the product shall be within .007 inch (0.178 mm) of their true position relative to a maximum width tab.
6. The product may be measured by direct methods or by gauge.
7. Tab centerline.

Symbol	Inches		Millimeters		Notes
	Min	Max	Min	Max	
A	.170	.210	4.32	5.33	
ϕb	.016	.021	0.41	0.53	3
ϕb_1	.016	.019	0.41	0.48	3
ϕD	.209	.230	5.31	5.84	
ϕD_1	.178	.195	4.52	4.95	
e	.100 T. P.		2.54 T. P.		5
e_1	.050 T. P.		1.27 T. P.		5
h	-	.030		0.76	
j	.036	.046	0.91	1.17	
k	.028	.048	0.71	1.22	4
L	.500		12.70		3
L_1		.050		1.27	3
L_2	.250		6.35		3
α	45 T. P.		45 T. P.		5, 7

FIGURE 1. Physical dimensions. "

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:21Z
Check the source to verify that this is the current version before use.

The margins of this amendment are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodian:
Navy - EC

Review activities:
Navy - SH
DLA - ES

User activities:
Navy - AS, CG, MC, OS

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5961-N922)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:21Z
Check the source to verify that this is the current version before use.