MIL-S-20706A
21 April 1970

MIL-S-20706
30 December 1957

MILITARY SPECIFICATION

SCARIFIED ASSEMBLIES, BACK-RIP, EARTH,

DOZER MOUNTED

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers back-rip scarifier assemblies for mounting on angledozers and bulldozers conforming to MIL-A-17076 and MIL-B-52449 respectively.

1.2 Classification. Scarifier assemblies shall be of the following types and sizes as specified:

Type I - For straight-blade and semi-U blade dozers covered in MIL-A-17076 and bulldozers covered in MIL-B-52449.
Size 1 - For MIL-A-17076, size 1 dozer
Size 2 - For MIL-A-17076, size 2 dozer and MIL-B-52449, size 1
Size 3 - For MIL-A-17076, size 3 dozer and MIL-B-52449, size 2
Size 4 - For MIL-A-17076, size 4 dozer and MIL-B-52449, size 3
Size 5 - For MIL-A-17076, size 5 dozer
Size 6 -For MIL-A-17076, size 6 dozer

Type II -For angle-blade dozers covered in MIL-A-17076.
Size 1 - For size 1 dozer
Size 2 - For size 2 dozer
Size 3 -For size 3 dozer
Size 4 - For size 4 dozer
Size 5 - For size 5 dozer
Size 6 - For size 6 dozer

20 APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

FSC 3830

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:14Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

Federal

PPP-B-601	- Boxes, Wood, Cleated-Plywood.

Military

MIL-P-116	- Preservation, Methods of.
MIL-T-704	- Treatment and Painting of Materiel.
MIL-A-17076	- Angledozers and Bulldozers, Earthmoving: Cable and Hydraulic Operated, for Crawler Tractors.
MIL-T-20705	- Teeth, Scarifier, Back-Rip.
MIL-B-52449	- Bulldozers, Earthmoving: HydraulicaUy-Operated, for Pneumatic-Tired Tractors.

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.
MIL-STD-130	Identification Marking of U.S. Military Property.
MIL-STD-1186	Cushioning, Anchoring, Bracing, Blocking, and Waterproofing; with Appropriate Test Methods.
MS39000	Shank, Scarifier, Back-Rip, Bulldozer.
MS39126	Shank, Scarifier, Back-Rip, Angledozer.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification.

(Application for copies should be addressed to the Tariff Publishing Office, Room 202, Union Station, 516 West Jackson Boulevard, Chicago, Illinois 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:14Z
Check the source to verify that this is the current version before use.

AMERICAN WELDING SOCIETY

Standard Qualification Procedure (AWS B3.0)

(Application for copies should be addressed to the American Welding Society, 345 East 47th Street, New York, N.Y. 10017.)

AMERICAN SOCIETY OF MECHANICAL ENGINEERS

Boiler and pressure Vessel Code, Welding Qualifications, Section IX.

(Application for copies should be addressed to the American Society of Mechanical Engineers, 345 East 47th Street, New York, N.Y. 10017.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., ATTN: Tariff Order Section, 1616 P Street NW, Washington, D.C. 20036.)

3. REQUIREMENTS

3.1 Description. The back-rip scarifier assemblies shall each consist of one housing, one shank, and one tooth. The assembly shall be for mounting on the back side of moldboards of straight-blade and semi-U dozers or “C” frames of angledozers so that ripping or scarifier action is accomplished when the tractor-dozer unit is backing up with the blade dragging on the ground. On straight-blade and semi-U dozers, scarifier housings shall bolt onto brackets mounted on the back side of the moldboard. The tooth shank shall be hinged so that it can float freely over the ground when the tractor is blading forward. The shank shall be retractable into the housing, and a locking device shall be furnished to hold the shank assembly rigidly above the lower edge of the blade. When in the ripping position, the scarifier assembly shall permit a ripping depth below the blade not less than that specified in table I for the size specified.

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:14Z
Check the source to verify that this is the current version before use.

Table I. Scarifier Assembly Requirements

Size	Shank size (inches)	Ground penetration, minimum (inches)
1	1-1/2 x 3	6
2	1-1/2 x 3	7
3	1-1/2 x 4	8
4	2 x 4	8
5	3 x 4	8
6	3 x 4	8

3.1.1 Load capacity. The scarifier assemblies shall withstand without damage or permanent deformation the draft loads specified in table II and the lateral loads specified in table III when the assemblies are tested in accordance with 4.5.2.2 and 4.5.2.3 respectively

Table II. Draft Load Requirements

Size	Initial load, approx. 75 percent of terminal	Terminal loads	Max. allowable permanent set
	(foot-pounds)	(foot-pounds)	(inch)
1	18,700	25,000	0.025
2	18,700	25,000	0.025
3	30,000	40,000	0.025
4	41,000	55,000	0.025
5	52,000	70,000	0.025
6	64,000	85,000	0.025

Table III. Lateral Load Requirements

Size	Initial load, approx. 75 percent of terminal	Terminal load	Max. allowable permanent set
	(foot-pounds)	(foot-pounds)	(inch)
1	9,300	12,500	0.025
2	9,300	12,500	0.025
3	13,000	17,500	0.025
4	22,500	30,000	0.025
5	33,800	45,000	0.025
6	45,000	60,000	0.025

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:14Z
Check the source to verify that this is the current version before use.

3.2 First article.

3.2.1 Preproduction model. The supplier shall furnish a scarifier assembly within the time - specified to prove, prior to starting production, that his production methods will produce scarifier assemblies that comply with the requirements of this specification. Examination and test shall be those specified in section 4 and shall be subject to surveilance and approval by the Government (see 6.3).

3.3 Material. Material shall be as specified herein. Material not specified shall be selected by the supplier and shall be subject to all provisions of this specification.

3.4 Temperature conditions. The scarifier assembly shall perform as specified herein, without damage or permanent defamation in any ambient temperature from plus 125°F. to minus 65°F.

3.5 Identification marking. The scarifier assembly shall be identified in accordance with MIL-STD-130.

3.6 Treatment and painting. Portions of the scarifier assembly and its components and parts normally painted than be cleaned, treated and painted in accordance with MIL-T-704, type A.

3.7 Identification of hight strength steels. When high strength steels are used in the fabrication of the scarifier assemblies, the supplier shall include in the technical publications the identification and location of these steels, and the necessary precautions to be takes by the using agency in the field concerning rewelding, repair and replacement of these steels.

3.8 Repair parts and maintenance tools. such repair parts and maintenance tools as are specified shall be furnished.

3.9 Type I, for straight-blade dozers and semi-U dozers. Scarifier assemblies for straight-blade and semi-U dozers shall have a housing with four bolt holes of the same dimensions as specified for the mounting brackets in accordance with the tractor size as shown in figure 1. The base of the housing shall rest on the top side of the lower bracket. The housing shall withstand all working loads and forces imposed by the shank without failure, distortion or spreading, or changing the pitch of the tooth. The housing shall provide a means for locking the hinge pin to prevent its rotation. The housing shall be constructed to prevent the entrance of soil into the scarifier assembly. The housing shall accommodate the shank in its working

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:14Z
Check the source to verify that this is the current version before use.

position and in the carrying position when not in use and a spring actuating mechanism when specified (see 3.9.3). When the shank is in the working position, the housing shall hold the shank vertical (90 degrees to the ground line in two planes). The housings shall be constructed so that when the shank is in the carrying position the bottoom of the tooth shall have a ground clearance of not less than 1-1/2 inches. The housing shall not extend rearward more than 3 inches from the vertical plane of the working face of the shank. All bolt holes shall be spaced to fit the mounting brackets within plus or minus l/32 inch and shall be of the diameter specified for the size of tractor specified. The overall horizontal dimensions of the housing measured from the vertical plane of the upper moldboard bracket shall not exceed the amount specified in table IV.

Table IV. Housing Dimensions

Size	Maximum allowable distance, measured from the vertical plane of the upper bracket bolt face, with blade in normal working position, to the rearward edge of the housing, measured in the horizontal plane.	
	Measured at centerline of upper bolt holes.	Measured to the farthest edge of the housing.
	(Inches)	(Inches)
1	2-7/8	4-5/8
2	3	4-3/4
3	4-3/8	5-1/2
4	4-3/4	7
5	4-3/4	7
6	6	9

3.9.1 Shank. The shank shall swing from the housing assembly and be of sufficient length for the tooth to penetrate below the cutting edge of the dozer not less than the amount specified in table I. Individual shanks shall be of sufficient strength to withstand the maximum pull of the tractor without distortion or failure. The entire shank shall be located rearward of any moldboard surfaces. The horizontal distance from the cutting edge of the tooth to the vertical working surface of the shank shall be not less than 7 inches. The shank in any position of adjustment shall not interfere with any part of the tractor. The lower tip of the shank shall accept and retain under maximum load a replaceable teeth conforming to MIL-T-20705. The section of the shank

Source: https://assist.dla.mil -- Downloaded: 2026l0-19T08:14Z
Check the source to verify that this is the current version before use.

shall be such that the tooth when mounted on the shank makes an angle of 41 degrees plus or minus 1 degree with reference to the ground when the shank is in vertical cutting position. When the shank is in dragging position, the heel of the shank shall float not less than 1-1/2 inches above ground level. The section of the shank adjacent to the tooth shall be the same width as the tooth cutting bit (cutting face). The shank shall conform to MS39000 except that the dimensions shall be as specified in-table I. The shank shall permit the use of an actuating mechanism for spring loading the shank. The shank assembly shall be constructed so that it can be installed or removed without special tools in less than 1 minute by one man.

3.9.2 Mounting bolts. Mounting bolts shall be 1/8 inch smaller than the bolt holes for the mounting brackets as shown in figure 1.

3.9.3 Latch mechanism. When specified, a spring actuating mechanism shall be provided for holding the tooth in the digging position to counteract the forces gravity when the tractor dozer unit is working up a slope. This mechanism shall be compact, self-operating, and shall permit the shank to rest against the resistance of the spring. The spring shall of sufficient strength to return the shank against the moldboard when the scarifier is in a position 50 degrees from vertical.

3.10 Type II, for angledozer blades. Scarifier assemblies for angledozers shall have a housing to fit on the yoke or "C" frame of the angledozer. The housing shall be suitable for welding to the yoke or “C" frame. The assembly shall withstand the entire force or load of the tractor without distortion or failure of the housing or the attaching welds. The housing skill fit closely on the bottom and both sides of the box frame of the yoke to provide sufficient surface for securing the housing. Means shall be provided for the shank and tooth to be locked in the carry position permitting ground clearance when not in use. The houseing shall be constructed to minimize entrance of soil into the housing assembly. The requirements for strength, materials, and tolerances shall be the same as specified for type I scarifier assemblies.

3.10.1 Shank. The shank construction, materials, and operation shall be the same as specified for type I scarifier assemblies. The size 4 shank shall conform MS39126.

3.10.2 Tooth. The tooth shall ocnform to MIL-T-20705.

3.11 Workmanship. All parts and components of the scarifier assemblies including castings, forgings, molded parts, stampings, bearings,

Source: https://assist.dla.mil -- Downloaded: 2026l0-19T08:14Z
Check the source to verify that this is the currentversion before use.

seals, machined surfaces, and welded parts shall be clean and free front sand, dirt, fins, pits, sprues, scale, flux, and other harmful, extraneous material. External. surfaces shall be free of burrs, sharp edges, and corners except when sharp edges or corners are requires.

3.11.1 Fabrication. All parts shall be fabricated in Such a manner that during and after assembly, correct fit, alinement, and clearance shall be provided between mating parts and between operating parts.

3.11.2 Steel condition. Steel used in the fabrication of the scarifier assemblies shall provide original quality surface finish and shall be free from kinks and sharp bends. Steel having eroded surface is not acceptable. The forming of material shall be done by methods that will not cause damage to the metal. Shearing and chipping shall be done neatly and accurately. Corners shall be square and true, and all sharp edges and burro shall be removed. Burned surfaces of flamecut material shall be free of burrs, sharp edges, and slag. Precautions shall be taken to avoid overheating, and heated metals should be allowed to cool slowly except where heat treatment is required. All bends of a major character shall be made with metal dies or fixtures to insure uniformity of size and shape.

3.l1.3 Bolted connections. Bolt holes shall be accurately punched or drilled and shall have the burrs removed. Bolt holes in structural members subject to variable loads shall be punched or drilled. Washers or lockwashers shall be provided where necessary. All bolts, nuts, and screws shall be tight. Threads securing bolts or capscrews shall be of sufficient strength to withstand the tensile strength of the bolt.

3.11.4 Welders and welding.

3.11.4.1 Welders. Before assigning any welder to manual welding work covered by this specification, the supplier shall provide the contacting officer with certification that the welder has passed qualification tests as prescribed by either of the following listed codes for the type of welding operation to be perfomed and that such qualification is effective as defined by the particular code:

Standard Qualification Procedure of the American Welding Society.
Welding Qualification of the ASME Boiler and Pressure Vessel Code.

3.11.4.2 Welding. The surfaces of parts to be welded shall be free from rust, scale, paint, grease, and other foreighn matter. Welds shall transmit stress without permanent deformation or failure when the parts connected by the welds are subjected to proof and service loadings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:14Z
Check the source to verify that this is the current version before use.

3.11.5 Machine work. Tolerance and gages for metal fits shall conform to the limitations specified herein,

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The supplier is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2 Classification of inspection. Inspection shall be classifieed as follows:

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of Preparation for delivery (see 4.6).

4.3 Preproduction inspection.

4.3.1 Examination. The preproduction scarifier assembly shall be examined for the cirtical and major defects specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. Upon successful completion of the examination specified in 4.3.1, the preproduction scarifier assembly shall be subjected to the tests specified in 4.5.2. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination and tests shall be in accordance with MIL-STD-105, inspection level II.

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:14Z
Check the source to verify that this is the current version before use.

4.4.2 Examination.

4.4.2.1 Individual. Each scarifier assembly shall be examined for the critical defect specified in 4.5.l. Presence of a critical defect shall be cause for rejection.

4.4.2.2 Samples. Samples selected in accordance with 4.4.1 shall be examined for the major defects specified in 4.5.1. AQL shall be 2.5 percent defective.

4.4.3 Tests. Samples selected in accordance with 4.4.1 shall be tested as specified in 4.5.2. AQL shall be 2.5 percent defective.

4.5 Inspection procedure.

4.5.l Examination. Scarifier assemblies shall be examined for the following defects:

Critical

1. Dimensional tolerances not as specified in MS39000 for the type I and in MS39126 for the type II, size 4.

Major

101. Nonmetallic inclusions.
102. Segregation.
103. Cracks.
104. Seams.
105. Pipes.
106. Holes not clean cut.
107. Laps.
108. Fins.
109. Scale.

4.5.2 Tests.

4.5.2.1 Test apparatus. A test stand constructed to include calibrated gages for registering pressures convertible to foot-pounds force and a 50-ton capacity hydraulic jack shall be used for testing as specified herein. The type I scarifier assembly shall be tested with a moldboard bracket welded to the test stand. The type II scarifier assembly shall be tested with the scarifier housing welded to the test stand in proportion to the type yoke to which it will mount.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:14Z
Check the source to verify that this is the current version before use.

4.5.2.2 Draft load. The scarifier housing shall be installed on the test stand, all mounting bolts and nuts shall be tightened, and the shank shall be mounted in the housing in accordance with figure 2 and table II. A jack shall be installed with the center of the jack in line with the lower end of the shank bar as shown on figure 2. A deflection gage shall be mounted on the frame of the test stand, and the stem shall contact the shank at the point shown in figure 2. The initial load shown in table II shall be applied for not less than 2 minutes for the size being tested for seating all parts. Pressure shall be released and gages reset at zero before the terminal load is applied. The terminal load shall be applied for not less than 10 minutes. Damage to or permanent deformation beyond the maximum allowable set specified in table II shall constitute failure of this test.

4.5.2.3 Lateral load test. The searifier housing shall be installed on the test stand, all mounting bolts and nuts shall be tightened, and the shank shall be mounted in the housing in accordance with figure 3 and table III. The base of the jack shall rest against a narrow bar to permit the arm pivot through a small arc which occurs in flexing the shank. An indicator gage for registering housing deflection shall be mounted on the frame as shown in figure 3. The initial load shown in table III shall be applied for not less than 2 minutes for the size being tested for seating all parts. Pressure shall be released, and gages shall be reset at zero before the terminal load is applied. The terminal load specified in table III for the size being tested shall be applied for not less than 10 minutes. Damage to or permanent defomation beyond the maximum allowable set specified in table III shall constitute failure of this test.

4.5.2.4 Latch mechanism. When the spring latch mechanisms specified, the type I housing shall be tilted at an angle of 50 degrees from vertical with the spring actuated latch mechanism in place to prevent the shank from hanging vertically due to the force of gravity. The shank shall be pulled to vertical position by hand and released. Failure of the mechanism to return the shank to its working position in the housing with the edge of the shank contacting the housing base shall constitute failure of this test.

4.6 Inspection of preparation for delivery.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection, a completely processed pack prepared for shipment shall be considered a unit of product.

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:14Z
Check the source to verify that this is the current version before use.

4.6.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.1.3 Examination. Samples selected in accordance with 4.6.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

110. Materials and containers not as specified for level A or B. Each incorrect material or each incorrect container shall constitute a defect.
111. Unpainted surfaces not coated with preservative as specified for level A.
112. Strapping not zinc coated for level A.
113. Strapping not placed adjacent to the skids for level A or B.
114. Marking illegible, incomplete or incorrect.

5. PREPARATION FOR DELIVERY

5.1 Preservation. Preservation shall be level A or C, as specified.

5.1.1 Level A. Unpainted surfaces of the scarifier assemblies, including bolts and nuts, requiring the application of a contact preservative in accordance with MIL-P-116 shall be cleaned, dried, and coated with type P-1 preservative conforming to the applicable specification listed in MIL-P-116.

5.1.2 Level C. The scarifier assemblies, including bolts and nuts shall be preserved to afford protection against deterioration from the supplier to the initial destination for immediate use.

5.2 Packing. Packing shall be level A, B, or C, as specified.

5.2.1 Level A. The searifier assemblies of like type and size shall be packed in quantities of two in close-fitting plywood boxes conforming to PPP-B-601, style A or B, overseas type. The boxes shall be modified with skids in accordance with the box specification. Blocking and bracing of the assemblies within the boxes shall be in accordance with MIL-STD-1186. The weight limitation of the boxes shall be waived if necessary to accomplish the packing specified herein. The boxes shall be strapped in accordance with the appendix to the box specifications except flat steel strapping shall be type I, class B and shall be placed adjacent to the skids. The filler edge cleats shall be wide enough so as not to allow strapping to pass over any voids.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:14Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. The scarifier assemblies shall be packed as specified for level A, except boxes shall be domestic type and strapping shall not be required to be zinc coated.

5.2.3 Level C. The scarifier assemblies shall be prepared for shipment in a manner to afford protection against deterioration at the lowest ratings of the carrier in compliance with Uniform Freight Classification rules or National Motor Freight Classification rules.

5.3 Marking. Marking shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The scarifies are intended for use in ripping the ground by bulldozing-type vehicles during the time the vehicle is traveling in reverse or backing. The scarifiers can be used in all types of terrain encountered in road construction and similar earth-moving work.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type and size acquired (see 1.2).
(c) The frame required for submission of the preproduction model (see 3.2.1).
(d) Applicable list of repair parts and maintenance tools (see 3.8).
(e) When a spring actuating mechanism is required (see 3.9.3).
(f) Level of preservation and level of packing required (ace 5.1 and 5.2).

6.3 Preproduction model. Any changes or deviations of production scarifier assemblies from the approved preproduction model during production will be subject to the approval of the contracting officer. Approval of the preproduction model will not relieve the supplier of his obligation to furnish scarifier assemblies conforming to this specification.

Custodian:

Army - ME

User activities:

Army - CE
Navy - YD, MC

Preparing activity:

Army - ME

Project No. 3830-0079

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:14Z
Check the source to verify that this is the current version before use.

SCARIFIER MOLDBOARD BRACKET DIMENSIONS						
	SIZE NUMBER					
	1	2	3	4	5	6
A	6	6	6	6	6	6
B	2 3/4	2 3/4	2 3/4	3 1/2	3 3/4	3 3/4
C	3/8	3/8	3/8	1/2	5/8	5/8
D	1	1	1 1/8	1 3/8	1 3/8	1 3/8
E	7	7	8	9 3/8	12	12
F	1 1/4	1 1/4	1 1/4	1 1/2	2 1/16	2 1/16
G	4 1/2	4 1/2	5 7/16	6 3/8	7 7/8	7 7/8
H	6	6	6	6	6	6
J	3/4	3/4	1	1	1	1
K	15/16	15/16	1 1/8	1 1/2	1 1/2	1 1/2
L	1	1	1 1/8	1 3/8	1 3/8	1 3/8
M	7	7	8	9 3/8	12	12
N	3 1/2	3 1/2	4	4 11/16	6	6
O	15 3/4	15 3/4	17 7/8	21	22 3/8	22 3/8
P	1/4	1/4	1/2	7/8	7/16	7/16
Q	4 3/4	4 3/4	5 3/4	6 1/2	6 1/2	6 1/2
R	1/4	1/4	1		1	1
S	1 1/8	1 1/8	1 1/8		2	2
T	2 1/4	2 1/4	2 1/4		4	4
U	1 5/16	1 5/16	2	2	1 7/8	1 7/8
V	1 1/16	1 1/16	1 3/8	1 1/2	1 1/2	1 1/2

DIMENSIONS "A" AND "H" MAY VARY, BUT TEETH MUST WORK as specified.

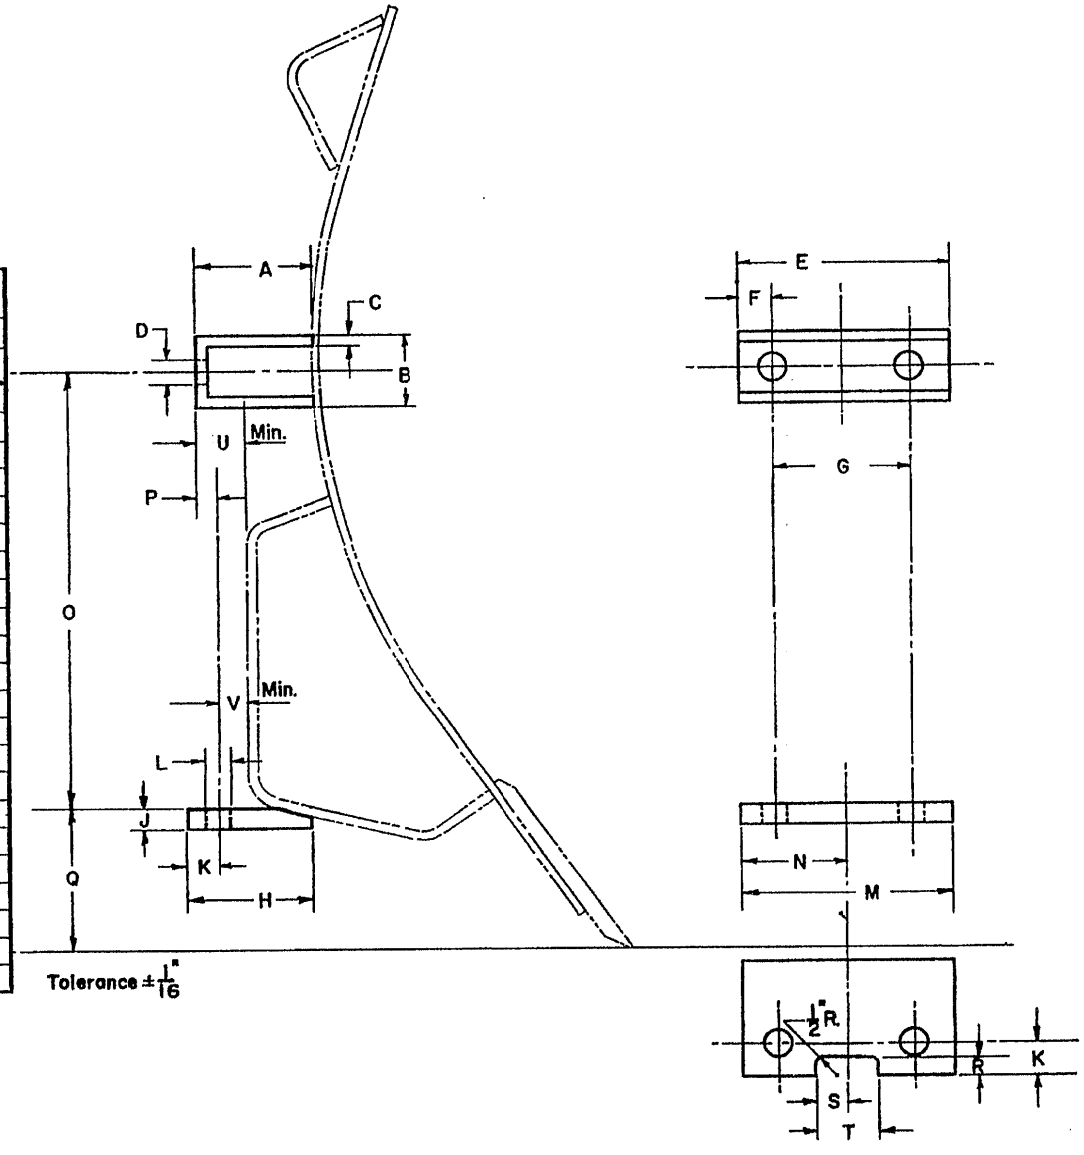


FIGURE 1, SCARIFIER, BRACKET DIMENSIONS, MOLDBOARD X-173

Source: https://assist.dla.mil -- Downloaded: 20260-19T08:14Z
Check the source to verify that this is the current version before use.

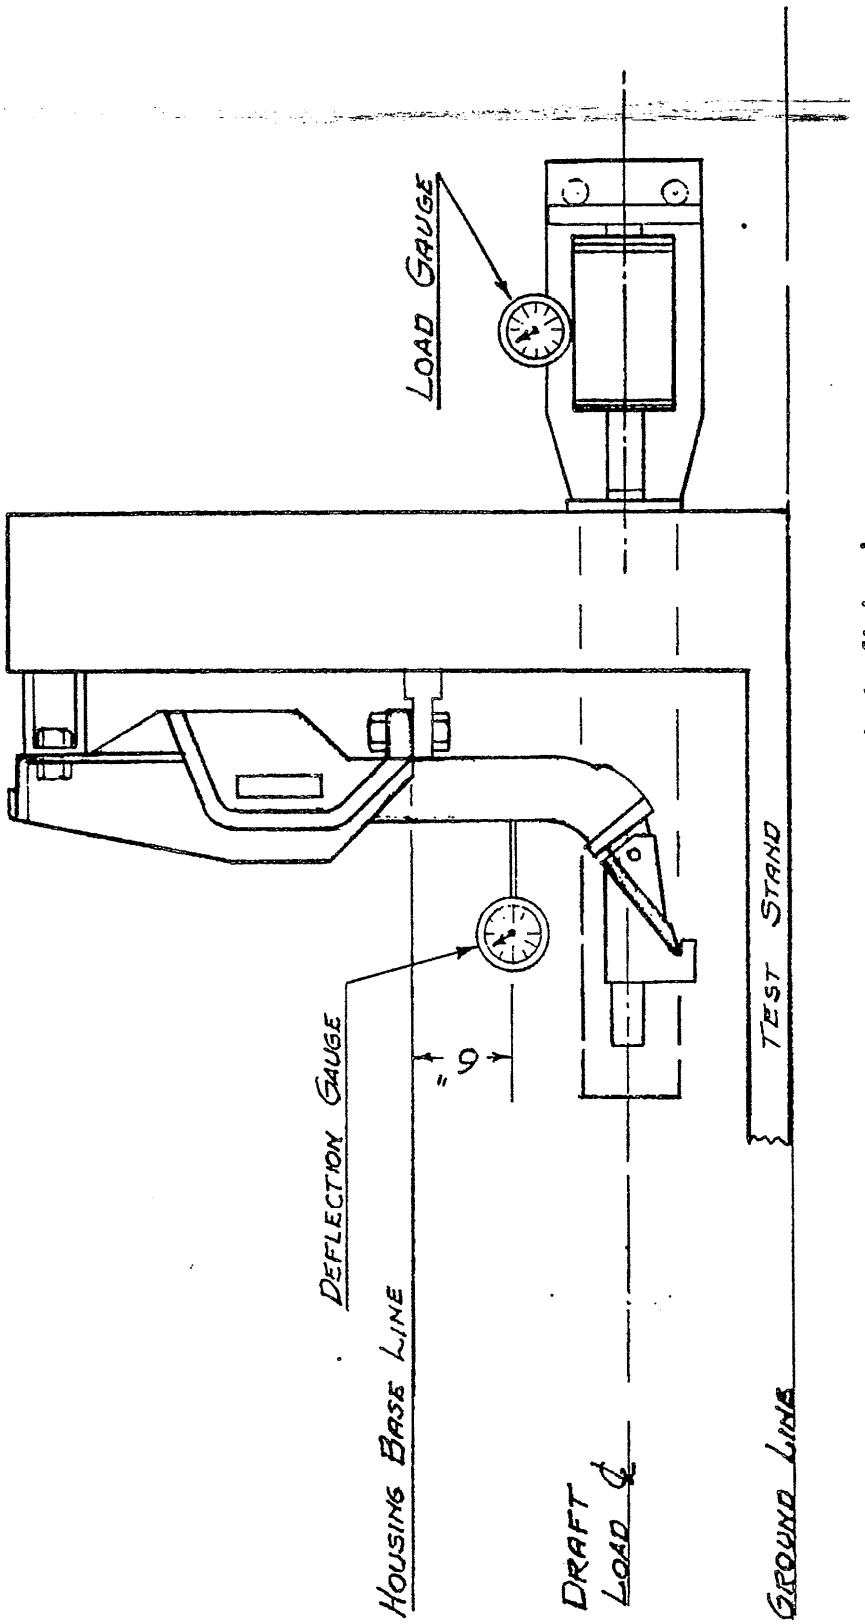


Figure 2- Test stand, draft load

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:14Z
Check the source to verify that this is the current version before use.

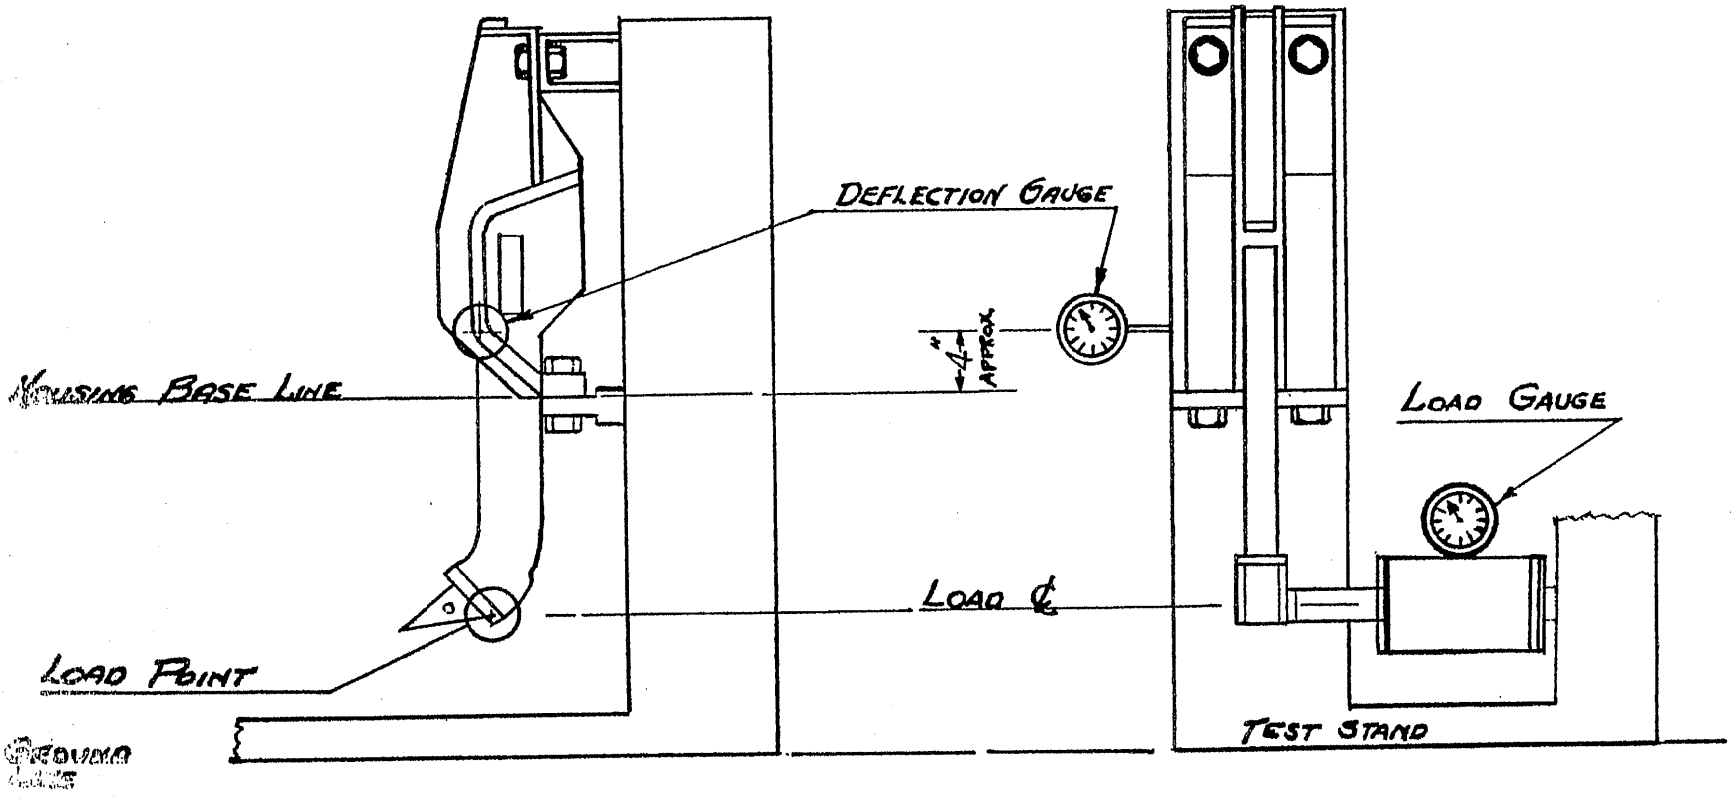


Figure 3- Test stand, lateral load

A 11003-3

Source: https://assist.dla.mil -- Downloaded: 20260-19T08:14Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-S-20706A - Scarifier Assemblies, Back-Rip, Earth, Dozer Mounted

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:14Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. A. ARMY MOBILITY EQUIPMENT COMMAND
RESEARCH, DEVELOPMENT AND ENGINEERING DIRECTORATE
ATTN: AMSME-RZK-KX
FORT BELVOIR, VIRGINIA 22060

OFFICIAL BUSINESS

POSTAGE AND FEES PAID

DEPARTMENT OF THE ARMY
U. S. ARMY MOBILITY EQUIPMENT COMMAND
RESEARCH, DEVELOPMENT AND ENGINEERING DIRECTORATE
ATTN: AMSME-RZK-KX
FORT BELVOIR, VIRGINIA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 202640-19T08:14Z
Check the source to verify that this is the current version before use.