MIL-S-20708/43A(NORD)
25 November 1959
SUPERSEDING
MIL-S-20708/43(NORD)
31 August 1959

MILITARY SPECIFICATION

SYNCHRO, TRANSMITTER, TYPE 19CXB6a

1. SCOPE.

1.1 This specification covers the detail requirements for transmitter synchro, type 19CXB6a, 115 volt, 60 cycle.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids form a part of this specification.

SPECIFICATIONS

MILITARY

MIL-I-16557 - Ink, Marking, Quick-drying (For Non-porous Surfaces).
MIL-S-20708 - Synchros, 60 and 400 cycles, General Specifications for.

DRAWINGS

BUREAU OF ORDNANCE

643019 - Clamp Assembly.
643090 - Washer, Drive.
644594 - Nut.
LD 255268 - Stock Material for Precision Instrument Components.
SA 2412503 - Gage, Spline.

(Copies of specifications, standards and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

FSC 5990

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:18Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Qualification. - Except as specified in par. 3.1.1, synchros covered by this specification shall be a product which has been tested and qualified in accordance with Specification MIL-S-20708.

3.1.1 Preproduction sample. - Pending issuance of a Qualified Products List (Q.P.L.), a sample (see 4.1.1.1) of the synchros to be furnished under this specification shall be subjected to the preproduction tests as specified in Specification MIL-S-20708.

3.2 Requirements. - All requirements shall be in accordance with Specification MIL-S-20708 except as otherwise specified herein.

3.2.1 Salt spray requirements. - Not applicable.

3.2.2 Design and construction. - The synchro shall be of the design, construction and physical dimensions specified in Figure 1, and shall be complete, including all hardware shown and identified thereon.

3.2.3 Performance requirements. - The values applicable to the synchro shall be as specified in Table I.

Table I. - Synchro, Transmitter, Type 19CXB6a

Requirement	Unit	Value
Frequency	Cycles	60
Primary voltage (nominal)	Volts	115
Primary current (min) (max)	Milliamps	25-75
Primary power (min) (max)	Watts	0.65-1.6
Transformation ratio ±2%		0.783
Electrical error (maximum)	Minutes	8.0
Null voltage total (maximum)	Millivolts	90
Fundamental component of null voltage (maximum)	Millivolts	65
Friction torque (maximum)	Ounce-inches	0.15
Phase shift	Degrees	11.0 (lead)
Primary impedance (Zp)	Ohms	1/
Secondary impedance (Zd)	Ohms	1/
Secondary impedance (Zq)	Ohms	1/

1/ As specified by the Bureau of Ordnance (see 6.1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:18Z
Check the source to verify that this is the current version before use.


SPLINE DATA	
TEETH	21
PITCH	120
PITCH DIAMETER	.175 +.001 -.001
OUTSIDE DIAMETER	.1872 +.0000 -.0003
PRESSURE ANGLE	20°
ROOT DIAMETER MAX	.155
TOOTH FORM	FULL DEPTH INVOLUTE


NOTE THE END FUNCTION OF THIS SPLINE IS FOR POSITIVE ROTATIONAL FASTENINGS IT IS NOT TO BE USED AS A GEAR THIS SPLINE SHALL BE INSPECTED BY GO, NO GO SPLINE RING GAGE SA 2412503

GEAR DATA	
TEETH	120
PITCH	72
PITCH DIAMETER	1.6666 +.0000 -.0003
OUTSIDE DIAMETER	1.6944 +.0000 -.0003
PRESSURE ANGLE	20°
ROOT DIAMETER MAX	1.6282
TOOTH FORM	FULL DEPTH INVOLUTE

NOTE O.D. OF GEAR TO BE CONCENTRIC TO I.3620 DIAMETER COLLAR WITHIN .005 SHAFT TO BE LOCKED TO OUTER HOUSING AND SHAFT MARK TO BE IN LINE WITH OUTER HOUSING ARROW)

TO SET SYNCHRO AT ZERO LOCK INNER AND OUTER HOUSING WITH A .060 PIN ARROW LOCATION ON HOUSING IS TO MATCH SHAFT MARK WHEN ROTOR IS SET AT SYNCHRO ZERO THE ARROW LOCATION ON HOUSING WILL BEAR NO RELATION TO THE CENTER LINES SHOWN ON THIS DRAWING RUBBER STAMP ARROW AND TYPE NO (180° FROM ARROW) USING BLACK MARKING INK MIL-I-16557.

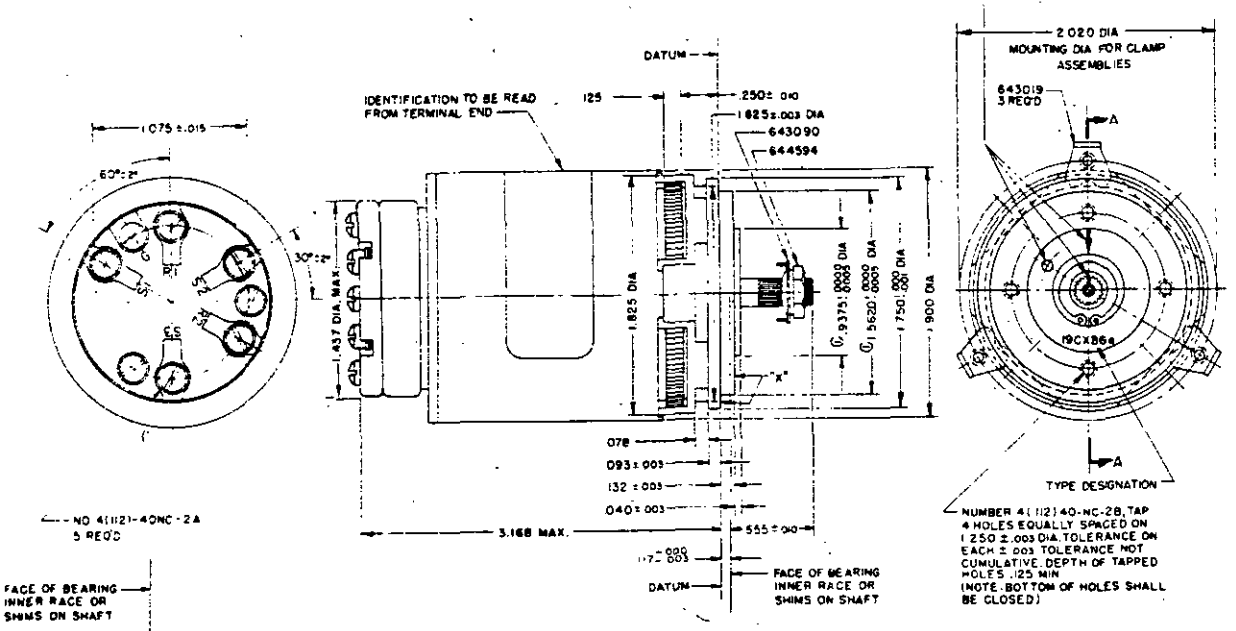

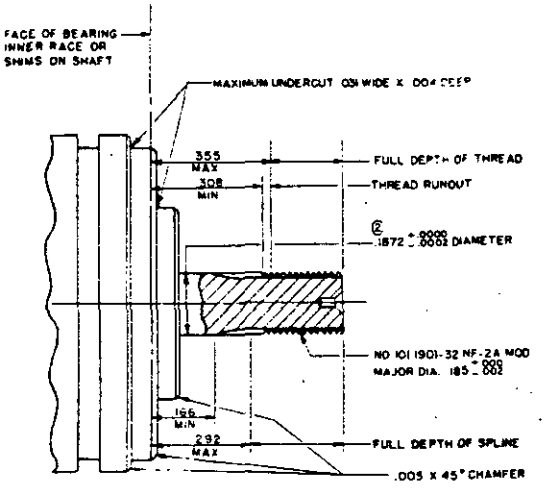

NOTES

1. RUNOUT OF Ⓒ DIAMETERS SHALL NOT EXCEED .001 TIR WHEN MEASURED WITH THE UNIT IN A VERTICAL POSITION SUPPORTED BY THE OUTPUT SHAFT AND THE HOUSING ROTATED
2. RUNOUT OF Ⓒ DIAMETER (SMOOTH PORTION) OF SHAFT SHALL NOT EXCEED .0008 TIR.
3. FULL WIDTH OF SURFACES MARKED "X" SHALL BE PERPENDICULAR TO DIAMETER MARKED Ⓖ WITHIN .002 TIR WHEN MEASURED WITH THE UNIT IN A VERTICAL POSITION SUPPORTED BY THE OUTPUT SHAFT AND THE HOUSING ROTATED
4. END PLAY MEASURED AS TOTAL MOVEMENT DURING REVERSAL OF 1 POUND AXIAL LOAD SHALL BE .003 INCHES MAX.
5. RADIAL PLAY MEASURED AS CLOSE TO THE BEARING AS POSSIBLE SHALL NOT EXCEED .0006 INCHES MAX. TIR DURING REVERSAL OF 1 POUND LOAD APPLIED NOT MORE THAN 1/8 INCH FROM END OF SHAFT.
6. THE DESIGN OF THIS UNIT SHALL PROVIDE FOR THE TERMINAL BLOCK TO REMAIN FIXED WHEN TERMINAL SCREWS AND TERMINAL LUGS ARE REMOVED.
7. THE END CAP DESIGN SHALL BE SUCH THAT THE TERMINAL LUG 12-2-7001-2813 MAY BE INSTALLED WITH THE BARREL INBOARD OR AT 180° POSITION OUTBOARD RECESSES FOR LUGS SHALL BE OF WIDTH AND DEPTH TO PREVENT TURNING OF THE LUGS.

PARTIAL SECTION A-A

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1°

FIGURE 1-SYNCHRO, TRANSMITTER, TYPE 19CXB6a

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:18Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS AND TEST REQUIREMENTS

4.1 Sampling, inspection and tests. -

4.1.1 Sampling. - Except as specified in 4.1.1.1, sampling shall be in accordance with the requirements of Specification MIL-S-20708.

4.1.1.1 Preproduction samples. - Unless otherwise specified (see 4.1.1.1.1) and pending the issuance of a Q.P.L. (see 3.1.1), four (4) synchros shall be furnished by the contractor to the procuring activity for preproduction testing in accordance with Specification MIL-S-20708. Further production of the item by the contractor prior to the approval of the procuring activity shall be at the contractors risk. Accepted preproduction samples will become the property of the procuring activity and will be included in the quantity of synchros called for in the contract or order.

4.1.1.1.1 Preproduction sample for a subsequent contract. - If a contractor has delivered synchros previously in accordance with the requirements of this specification and his product has been found to be satisfactory, the preproduction sample for any subsequent contract or order may be waived at the discretion of the procuring activity (see 6.1).

4.1.2 Inspection and tests. - Inspection and tests shall be conducted in accordance with the requirements of Specification MIL-S-20708 except as otherwise specified herein.

4.1.2.1 Salt spray test. - Not applicable.

4.1.2.2 Preproduction rejection criteria. - Failure of any preproduction sample synchro in any test or requirement shall be cause for withholding approval (see 4.1.1.1).

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with the requirements of Specification MIL-S-20708 except as otherwise specified herein.

5.2 Hardware. - All loose hardware (see 3.2.2) shall be packaged in a ventilated envelope made of material having a PH value of 6-8 that is compatible with the weight of the contents. The packaged hardware shall be placed in the unit synchro package.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:18Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 All notes specified in Specification MIL-S-20708 are applicable to this specification and in addition, under ordering data, should specify the following:

a. If preproduction samples are not required (see 4.1.1.1).

b. Impedance (see Table I).

6.2 Stock material. - Miscellaneous stock materials not shown on Figure 1 which may be required for use with synchros, should be selected from LD 255268.

Notice. - When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished or in any way supplied the said drawings, specifications or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:18Z
Check the source to verify that this is the current version before use.