DOD-STD-35-126(MI)
30 JUNE 1978

MILITARY STANDARD

CYLINDERS, ACTUATING, LINEAR

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Cylinders, Actuating, Linear
Automated Engineering
Document Preparation System

DOD-STD-35-126(MI)

1. This Military Standard. is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comnents (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-126(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for linear actuating cylinders.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CONTENTS

Page

Paragraph 1. SCOPE---------- 1
1.1 General---------- 1
1.2 Purpose---------- 1
1.3 Utilization---------- 1
1.4 Military Specification Exception Title Index---------- 1

2. REFERENCED DOCUMENTS---------- 5
2.1 Issues of documents---------- 5
2.2 Other publications---------- 6

3. DEFINITIONS---------- 7

4. GENERAL REQUIREMENTS---------- 9
4.1 Introduction---------- 9
4.2 Specification Requirement Sheet (SRS)---------- 9
4.3 Configuration---------- 9
4.3.1 Dimensions---------- 9
4.3.2 Illustrations---------- 9
4.4 Units of measure---------- 9

5. DETAILED REQUIREMENTS---------- 11
5.1 Introduction---------- 11
5.2 MSE Formats---------- 11
5.3 Referenced documents---------- 11
5.4 Test matrix---------- 11
5.5 Tabulation---------- 13
5.6 Keyword Code Index (KCI) and Standard Paragraphs---------- 15
5.6.1 Interrelationship of Codes---------- 15
5.6.2 Automatic MSE Data---------- 15
5.6.3 DOD-STD-35 Tables---------- 15

TABLES

I. Title Index---------- 2
II. Test matrix---------- 12
III. Tabulation candidates ---------- 13

APPENDICES

Appendix A. Illustrations---------- 117
B. Characteristic Code Index---------- 127

Index---------- 133

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for linear actuating cylinders.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the . Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

The MSE title mayor may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	COVERAGE
CYLINDER, ACTUATING, LINEAR	249001	MIL-C-5503	HYDRAULIC Cylinders AERONAUTICAL SYSTEMS
		MIL-C-8838	PNEUMATIC CYLINDERS
		MIL-C-46802	HYDRAULIC Cylinders MISSILE LAUNCH ERECTOR
		MIL-C-468Q9	HYDRAULIC CYLINDERS,DOWN LATCH ASSEMBLY
		MIL-C-52464	HYDRAULIC CYLINDERS, VEHICLE BRIDGE LAUNCHER
		MIL-C-52762	DOUBLE-ACTING HYDRAULIC CYLINDERS
CYLINDER ASSEMBLIES ACTUATING, LINEAR	249002	MIL-C-5503	HYDRAULIC Cylinders AERONAUTICAL SYSTEMS

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:04Z
Check the source to verify that this is the current version before use.

TABLE 1. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	COVERAGE
	249002 (CONT)	MIL-C-8838	PNEUMATIC CYLINDERS
		MIL-C-46802	HYDRAULIC CYLINDERS, MISSILE LAUNCH ERECTOR
		MIL-C-46809	HYDRAULIC CYLINDERS, DOWN LATCH ASSEMBLY
		MIL-C-52464	HYDRAULIC CYLINDERS, VEHICLE BRIDGE LAUNCHER
		MIL-C-52762	DOUBLE-ACTING HYDRAULIC CYLINDERS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-C-5503	Cylinders, Aeronautical, Hydraulic Actuating, General Requirements For
MIL-I-6866	Inspection, Penetrant Method Of
MIL-I-6868	Inspection Process, Magnetic Particle
MIL-C-8838	Cylinder, Pneumatic Actuating, Aircraft Utility System, General Specification For
MIL-C-46802	Cylinder, Hydraulic, Erecting Beam Launcher
MIL-C-46809	Cylinder, Hydraulic-Linear Actuating Downlatch Assembly
MIL-C-52464	Cylinder Assemblies, Actuating, Linear, Hydraulic, for Bridge and Bridge Launcher
MIL-C-52762	Cylinder, Hydraulic, Double-Acting, Linear

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-453	Inspection, Radiographic
MIL-STD-810	Environmental Test Methods

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

(copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the Issue in effect on date of invitation for bids or request for proposal shall apply.

ASTMB117	Salt Spray (Fog) Testing, Method of Test For
ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

HBH28	Screw-Threads Standards for Federal Services

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington 25, D.C.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Cylinders, Actuating, Linear.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Cylinders, Actuating, Linear, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Cylinders, Actuating, Linear.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Cylinders, Actuating, Linear.

4.3.2 Illustrations. Illustrations applicable to Cylinders, Actuating, Linear are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE .

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX

TEST	CODE	DOCUMENT					
		MIL-C-5503	MIL-C-8838	MIL-C-46802	MIL-C-46809	MIL-C-52464	MIL-C-52762
Cycles	1821			X	X		
Drag, Piston and Rod	1848						X
Drift, Piston	1866						X
Endurance	1928	X	X				
Endurance, Cyclic (Stroke)	1966						X
Endurance, Impulse (Pressure)	1998						X
Endurance, Simplified	2040	X					
Immersion	2090	X					
Inspection, Ultrasonic	2199	X	X				
Motion, Freedom of	2205		X				
Operation	2226	X	X		X		
Pressure, Burst	2368	X	X				
Pressure, High	2428		X	X			
Pressure, Low	2478		X	X			
Pressure, Proof	2528	X	X		X	X	X
Snubbing Action, Extended Stroke	2612			X			
Snubbing Action, Retracted Stroke	2642			X			
Temperature, High	2700	X	X	X	X		
Temperature, Intermediate	2750	X	X				
Temperature, Low	2802	X	X	X	X		X
Temperature, Simplified Extreme	2842	X					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for linear actuating cylinders characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

TABLE III. TABULATION CANDIDATES

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
3600	NOMINAL BORE SIZE INCH(S)	1694	MINIMUM OPR PRESS PSI	1786	RETRACTED STROKE MILLIMETER
1602	NOMINAL BORE SIZE MILLIMETER	1696	MINIMUM OPR PRESS KPA	2364	MIN BURST PRESS PSI
3604	MINIMUM BORE SIZE INCH(S)	1698	MAXIMUM OPR PRESS PSI	2365	MIN BURST PRESS KPA
1606	MINIMUM BORE SIZE MILLIMETER	1700	MAXIMUM OPR PRESS KPA	2512	MIN PROOF PRESS PSI
3608	MAXIMUM BORE SIZE INCH(S)	1780	EXTENDED STROKE INCH(S)	2514	MIN PROOF PRESS KPA
1610	MAXIMUM BORE SIZE MILLIMETER	3782	EXTENDED STROKE MILLIMETER	7023	MAXIMUM WEIGHT POUND(S)
1690	NOMINAL OPR PRESS PSI	1784	RETRACTED STROKE INCH(S)	7024	MAXIMUM WEIGHT KGRAM(S)
1692	NOMINAL OPR PRESS KPA				

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind -- of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*Government DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	O108. SCOPE. SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
	PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER. PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DUTY CYCLE RATING	
MINIMUM (CYCLES)	1562
OPERATING MEDIA TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	1570
MINIMUM OPERATING (DEGREES CELSIUS)	1572
CONFIGURATION	
(ILLUSTRATION NUMBER)	1009
DIMENSION TABLE, (SEE TABLE III, DOD-STD-35)	
*UNITS (SELECT ONE)	
U.S. (SELECT ONE)	
(INCHES)	7572
(FEET)	7573
(YARDS)	7574
SI (SELECT ONE)	
(CENTIMETERS)	7576
(MILLIMETERS)	7577
(METERS)	7578

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1562	DUTY CYCLE RATING. THE CYLINDER SHALL BE CAPABLE OF PERFORMING NOT LESS THAN 1562 CYCLES.
	OPERATING MEDIA TEMPERATURE RATING.
1570	MAXIMUM OPERATING MEDIA TEMPERATURE SHALL BE 1570 DEGREES CELSIUS.
1572	MINIMUM OPERATING MEDIA TEMPERATURE SHALL BE 1572 DEGREES CELSIUS.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7573	ALL DIMENSIONS, UNLESS OTHERWISE Specified SHALL BE IN FEET OR DEGREES.
7574	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN YARDS OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
7578	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN METERS OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ILLUSTRATIONS	
(NUMBER)	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE : AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	Material MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED. IN THE FINISH TABLES (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION	
ACCESSORIES TABLE	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

DESIGN AND CONSTRUCTION

ACCESSORIES TABLE. ACCESSORIES IDENTIFIED IN THE ACCESSORIES TABLE SHALL BE FURNISHED WITH EACH ITEM.

ACCESSORIES TABLE

ITEM	PART NUMBER	SPECIFICATION/VENDOR	QUAN PER UNIT
FEMALE ROD CLEVIS	3001	3002	3003
KNUCKLE	3004	3005	3006
CLEVIS BRACKET	3007	3008	3009
EYE BRACKET	3010	3011	3012
MOUNTING PLATE	3013	3014	3015
PIVOT PIN	3016	3017	3018
RETAINING RING	3019	3020	3021
BLEEDER PLUG	3022	3023	3024
SHUTTLE VALVE	3025	3026	3027
RELIEF VALVE	3028	3029	3030
LUBRICATING FITTING	3031	3032	3033
MOUNTING FLANGE	3034	3035	3036
3037	3038	3039	3040
3041	3042	3043	3044
3045	3046	3047	3048
3049	3050	3051	3052
3053	3054	3055	3056

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
ACCESSORIES TABLE (CONT)	
ACCESSORIES FURNISHED (SELECT ONE)	
NOT MOUNTED.	1580
INSTALLED.	1582
ACTING TYPE (SELECT ONE)	
SINGLE.	1590
DOUBLE*	1592
BORE SIZE (SELECT ONE)	
U.S.	
NOMINAL (INCHES)	1600
MINIMUM (INCHES)	1604
MAXIMUM (INCHES)	1608
SI	
NOMINAL (MILLIMETERS)	1602
MINIMUM (MILLIMETERS)	1606
MAXIMUM (MILLIMETERS)	1610

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1580	THE ACCESSORIES SHALL BE SUPPLIED BUT SHALL BE NOT MOUNTED ON THE ITEM(S).
1582	THE ACCESSORIES SHALL BE ASSEMBLED ONTO THE ITEM(S).
1590	ACTING TYPE. THE CYLINDER SHALL BE A SINGLE-ACTING TYPE.
1592	ACTING TYPE. THE CYLINDER SHALL BE A DOUBLE-ACTING TYPE.
1600	THE NOMINAL BORE SIZE SHALL BE 11600 INCH(S).
1604	THE BORE SIZE SHALL BE NOT LESS THAN 31604 INCH(S).
1608	THE BORE SIZE SHALL BE NOT GREATER THAN 1608 INCH(S).
1602	THE NOMINAL BORE SIZE SHALL BE 1602 MILLIMETER(S).
1606	THE BORE SIZE SHALL BE NOT LESS THAN 1606 MILLIMETER(S).
1610	THE BORE SIZE SHALL BE NOT GREATER THAN 1610 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
CUSHION (SELECT ONE)	
HEAD END.	1640
CAP END.	1642
BOTH ENDS.	1644
NOT REQUIRED.	1646
JOINT FABRICATION (SELECT ONE)	
HYDROGEN BRAZING.	1660
WELDING,	1662
OPERATING MEDIA (SELECT ONE)	
FILTERED AIR.	1670
WATER l	1672
(NAME)	1674
PER DOCUMENT (DOC DES)	1676
OPERATING PRESSURE (SELECT ONE)	
U.S.	
NOMINAL (POUNDS PER SQUARE INCH)	1690
MINIMUM (POUNDS PER SQUARE INCH)	1694
MAXIMUM (POUNDS PER SQUARE INCH)	1698

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T21:04Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
1640	CUSHION. CUSHION-HEAD END IS REQUIRED.
1642	CUSHION. CUSHION-CAP END IS REQUIRED.
1644	CUSHION. CUSHIONS-BOTH ENDS ARE REQUIRED.
1646	CUSHION. CUSHIONS ARE NOT REQUIRED.
1660	JOINT FABRICATION. STEEL JOINTS SHALL BE HYDROGEN BRAZED.
1662	JOINT FABRICATION. STEEL JOINTS SHALL BE WELDED.
1670	OPERATING MEDIA. THE OPERATING MEDIA SHALL BE FILTERED AIR.
1672	OPERATING MEDIA. THE OPERATING MEDIA SHALL BE WATER.
1674	OPERATING MEDIA. THE OPERATING MEDIA SHALL BE 1674.
1676	THE OPERATING MEDIA SHALL BE IN ACCORDANCE WITH 1676.
	OPERATING PRESSURE.
1690	THE NOMINAL OPERATING PRESSURE SHALL BE 1690 POUNDS PER SQUARE INCH.
1694	THE OPERATING PRESSURE SHALL BE NOT LESS THAN 1694 POUNDS PER SQUARE INCH.
1698	THE OPERATING PRESSURE SHALL BE NOT GREATER THAN 1698 POUNDS PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
OPERATING PRESSURE (CONT)	
SI	
NOMINAL (KILOPASCALS)	1692
MINIMUM (KILOPASCALS)	1696
MAXIMUM (KILOPASCALS)	1700
OPERATION TYPE (SELECT ONE)	
HYDRAULIC.	1710
PNEUMATIC.	1712
PORT ONE	
(DOC DES)	1720
NOMINAL SIZE (SELECT ONE)	
(INCHES)	1722
(MILLIMETERS)	1724
THREAD _____	1726
THREAD DESIGNATION (SELECT ONE)	
HBH28.	1728
PER DOCUMENT (DOC DES)	1730
DESIGNATION_____	1732

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1692	THE NOMINAL OPERATING PRESSURE SHALL BE 1692 KILOPASCAL(S).
1696	THE OPERATING PRESSURE SHALL BE NOT LESS THAN 1696 KILOPASCAL(S).
1700	THE OPERATING PRESSURE SHALL BE NOT GREATER THAN 1700 KILOPASCAL(S).
1710	OPERATION TYPE. THE TYPE OF OPERATION SHALL BE Hydraulic
1712	OPERATION TYPE. THE TYPE OF OPERATION SHALL BE Pneumatic
	PORT ONE.
1720	PORT ONE SHALL BE IN ACCORDANCE WITH 1720
1722	THE NOMINAL SIZE OF PORT ONE SHALL BE 1722 INCH(S).
1724	THE NOMINAL SIZE OF PORT ONE SHALL BE 1724 MILLIMETER(S).
1726	THE THREAD SIZE OF PORT ONE SHALL BE 1726.
1728	PORT ONE THREADS SHALL BE IN ACCORDANCE WITH HBH28.
1730	PORT ONE THREADS SHALL BE IN ACCORDANCE WITH 1730
1732	PORT ONE DESIGNATION SHALL BE 1732.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
PORT TWO	
(DOC DES)	1736
NOMINAL SIZE (SELECT ONE)	
(INCHES)	1738
(MILLIMETERS)	1740
THREAD _____	1742
THREAD DESIGNATION (SELECT ONE)	
HBH28.	1744
PER DOCUMENT (DOC DES)	1746
DESIGNATION _____	3748
STROKE	
EXTENDED (SELECT ONE)	
(INCHES)	1780
(MILLIMETERS)	1782
RETRACTED (SELECT ONE)	
(INCHES)	1784
(MILLIMETERS)	1786

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	PORT TWO.
1736	PORT TWO SHALL BE IN ACCORDANCE WITH 1736.
1738	THE NOMINAL SIZE OF PORT TWO SHALL BE 1738 INCH(S).
1740	THE NOMINAL SIZE OF PORT TWO SHALL BE 1740 MILLIMETER(S).
1742	THE THREAD SIZE OF PORT TWO SHALL 1742.
1744	PORT TWO THREADS SHALL BE IN ACCORDANCE WITH HBH28.
1746	PORT TWO THREADS SHALL BE IN ACCORDANCE WITH 1746.
1748	PORT TWO DESIGNATION SHALL BE 1748.
	STROKE.
1780	THE EXTENDED STROKE SHALL BE 1780 INCH(S).
1782	THE EXTENDED STROKE SHALL BE 1782 Millimeter(s).
1784	THE RETRACTED STROKE SHALL BE 1784 INCH(S).
1786	THE RETRACTED STROKE SHALL BE 1786 Millimeter(s).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
STROKE (CONT)	
STROKE TOLERANCE (SELECT ONE)	
(INCHES)	1788
(MILLIMETERS)	1790
PISTON ROD THREADS	
CYLINDER-HEAD-END (SELECT ONE)	
HBH28.	1796
PER DOCUMENT (DOC DES)	1798
CYLINDER-CAP-END (SELECT ONE)	
HBH28.	1800
PER DOCUMENT (DOC DES)	1802
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
(POUNDS)	7023
(KILOGRAMS)	7024

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1788 THE STROKE TOLERANCE SHALL BE 1788 INCH(S).

1790 THE STROKE TOLERANCE SHALL BE 1790 MILLIMETER(S).

PISTON ROD THREADS.

1796 CYLINDER-HEAD-END PISTON ROD THREADS SHALL BE IN ACCORDANCE WITH HBH28.

1798 CYLINDER-HEAD-END PISTON ROD THREADS SHALL BE IN ACCORDANCE WITH 1798.

1800 CYLINDER-CAP-END PISTON ROD THREADS SHALL BE IN ACCORDANCE WITH HBH28.

1802 CYLINDER-CAP-END PISTON ROD THREADS SHALL BE IN ACCORDANCE WITH 1802.

7023 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S)*

7024 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CYCLES	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1814
NO EVIDENCE OF LEAKAGE.	1815
MAXIMUM LEAKAGE OF ONE DROP PER (CYCLES)	1816
MAXIMUM LEAKAGE (SELECT ONE)	
PER CYCLE (CUBIC CENTIMETERS)	1817
PER HOUR (CUBIC CENTIMETERS)	1818
PER MINUTE (CUBIC CENTIMETERS)	1819
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT_____	1820
PER DOCUMENT (DOC DES)	1821
PRESSURE APPLIED (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1822
TOLERANCE (POUNDS PER SQUARE INCH)	1823
(KILOPASCALS)	1824
TOLERANCE (KILOPASCALS)	1825

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1814	CYCLES. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1814.
1815	CYCLES. THERE SHALL BE NO EVIDENCE OF LEAKAGE.
1816	CYCLES. LEAKAGE SHALL BE NOT GREATER THAN ONE DROP PER 1816 CYCLE(S),
1817	CYCLES. LEAKAGE SHALL BE NOT GREATER THAN 1817 CUBIC CENTIMETER(S) PER CYCLE.
1818	CYCLES. LEAKAGE SHALL BE NOT GREATER THAN 1818 CUBIC CENTIMETER(S) PER HOUR.
1819	CYCLES, LEAKAGE SHALL BE NOT GREATER THAN 1819 CUBIC CENTIMETER(S) PER MINUTE.
1820	CYCLES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1820.
1821	CYCLES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1821.
1822	PRESSURE APPLIED SHALL BE 1822 POUNDS PER SQUARE INCH.
1823	PRESSURE APPLIED TOLERANCE SHALL BE 1823 POUNDS PER SQUARE INCH.
1824	PRESSURE APPLIED SHALL BE 1824 KILOPASCAL(S).
1825	PRESSURE APPLIED TOLERANCE SHALL BE 1825 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CYCLES (CONT)	
PER DOCUMENT (CONT)	
CYCLES (QUANTITY)	1826
CYCLE RATE (CYCLES PER MINUTE)	1827
TOLERANCE (CYCLES PER MINUTE)	1828
DURATION OF TEST (SELECT ONE)	
(HOURS)	1829
(MINUTES)	1830
DRAG, PISTON AND ROD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	1840
AS FOLLOWS:	1841
MAXIMUM NO-LOAD BREAKAWAY PRESSURE	
HEAD-END (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1842
(KILOPASCALS)	1843

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1826 THERE SHALL BE 1826 CYCLE(S) OF OPERATION.

1827 THE CYCLE RATE SHALL BE 1827 CYCLE(S) PER MINUTE.

1828 THE CYCLE RATE TOLERANCE SHALL BE 1828 CYCLE(S) PER MINUTE.

1829 DURATION OF THE TEST SHALL BE 1829 HOUR(S).

1830 DURATION OF THE TEST SHALL BE 1830 MINUTE(S).

1840 DRAG, PISTON AND ROD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1840.

1841 DRAG, PISTON AND ROD. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1842 THE NO-LOAD BREAKAWAY PRESSURE FOR THE HEAD-END PISTON ROD SHALL BE NOT GREATER THAN 1842 POUNDS PER. SQUARE INCH.

1843 THE NO-LOAD BREAKAWAY PRESSURE FOR THE HEAD-END PISTON ROD SHALL BE NOT GREATER THAN 1843 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DRAG, PISTON AND ROD (CONT)	
MAXIMUM NO-LOAD BREAKAWAY PRESSURE (CONT)	
CAP-END (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1844
(KILOPASCALS)	1845
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1847
PER DOCUMENT (DOC DES)	1848
DRIFT, PISTON	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1860
AS FOLLOWS:	1861
MAXIMUM PISTON DRIFT (SELECT ONE)	
(INCHES)	1862
(MILLIMETERS)	1863
MAXIMUM DURATION OF PISTON DRIFT {MINUTES)	1864

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1844	THE NO-LOAD BREAKAWAY PRESSURE FOR THE CAP-END PISTON ROD SHALL BE NOT GREATER THAN 1844 POUNDS PER SQUARE INCH.
1845	THE NO-LOAD BREAKAWAY PRESSURE FOR THE CAP-END PISTON ROD SHALL BE NOT GREATER THAN 1845 KILOPASCAL(S),
1847	DRAG, PISTON AND ROD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1847.
1848	DRAG, PISTON AND ROD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1848.
1860	DRIFT, PISTON. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1860.
1861	DRIFT, PISTON, THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1862	PISTON DRIFT SHALL BE NOT GREATER THAN 1862 INCH(S).
1863	PISTON DRIFT SHALL BE NOT GREATER THAN 1863 Millimeter(s).
1864	DURATION OF THE PISTON DRIFT SHALL BE NOT GREATER THAN 1864 MINUTE(S),

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DRIFT, PISTON (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1865
PER DOCUMENT (DOC DES)	1866
OPERATING MEDIA TEMPERATURE (DEGREES CELSIUS)	1867
OPERATING MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1868
PRESSURE APPLIED (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1869
(KILOPASCALS)	1870
DURATION OF PRESSURE APPLICATION (MINUTES)	1873
DUST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4724
AS FOLLOWS:	3880
NO EVIDENCE OF DUST PENETRATION.	4801

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1865	DRIFT, PISTON. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1865.
1866	DRIFT, PISTON. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1866.
1867	OPERATING MEDIA TEMPERATURE SHALL BE 1867 DEGREES CELSIUS.
1868	OPERATING MEDIA TEMPERATURE TOLERANCE SHALL BE 1868 DEGREES CELSIUS.
1869	PRESSURE APPLIED SHALL BE 1869 POUNDS PER SQUARE INCH.
1870	PRESSURE APPLIED SHALL BE 1870 KILOPASCAL(S).
1871	PRESSURE SHALL BE APPLIED FOR 1871 MINUTE(S)-
4724	DUST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4724.
1880	DUST. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
4801	THERE SHALL BE NO EVIDENCE OF DUST PENETRATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DUST (CONT)	
AS FOLLOWS: (CONT)	
LEAKAGE (SELECT ONE)	
NO EVIDENCE OF LEAKAGE*	1881
MAXIMUM LEAKAGE OF ONE DROP PER (CYCLES)	1882
MAXIMUM LEAKAGE (SELECT ONE)	
PER CYCLE' (CUBIC CENTIMETERS)	1884
PER HOUR (CUBIC CENTIMETERS)	1886
PER MINUTE (CUBIC CENTIMETERS)	1888
MAXIMUM HEAD-END PISTON ROD BREAKAWAY PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1890
(KILOPASCALS)	1892
MAXIMUM CAP-END PISTON ROD BREAKAWAY PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1894
(KILOPASCALS)	1896

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1883	THERE SHALL BE NO EVIDENCE OF LEAKAGE.
1882	LEAKAGE SHALL BE NOT GREATER THAN ONE DROP PER 1882 CYCLE(S).
1884	LEAKAGE SHALL BE NOT GREATER THAN 1884 CUBIC CENTIMETER(S) PER CYCLE.
1886	LEAKAGE SHALL BE NOT GREATER THAN 1886 CUBIC CENTIMETER(S) PER HOUR.
1888	LEAKAGE SHALL BE NOT GREATER THAN 1888 CUBIC CENTIMETER(S) PER MINUTE.
1890	HEAD-END PISTON ROD BREAKAWAY PRESSURE SHALL BE NOT GREATER THAN 1890 POUNDS PER SQUARE INCH.
1892	HEAD-END PISTON ROD BREAKAWAY PRESSURE SHALL BE NOT GREATER THAN 1892 KILOPASCAL(S).
1894	CAP-END PISTON ROD BREAKAWAY PRESSURE SHALL BE NOT GREATER THAN 1894 POUNDS PER SQUARE INCH.
1896	CAP-END PISTON ROD BREAKAWAY PRESSURE SHALL BE NOT GREATER THAN 1896 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DUST (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4895
PER MIL-STD-810, METHOD 510.	4953
ITEMS SHALL BE OPERATED DURING STEP(S) (NUMBERS)	4872
*DURATION OF OPERATION (HOURS)	6299
ORIENTATION SHALL BE CHANGED DURING TEST.	1539
SECOND 6-HOUR TEST IMMEDIATELY FOLLOWING TEMPERATURE STABILIZATION IN STEP 2.	4956
STEP 2 AND STEP 3 TEMPERATURE (DEGREES CELSIUS)	4840
ENDURANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1910
NO EVIDENCE OF PHYSICAL DAMAGE.	1912
LEAKAGE (SELECT ONE)	
NO EVIDENCE OF LEAKAGE.	1914

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4895	DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4895.
4953	DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 510 OF MIL-STD-810.
4872	ITEMS SHALL BE OPERATED DURING STEP(S) 4872.
6299	DURATION OF OPERATION SHALL BE 6299 HOUR(S).
1539	ORIENTATION SHALL BE CHANGED DURING THE TEST.
4956	THE SECOND 6-HOUR TEST SHALL BE PERFORMED IMMEDIATELY AFTER REACHING TEMPERATURE STABILIZATION IN STEP 20
4840	THE TEMPERATURE SHALL BE 4840 DEGREES CELSIUS FOR STEPS 2 AND 3.
1910	ENDURANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1910.
1912	ENDURANCE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1914	ENDURANCE. THERE SHALL BE NO EVIDENCE OF LEAKAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE (CONT)	
LEAKAGE (CONT)	
MAXIMUM LEAKAGE OF ONE DROP PER (CYCLES)	1916
MAXIMUM LEAKAGE (SELECT ONE)	
PER CYCLE (CUBIC CENTIMETERS)	1918
PER HOUR (CUBIC CENTIMETERS)	1920
PER MINUTE (CUBIC CENTIMETERS)	1922
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1926
PER DOCUMENT (DOC DES)	1928
TEST TEMPERATURE (DEGREES CELSIUS)	1930
CYCLES (QUANTITY)	1932
CYCLE RATE (CYCLES PER MINUTE)	1934
TOLERANCE (CYCLES PER MINUTE)	1936
DURATION OF TEST (SELECT ONE)	
(HOURS)	1938
(MINUTES)	1940

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1916	ENDURANCE. LEAKAGE SHALL BE NOT GREATER THAN ONE DROP PER 1916 CYCLE(S).
1918	ENDURANCE. LEAKAGE SHALL BE NOT GREATER THAN 1938 CUBIC CENTIMETER(S) PER CYCLE.
1920	ENDURANCE. LEAKAGE SHALL BE NOT GREATER THAN 1920 CUBIC CENTIMETER(S) PER HOUR.
1922	ENDURANCE. LEAKAGE SHALL BE NOT GREATER THAN 1922 CUBIC CENTIMETER(S) PER MINUTE.
1926	ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1926.
1928	ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1928.
1930	THE TEST TEMPERATURE SHALL BE 1930 DEGREES CELSIUS.
1932	THERE SHALL BE 1932 CYCLE(S) OF OPERATION.
1934	THE CYCLE RATE SHALL BE 1934 CYCLE(S) PER MINUTE.
1936	THE CYCLE RATE TOLERANCE SHALL BE 1936 CYCLE(S) PER MINUTE.
1938	DURATION OF THE TEST SHALL BE 1938 HOUR(S).
1940	DURATION OF THE TEST SHALL BE 1940 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, CYCLIC (STROKE CYCLE)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1950
NO EVIDENCE OF PHYSICAL DAMAGE.	1952
LEAKAGE (SELECT ONE)	
NO EVIDENCE OF LEAKAGE.	1954
MAXIMUM LEAKAGE OF ONE DROP PER (CYCLES)	1956
MAXIMUM LEAKAGE (SELECT ONE)	
PER CYCLE (CUBIC CENTIMETERS)	1958
PER HOUR (CUBIC CENTIMETERS)	11960
PER MINUTE (CUBIC CENTIMETERS)	1962
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1964
PER DOCUMENT (DOC DES)	1966

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1950	ENDURANCE, CYCLIC (STROKE CYCLE). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1950.
1952	ENDURANCE, CYCLIC (STROKE CYCLE). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1954	ENDURANCE, CYCLIC (STROKE CYCLE). THERE SHALL BE NO EVIDENCE OF LEAKAGE.
1956	ENDURANCE, CYCLIC (STROKE CYCLE). LEAKAGE SHALL BE NOT GREATER THAN ONE DROP PER 1956 CYCLE(S).
1958	ENDURANCE, CYCLIC (STROKE CYCLE). LEAKAGE SHALL BE NOT GREATER THAN 1958 CUBIC CENTIMETER(S) PER CYCLE.
1960	ENDURANCE, CYCLIC (STROKE CYCLE). LEAKAGE SHALL BE NOT GREATER THAN 1960 CUBIC CENTIMETER(S) PER HOUR.
1962	ENDURANCE, CYCLIC (STROKE CYCLE). LEAKAGE SHALL BE NOT GREATER THAN 1962 CUBIC CENTIMETER(S) PER MINUTE.
1964	ENDURANCE, CYCLIC (STROKE CYCLE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1964.
1966	ENDURANCE, CYCLIC (STROKE CYCLE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1966.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, CYCLIC (STROKE CYCLE) (CONT)	
PER DOCUMENT (CONT)	
MINIMUM STROKE CYCLE RATE (CYCLES PER MINUTE)	1968
MAXIMUM PRESSURE RISE TIME (SECONDS)	1970
OPERATING MEDIA TEMPERATURE DURING FIRST 10 PERCENT OF STROKE CYCLES (DEGREES CELSIUS)	1972
*MEDIA TEMPERATURE DURING FINAL 90 PERCENT OF TEST RUN (DEGREES CELSIUS)	1974
CYCLES (QUANTITY)	1976
ENDURANCE, IMPULSE (PRESSURE CYCLE)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1980
NO EVIDENCE OF PHYSICAL DAMAGE.	1982
LEAKAGE (SELECT ONE)	
NO EVIDENCE OF LEAKAGE.	1984

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1968	THE STROKE CYCLE RATE SHALL BE NOT LESS THAN 1968 CYCLE(S) PER MINUTE.
1970	PRESSURE RISE TIME SHALL BE NOT GREATER THAN 1970 SECOND(S).
1972	THE OPERATING MEDIA TEMPERATURE DURING THE FIRST 10 PERCENT OF THE STROKE CYCLES SHALL BE 1972 DEGREES CELSIUS.
1974	THE OPERATING MEDIA TEMPERATURE DURING THE FINAL 90 PERCENT OF THE STROKE CYCLES SHALL BE 1974 DEGREES CELSIUS.
1976	THERE SHALL BE 1976 CYCLE(S) OF OPERATION.
1980	ENDURANCE, IMPULSE (PRESSURE CYCLE). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1980.
1982	ENDURANCE, IMPULSE (PRESSURE CYCLE). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1984	ENDURANCE, IMPULSE (PRESSURE CYCLE). THERE SHALL BE NO EVIDENCE OF LEAKAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, IMPULSE (PRESSURE CYCLE) (CONT)	
LEAKAGE (CONT)	
MAXIMUM LEAKAGE OF ONE DROP PER (CYCLES)	1986
MAXIMUM LEAKAGE (SELECT ONE)	
PER CYCLE (CUBIC CENTIMETERS)	1988
PER HOUR (CUBIC CENTIMETERS)	1990
PER MINUTE (CUBIC CENTIMETERS)	1992
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1996
PER DOCUMENT (DOC DES)	1998
MINIMUM PRESSURE CYCLE RATE (CYCLES PER MINUTE)	2000
MAXIMUM PRESSURE RISE TIME (SECONDS)	2002
OPERATING MEDIA TEMPERATURE (DEGREES CELSIUS)	2004
CYCLES (QUANTITY)	2006

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1986	ENDURANCE, IMPULSE (PRESSURE CYCLE). LEAKAGE SHALL BE NOT GREATER THAN ONE DROP PER 1986 CYCLE(S).
1988	ENDURANCE, IMPULSE (PRESSURE CYCLE). LEAKAGE SHALL BE NOT GREATER THAN 1988 CUBIC CENTIMETER(S) PER CYCLE.
1990	ENDURANCE, IMPULSE (PRESSURE CYCLE). LEAKAGE SHALL BE NOT GREATER THAN 1990 CUBIC CENTIMETER(S) PER HOUR.
1992	ENDURANCE, IMPULSE (PRESSURE CYCLE). LEAKAGE SHALL BE NOT GREATER THAN 1992 CUBIC CENTIMETER(S) PER MINUTE.
1996	ENDURANCE, IMPULSE (PRESSURE CYCLE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1996.
1998	ENDURANCE, IMPULSE (PRESSURE CYCLE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1998.
2000	THE PRESSURE CYCLE RATE SHALL BE NOT LESS THAN 2000 CYCLE(S) PER MINUTE.
2002	PRESSURE RISE TIME SHALL BE NOT GREATER THAN 2002 SECOND(S).
2004	THE OPERATING MEDIA TEMPERATURE SHALL BE 2004 DEGREES CELSIUS.
2006	THERE SHALL BE 2006 CYCLE(S) OF OPERATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, SIMPLIFIED	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2020
NO EVIDENCE OF PHYSICAL DAMAGE.	2022
LEAKAGE (SELECT ONE)	
NO EVIDENCE OF LEAKAGE.	2024
MAXIMUM LEAKAGE OF ONE DROP PER (CYCLES)	2026
MAXIMUM LEAKAGE (SELECT ONE)	
PER CYCLE (CUBIC CENTIMETERS)	2028
PER HOUR (CUBIC CENTIMETERS)	2030
PER MINUTE (CUBIC CENTIMETERS)	2032
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2038
PER DOCUMENT (DOC DES)	2040

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2020	ENDURANCE, SIMPLIFIED. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2020.
2022	ENDURANCE, SIMPLIFIED. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2024	ENDURANCE, SIMPLIFIED THERE SHALL BE NO EVIDENCE OF LEAKAGE.
2026	ENDURANCE, SIMPLIFIED. LEAKAGE SHALL BE NOT GREATER THAN ONE DROP PER 2026 CYCLE(S).
2028	ENDURANCE, SIMPLIFIED. LEAKAGE SHALL BE NOT GREATER THAN 2028 CUBIC CENTIMETER(S) PER CYCLE.
2030	ENDURANCE, SIMPLIFIED. LEAKAGE SHALL BE NOT GREATER THAN 2030 CUBIC CENTIMETER(S) PER HOUR.
2032	ENDURANCE, SIMPLIFIED. LEAKAGE SHALL BE NOT GREATER THAN 2032 CUBIC CENTIMETER(S) PER MINUTE.
2038	ENDURANCE, SIMPLIFIED. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2038.
2040	ENDURANCE, SIMPLIFIED. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2040.

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, SIMPLIFIED (CONT)	
PER DOCUMENT (CONT)	
MAXIMUM PRESSURE CYCLE RATE (CYCLES PER MINUTE)	2042
PRESSURE APPLIED (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2044
(KILOPASCALS)	2046
CYCLES (QUANTITY)	2048
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2042 THE PRESSURE CYCLE RATE SHALL BE NOT GREATER THAN 2042 CYCLE(S) PER MINUTE.

2044 PRESSURE APPLIED SHALL BE 2044 POUNDS PER SQUARE INCH.

2046 PRESSURE APPLIED SHALL BE 2046 KILOPASCAL(S).

2048 THERE SHALL BE 2048 CYCLE(S) OF OPERATION.

4760 FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.

4761 FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH . THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.

4762 FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH . THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.

4754 FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788
PER MIL-STD-810, METHOD 507.	4781
*PROCEDURE NUMBER (SELECT ONE)	
TEST PROCEDURE IV.	6336
TEST PROCEDURE V.	6337
NUMBER OF CYCLES (NUMBER)	4800

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4781	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 507 OF MIL-STD-810.
6336	PROCEDURE NUMBER IV SHALL APPLY.
6337	PROCEDURE NUMBER V SHALL APPLY.
4800	THERE SHALL BE 4800 TEST CYCLE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4819
NO EVIDENCE OF PHYSICAL DAMAGE.	4820
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4809
PER DOCUMENT (DOC DES)	2090
IMMERSION PERIOD (HOURS)	2092
IMMERSION FLUID (NAME)	2094
IMMERSION FLUID DOCUMENT (DOC DES)	2096
IMMERSION FLUID TEMPERATURE (DEGREES CELSIUS)	2098
FLUID TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2099
INSPECTION, MAGNETIC PARTICLE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2110

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4819	IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4819.
4820	IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4809	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4809.
2090	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2090.
2092	IMMERSION PERIOD SHALL BE 2092 HOUR(S).
2094	IMMERSION FLUID SHALL BE 2094.
2096	THE IMMERSION FLUID DOCUMENT SHALL BE 2096.
2098	THE IMMERSION FLUID TEMPERATURE SHALL BE 2098 DEGREES CELSIUS.
2099	THE IMMERSION FLUID TEMPERATURE TOLERANCE SHALL BE 2099 DEGREES CELSIUS.
2110	INSPECTION, MAGNETIC PARTICLE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2110.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSPECTION, MAGNETIC PARTICLE (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	21312
NO HARMFUL DISCONTINUITIES.	2114
NO CRACKS.	2116
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2120
PER MIL-I-6868.	2122
INSPECTION, PENETRANT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2130
AS FOLLOWS:	2132
NO HARMFUL DISCONTINUITIES.	2134
NO CRACKS.	2136
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2140

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2112	INSPECTION MAGNETIC PARTICLE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2114	THERE SHALL BE NO HARMFUL DISCONTINUITIES.
2116	THERE SHALL BE NO CRACKS.
2120	INSPECTION, MAGNETIC PARTICLE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2120.
2122	INSPECTION, MAGNETIC PARTICLE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-I-6868.
2130	INSPECTION, PENETRANT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2130.
2132	INSPECTION, PENETRANT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2134	THERE SHALL BE NO HARMFUL DISCONTINUITIES.
2136	THERE SHALL BE NO CRACKS.
2140	INSPECTION, PENETRANT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2140.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSPECTION, PENETRANT (CONT)	
TEST METHODS (CONT)	
PER MIL-I-6866.	2142
TYPE OF INSPECTION (SELECT ONE)	
I.	2144
II.	2146
METHOD (SELECT ONE)	
A.	2148
B.	2150
C.	2152
INSPECTION, RADIOGRAPHIC	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2160
AS FOLLOWS:	2162
NO CRACKS IN PARENT METAL-OR WELD.	2164
NO UNDERBEAD CRATERS.	2166
NO BURNTHROUGH.	2168
NO ELONGATED METALLIC OR NONMETALLIC INCLUSIONS.	2170

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2142	INSPECTION PENETRANT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-I-6866.
21144	TYPE I INSPECTION SHALL APPLY.
2346	TYPE II INSPECTION SHALL APPLY.
2148	METHOD A SHALL APPLY.
2150	METHOD B SHALL APPLY.
2152	METHOD C SHALL APPLY.
2160	Inspection RADIOGRAPHIC. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2160.
2162	INSPECTION, RADIOGRAPHIC. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2164	THERE SHALL BE NO CRACKS IN THE PARENT METAL OR WELD.
2166	THERE SHALL BE NO UNDERBEAD CRATERS.
2168	THERE SHALL BE NO BURNTHROUGH.
2370	THERE SHALL BE NO ELONGATED METALLIC OR NONMETALLIC INCLUSIONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSPECTION, RADIOGRAPHIC (CONT)	
AS FOLLOWS: (CONT)	
SUFFICIENT WELD PENETRATION.	2172
SUFFICIENT WELD FUSION.	2174
NO SHARP WELD EDGES.	2176
DISPOSITIONS OF NEGATIVES OR RECORDS (SELECT ONE)	
DELIVERED.	2161
NOT DELIVERED.	2163
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2184
PER MIL-STD-453.	2186
SOURCE-OBJECT DISTANCE (SELECT ONE)	
(INCHES)	2165
(METERS)	2167

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2172	THERE SHALL BE SUFFICIENT WELD PENETRATION.
2174	THERE SHALL BE SUFFICIENT WELD FUSION.
2176	THERE SHALL BE NO SHARP WELD EDGES.
2161	THE NEGATIVE OR RECORDS SHALL BE DELIVERED.
2163	THE NEGATIVE OR RECORDS SHALL NOT BE DELIVERED.
2184	INSPECTION, RADIOGRAPHIC. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2184.
2186	INSPECTION, RADIOGRAPHIC. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-453.
21165	THE SOURCE-OBJECT DISTANCE (THE DISTANCE FROM THE FOCAL SPOT OF THE X-RAY TUBE TO THE OBJECT BEING RADIOGRAPHED) SHALL BE 2165 INCH(S).
2167	THE SOURCE-OBJECT DISTANCE (THE DISTANCE FROM THE FOCAL SPOT OF THE X-RAY TUBE TO THE OBJECT BEING RADIOGRAPHED) SHALL BE 2167 METER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSPECTION, RADIOGRAPHIC (CONT)	
PER MIL-STD-453. (CONT)	
PENETRAMETER WIRE SIZE (AWG)	2169
NONFILM TECHNIQUES ALLOWED.	2171
VIEWING EQUIPMENT (IDENTIFY)	2173
MAGNIFICATION (X-POWER)	2175
INSPECTION, ULTRASONIC	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2192
MAXIMUM FLAT BOTTOM DIAMETER (SELECT ONE)	
(INCHES)	2194
(MILLIMETERS)	2196
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2198
PER DOCUMENT (DOC DES)	2199

Source: https://assist.dla.mil -- Downloaded: 202640-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2169	A RADIOGRAPH OF THE PENETRAMETER SHALL BE INCLUDED ON EACH RADIOGRAPHIC FILM. THE PENETRAMETER SHALL BE MADE FROM A SAMPLE ITEM OF THE SAME TYPE AS THE ITEM BEING INSPECTED (RADIOGRAPHED). THE PENETRAMETER SHOULD UTILIZE AN AWG SIZE 2169 COPPER WIRE ON THE SIDE-OF THE ITEM FARTHEST FROM THE X-RAY FILM.
2171	NONFILM TECHNIQUES MAY BE USED. IF DESIRED. RECORDS SHALL BE MAINTAINED, FOR EXAMINATION OR DELIVERY, AS SPECIFIED.
2173	THE VIEWING EQUIPMENT SHALL BE 2173.
2175	THE IMAGES SHALL BE VIEWED 2175 X-POWER MAGNIFICATION.
2192	INSPECTION, ULTRASONIC. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2192.
2194	INSPECTIONS ULTRASONIC. FLAT BOTTOM DIAMETERS SHALL BE NOT GREATER THAN 2194 INCH(S).
2196	INSPECTION, ULTRASONIC. FLAT BOTTOM DIAMETERS SHALL BE NOT GREATER THAN 2196 MILLIMETER(S).
2198	INSPECTION, ULTRASONIC. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2198.
2199	INSPECTION, ULTRASONIC. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2199.

Source: https://assist.dla.mil -- Downloaded: 202640-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOTION, FREEDOM OF	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2201
NO EVIDENCE OF CHATTERING OR BINDING.	2202
NO EVIDENCE OF PHYSICAL DAMAGE.	2203
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2204
PER DOCUMENT (DOC DES)	2205
MAXIMUM PRESSURE APPLIED (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2206
(KILOPASCALS)	2207
CYCLES (QUANTITY)	2208
OPERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2210

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2201	MOTION, FREEDOM OF. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2201.
2202	MOTION, FREEDOM OF. THERE SHALL BE NO EVIDENCE OF CHATTERING OR BINDING.
2203	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2204	MOTION, FREEDOM OF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2204.
2205	MOTION, FREEDOM OF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2205.
2206	PRESSURE APPLIED SHALL BE NOT GREATER THAN 2206 POUNDS PER SQUARE INCH.
2207	PRESSURE APPLIED SHALL BE NOT GREATER THAN 2207 KILOPASCAL(S).
2208	THERE SHALL BE 2208 CYCLE(S) OF OPERATION.
2210	OPERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2210.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATION (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF LEAKAGE.	2212
MAXIMUM LEAKAGE OF ONE DROP PER (CYCLES)	2214
MAXIMUM LEAKAGE (SELECT ONE)	
PER CYCLE (CUBIC CENTIMETERS)	2216
PER HOUR (CUBIC CENTIMETERS)	2218
PER MINUTE (CUBIC CENTIMETERS)	2220
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2224
PER DOCUMENT (DOC DES)	2226
PRESSURE APPLIED (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2228
TOLERANCE (POUNDS PER SQUARE INCH)	2230
(KILOPASCALS)	2232
TOLERANCE (KILOPASCALS)	2234

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2212	OPERATION. THERE SHALL BE NO EVIDENCE OF LEAKAGE.
2214	OPERATION. LEAKAGE SHALL BE NOT GREATER THAN ONE DROP PER 2214 CYCLE(S).
2216	OPERATION. LEAKAGE SHALL BE NOT GREATER THAN 2216 CUBIC CENTIMETER(S) PER CYCLE.
2218	OPERATION. LEAKAGE SHALL BE NOT GREATER THAN 2218 CUBIC CENTIMETER(S) PER HOUR.
2220	OPERATION. LEAKAGE SHALL BE NOT GREATER THAN 2220 CUBIC CENTIMETER(S) PER MINUTE.
2224	OPERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2224.
2226	OPERATION, TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2226,
2228	PRESSURE APPLIED SHALL BE 2228 POUNDS PER SQUARE INCH.
2230	PRESSURE APPLIED TOLERANCE SHALL BE 2230 POUNDS PER SQUARE INCH.
2232	PRESSURE APPLIED SHALL BE 2232 KILOPASCAL(S).
2234	PRESSURE APPLIED TOLERANCE SHALL BE 2234 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATION (CONT)	
PER DOCUMENT (CONT)	
CYCLES (QUANTITY)	2236
DURATION OF APPLIED PRESSURE (SELECT ONE)	
(HOURS)	2238
(MINUTES)	2240
UNRESTRAINED PISTON.	2242
PRESSURE, BURST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2360
AS FOLLOWS:	2361
MINIMUM BURST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2364
(KILOPASCALS)	2365
NO RUPTURES	2366
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2367

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2236	THERE SHALL BE 2236 CYCLE(S) OF OPERATION.
2238	DURATION OF THE APPLIED PRESSURE SHALL BE 2238 HOUR(S).
2240	DURATION OF THE APPLIED PRESSURE SHALL BE 2240 MINUTE(S).
2242	THE CYLINDER SHALL BE CYCLED WITH THE PISTON Unrestrained --
2360	PRESSURE, BURST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2360.
2363	PRESSURE, BURST. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2364	THE CYLINDER SHALL WITHSTAND A BURST PRESSURE OF NOT LESS THAN 2364 POUNDS PER SQUARE INCH.
2365	THE CYLINDER SHALL WITHSTAND A BURST PRESSURE OF NOT LESS THAN 2365 KILOPASCAL(S).
2366	RUPTURE SHALL NOT OCCUR AT ANY PRESSURE BELOW THE SPECIFIED BURST PRESSURE.
2367	PRESSURE, BURST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2367.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE, BURST (CONT)	
TEST METHODS (CONT)	
PER DOCUMENT (DOC DES)	2368
RATE OF APPLYING PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH PER MINUTE)	2370
(KILOPASCALS PER MINUTE)	2372
APPLY BURST PRESSURE.	2374
DURATION OF APPLIED PRESSURE (SELECT ONE)	
(HOURS)	2378
(MINUTES)	2380
PRESSURE, HIGH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2410
NO EVIDENCE OF LEAKAGE.	2412
NO EVIDENCE OF PHYSICAL DAMAGE.	2414
MAXIMUM LEAKAGE OF ONE DROP PER (CYCLES)	2416

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2368	PRESSURE, BURST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2368.
2370	PRESSURE SHALL BE APPLIED AT A RATE OF 2370 POUNDS PER SQUARE INCH PER MINUTE-
2372	PRESSURE SHALL BE APPLIED AT A RATE OF 2372 KILOPASCAL(S) PER MINUTE.
2374	THE MINIMUM BURST PRESSURE SHALL BE APPLIED,
2378	PRESSURE SHALL BE APPLIED FOR 2378 HOUR(S).
2380	PRESSURE SHALL BE APPLIED FOR 2380 MINUTE(S).
2410	PRESSURE, HIGH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2410.
2412	PRESSURE, HIGH. THERE SHALL BE NO EVIDENCE OF LEAKAGE.
2414	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2416	PRESSURE, HIGH. LEAKAGE SHALL BE NOT GREATER THAN ONE DROP PER 2416 CYCLE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE, HIGH (CONT)	
REQUIREMENTS (CONT)	
MAXIMUM LEAKAGE (SELECT ONE)	
PER CYCLE (CUBIC CENTIMETERS)	2418
PER HOUR (CUBIC CENTIMETERS)	2420
PER MINUTE (CUBIC CENTIMETERS)	2422
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2426
PER DOCUMENT (DOC DES)	2428
PRESSURE APPLIED (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2430
TOLERANCE (POUNDS PER SQUARE INCH)	2432
(KILOPASCALS)	2434
TOLERANCE (KILOPASCALS)	2436
DURATION OF APPLIED PRESSURE (SELECT ONE)	
(HOURS)	2438
(MINUTES)	2440

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2438	PRESSURE, HIGH, LEAKAGE SHALL BE NOT GREATER THAN 2418 CUBIC CENTIMETER(S) PER CYCLE.
2420	PRESSURE, HIGH. LEAKAGE SHALL BE NOT GREATER THAN 2420 CUBIC CENTIMETER(S) PER HOUR.
2422	PRESSURE, HIGH. LEAKAGE SHALL BE NOT GREATER THAN 2422 CUBIC CENTIMETER(S) PER MINUTE.
2426	PRESSURE, HIGH, TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2426.
2428	PRESSURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2428.
2430	PRESSURE APPLIED SHALL BE 2430 POUNDS PER SQUARE INCH.
2432	PRESSURE APPLIED TOLERANCE SHALL BE 2432 POUNDS PER SQUARE INCH.
2434	PRESSURE APPLIED SHALL BE 2434 KILOPASCAL(S).
2436	PRESSURE APPLIED TOLERANCE SHALL BE 2436 KILOPASCAL(S).
2438	PRESSURE SHALL BE APPLIED FOR 2438 HOUR(S).
2440	PRESSURE SHALL BE APPLIED FOR 2440 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE, LOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2460
NO EVIDENCE OF LEAKAGE.	2462
NO EVIDENCE OF PHYSICAL DAMAGE.	2464
MAXIMUM LEAKAGE OF ONE DROP PER (CYCLES)	2466
MAXIMUM LEAKAGE (SELECT ONE)	
PER CYCLE (CUBIC CENTIMETERS)	2468
PER HOUR (CUBIC CENTIMETERS)	2470
PER MINUTE (CUBIC CENTIMETERS)	2472
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2476
PER DOCUMENT (DOC DES)	2478

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2460	PRESSURE, LOW, THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2460,
2462	PRESSURE, LOW. THERE SHALL BE NO EVIDENCE OF LEAKAGE.
2464	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2466	PRESSURE, LOW, LEAKAGE SHALL BE NOT GREATER THAN ONE DROP PER 2466 CYCLE(S).
2468	PRESSURE, LOW. LEAKAGE SHALL BE NOT GREATER THAN 2468 CUBIC CENTIMETER(S) PER CYCLE.
2470	PRESSURE, LOW, LEAKAGE SHALL BE NOT GREATER THAN 2470 CUBIC CENTIMETER(S) PER HOUR.
2472	PRESSURE, LOW. LEAKAGE SHALL BE NOT GREATER THAN 2472 CUBIC CENTIMETER(S) PER MINUTE.
2476	PRESSURE, LOW , TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 24760
2478	PRESSURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2478.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE, LOW (CONT)	
PER DOCUMENT (CONT)	
PRESSURE APPLIED (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2480
TOLERANCE (POUNDS PER SQUARE INCH)	2482
(KILOPASCALS)	2484
TOLERANCE (KILOPASCALS)	2486
DURATION OF APPLIED PRESSURE (SELECT ONE)	
(HOURS)	2488
(MINUTES)	2490
PRESSURE, PROOF	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2510
AS FOLLOWS:	2511
MINIMUM PROOF PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2512
(KILOPASCALS)	2514

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2480 PRESSURE APPLIED SHALL BE 2480 POUNDS PER SQUARE INCH.

2482 PRESSURE APPLIED TOLERANCE SHALL BE 2482 POUNDS PER SQUARE INCH.

2484 PRESSURE APPLIED SHALL BE 2484 KILOPASCAL(S).

2486 PRESSURE APPLIED TOLERANCE SHALL BE 2486 KILOPASCAL(S).

2488 PRESSURE SHALL BE APPLIED FOR 2488 HOUR(S),

2490 PRESSURE SHALL BE APPLIED FOR 2490 MINUTE(S).

2510 PRESSURE, PROOF. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2510.

2511 PRESSURE, PROOF. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2512 THE CYLINDER SHALL WITHSTAND A PROOF PRESSURE OF NOT LESS THAN 25112 POUNDS PER SQUARE INCH.

2514 THE CYLINDER SHALL WITHSTAND A PROOF PRESSURE OF NOT LESS THAN 2514 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 20260-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE, PROOF (CONT)	
AS FOLLOWS: (CONT)	
LEAKAGE (SELECT ONE)	
NO EVIDENCE OF LEAKAGE.	2515
NO EVIDENCE OF PHYSICAL DAMAGE.	2516
MAXIMUM LEAKAGE OF ONE DROP PER (CYCLES)	2517
MAXIMUM LEAKAGE (SELECT ONE)	
PER CYCLE (CUBIC CENTIMETERS)	2518
PER HOUR (CUBIC CENTIMETERS)	2520
PER MINUTE (CUBIC CENTIMETERS)	2522
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2526
PER DOCUMENT (DOC DES)	2528
APPLY PROOF PRESSURES	2530
DURATION OF APPLIED PRESSURE (SELECT ONE)	
(HOURS)	2534
(MINUTES)	2536

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2515	THERE SHALL BE NO EVIDENCE OF LEAKAGE.
2516	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2517	LEAKAGE SHALL BE NOT GREATER THAN ONE DROP PER 2517 CYCLE(S).
2518	LEAKAGE SHALL BE NOT GREATER THAN 2518 CUBIC CENTIMETER(S) PER CYCLE.
2520	LEAKAGE SHALL BE NOT GREATER THAN 2520 CUBIC CENTIMETER(S) PER HOUR.
2522	LEAKAGE SHALL BE NOT GREATER THAN 2522 CUBIC CENTIMETER(S) PER MINUTE,
2526	PRESSURE, PROOF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2526.
2528	PRESSURE, PROOF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2528.
2530	THE MINIMUM PROOF PRESSURE SHALL BE APPLIED.
2534	PRESSURE SHALL BE APPLIED FOR 2534 HOUR(S).
2536	PRESSURE SHALL BE APPLIED FOR 2536 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY/FOG	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6356
NO EVIDENCE OF CORROSION PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE,	6357
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6353
PER ASTMB117.	6354
EXPOSURE PERIOD (HOURS)	4783
SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	7315
NO EVIDENCE OF PHYSICAL DAMAGE,	7316
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	731111
PER MIL-STD-810, METHOD 516.	7312

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6356	SALT SPRAY/FOG. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6356.
6357	SALT SPRAY/FOG. THERE SHALL BE NO EVIDENCE OF Corrosion, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
6353	SALT SPRAY/FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6353.
6354	SALT SPRAY/FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMB117.
4783	DURATION OF THE TEST SHALL BE 4783 HOUR(S).
7315	SHOCK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7315.
7316	SHOCK. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
7311	SHOCK, TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7311.
7312	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 5116 OF MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK (CONT)	
PER MIL-STD-810, METHOD 516. (CONT)	
*PROCEDURE	
PROCEDURE I.	7313
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	7317
FIGURE 516-2 APPLIES.	7318
*AMPLITUDE, A OR B (LETTER)	7305
*DURATION, C OR D (LETTER)	7306
PROCEDURE 11.	6327
PROCEDURE 111.	6338
*FIGIURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	6339
FIGURE 516-2 APPLIES.	6340
*AMPLITUDE, A OR B (LETTER)	6341
*DURATION, C OR D (LETTER)	6342

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7313	PROCEDURE NUMBER I SHALL APPLY.
7317	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 5116 OF MIL-STD-810.
7318	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 5116 OF MIL-STD-810.
7305	AMPLITUDE LETTER 7305 SHALL APPLY.
7306	DURATION LETTER 7306 SHALL APPLY.
6327	PROCEDURE NUMBER II SHALL APPLY.
6338	PROCEDURE NUMBER III SHALL APPLY.
6339	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-11 OF METHOD 516 OF MIL-STD-810.
6340	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.
63411	AMPLITUDE LETTER 6341 SHALL APPLY.
6342	DURATION LETTER 6342 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK (CONT)	
PROCEDURE (CONT)	
PROCEDURE IV.	6343
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	6344
FIGURE 516-2 APPLIES.	6345
*AMPLITUDE, A OR B (LETTER)	6346
*DURATION, C OR D (LETTER)	6347
PROCEDURE V.	6348
TEST TEMPERATURE (DEGREES CELSIUS)	7307
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	7308
OPERATION DURING TEST REQUIRED.	7309
SNUBBING ACTION, EXTENDED STROKE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2602

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6343	PROCEDURE NUMBER IV SHALL APPLY.
6344	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
6345	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.
6346	AMPLITUDE LETTER 6346 SHALL APPLY.
6347	DURATION LETTER 6347 SHALL APPLY.
6348	PROCEDURE NUMBER V SHALL APPLY.
7307	THE TEST TEMPERATURE SHALL BE 7307 DEGREES CELSIUS.
7308	THE TEST TEMPERATURE TOLERANCE SHALL BE WITHIN 7308 DEGREES CELSIUS.
7309	OPERATION DURING THE TEST IS REQUIRED.
2602	SNUBBING ACTION, EXTENDED STROKES. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2602.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SNUBBING ACTION, EXTENDED STROKE (CONT)	
REQUIREMENTS (CONT)	
MINIMUM SNUBBING (SELECT ONE)	
(INCHES)	2604
(MILLIMETERS)	2606
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2610
PER DOCUMENT (DOC DES)	2612
PRESSURE APPLIED (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2614
PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2616
(KILOPASCALS)	2618
PRESSURE TOLERANCE (KILOPASCALS)	2620
SNUBBING ACTION, RETRACTED STROKE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2632

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2604	SNUBBING ACTION, EXTENDED STROKE. SNUBBING ACTION OF THE ROD WHILE EXTENDING SHALL BEGIN NOT LESS THAN 2604 INCH(S) PRIOR TO THE END OF THE STROKE.
2606	SNUBBING ACTION, EXTENDED STROKE. SNUBBING ACTION OF THE ROD WHILE EXTENDING SHALL BEGIN NOT LESS THAN 2606 MILLIMETER(S) PRIOR TO THE END OF THE STROKE.
2610	SNUBBING ACTION, EXTENDED STROKE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2610.
2612	SNUBBING ACTION, EXTENDED STROKE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2612.
2614	PRESSURE APPLIED SHALL BE 2614 POUNDS PER SQUARE INCH.
2616	PRESSURE APPLIED TOLERANCE SHALL BE 2616 POUNDS PER SQUARE INCH.
2618	PRESSURE APPLIED SHALL BE 2618 KILOPASCAL(S).
2620	PRESSURE APPLIED TOLERANCE SHALL BE 2620 KILOPASCAL(S).
2632	SNUBBING ACTION, RETRACTED STROKE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2632.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SNUBBING ACTION, RETRACTED STROKE (CONT)	
REQUIREMENTS (CONT)	
MINIMUM SNUBBING (SELECT ONE)	
(INCHES)	2634
(MILLIMETERS)	2636
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2640
PER DOCUMENT (DOC DES)	2642
PRESSURE APPLIED (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2644
PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2646
(KILOPASCALS)	2648
PRESSURE TOLERANCE (KILOPASCALS)	2650
TEMPERATURE, HIGH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2683

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2634	SNUBBING ACTION, RETRACTED STROKE. SNUBBING ACTION OF THE ROD WHILE RETRACTING SHALL BEGIN NOT LESS THAN 2634 INCH(S) PRIOR TO THE END OF THE STROKE.
2636	SNUBBING ACTION, RETRACTED STROKE. SNUBBING ACTION OF THE ROD WHILE RETRACTING SHALL BEGIN NOT LESS THAN 2636 MILLIMETER(S) PRIOR TO THE END OF THE STROKE.
2640	SNUBBING ACTION, RETRACTED STROKE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2640.
2642	SNUBBING ACTION, RETRACTED STROKE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2642.
2644	PRESSURE APPLIED SHALL BE 2644 POUNDS PER SQUARE INCH.
2646	PRESSURE APPLIED TOLERANCE SHALL BE 2646 POUNDS PER SQUARE INCH.
2648	PRESSURE APPLIED SHALL BE 2648 KILOPASCAL(S).
2650	PRESSURE APPLIED TOLERANCE SHALL BE 2650 KILOPASCAL(S).
2683	TEMPERATURE, HIGH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2683.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, HIGH (CONT)	
REQUIREMENTS (CONT)	
NO BINDING.	2684
NO EVIDENCE OF PHYSICAL DAMAGE.	2686
LEAKAGE (SELECT ONE)	
NO EVIDENCE OF LEAKAGE.	2688
MAXIMUM LEAKAGE OF ONE DROP PER (CYCLES)	2690
MAXIMUM LEAKAGE (SELECT ONE)	
PER CYCLE (CUBIC CENTIMETERS)	2692
PER HOUR (CUBIC CENTIMETERS)	2694
PER MINUTE (CUBIC CENTIMETERS)	2696
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2701
PER DOCUMENT (DOC DES)	2700
TEST TEMPERATURE (DEGREES CELSIUS)	2702
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2704

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2684	TEMPERATURE, HIGH. THERE SHALL BE NO BINDING OF THE PISTON.
2686	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2688	TEMPERATURE, HIGH. THERE SHALL BE NO EVIDENCE OF LEAKAGE.
2690	TEMPERATURE, HIGH. LEAKAGE SHALL BE NOT GREATER THAN ONE DROP PER 2690 CYCLE(S).
2692	TEMPERATURE, HIGH, LEAKAGE SHALL BE NOT GREATER THAN 2692 CUBIC CENTIMETER(S) PER CYCLE.
2694	TEMPERATURE, HIGH. LEAKAGE SHALL BE NOT GREATER THAN 2694. CUBIC CENTIMETER(S) PER HOUR.
2696	TEMPERATURE, HIGH. LEAKAGE SHALL BE NOT GREATER THAN 2696 CUBIC CENTIMETER(S) PER MINUTE.
2701	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT? EXCEPT 2701.
2700	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2700.
2702	TEST TEMPERATURE SHALL BE 2702 DEGREES CELSIUS.
2704	TEST TEMPERATURE TOLERANCE SHALL BE 2704 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, HIGH (CONT)	
PER DOCUMENT (CONT)	
TEST DURATION (SELECT ONE)	
(HOURS)	2706
(MINUTES)	2708
TEST CYCLES (QUANTITY)	27110
RELATIVE HUMIDITY (PERCENT)	2712
RELATIVE HUMIDITY TOLERANCE (PERCENT)	2714
TEMPERATURE, INTERMEDIATE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2730
NO BINDING.	2734
NO EVIDENCE OF PHYSICAL DAMAGE.	2736
LEAKAGE (SELECT ONE)	
NO EVIDENCE OF LEAKAGE.	2738
MAXIMUM LEAKAGE OF ONE DROP PER (CYCLES)	2740

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2706	DURATION OF THE TEST SHALL BE 2706 HOUR(S).
2708	DURATION OF THE TEST SHALL BE 2708 MINUTE(S)-
2710	THERE SHALL BE 2710 CYCLE(S) OF OPERATION.
2712	THE RELATIVE HUMIDITY SHALL BE 2712 PERCENT.
2714	THE RELATIVE HUMIDITY TOLERANCE SHALL BE 2714 PERCENT.
2730	TEMPERATURE, INTERMEDIATE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2730.
2734	TEMPERATURE, Intermediate THERE SHALL BE NO BINDING OF THE PISTON.
2736	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2738	TEMPERATURE, INTERMEDIATE. THERE SHALL BE NO EVIDENCE OF LEAKAGE.
2740	TEMPERATURE, Intermediate LEAKAGE SHALL BE NOT GREATER THAN ONE DROP PER 2740 CYCLE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, INTERMEDIATE (CONT)	
LEAKAGE (CONT)	
MAXIMUM LEAKAGE (SELECT ONE)	
PER CYCLE (CUBIC CENTIMETERS)	2742
PER HOUR (CUBIC CENTIMETERS)	2744
PER MINUTE (CUBIC CENTIMETERS)	2746
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2748
PER DOCUMENT (DOC DES)	2750
LOW TEMPERATURE (DEGREES CELSIUS)	2752
HIGH TEMPERATURE (DEGREES CELSIUS)	2754
TEST DURATION (SELECT ONE)	
(HOURS)	2756
(MINUTES)	2758
MONITOR LEAKAGE.	2760
CYCLES (QUANTITY)	2762

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2742	TEMPERATURE, INTERMEDIATE. LEAKAGE SHALL BE NOT GREATER THAN 2742 CUBIC CENTIMETER(S) PER CYCLE.
2744	TEMPERATURE, INTERMEDIATE. LEAKAGE SHALL BE NOT GREATER THAN 2744 CUBIC CENTIMETER(S) PER HOUR.
2746	TEMPERATURE, INTERMEDIATE. LEAKAGE SHALL BE NOT GREATER THAN 2746 CUBIC CENTIMETER(S) PER MINUTE.
2748	TEMPERATURE, INTERMEDIATE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2748.
2750	Temperature INTERMEDIATE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2750.
2752	THE LOW TEMPERATURE SHALL BE 2752 DEGREES CELSIUS.
2754	THE HIGH TEMPERATURE SHALL BE 2754 DEGREES CELSIUS.
2756	DURATION OF THE TEST SHALL BE 2756 HOUR(S).
2758	DURATION OF THE TEST SHALL BE 2758 MINUTE(S).
2760	THE TEST ITEM SHALL BE MONITORED FOR LEAKAGE FROM LOW TO HIGH TEMPERATURE CHANGE.
2762	THERE SHALL BE 2762 CYCLE(S) OF OPERATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2783
NO BINDING.	2784
NO EVIDENCE OF PHYSICAL DAMAGE.	2786
LEAKAGE (SELECT ONE)	
NO EVIDENCE OF LEAKAGE.	2788
MAXIMUM LEAKAGE OF ONE DROP PER (CYCLES)	2790
MAXIMUM LEAKAGE (SELECT ONE)	
PER CYCLE (CUBIC CENTIMETERS)	2792
PER HOUR (CUBIC CENTIMETERS)	2794
PER MINUTE (CUBIC CENTIMETERS)	2796
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2801
PER DOCUMENT (DOC DES)	2802

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2783	TEMPERATURE, LOW . THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2783.
2784	TEMPERATURE, LOW. THERE SHALL BE NO BINDING OF THE PISTON.
2786	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2788	TEMPERATURE, LOW. THERE SHALL BE NO EVIDENCE OF LEAKAGE.
2790	TEMPERATURE, LOW. LEAKAGE SHALL BE NOT GREATER THAN ONE DROP PER 2790 CYCLE(S).
2792	TEMPERATURE, LOW . LEAKAGE SHALL BE NOT GREATER THAN 2792 CUBIC CENTIMETER(S) PER CYCLE.
2794	TEMPERATURE, LOW . LEAKAGE SHALL BE NOT GREATER THAN 2794 CUBIC CENTIMETER(S) PER HOUR.
2796	TEMPERATURE, LOW . LEAKAGE SHALL BE NOT GREATER THAN 2796 CUBIC CENTIMETER(S) PER MINUTE.
28011	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2801.
2802	TEMPERATURE, LOW . TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2802.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW (CONT)	
PER DOCUMENT (CONT)	
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	2804
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	2806
STORAGE TEMPERATURE (DEGREES CELSIUS)	2808
TEST DURATION (SELECT ONE)	
(HOURS)	2810
(MINUTES)	2812
CYCLES (QUANTITY)	2814
TEMPERATURE SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	6214
NO EVIDENCE OF PHYSICAL DAMAGE.	6215
REMAIN WITHIN SPECIFIED TOLERANCE.	4726
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	6212
PER MIL-STD-810 METHOD 503.	4710

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2804	FIRST TEST TEMPERATURE SHALL BE 2804 DEGREES CELSIUS.
2806	SECOND TEST TEMPERATURE SHALL BE 2806 DEGREES CELSIUS.
2808	STORAGE TEMPERATURE SHALL BE 2808 DEGREES CELSIUS.
2810	DURATION OF THE TEST SHALL BE 2810 HOUR(S).
2812	DURATION OF THE TEST SHALL BE 2812 Minute(s).
2814	THERE SHALL BE 2814 CYCLE(S) OF OPERATION.
6214	TEMPERATURE SHOCK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6214.
6215	TEMPERATURE SHOCK. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4726	ITEM(S) SHALL REMAIN WITHIN SPECIFIED Tolerance
6212	TEMPERATURE SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6212.
4710	TEMPERATURE SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 503 OF MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, SIMPLIFIED EXTREME	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2820
NO BINDING,	2824
NO EVIDENCE OF PHYSICAL DAMAGE.	2826
LEAKAGE (SELECT ONE)	
NO EVIDENCE OF LEAKAGE.	2828
MAXIMUM LEAKAGE OF ONE DROP PER (CYCLES)	2830
MAXIMUM LEAKAGE (SELECT ONE)	
PER CYCLE (CUBIC CENTIMETERS)	2832
PER HOUR (CUBIC CENTIMETERS)	2834
PER MINUTE (CUBIC CENTIMETERS)	2836
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2840
PER DOCUMENT (DOC DES)	2842

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2820	Temperature SIMPLIFIED EXTREME. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2820.
2824	TEMPERATURE SIMPLIFIED EXTREME. THERE SHALL BE NO BINDING OF THE PISTON.
2826	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2828	TEMPERATURE, SIMPLIFIED EXTREME. THERE SHALL BE NO EVIDENCE OF LEAKAGE.
2830	TEMPERATURE, SIMPLIFIED EXTREME. LEAKAGE SHALL BE NOT GREATER THAN ONE DROP PER 2830 CYCLE(S).
2832	TEMPERATURE, SIMPLIFIED EXTREME. LEAKAGE SHALL BE NOT GREATER THAN 2832 CUBIC CENTIMETER(S) PER CYCLE.
2834	TEMPERATURE, SIMPLIFIED EXTREME. LEAKAGE SHALL BE NOT GREATER THAN 2834 CUBIC CENTIMETER(S) PER HOUR.
2836	Temperature, SIMPLIFIED EXTREME. LEAKAGE SHALL BE NOT GREATER THAN 2836 CUBIC CENTIMETER(S) PER MINUTE.
2840	TEMPERATURE? SIMPLIFIED EXTREME. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2840.
2842	TEMPERATURE, SIMPLIFIED EXTREME. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2842.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, SIMPLIFIED EXTREME (CONT)	
PER DOCUMENT (CONT)	
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	2844
DURATION OF EXPOSURE (HOURS)	2846
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	2848
DURATION OF EXPOSURE (HOURS)	2850
THIRD TEST TEMPERATURE (DEGREES CELSIUS)	2852
DURATION OF EXPOSURE (HOURS)	2854
VIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4681
NO EVIDENCE OF PHYSICAL DAMAGE.	4682
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3505
PER MIL-STD-810, METHOD 514.	1514
*PROCEDURE NUMBER (ROMAN NUMERAL)	1518
CURVE (LETTERS)	1525
OPERATION NOT REQUIRED.	1424

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2844 THE FIRST TEST TEMPERATURE SHALL BE 2844 DEGREES CELSIUS.

2846 EXPOSURE DURATION SHALL BE 2846 HOUR(S).

2848 THE SECOND TEST TEMPERATURE SHALL BE 2848 DEGREES CELSIUS.

2850 EXPOSURE DURATION SHALL BE 2850 HOUR(S).

2852 THE THIRD TEST TEMPERATURE SHALL BE 2852 DEGREES CELSIUS.

2854 EXPOSURE DURATION SHALL BE 2854 HOUR(S).

4681 VIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4681.

4682 VIBRATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

1505 VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1505.

1514 VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 514 OF MIL-STD-810.

1518 PROCEDURE NUMBER 1518 SHALL APPLY.

1525 CURVE 1525 SHALL APPLY.

1424 OPERATION DURING THE TEST IS NOT REQUIRED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE.
VIBRATION (CONT)	
PER MIL-STD-810, METHOD 514. (CONT)	
TEMPERATURE (DEGREES CELSIUS)	1542
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1543
DURATION AT TEMPERATURE (HOURS)	1544
EQUIPMENT (CATEGORY)	1540
APPLICABLE TABLE (NUMBER)	1532
APPLICABLE FIGURE (NUMBER)	1559
PERFORMANCE CHARACTERISTICS (SEE TABLE XII), DOD-STD-35)	
NOTE : AUTOMATIC WHEN TABLE XII IS USED-	
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE : AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1542	VIBRATION TEST SHALL BE PERFORMED AT A TEMPERATURE OF 1542 DEGREES CELSIUS.
1543	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1543 DEGREES CELSIUS.
1544	THE TEMPERATURE TIME DURATION SHALL BE 1544 HOUR(S).
1540	THE EQUIPMENT CATEGORY SHALL BE 1540 IN ACCORDANCE WITH METHOD 514 OF MIL-STD-810.
1532	PROCEDURE AND TIME SCHEDULE SHALL BE AS SHOWN ON TABLE 1532 OF METHOD 514 OF MIL-STD-81O.
11559	TEST CURVES SHALL BE AS SHOWN IN FIGURE 1559 OF METHOD 514 OF MIL-STD-810.

PERFORMANCE CHARACTERISTICS. PERFORMANCE CHARACTERISTICS SHALL BE AS SHOWN IN THE PERFORMANCE CHARACTERISTICS TABLE.

MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.

6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL REQUIREMENTS	
A_____	7001
B_____	7002
c_____	7003
D_____	7004
E_____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A_____	6991
B_____	6992
c_____	6993
D_____	6994
E_____	6995

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(c) 7003.
7004	(D) 7004.
7005	(E) 7005.

6372 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.

7629 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

ADDITIONAL PART MARKING.

6991 (A) 6991.

6992 (B) 6992.

6993 (C) 6993,

6994 (D) 6994.

6995 (E) 6995,

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Custodians:
Army-MI

Review activities
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI

(Project EDS-A231)


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

APPENDIX A


ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

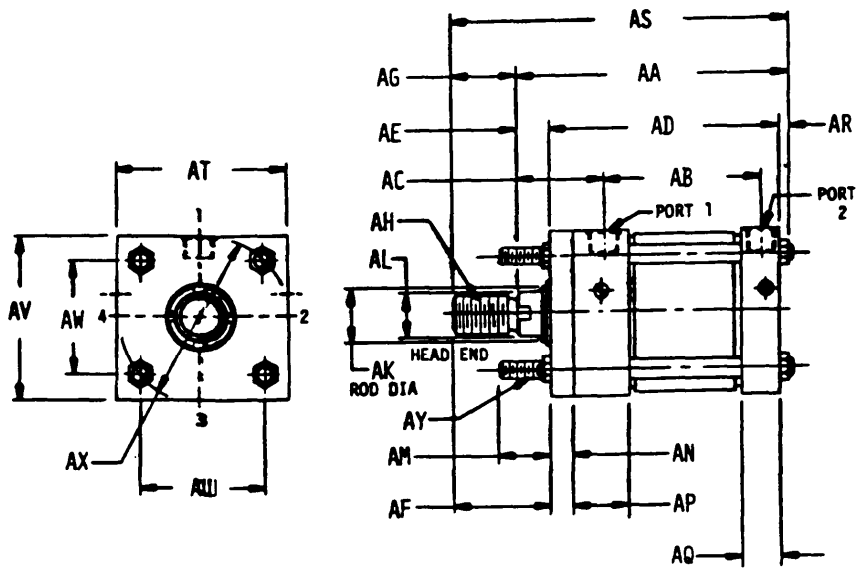


249-01-1

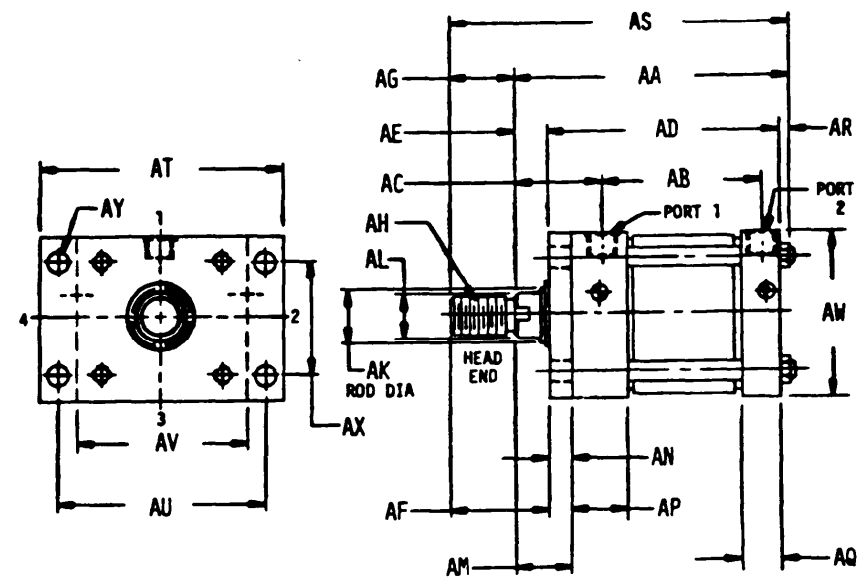


249-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

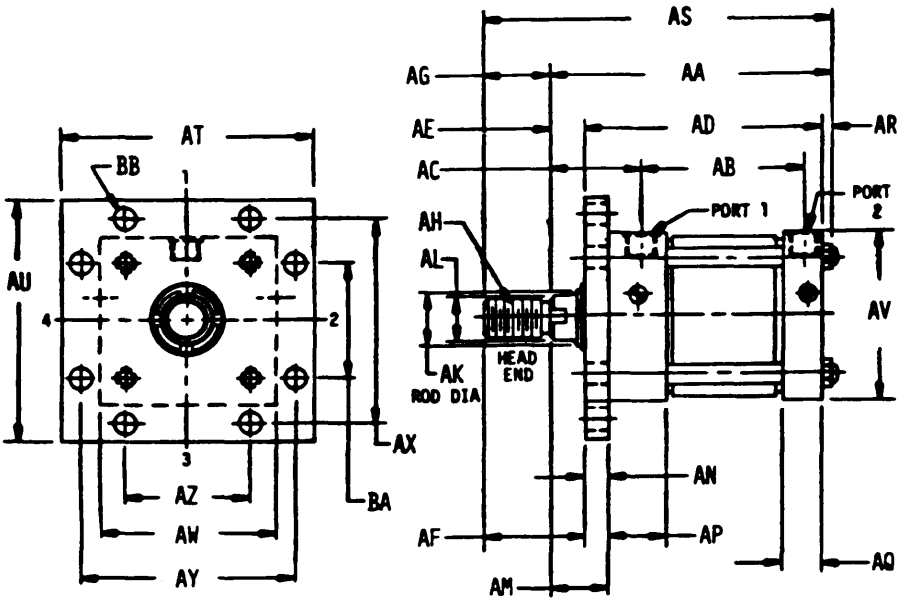


249-01-3

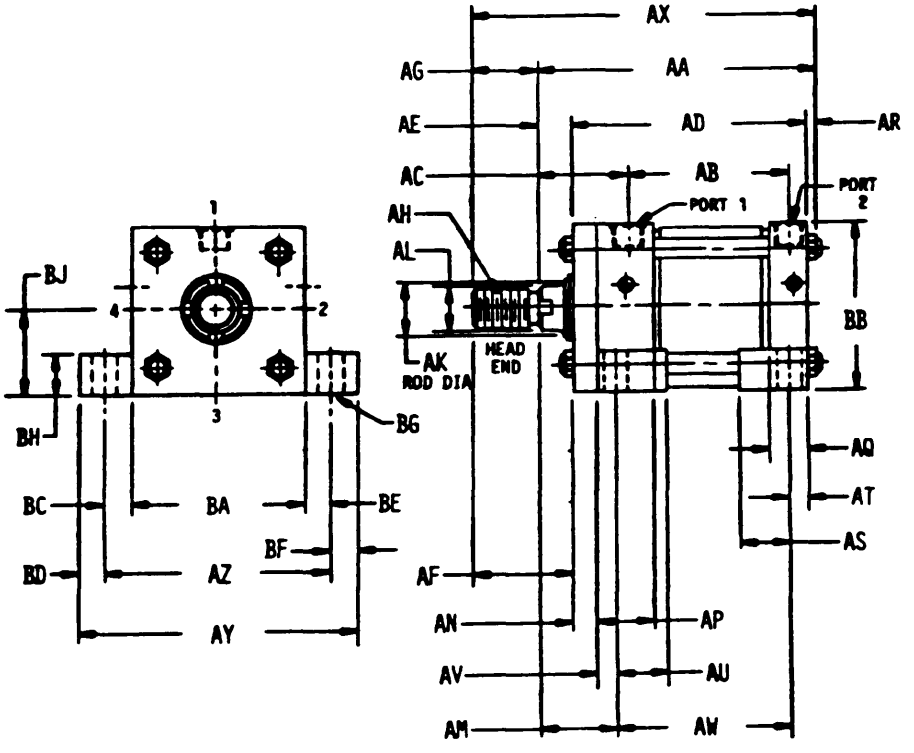


249-01-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

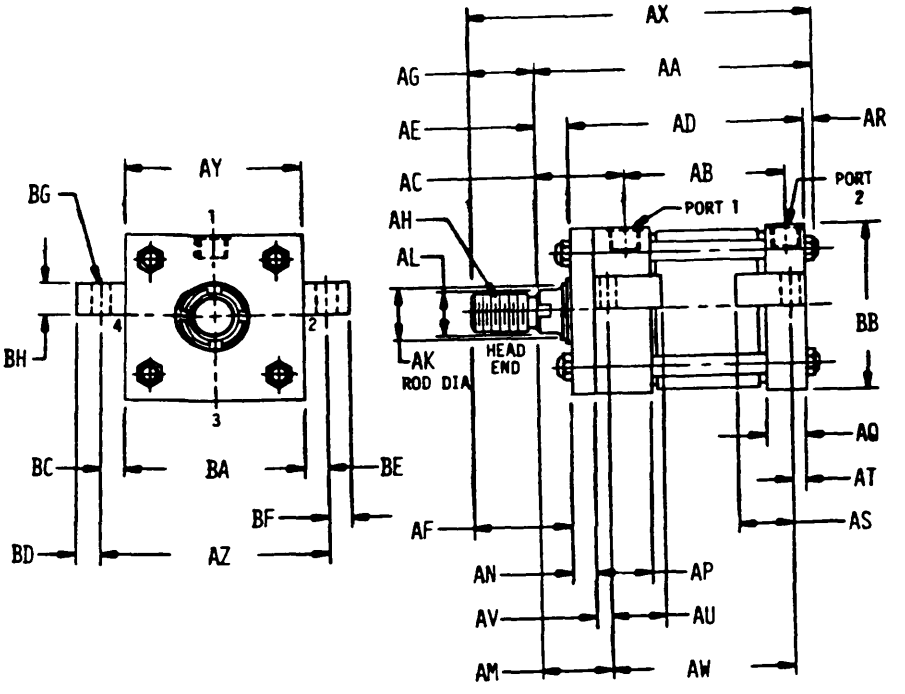


249-01-5

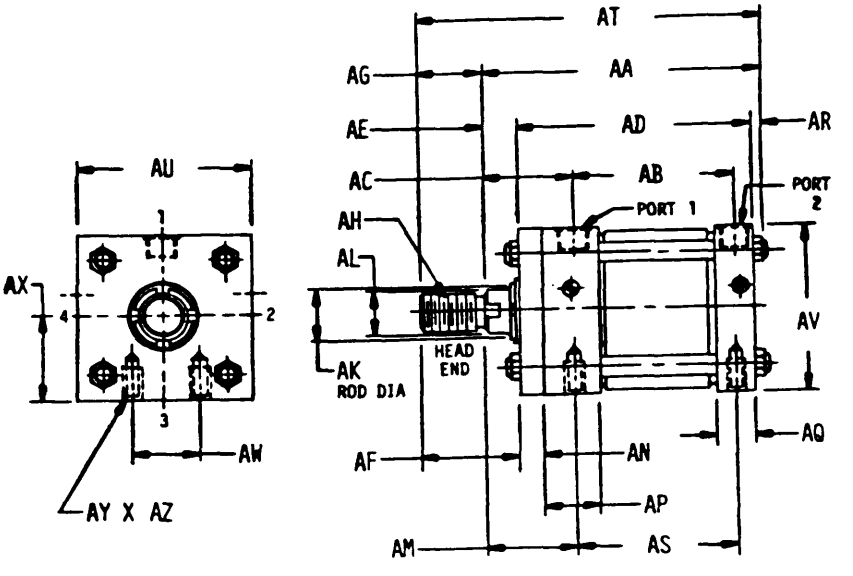


249-01-6

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:04Z
Check the source to verify that this is the current version before use.

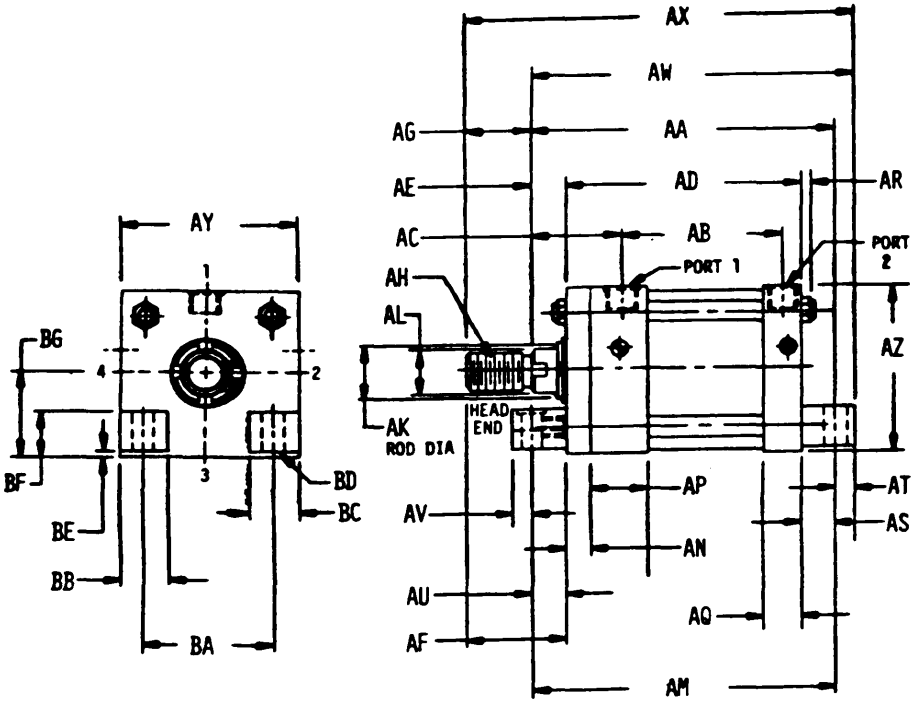


249-01-7

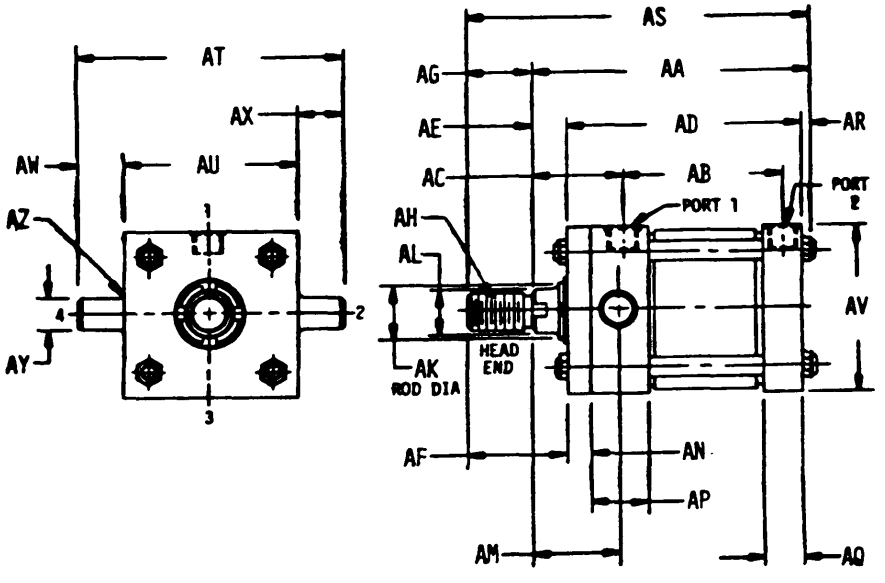


249-01-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

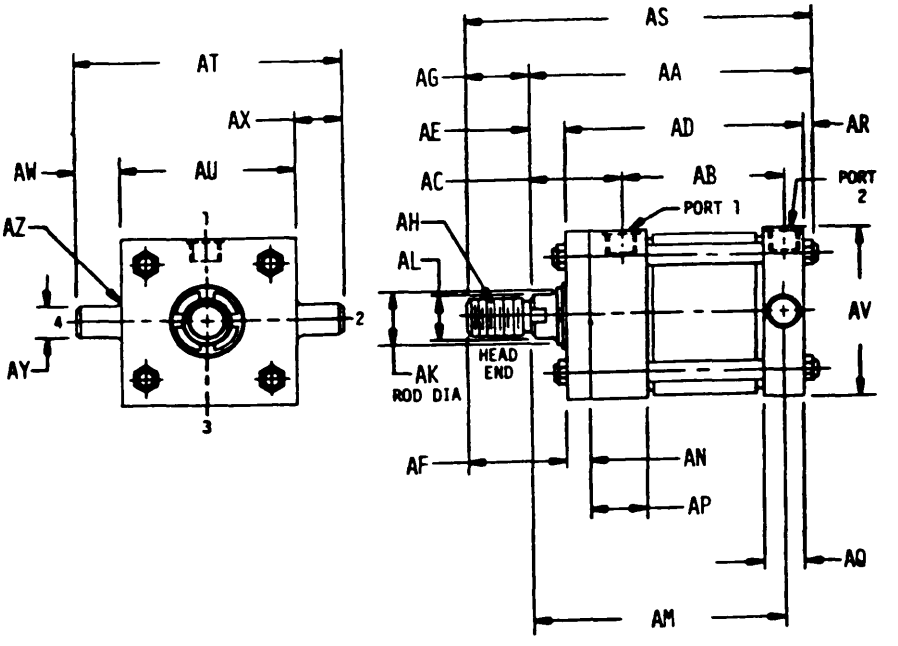


249-01-9

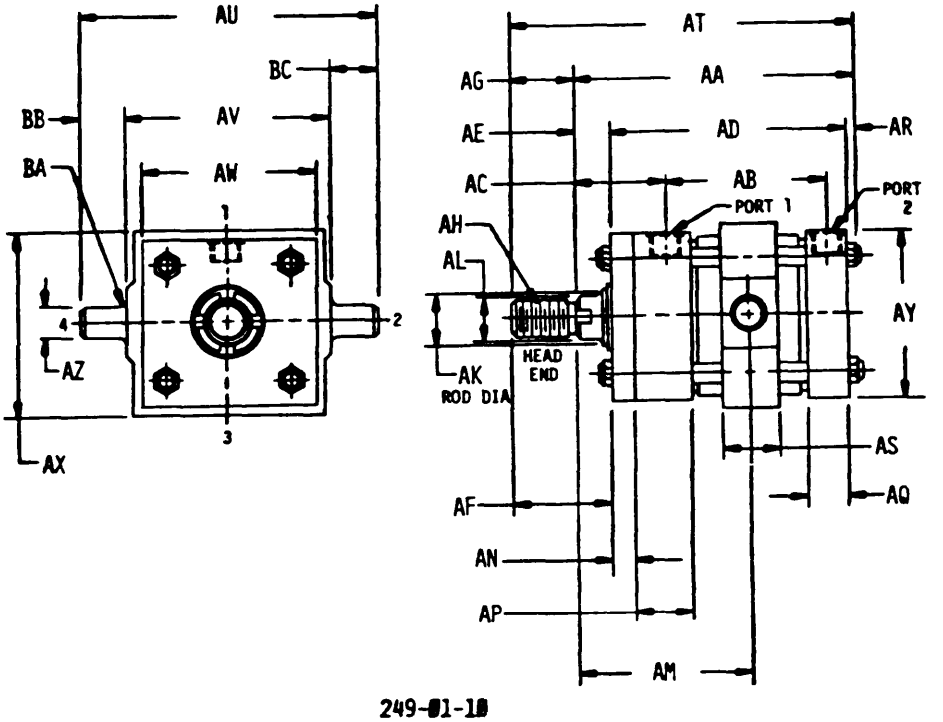


249-01-10

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:04Z
Check the source to verify that this is the current version before use.

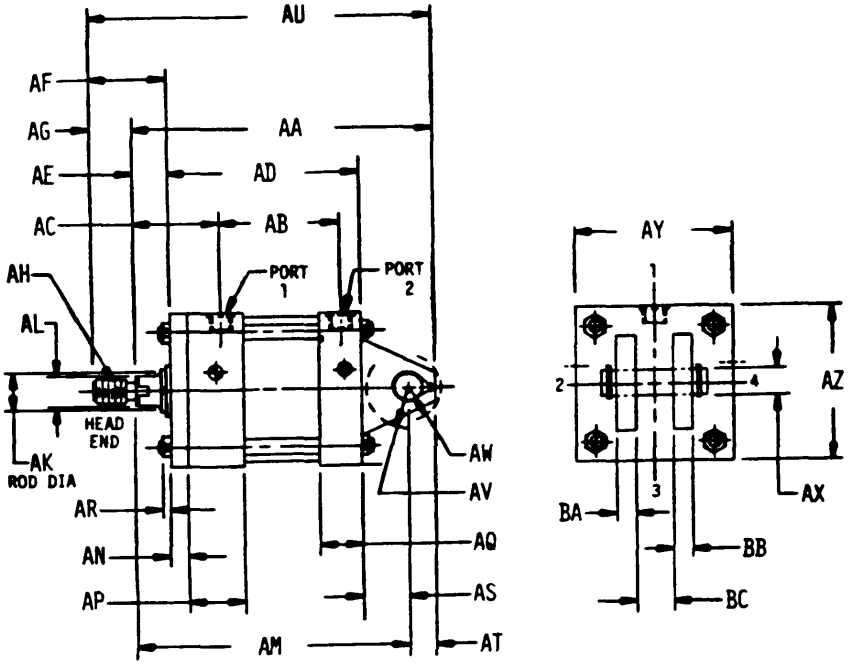


249-01-11

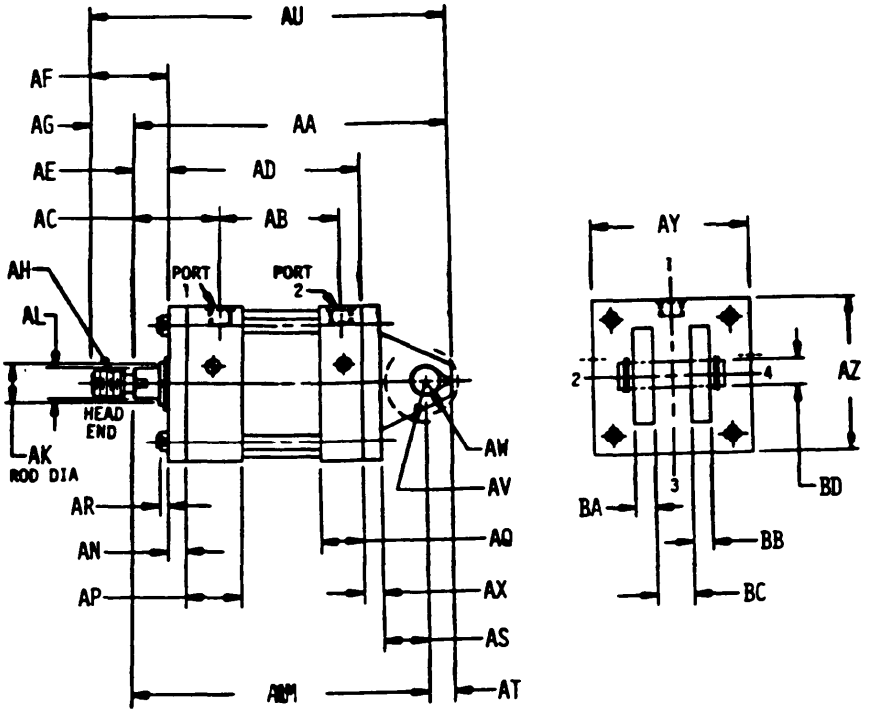


249-01-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

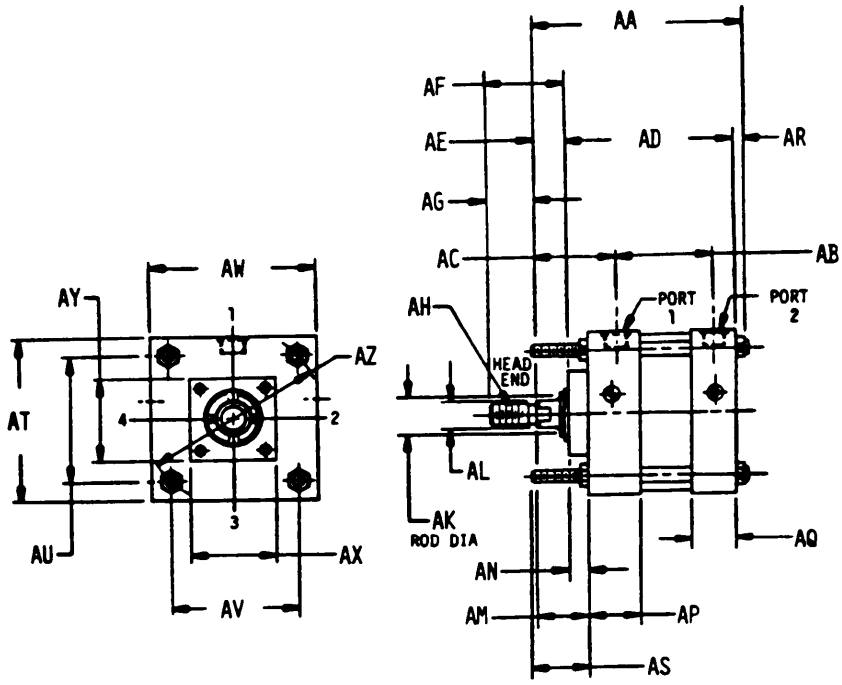


249-01-13

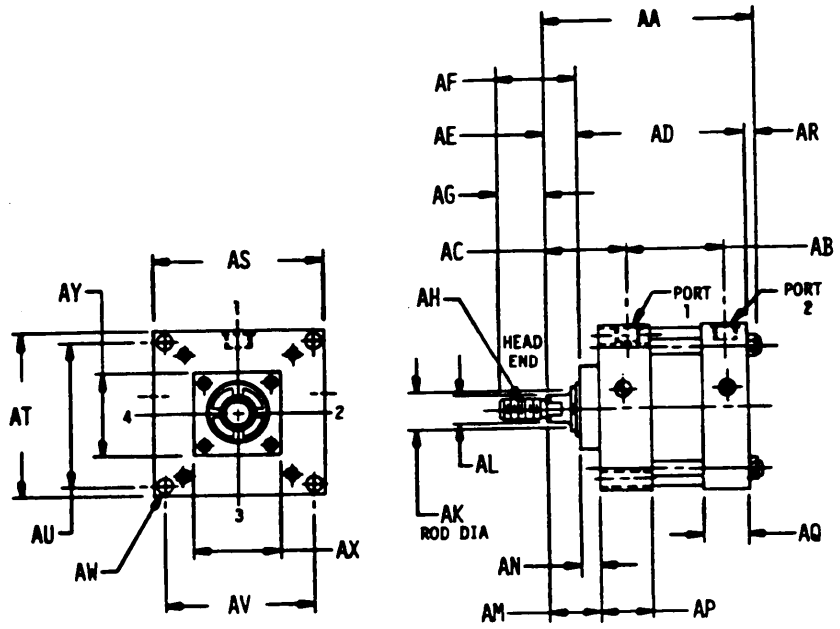


249-01-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

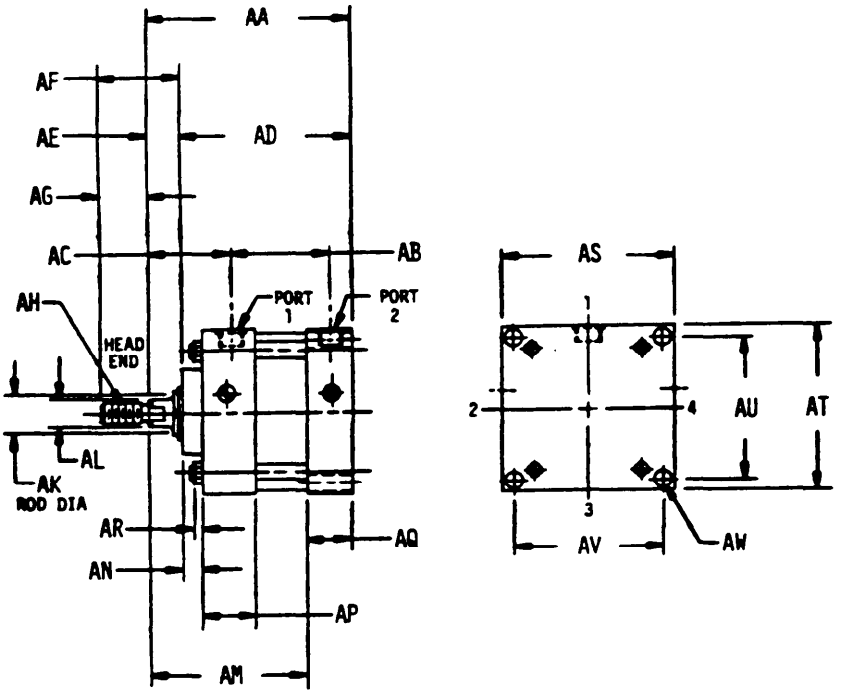

249-01-15

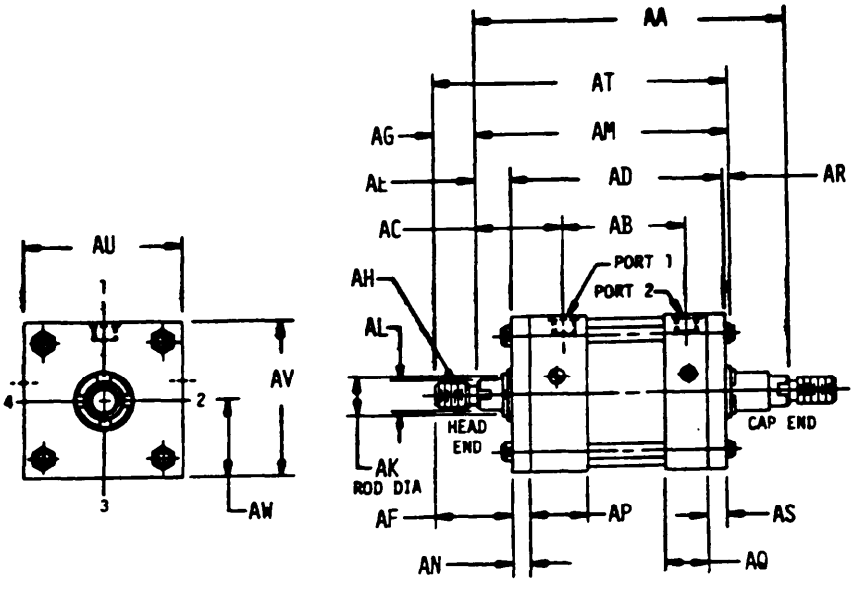

249-01-16

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	16	1640	28	1800	34	1881	44
0102	16	1642	28	1802	34	1882	44
0103	16	1644	28	1814	36	1884	44
0104	16	1646	28	1815	36	1886	44
0105	16	1660	28	1816	36	1880	44
0107	18	1662	28	1817	36	1890	44
0108	18	1670	28	1818	36	1892	44
0700	16	1672	28	1819	36	1894	44
O800	16	1674	28	1820	36	1896	44
1003	16	1676	28	1821	36	1910	46
1004	16	1690	28	1822	36	1912	46
1005	16	1692	30	1823	36	1914	46
1006	16	1694	28	1824	36	1916	48
1008	16	1696	30	1825	36	1918	48
1009	20	1698	28	1826	36	1920	48
1424	110	1700	30	1827	38	1922	48
1505	110	1710	30	1828	38	1926	48
1514	110	1712	30	1829	38	1928	48
1518	110	1720	30	1830	38	1930	48
1525	113	1722	30	1840	38	1932	48
1532	112	1724	30	1841	38	1934	48
1539	46	1726	30	1842	36	1936	48
1540	112	1728	30	1843	38	1938	48
1542	112	1730	30	1844	40	1940	48
1543	112	1732	30	1845	40	1950	50
1544	112	1736	32	1847	40	1952	50
1559	112	1738	32	1848	40	1954	50
1562	20	1740	32	1860	40	1956	50
1570	20	1742	32	1861	40	1958	50
1572	20	1744	32	1862	40	1960	50
1580	26	1746	32	1863	40	1962	50
1582	26	1748	32	1864	40	1964	50
1590	26	1780	32	1865	42	1966	50
1592	26	1782	32	1866	42	1968	52
1600	26	1784	32	1867	42	1970	52
1602	26	1786	32	1868	42	1972	52
1604	26	1788	34	1869	42	1974	52
1606	26	1790	34	1870	42	1976	52
1608	26	1796	34	1871	42	1980	52
1610	26	1798	34	1880	42	1962	52

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1984	52	2140	64	2212	74	2438	80
1986	54	2142	66	2214	74	2440	80
1988	54	2144	66	2216	74	2460	82
1990	54	2146	66	2218	74	2462	82
1992	54	2148	66	2220	74	2464	82
1996	54	2150	66	2224	74	2466	82
1998	54	2152	66	2226	74	2468	82
2000	54	2160	66	2228	74	2470	82
2002	54	2161	68	2230	74	2472	82
2004	54	2162	66	2232	74	2476	82
2006	54	2163	68	2234	74	2478	82
2020	56	2164	66	2236	76	2480	84
2022	56	2165	68	2238	76	2482	84
2024	56	2166	66	2240	76	2484	84
2026	56	2167	68	2242	76	2486	84
2028	56	2168	66	2360	76	2488	84
2030	56	2169	70	2361	76	2490	84
2032	56	2170	66	2364	76	2510	84
2036	56	2171	70	2365	76	2511	84
2040	56	2172	68	2366	76	2512	84
2042	58	2173	70	2367	76	2514	84
2044	58	2174	68	2368	78	2515	06
2046	58	2175	70	2370	78	2516	86
2048	58	2176	68	2372	78	2517	86
2090	62	2184	68	2374	78	2518	86
2092	52	2186	68	2378	78	2520	86
2094	62	2192	70	2380	78	2522	86
2096	62	2194	70	2410	78	2526	86
2098	62	2196	70	2412	78	2528	86
2099	62	2198	70	2414	70	2530	86
2110	62	2199	70	2416	78	2534	86
2112	64	2201	72	2418	80	2536	86
2114	64	2202	72	2420	80	2602	92
2116	64	2203	72	2422	80	2604	94
2120	64	2204	72	2426	80	2606	94
2122	64	2205	72	2428	80	2610	94
2130	64	2206	72	2430	80	2612	94
2132	64	2207	72	2432	80	2614	94
2134	64	2208	72	2434	80	2616	94
2136	64	2210	72	2436	80	2618	94

Source: https://assist.dla.mil -- Downloaded: 202640-23T21:04Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2620	94	2758	102	3006	25	3046	25
2632	94	2760	102	3007	25	3047	25
2634	96	2762	102	3008	25	3048	25
2636	96	2783	104	3009	25	3049	25
2640	96	2784	104	3010	25	3050	25
2642	96	2786	104	3011	25	3051	25
2644	96	2788	104	3012	25	3052	25
2646	96	2790	104	3013	25	3053	25
2648	96	2792	104	3014	25	3054	25
2650	96	2794	104	3015	25	3055	25
2683	96	2796	104	3016	25	3056	25
2684	98	2801	104	3017	25	4681	110
2686	98	2802	104	3018	25	4682	110
2688	98	2804	106	3019	25	4710	106
2690	98	2806	106	3020	25	4724	42
2692	98	2808	106	3021	25	4726	106
2694	98	2810	106	3022	25	4754	58
2696	98	2812	106	3023	25	4755	60
2700	98	2814	106	3024	25	4756	60
2701	98	2820	108	3025	25	4760	50
2702	98	2824	108	3026	25	4761	58
2704	98	2826	108	3027	25	4762	58
2706	100	2828	108	3028	25	4781	60
2708	100	2830	108	3029	25	4783	88
2710	100	2832	108	3030	25	4788	60
2712	100	2834	108	3031	25	4798	60
2714	100	2836	108	3032	25	4799	60
2730	100	2840	108	3033	25	4801	42
2134	100	2842	108	3034	25	4809	62
2736	100	2844	110	3035	25	4815	60
2738	100	2846	110	3036	25	4819	62
2740	100	2848	110	3037	25	4820	62
2742	102	2850	110	3038	25	4840	46
2744	102	2852	110	3039	25	4872	46
2746	102	2854	110	3040	25	4895	46
2748	102	3001	25	3041	25	4950	22
2750	102	3002	25	3042	25	4953	46
2752	102	3003	25	3043	25	4956	46
2754	102	3004	25	3044	25	6212	106
2756	102	3005	25	3045	25	6214	106

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.
6215	106
6299	46
6327	90
6336	50
6338	90
6339	90
6340	90
6341	90
6342	90
6343	92
6344	92
6345	92
6346	92
6347	92
6348	92
6353	88
6354	88
6356	88
6357	66
6369	16
6372	114
6870	112
6873	16
6874	18
6941	18
6942	18
6991	114
6992	114
6993	114
6994	114
6995	114
7001	114
7002	114
7003	114
7004	114
7005	114
7023	34
7024	34
7305	90
7306	90
7307	92
7308	92
7309	92
7311	88
7312	88
7313	90
7315	88
7316	88
7317	90
7318	90
7572	20
7573	20
7574	20
7576	20
7577	20
7578	20
7580	22
7629	114

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

INDEX

Page

Accessories Table---------- 24
Acting Type---------- 26
Additional Part Marking---------- 114
Additional Requirements---------- 114
Aperture Cards Required---------- 18
Applicable Documents---------- 116

Base Document---------- 16
Bore Size---------- 26

City, State, Zip---------- 16
Company Name/Command---------- 16
Configuration---------- 20
Contract Number/Office Symbol---------- 16
Control---------- 16
Cushion---------- 28
Cycles---------- 36

Date---------- 16
Design and Construction---------- 24
Drag, Piston and Rod---------- 38
Drift, Piston---------- 40
Dust---------- 42
Duty Cycle Rating---------- 20

Endurance---------- 46
Endurance, Cyclic (Stroke Cycle)---------- 50
Endurance, Impulse (Pressure Cycle)---------- 52
Endurance, Simplified---------- 56

Format---------- 16
Finishes---------- 22
Fungus---------- 58

Government Design Activity FSCM---------- 16

Humidity---------- 60

Illustrations---------- 22
Immersion---------- 62
Inspection, Magnetic Particle---------- 62
Inspection, Penetrant---------- 64
Inspection, Radiographic---------- 66
Inspection, Ultrasonic---------- 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

Page

Joint Fabrication---------- 28

Materials---------- 22
Metals---------- 22
Motion, Freedom of---------- 72
Mounting Hardware ----------112

Nomenclature---------- 116
Notes---------- 116

Operating Media---------- 28
Operating Media Temperature Rating---------- 20
Operating Pressure---------- 28
Operation---------- 72
Operation Type---------- 30

Packaging---------- 116
Part Marking----------114
Part Number---------- 18
Part Number Cross-Reference----------116
Performance Characteristics----------112
Phone Number---------- 16
Piston Rod Threads---------- 34
Port One---------- 30
Port Two---------- 32
Pressure, Burst---------- 76
Pressure, High---------- 78
Pressure, Low ---------- 82
Pressure, Proof---------- 84

Quality Assurance Provisions----------116

Requester FSCM---------- 16
Requester's Name---------- 16
Revision of AEDPS Document Number---------- 18

Salt Spray/Fog---------- 88
Scope---------- 18
Shock---------- 88
Snubbing Action, Extended Stroke---------- 92
Snubbing Action, Retracted Stroke---------- 94
Source Table---------- 18
Street/Building---------- 16
Stroke---------- 32

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

Page

Superseded Document---------- 116
System Application---------- 16

Tabulated Characteristics---------- 22
Temperature, High---------- 96
Temperature, Intermediate---------- 100
Temperature, Low---------- 104
Temperature Shock---------- 106
Temperature, Simplified Extreme---------- 108

Units of Measure---------- 18

Vibration---------- 110

Weight---------- 34
Workmanship---------- 112

GOVERNMENT PRINTING OFFICE: 1980-603-121/592

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET ___ OF ___

TITLE CODE 1 2 3 4 5 6	REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60 65 70 75 79	LINE NO. 80

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET___OF___

*TITLE CODE 1 2 3 4 5 6	*REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13 14 15 16
*REQUESTER'S NAME		Ø 1 Ø 1
*COMPANY NAME/COMMAND		Ø 1 Ø 2
*STREET/BUILDING		Ø 1 Ø 3
*CITY, STATE, ZIP		Ø 1 Ø 4
*PHONE NO. INCLUDE A/C AUTOVON IF APPLICABLE		Ø 1 Ø 5
*DATE		1 Ø Ø 3
*REQUESTER FSCM		1 Ø Ø 4
*CONTRACT NO./OFFICE SYMBOL		1 Ø Ø 5
*BASE DOCUMENT		1 Ø Ø 6
*SYSTEM APPLICATION		1 Ø Ø 8
*GOVERNMENT DESIGN ACTIVITY FSCM		6 3 6 9
*FORMAT SIX SECTION DOCUMENT.		Ø 7 Ø Ø
ONE SECTION DOCUMENT.		Ø 8 Ø Ø
APERTURE CARDS REQUIRED.		Ø 1 Ø 7
REVISION OF AEDPS DOCUMENT NO.		Ø 1 Ø 8
*CONTROL SOURCE.		6 8 7 3
SPECIFICATION.		6 8 7 4
*SOURCE TABLE		9 1 5 1
UNIT OF MEASURE U.S.		6 9 4 1
SI.		6 9 4 2

CHARACTERISTIC VALUE

20 25 30 35 40 45 50 55 60 65 70 75 79 LINE NO. 80

PLEASE SUPPLY THE FOLLOWING:

DASH-NUMBERED PART _____ REV _____ NOTICE # _____

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ MANDATORY CHARACTERISTIC CODES AND VALUES NOT SUPPLIED
- ☐ ZERO (Ø) WRITTEN WITHOUT VIRGULE (0)
- ☐ USE OF POUND SIGN (#) WITHOUT ACCOMPANYING CHARACTERISTIC VALUE
- ☐ POUND SIGN (#) OMITTED FROM END OF STATEMENT (CHARACTERISTIC VALUE)
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (OTHER THAN MULTILINE STATEMENT)
- ☐ MULTILINE STATEMENT NOT NUMBERED IN COLUMN 80

*MANDATORY

Source: https://assist.dla.mil -- Downloaded: 2026Ø10-23T21:04Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:04Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command,
ATTN: DRDMI-ESD,
Redstone Arsenal, Alabama 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:04Z
Check the source to verify that this is the current version before use.