MIL-B-82273B(SA)
20 November 1975
SUPERSEDING
MIL-B-82273A(SA)
3 November 1970

MILITARY SPECIFICATION

BOOTEE, WET SUIT (CHLOROPRENE FOAM)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a bootee - wet suit, fabricated from closed cell chloroprene foam and shall be of one type and size (universal).

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-285 - Thread, Polyester
DDD-L-20 - Label; For Clothing, Equipage and Tentage (General Use)
PPP-B-566 - Boxes, Folding, Paperboard
PPP-B-601 - Boxes, Wood, Cleated-Plywood
PPP-B-636 - Box, Fiberboard
PPP-T-76 - Tape, Pressure-Sensitive Adhesive Paper, Water Resistant (For Carton Sealing)

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods
FED-STD-356 - Commercial Packaging of Supplies and Equipment
FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

FSC 4220

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:58Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS
D-1056 - Tests for Sponge and Expanded Cellular Rubber Products

(Copies of ASTM publications may be obtained from the American Society for Testing Material, 1916 Race Street, Philadelphia, PA 19103.)

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance to the supplier (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article approval. The requirement for first article will be as specified by the procuring activity (see 6.2).

3.3 Materials.

3.3.1 Chloroprene foam. The chloroprene foam for the bootee shall be of expanded chlorinated cellular rubber, pigmented black, 3/16 (± 1/32) inch (4.8 ± 0.8 mm) thick, having a closed cell structure conforming to ASTM designation SCE41, and other requirements set forth herein when tested as specified in 4.3.1.1. It shall have a minimum density of 10 and a maximum density of 20 pounds per cubic foot (minimum density of 157.5 and a maximum density of 315 grams per cubic centimeter), with a natural skin surface on one or two sides.

3.3.2 Knitted stretch cloth. The stretch cloth shall be circular knit from 100 percent continuous filament stretch-type nylon yarn and conform to the physical requirements specified in Table I when tested as specified in 4.3.1.1.

Table I. Knitted stretch cloth

Knitted stitch	Yarns per Inch (cm) (min.)		Weight, oz. per sq. yd. (g per sq. m)	Elongation percent		Color
	Wales	Courses		Wales	Courses	
Jersey	20 (7.9)	30 (11.8)	3.0 ± 0.25 (100.8 ± 0.7)	140 min. 200 max.	200 min. 280 max.	Black

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:58Z
Check the source to verify that this is the current version before use.

3.3.2.1 Colorfastness. The knitted cloth shall show fastness to laundering, crocking and perspiration equal to or better than the standard sample. When no standard sample is available, the finished material shall show a minimum of "good" fastness to laundering, perspiration, and a Munsell value for crocking not lower than 8.5. Testing shall be as specified in 4.3.1.1.

3.3.3 Lamination. The stretch cloth shall be laminated to one side of the 3/16 inch (4.8 mm) chloroprene foam by means of a suitable adhesive, or other process capable of meeting the physical requirements of the laminated foam material. If the foam has no side with a cut surface, the stretch cloth shall be laminated on any side. When foam has a cut surface on one side, the stretch cloth shall be laminated to the cut side. The adhesive used shall be non-toxic, non-irritant and free from objectionable odor. The fabric backed (laminated) side shall be smooth and free of wrinkles or puckers, and show no signs of blocking, tackiness or adhesive strike-through.

3.3.3.1 Laminated foam. The finished laminated foam material shall conform to Table II when tested as specified in 4.3.1.1.

Table II. Laminated foam

Characteristic	Requirement
Compression set, % max.	35
Compression deflection, psi (g/cm^2)	2.0 min. (139) 7.0 max. (486.5)
Accelerated aging shrinkage, % max. in each direction	5.0
Water absorption, % max.	15.0
Laundering resistance	No delamination
Adhesion, original, lbs. (Kg) min., per two inches (50.8 mm)	6.0 (2.7)
Adhesion after launderings, lbs. (Kg) min., per two inches (50.8 mm)	6.0 (2.7)
Adhesion after aging, lbs. (Kg) min., per two inches (50.8 mm)	6.0 (2.7)
Blocking	No blocking

3.3.4 Thread, polyester. The thread used for sewing the front and back seams, shall conform to type II, class 1, 4 ply, letter size F of V-T-285. The color of the thread shall be Black AA, Cable No. 66043.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:58Z
Check the source to verify that this is the current version before use.

3.3.4.1 Colorfastness. The dyed thread shall show fastness to laundering, perspiration and light equal to or better than the standard sample when tested as specified in V-T-285. When no standard sample is available, the dyed thread shall show a minimum of "good" fastness to laundering, perspiration and light when tested as specified in V-T-285.

3.3.5 Adhesive cement. The cement used to seal the seams shall be a chloroprene compound and shall conform to the requirements herein when tested as specified in 4.3.1.1.

3.3.6 Marking. The marking shall be applied to each bootee with a yellow marking medium conforming to type IV, class 1 of DDD-L-20. Marking shall be applied to the inside, centered, on the left side 1 inch (25.4 mm) from the top edge of bootee. The marking shall be permanent and shall not run, bleed, or rub off when tested as specified in 4.3.1.1. The inscription shall read as follows:

NAME OF ITEM: BOOTEE, WET SUIT (CHLOROPRENE FOAM)
CONTRACT NO.: DSA-100-00-0-000 (Example)
STOCK NO.: 4220-00-000-0000 (Example)
NAME OF SUPPLIER:

3.3.6.1 Special marking. A white paper label printed or stamped with black block letters 1/8 inch (3.2 mm) high for capital letters and 1/16 inch (1.6 mm) high for lower case letters bearing the following information shall be placed inside one bootee of each pair of bootees:

To prolong the life of the bootee, observe the following instructions for care and handling.

1. Do not pull or tug bootee on or off since the foam may tear or split at the seams. If required, dust inside of bootee with talc to facilitate donning.

2. To remove, turn bootee inside out.

3. After each use, wash with fresh water.

4. Allow to dry before storage.

5. Do not fold or crease in storage.

3.4 Design. The bootee shall be a slip-on (either foot) design, made of a laminated closed cell chloroprene foam material (see 3.3). All seams shall be cemented. The top ends of both front and back seams shall be stitched and cemented (see Figure 1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:58Z
Check the source to verify that this is the current version before use.

3.4.1 Figure. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

3.5 Patterns. Standard patterns will be furnished by the Government. The standard patterns shall not be altered in any way and are to be used for cutting the supplier's working patterns. The working patterns shall be identical to the standard patterns.

3.5.1 Pattern parts. The component parts of the bootee shall be cut from the material specified in accordance with the following pattern parts:

Material	Nomenclature of pattern parts	Cut parts
Laminated foam	Right side	1
	Left side	1

3.6 Construction.

3.6.1 Stitch, seam and stitching types. Stitch, seam and stitching types specified in Table III shall conform to FED-STD-751.

3.6.2 Thread breaks and ends of seams. The ends of the front and back seam stitching shall be securely tacked or backstitched not less than 3/8 inch (9.5 mm). Thread breaks shall be secured by stitching back of the break not less than 1/2 inch (12.7 mm).

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table III.

3.6.4 Cemented seams. The cemented seams shall have a minimum breaking strength of 28 pounds per two inches (12.6 Kg per 50.8 mm), when tested as specified in 4.3.1.1.

3.7 Manufacturing requirements. The bootee shall be manufactured in accordance with the operation requirements specified in Table III. The supplier is not required to follow the exact sequence of operations listed provided that the finished bootees are identical to that produced by following the sequence of operations as listed in Table III. The smooth natural skin side of the foam rubber shall be used as the face of the material and shall be on the outside.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:58Z
Check the source to verify that this is the current version before use.

Table III - Construction of bootee

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting of laminated foam material The bootee shall be cut in accordance with patterns furnished which shall show shape and markings for cutting and proper assembly of all component parts.					
2.	Replacement of damaged components During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in Section 4, shall be removed from production and replaced with non-defective and properly matched components.					
3.	Preparing components for assembly a. Apply two coats of chloroprene cement to all areas to be abutted or stitched, 24 hours prior to assembly. b. Apply two additional coats of chloroprene cement to all areas to be abutted or stitched, after the 24 hour period. (No solvent is required on seams.) c. The abutted seams shall be overcoated 1/4 (± 1/16) inch (6.35 ± 1.58 mm) beyond seams on the outside and on the inside of the bootee.					
4.	Assembly instruction a. Insure that all seams to be cemented are cleaned of foreign matter and are tacky prior to joining. b. Allow more time for curing on critical curves prior to the next step of joining.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:58Z
Check the source to verify that this is the current version before use.

Table III - Construction of bootee (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
5.	Assembly a. Place the two parts of bootee side by side. b. Abut the two parts; commence at the top and cement around the periphery of bootee. c. Stitch the top of both front and back seams for a distance of 1-1/4 (± 1/8) inches (31.75 ± 3.17 mm). The needle bite across the abutted edges shall be not less than 5/16 inch (7.93 mm), with the abutted edge centered between the stitches.	304	FSa-1	4-5	F	F
6.	Markings Apply markings as indicated in 3.3.6.					
7.	Cleanness a. Trim all ends of thread and remove loose threads. b. Remove all spots, stains and excessive cement without injury to the material.					

NCTR Form 1, 15 Sep 1967

MIL-B-82273B(SA)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:58Z
Check the source to verify that this is the current version before use.

3.8 Measurements. The finished bootee shall conform to the measurements shown in Table IV. All measurements and tolerances are expressed in inches and millimeters. The measurements shall be taken as indicated below (see Figure 1).

Table IV. Measurements

	Size - Universal	Tolerance
A - Height of bootee	10-1/2 (266.70)	+ 1/4 (6.35), -0
B - Length of foot	11-1/2 (292.10)	+ 1/4 (6.35), -0
C - Height of instep	4-3/4 (120.65)	+ 1/8 (3.17), -0
D - Width of opening	4-3/4 (120.65)	+ 1/8 (3.17), -0

NOTE: The designations A, B, C and D refer to Figure 1 and shall be taken with the bootee laid flat in a relaxed condition.

3.9 Workmanship. The finished bootee shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 First article inspection. When required, the first article submitted in accordance with 3.2 shall be inspected as specified in 4.3.2, for compliance with design, construction, workmanship, appearance, and dimensional requirements.

4.3 Inspection. Inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.3.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:58Z
Check the source to verify that this is the current version before use.

4.3.1.1 Testing of components. In addition to the quality assurance provisions of the referenced specifications, components listed in Table VI shall be tested for the characteristics shown therein. The tests shall be performed on specially prepared cemented seams, similar to those on the end item. The methods of testing specified in FED-STD-191 wherever applicable and as specified herein shall be followed. All test reports shall contain the individual values utilized in expressing the final result. The sample size shall be in accordance with Table V and the lot shall be unacceptable if one or more units fail to meet any requirements specified. The basis for the lot size for the laminated and unlaminated chloroprene foam shall be one sheet, and one yard full width for the knitted stretch fabric. The sample unit for testing shall be as follows:

Unlaminated foam - one square yard (.8 square meter)
Laminated foam - one sheet
Knitted stretch fabric - one yard full width (.9 meter)

Table V. Sample size

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

Table VI. Testing of components

Component	Characteristic	Requirement paragraph	Test method
Chloroprene foam	Material identification	3.3.1	1/
	Color	3.3.1	Visual 2/
	Thickness	3.3.1	ASTM D1056 3/
	Density	3.3.1	See 4.3.1.1.1
Knitted stretch cloth	Material identification	3.3.2	1/
	Filament	3.3.2	1/
	Weight	3.3.2	5040
	Wales/courses per inch (cm)	3.3.2	5070
	Elongation	3.3.2	4.3.1.1.2
	Color	3.3.2	Visual 2/
	Colorfastness:		
	Laundering	3.3.2.1	5614
	Crocking	3.3.2.1	5651
	Perspiration	3.3.2.1	5680

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:58Z
Check the source to verify that this is the current version before use.

Table VI. Testing of components (cont'd)

Component	Characteristic	Requirement paragraph	Test method
Laminated foam	Compression set	3.3.3.1	ASTM D1056 4/
	Compression deflection	3.3.3.1	ASTM D1056
	Shrinkage after accelerated aging	3.3.3.1	4.3.1.1.3
	Water absorption	3.3.3.1	4.3.1.1.4
	Laundering resistance	3.3.3.1	5556 6/
	Adhesion:		
	Initial	3.3.3.1	5950 5/
	After 3 launderings	3.3.3.1	5556 and 5950 5/ 6/
	After aging	3.3.3.1	4.3.1.1.3 and 5950 5/
	Blocking	3.3.3.1	5872 7/
Markings	Permanency	3.3.6	4.3.1.1.5
Adhesive cement	Material identification	3.3.5	1/
Cemented seam	Breaking strength	3.6.4	5100 8/

1/ A certificate of compliance will be accepted as evidence of conformance with the requirement.

2/ One determination shall be taken for this requirement.

3/ Thickness - Except that 5 determinations shall be made.

4/ Compression set - Test shall be run at room temperature for 22 hours with a recovery time of 24 hours.

5/ Adhesion - Except that the distance between the clamps shall be one inch (25.4 mm) at the start of the test. The use of a suitable solvent (e.g., MEK) to help separate the fabric from the foam sufficiently to fit the clamps is permissible. The adhesion shall be tested in the fabric's length (wale) direction only.

6/ Laundering - Except that five 8 by 8 inch (203 by 203 mm) specimens shall be tested and 3 cotton laundering cycles performed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:58Z
Check the source to verify that this is the current version before use.

7/ Blocking - Except specimens 4 by 4 inches (102 by 102 mm) shall be placed together fabric side to fabric side.

8/ Cemented seam strength - The cemented seams shall be centered equidistant from the clamps. All breaks shall be made with the seam at right angles to load direction. The clamps shall be one inch (25.4 mm) apart at the start of the test and the face of each jaw shall be not less than 1 by 2 inches (25.4 by 50.8 mm). The cemented seam test specimen shall be rectangular, 2 inches (50.8 mm) wide by not less than 6 inches (152.4 mm) long.

4.3.1.1.1 Density. Five specimens each 2 inches square shall be weighed separately to the nearest 0.001 gram on an analytical balance. The thickness of each specimen shall be determined in accordance with ASTM method D1056 and the following formula shall be used to determine density:

$$D = \frac{0.95 \times W}{T}$$

Where D = density in lbs/ft^3
W = the sum of the weights of the 5 specimens (grams)
T = the sum of the thicknesses of the 5 specimens (inches)(mm)

4.3.1.1.2 Elongation. An incline plane type of machine (i.e., I-P-4 or similar type) with a suitable autographic recording device shall be used. Specimens of the fabric shall be cut 4 by 6 inches (102 by 152 mm) with the long direction parallel to the direction to be tested. The specimen shall be evenly aligned without tension or slack in the 1 by 3 inch (25.4 by 76.2 mm) clamps set two inches (50.8 mm) apart. The machine shall run through two complete cycles, proceeding to its maximum depression so as to exert a five pound (2.25 Kg) tension. Five specimens, each containing different wales and courses shall be tested, using individual recorded elongation graphs. The average stretch of five specimens for each direction shall be measured at the peak of the last recorded cycle, in a line perpendicular to the horizontal zero axis and reported to the nearest percent.

4.3.1.1.3 Accelerated aging. Three square specimens each with a minimum dimension of 8 by 8 inches (203.2 by 203.2 mm) shall be measured to the nearest 1/32 inch (.8 mm) in both length and width direction by means of a steel rule. The specimens shall be suspended vertically in an air-oven at 158°F (± 2°F) (70°C ± 1°C) for seven days. At the conclusion of the aging interval, the specimens shall be cooled at room temperature on a flat surface and allowed to rest at least 4 hours before determination of shrinkage. The average shrinkage in each direction shall be calculated as follows and reported to the nearest 0.1 percent.

$$\text{Percent shrinkage} = \frac{O - A}{O} \times 100$$

Where O = original length of width (inches) (mm)
A = length or width after aging (inches) (mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:58Z
Check the source to verify that this is the current version before use.

4.3.1.1.4 Water absorption. Three specimens each 4 by 6 inches (102 by 152 mm) shall be weighed separately on an analytical balance to the nearest 0.1 gram. The specimens shall be placed in a tumble jar apparatus (as described in TM 5500 of FED-STD-191) containing two liters of distilled water and rotated for 20 minutes. At the end of the rotating period, the specimens shall be immediately removed from the water, without pressure blotted dry of surface water with filter paper or other absorbent material and weighed. The average percent water absorption shall be calculated as follows and reported to the nearest 0.1 percent.

$$\text{Water absorption percent} = \frac{W2 - W1}{W1} \times 100$$

Where:

W1 is the weight of specimen before immersion
W2 is the weight of specimen after immersion

4.3.1.1.5 Marking test. The marking shall be tested by rubbing a wet white cotton print cloth across the markings six times using normal pressure. There shall be no staining of the cotton cloth. The markings shall be complete in all details as specified in regard to correctness, completeness, legibility and location. Any of the above attributes that are not as specified shall be classified as a defect.

4.3.2 Examination of the end item. Examination of the end item shall be in accordance with 4.3.2.1 and 4.3.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.3.2.3. The sample unit shall be one finished bootee. The lot size shall be expressed in units of one bootee.

4.3.2.1 Visual examination. The bootee shall be examined for defects in color, design, material, workmanship and marking and the defects classified in accordance with the list below:

Defect	Classification	
	Major	Minor
MATERIAL DEFECTS AND WORKMANSHIP DAMAGES		
a. Any hole	X	
b. Deep creases or fold lines	X	
c. Needle chew	X	
d. Cut, tear or mend	X	
e. Unsightly cement mass		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:58Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
BASIC MATERIAL		
a. Any evidence of delamination	X	
b. Any brittle area which cracks when bent	X	
c. Area of excess cement, e.g., solid runs, ridges or lumps		X
d. Chloroprene foam or cement tacky	X	
e. Any imbedded foreign material easily removed, resulting in damage of basic material	X	
f. Any imbedded foreign material not easily removed, but if removable, does not damage basic material		X
g. Any blister or pin hole	X	
h. Mottled, cloudy or streaky finish		X
i. Any objectionable odor		X
CLEANNESS		
a. One or more spots or stains of an obvious permanent nature (excessive cement on surface of foam)		X
b. Thread ends not trimmed or loose thread ends not removed from ends of bootee		X
COMPONENTS AND ASSEMBLY		
Any component part omitted or any required operation omitted or improperly performed (unless otherwise classified herein)	X	
CUTTING		
Any component part not cut in accordance with marks indicated on pattern or not in accordance with specification requirements	X	
SEAMS AND STITCHING		
a. Stitching omitted	X	
b. Not specified seam or stitch type		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:58Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
SEAMS AND STITCHING (cont'd)		
c. Less than or more than the required stitches per inch		X
d. Open seam	X	
e. Thread breaks not secured or stitching back of the break less than 1/2 inch (12.7 mm)		X
f. Ends of seams not securely tacked or backstitched		X
CEMENTED SEAMS		
a. Any open seam	X	
b. Uneven seam		X
c. Twisted or puckered seam	X	
d. Seam not properly joined	X	
e. Cement tacky	X	
f. Stitching less than 1-1/8 inches (28.57 mm) or more than 1-3/8 inches (34.92 mm) from top opening		X
MARKING AND SPECIAL MARKING		
a. Omitted, incorrect or illegible	X	
b. Color (yellow) not as specified		X
c. Marking not permanent		X

4.3.2.2 Dimensional examination. The bootee shall be examined for defects in dimensions in accordance with the following:

Any measurement deviating from nominal dimensions and tolerances specified shall be scored as a measurement defect.

4.3.2.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's) expressed as defects per 100 units, for visual and dimensional examinations shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:58Z
Check the source to verify that this is the current version before use.

Examination	AQL's	Inspection level
For 4.3.2.1:		
Major	2.5	II
Total (Major and Minor combined)	6.5	II
For 4.3.2.2:		
One class	6.5	S-3

4.3.3 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery except that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing or not as specified or any component damaged.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps or paperboard boxes, loose strapping, inadequate stapling, incorrect application of tape. Bulging or distortion of containers.
Content	Number of packages is more or less than required. Number of bootees per package is more or less than required. 1/

1/ For this defect, two packages from each container in the sample shall be examined.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or commercial as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:58Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. Each pair of bootees shall be packaged in a folding paperboard box conforming to variety 2, style III, type F or G, class h or i of PPP-B-566. The bootees shall be placed in the box with the foot length at opposite sides, parallel to the box length and with the bootee height overlapping at one end. The inside dimensions of each paperboard box shall be 11-3/4 inches (298.45 mm) in length, 11-1/4 inches (285.75 mm) in width and 1-1/2 inches (38.10 mm) in depth. Box closure shall be secured with 2 inch (50.8 mm) minimum width gummed paper tape conforming to PPP-T-76, applied at the center of the length opening and extending across the top and along the bottom at least 1 inch (25.4 mm).

5.1.2 Commercial. Bootees shall be packaged in accordance with FED-STD-356, provided the package and the quantity per package is the same as that normally used by the supplier for retail distribution.

5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2).

5.2.1 Level A. Eighteen pair of bootees, of one size only, packaged as specified in 5.1, shall be packed in a close fitting box conforming to PPP-B-601, overseas type, grade B, style optional. Strapping shall be zinc coated.

5.2.2 Level B. Eighteen pair of bootees, of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to class weather-resistant, style RSC, grade V2s of PPP-B-636. Level A packages shall be packed on end, two in length, nine in width, and one in depth within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches (596.9 mm) in length, 15 inches (381.0 mm) in width and 12 inches (304.8 mm) in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed, waterproofed, and reinforced in accordance with the appendix of PPP-B-636.

5.2.3 Commercial. Bootees, packaged as specified in 5.1, shall be packed in accordance with FED-STD-356, provided the quantity packed per shipping container is the same as that normally used by the supplier for retail distribution.

5.3 Marking.

5.3.1 Military (Levels A and B). In addition to any special marking required by the contract or order, intermediate packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.2 Commercial. In addition to any special marking required by the contract or order, intermediate packages and shipping containers shall be marked in accordance with FED-STD-356.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:58Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The foam bootee is intended to be worn with the jacket, trousers, hood and mitten components of a wet-suit which is designed to protect personnel against the effect of cold water immersion.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Whether first article is required (see 3.2).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids.

Custodian:
Navy - SA

Review activities:
Navy - MS
DSA - CS

User activities:
Navy - AS, OS

Preparing activity:
Navy - SA

Project No. 8415-0873

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:58Z
Check the source to verify that this is the current version before use.

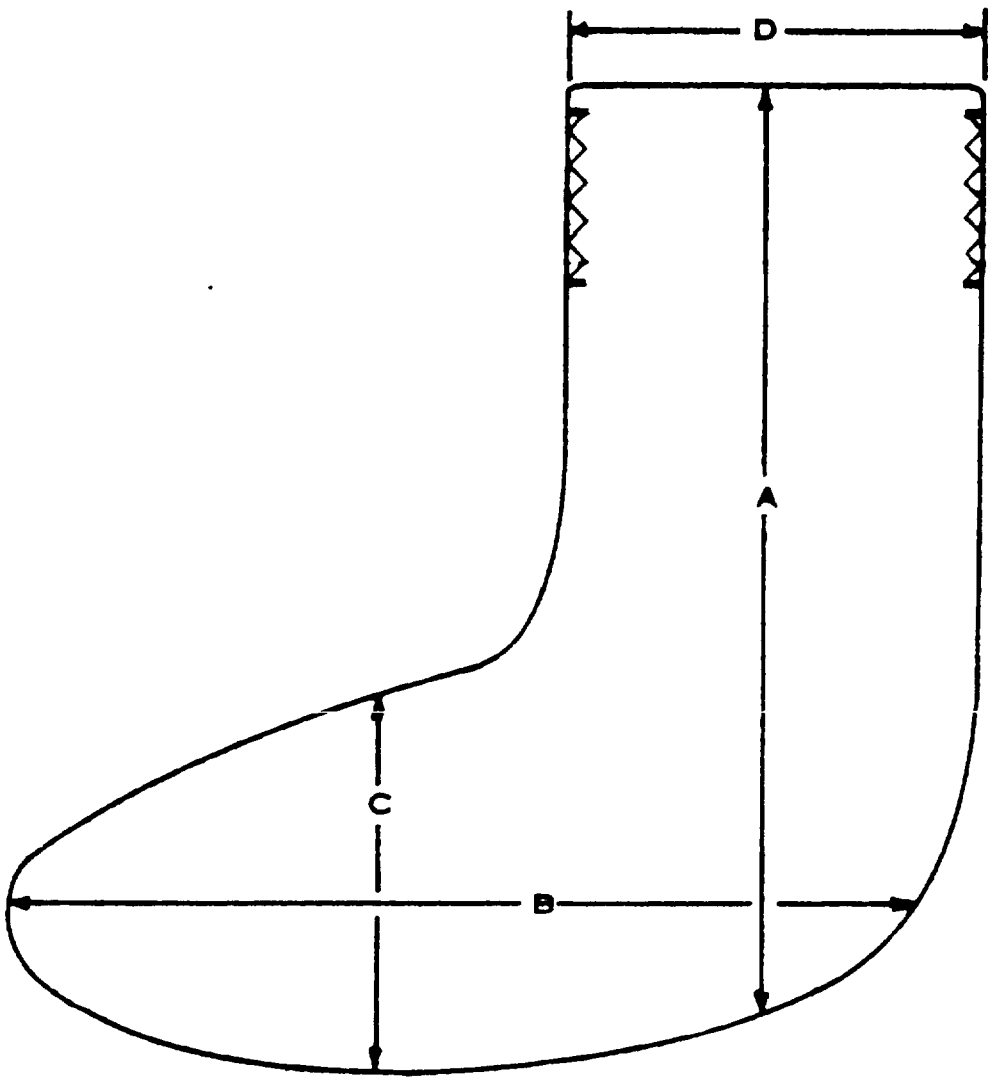


FIGURE 1 - BOOTEE, WET SUIT (CHLOROPRENE FOAM)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:58Z
Check the source to verify that this is the current version before use.

FOLD

Officer in Charge
Navy Clothing and Textile Research Unit
21 Strathmore Road
Natick, MA 01760

POSTAGE AND FEES PAID

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Officer in Charge
Navy Clothing and Textile Research Unit
21 Strathmore Road
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:58Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-B-82273B(SA); Bootee, Wet Suit (Chloroprene Foam)

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:58Z
Check the source to verify that this is the current version before use.