INCH-POUND

MIL-DTL-82121C(MC)
16 October 1997
SUPERSEDING
MIL-C-82121B(MC)
23 May 1994

DETAIL SPECIFICATION

CUMMERBUND, WOMAN'S - EVENING AND MESS DRESS (OFFICER'S)

This specification is approved for use by U.S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1. Scope. This specification covers requirements for a scarlet wool cummerbund.

1.2. Classification. The cummerbunds will be of one type and size with elastic strap adjustment.

2. APPLICABLE DOCUMENTS

2.1. General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commander (PSE-D), Marine Corps Systems Command, Quantico, VA 22134-5010 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2. Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-50196	- Thread, Silk
A-A-52094	- Thread, Cotton
CCC-C-426	- Cloth, Cotton, Drill
DDD-L-20	- Label: For Clothing, Equipage, and Tentage, (General Use)

DEPARTMENT OF DEFENSE

MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-C-21115	- Cloth, Tropical: Wool, Polyester/Wool

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

(Unless otherwise indicated, copies of the above specifications, standards, handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3. Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

ANSI/ASQC Z1.4 - Sampling Procedures and Tables for Inspection by Attributes

(Application for copies should be addressed to The American National Standards Institute, 11 West 42nd Street, New York, NY 10036)

2.4. Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1. Standard sample. Standard samples are furnished solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

3.2. First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.3.

3.3. Materials

3.3.1 Cloth, wool, tropical. The material for the front of the cummerbund shall be cloth, wool, tropical 10.5 ounce, scarlet, shade 2502, conforming to type I, class 1 of MIL-C-21115.

3.3.2 Cloth, rayon, satin. The material for lining the cummerbund shall be cloth, satin, rayon, scarlet shade 2504 (see 6.3), 4.5 ounce conforming to class 3 of MIL-C-368.

3.3.3 Elastic webbing. The elastic webbing shall be made of rayon yarn of suitable grade and denier to meet the requirements specified below, and natural or synthetic rubber strands of a suitable gage to meet the requirements specified below. The webbing shall be composed of two ground warps (one face and one back), one elastic warp, and one filling so as to produce a right twill effect on the face and back of the fabric. The elastic strands shall weave in such a manner as to be over all the back

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

picks and under all the face picks. The finished webbing shall conform to the following:

Width (inches)	1-1/8 ± 1/16
Weight per linear yd (ounces)	0.96 minimum
Total warp	170 minimum
Elastic strands	22 minimum
Picks per inch	56 minimum

The color of the webbing shall be black, showing good fastness to laundering, wet (dry) cleaning, crocking and perspiration.

3.3.4 Cloth, cotton, drill. The cummerbund shall be interlined with cloth, cotton drill 7.5 ounce/square yard, unbleached, conforming to type I, class 2 of CCC-C-426.

3.3.5 Thread

3.3.5.1. Silk thread. The thread for hand sewing shall be silk, ticket No. C, 2-ply, conforming to type III of A-A-50196.

3.3.5.2. Cotton thread. Thread for seaming and stitching shall be cotton, mercerized finish, ticket No. A, 3-ply, conforming to type III of A-A-52094. Basting thread shall be a good commercial grade.

3.3.5.3. Color and colorfastness. The cotton and silk thread shall show good fastness to light when tested as specified in the applicable thread specification.

3.3.6 Hardware. The buckle and slides shall be made of brass or bronze, nickel plated, and shall conform to the design and dimensions shown on Figure 2.

3.3.7 Label. Each cummerbund shall be provided with an identification label, conforming to type VI, class 1 of DDD-L-20. The label shall measure not less than 2-1/2 by 1-1/2 inches. The content and format shall be as follows:

Nomenclature: (item description)
Contract number:
Name of contractor:
Wool Products Act information
DRY CLEAN ONLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

NOTE: Size of characters for "Name of contractor" shall be minimum 6 point (approximately 1/16 inch).

The label shall show fastness to laundry and wet (dry) cleaning.

3.4. Design. The cummerbund shall be the U.S. Marine Corps design shown on Figure 1, having three horizontal pleats, left and right side extensions with the front interlined, two piece lined back, with elastic straps at each end, a clasp type metal buckle at the turned ends of the elastic straps, and metal adjusting slides on each elastic webbing strap.

3.5. Patterns. Standard patterns will be furnished to the contractor by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the contractor's working patterns. The contractor's working patterns shall be identical to the standard patterns. The standard patterns provide a 1/4 inch allowance for front and interlining seams, and 3/8 inch allowance for front and lining seams, unless otherwise specified in Table I. Standard patterns shall show seam allowances and directional lines for cutting, and are marked or notched for proper placement and assembly of the component parts.

3.5.1 List of pattern parts. The cummerbund shall be cut from the specified materials in accordance with the number of pattern parts indicated:

ITEM	PATTERN NOMENCLATURE	NO. OF CUT PARTS
	Material: Cloth, wool, tropical	
1 2	Front Side front	1 2
	Material: Cloth, rayon, satin	
3 4	Front lining Extension piece	1 1
	Material: Cloth, cotton, drill	
5	Front interlining	1

3.6. Construction. The cummerbunds shall be manufactured in accordance with the operations and stitch, seam and stitching

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

types specified in Table I. The contractor is not required to follow the exact sequence of operations as listed in Table I, but all operations specified shall be used to manufacture the cummerbunds.

3.6.1 Stitches, seams and stitching. The stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted.

3.6.1.1. Tacking and backstitching. Ends of seams and stitching produced with 301 type stitch, when not caught in other seams or stitchings, shall be securely backtacked not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch.

3.6.1.2. Shade marking. The rayon lining parts of the cummerbund shall be shade marked to ensure a uniform shade and size throughout the garment. Any method of shade marking may be used except:

a. Corrosive metal fastening devices.
b. Sew-on shade tickets.
c. Adhesive type tickets which show discoloration or leave traces of paper or adhesive mass to the material upon removal of the tickets.

TABLE I. Manufacturing requirements.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
1	Cutting. a. Cut cummerbund in strict accordance with patterns furnished. b. Cut all materials in the direction indicated by the directional lines on the patterns. c. Cut rayon lining parts from one piece of rayon satin material. d. Cut two pieces of 1-1/8 inches wide elastic 15 inches and 8 inches long. e. The use of drill holes is prohibited.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
2	Replacement of damaged parts.					
	a. Replace at time of cutting any part containing damages, such as holes or seriously weakening defects, such as smashes, multiple floats, and slubs likely to develop into holes.					
	b. Replace any part damaged during the manufacturing process by needle chews which may be expected to develop into a hole, scissor or knife cuts, tears, holes, mends or burns.					
3	Shade marking.					
	a. Mark or ticket (see 3.6.1.2) all satin lining parts to insure proper assembly and a uniform shade throughout cummerbund.					
	b. Adhesive tickets, when used shall be adhered to the inside of the cummerbund.					
	c. The use of metal fastening devises is prohibited on the rayon lining.					
4	Sew on identification label.					
	Finished appearance. The label shall be properly positioned and sewn to the back of cummerbund.					
	a. Position identification label on the back lining midway between each end and with top edge of label one inch from the top edge of the lining. Sew label to back lining with a single row of stitches 1/16 inch from each edge.	301	SSa-1	10-14	A	A
5	Make center front.					
	Finished appearance. All pleats and joining seams shall finish smooth and flat without distortions. The seams shall finish with outside folded edge towards the top of the front piece.					
	a. The front shall be made of one ply of wool material.					
	b. Fold front lengthwise, inside out, in accordance with notches on patterns, forming pleats. Stitch each pleat from end to end with a continuous row of stitches, 3/8 inch from folded edge.	301	OSf-1	6-10	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
5	Make center front. (cont'd)					
	c. Press front with the outside folded edge of each pleat towards the top of the finished cummerbund.					
6	Join side fronts.					
	Finished appearance. The side fronts shall finish smooth and flat without distortion.					
	a. Join left and right side front smooth and flat without distortion.	301	SSa-1	10-14	A	A
7	Interline front.					
	a. The interlining shall be made of a single ply of cotton drill material.					
	b. Position interlining on the inside of the front with edges even and seam 1/8 inch from the raw edges.	301	SSa-1	10-14	A	A
8	Assemble cummerbund.					
	Finished appearance. The assembled cummerbund shall be uniform in appearance and finish smooth and flat. Seams shall be without puckers, pleats, or distortions. The cummerbund shall finish 3-1/2 ± 1/4 inches wide.					
	a. Seam the left lining piece to the front 1/4 inch from the top and bottom edges, leaving the left end open and turning the right edge in at the notches.	301	SSa-1	10-14	A	A
	b. Seam the right extension lining piece to the front 1/4 inch from the top and bottom edges leaving the right end open.	301	SSa-1	10-14	A	A
	c. Slip the 15 inch length of elastic through the right end opening into the enclosed assembly with the edges even. Turn the top and bottom seams of the front assembly onto the lining and against the elastic. Stitch across the end with 1/4 inch seam, closing the right end and catching the elastic in the stitching.	301	SSa-1	10-14	A	A
	d. Slip the 8 inch length of elastic through the left end opening and repeat operation (c).	301	SSa-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
8	Assemble cummerbund. (cont'd)					
	e. Trim corners and raw edges of seams for proper turning.					
	f. Turn cummerbund to outside position through the opening of the right side lining, forcing out the seamed edges and baste the edges to hold the desired shape.					
	g. Turn under the end of the 8 inch elastic 1/4 to 3/8 inch and stitch to the body of the elastic 1/8 inch from the folded edge catching the turned under portion in the stitching.	301	EFa-1	10-14	A	A
9	Clean cummerbund.					
	a. Remove basting threads, trim all ends of stitchings and remove all loose threads from cummerbund.					
	b. Remove all spots, shade tickets, markers and stains from the cummerbund without injury to the material.					
10	Press cummerbund.					
	Finished appearance. Pressing shall be done on a heated pressing iron or pressing machine of a type suitable to obtain the desired appearance in accordance with good manufacturing practice without damage to the hooks.					
	a. Press the entire cummerbund, removing all wrinkles, impressions, gloss marks and creases.					
	b. Finish press.					
11	Attach hardware to buckle straps.					
	Finished appearance. The buckle and adjustable slides shall be positioned and secured to the straps.					
	a. The male half of the buckle and one adjustment slide shall be secured to the left strap as shown in Figure 2. The female half of the buckle and one adjustment slide shall be attached to the right strap.					
	b. Insert the end of the left strap through the slide, the buckle opening and back through the slide to secure.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
11	Attach hardware to buckle straps. (cont'd) c. Insert the end of the right strap through the slide, the buckle opening and back through the slide and into the opening of the extension lining piece.					

3.7. Finished measurements. The finished measurements shall conform to those listed in Figure 1.

3.8. Workmanship. The finished cummerbund shall conform to the quality and grade of product established by this specification.

3.9. Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

4. VERIFICATION

4.1. Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Conformance inspection (see 4.4).

4.2. Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the provisions set forth in ANSI/ASQC Z1.4.

4.3. First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.4.2.1 through 4.4.2.3. The presence of any defect or failure to pass any test shall be cause for rejection of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

4.4. Conformance inspection.

4.4.1 Testing of components. Testing of components shall be in accordance with the applicable subsidiary specifications and standards to the extent applicable, except that this specification shall govern in the event of conflict. The method of testing shall be as specified in ANSI/ASQC Z1.4 and FED-STD-191, wherever applicable, and as listed in Table II. The sample size (number of sample units) shall be as shown below. The lot shall be unacceptable if one or more units fail to meet requirements specified.

TABLE II. Test methods.

Components	Characteristics	Reqmt. para	Test method	No. det. per sample unit	Results reported as
Elastic webbing	Width	3.3.3	Visual	1	Pass or fail
	Weight/linear yard	3.3.3	5041 1/	5	Avg. of 5 det. to the nearest 0.01 oz.
	Total warp	3.3.3	Visual	1	Pass or fail
	Elastic strands	3.3.3	Visual	1	Pass or fail
	Pick per inch	3.3.3	Visual	1	Pass or fail
	Weave	3.3.3	Visual	1	Pass or fail
	Material identification	3.3.3			
	Colorfastness to:				
	- laundering	3.3.3	5614	1	Good, fair or poor
	- wet (dry) cleaning	3.3.3	5622	1	Good, fair or poor
	- crocking	3.3.3	5651	1	Good, fair or poor
	- perspiration	3.3.3	5680	1	Good, fair or poor
Buckle and slide	Material identification	3.3.6			
	Plating identification	3.3.6			

1/ Except that a full width specimen four inches in length shall be used.

Lot size	Sample size
800 or less	2
801 through 22,000 inclusive	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

4.4.1.1. Sampling for testing. Unless otherwise specified in subsidiary specifications, sampling shall be in accordance with ANSI/ASQC Z1.4. The unit for expressing lot size and sample unit for testing each component shall be in accordance with the applicable subsidiary specification and as follows:

Component	Expressed as	Sample unit for testing
Elastic webbing	yard	two continuous yards
Buckle	buckle and slide (each)	one buckle and one slide

4.4.1.2. In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

4.4.2 Examination of the end item. The end item shall be examined for the defects listed in 4.4.2.1 through 4.4.2.3. The sample unit for examination shall be one cummerbund.

4.4.2.1. General defects. General defects shall be classified as follows:

Examine	Defects	Classification		
		Major	Minor A	Minor B
Material defects and damages	a. Any hole.	101		
	b. Any weakening defect such as a smash, multiple float, or loose slub.	102		
	c. Shade bar or unsightly slub: - on outside. - on inside.	103	201	
	d. Needle chew, cut, tear, or mend.	104		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification		
		Major	Minor A	Minor B
NOTE: Material defects and workmanship damages are to be classified as indicated above only when the condition is one which weakens the fabric or garment, or when it is so conspicuously located as to be clearly noticeable. Nonweakening conditions which are inconspicuous shall not be classified as defects.				
Shaded parts	a. Rayon satin badly shaded.		202	
Cleanness	a. Basting thread not removed.		203	
	b. Shade tickets not removed.			301
	c. Any spot or stain clearly noticeable: - on outside of cummerbund. - on inside of cummerbund.	105	 204	
	d. Thread end or loose threads not removed throughout.			302
Component and assembly	a. Any part or required operation omitted (unless otherwise classified herein).	106		
	b. Any component not as specified.	107		
Cutting	a. Any component part not cut in accordance with specification requirements.	108		
Pressing	a. Burned or scorched.	109		
	b. Omitted over entire cummerbund.		205	
	c. Poorly pressed.			303
Seams and stitching	a. Accuracy of seaming.			
	1. Seam(s) twisted, puckered, or pleated (unless otherwise classified herein).			304

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification		
		Major	Minor A	Minor B
Seams and stitching (cont'd)	2. Part of material caught in unrelated operation or stitching:			
	- up to a distance of 1/4 (inclusive).		206	
	- for a distance greater than 1/4 inch.	110		
	3. End(s) of stitching when not caught in other seams or stitching backtacked less than 1/4 inch.	111		
	4. Stitching overlapping the end(s) of thread break less than 1/2 inch.			305
	b. Open seams:			
	1. Joining seams:			
	- up to 1/4 inch (inclusive).		207	
	- more than 1/4 inch but not more than 1/2 inch.		208	
	- more than 1/2 inch.	112		
	c. Skipped stitches:			
	- 1/4 inch to 1/2 inch long.		209	
	- more than 1/2 inch long.		210	
	d. Raw edge:			
	- more than 1/8 inch up to 1/4 inch (inclusive).		211	
	- more than 1/4 inch up to 3/4 inch (inclusive).			306
	- more than 3/4 inch.	113		
	e. Seam type or stitch type not as specified.		212	
	f. Stitch tension.			
	1. Loose tension resulting in a loose seam.		213	
Seams and stitching (cont'd)	2. Tight tension (stitches break when normal strain is applied to the seam or stitching).		214	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification		
		Major	Minor A	Minor B
NOTE: Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting pull in lengthwise direction of seam.				
	g. Stitches per inch - to be scored only if the condition exists on major portion (i.e., over one half or more) of seam.			
	1. Less than specified:			
	- one stitch.			307
	- two stitches.		215	
	- three or more stitches.	114		
	2. More than maximum specified.			308
Buckle and slide	a. Missing, broken, bent, cracked, or otherwise defective, affecting appearance or function.	115		
	b. Type, size, color, or finish other than specified.	116		

4.4.2.2. Detailed defects. Detailed defects applicable to specific parts shall be classified as follows:

Examine	Defects	Classification		
		Major	Minor A	Minor B
Front	a. Pleats.			
	1. Outside folded edge of one or more pleats not towards top of finished cummerbund.		216	
	2. One or more pleats set on crookedly, affecting appearance.		217	
Front (cont'd)	3. One or more pleats uneven in width by 1/4 inch or more.		218	
	4. One or more pleats twisted, affecting appearance.		219	
	5. Less than three pleats.	117		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification		
		Major	Minor A	Minor B
	b. Interlining tight, short, or twisted, causing fullness or twist on front.		220	
Fitting of back lining	a. Back lining tight or short, causing fullness on outside of cummerbund.	118		
	b. Back lining exposed on outside for a distance of:			
	- more than 1 inch but not more than 2 inches.		221	
	- more than 2 inches.		222	
Width of cummerbund	a. Less than 3-1/4 inches or more than 3-3/4 inches.			309
Buckle strap assembly	a. Improperly threaded, i.e., the male half of the buckle placed on the right strap and the female half of the buckle placed on the left strap.			310
	b. Improperly threaded, i.e., causing the buckle or slide to finish on reverse side or to function improperly.	119		
Label	a. Label omitted.	120		
	b. Label not stitched on four edges.			311
	c. Label positioned more than 1-1/4 inches from top edge of lining.			312

4.4.2.3. Finished measurements. Any measurement deviating from the nominal dimensions and tolerances specified in Figure 1 shall be classified as a size measurement defect.

5. PACKAGING

5.1. Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

Department of Defense (DoD) personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department of Defense Agency, or within the Military Department's Systems Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1. Intended use. The cummerbund covered by this specification is intended to be worn by women officers with the evening dress and mess dress uniforms.

6.2. Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of the specification.
b. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2).
c. Packaging requirements (see 5.1).
d. Whether first article is required (see 3.2).

6.3. Standard sample. For information regarding the availability of standard samples and patterns, address inquiry to the procuring activity issuing the invitation for bids.

6.4. Figures. Figures 1 and 2 show general design of the cummerbund and are furnished for information only. In the event of conflict between these figures and the text of this specification, the text of this specification will govern.

6.5. Subject term (keyword) listing.

Adjustable slides
Buckle
Elastic webbing

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

6.6. Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Preparing Activity:
Navy - MC
Project No. 8410-N341

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

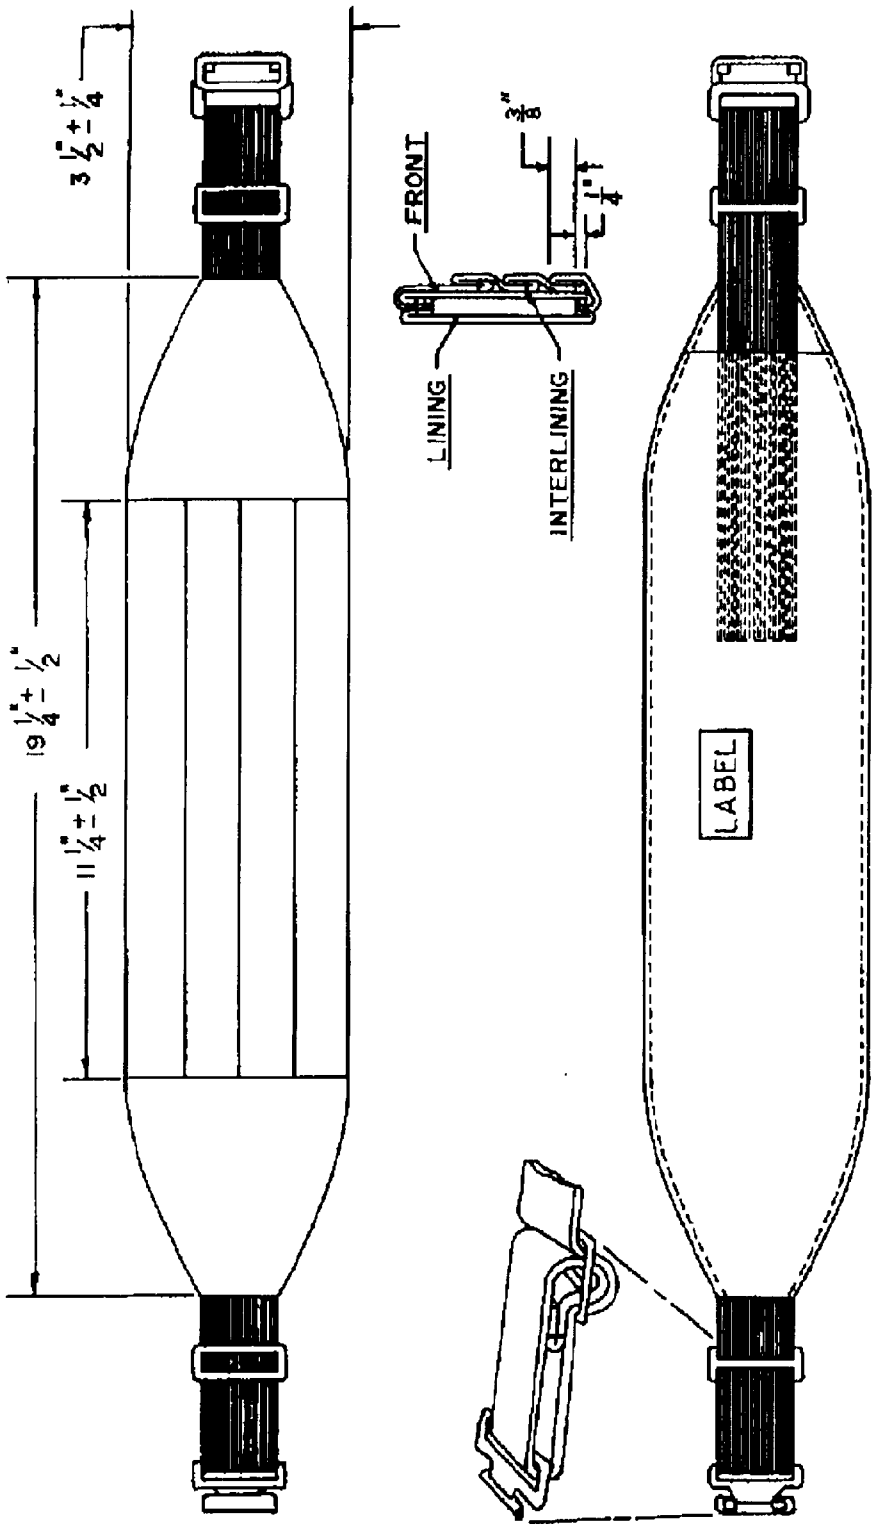


Figure 1. Cummerbund, Woman's - Evening and Mess Dress (Officer's)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:42Z
Check the source to verify that this is the current version before use.

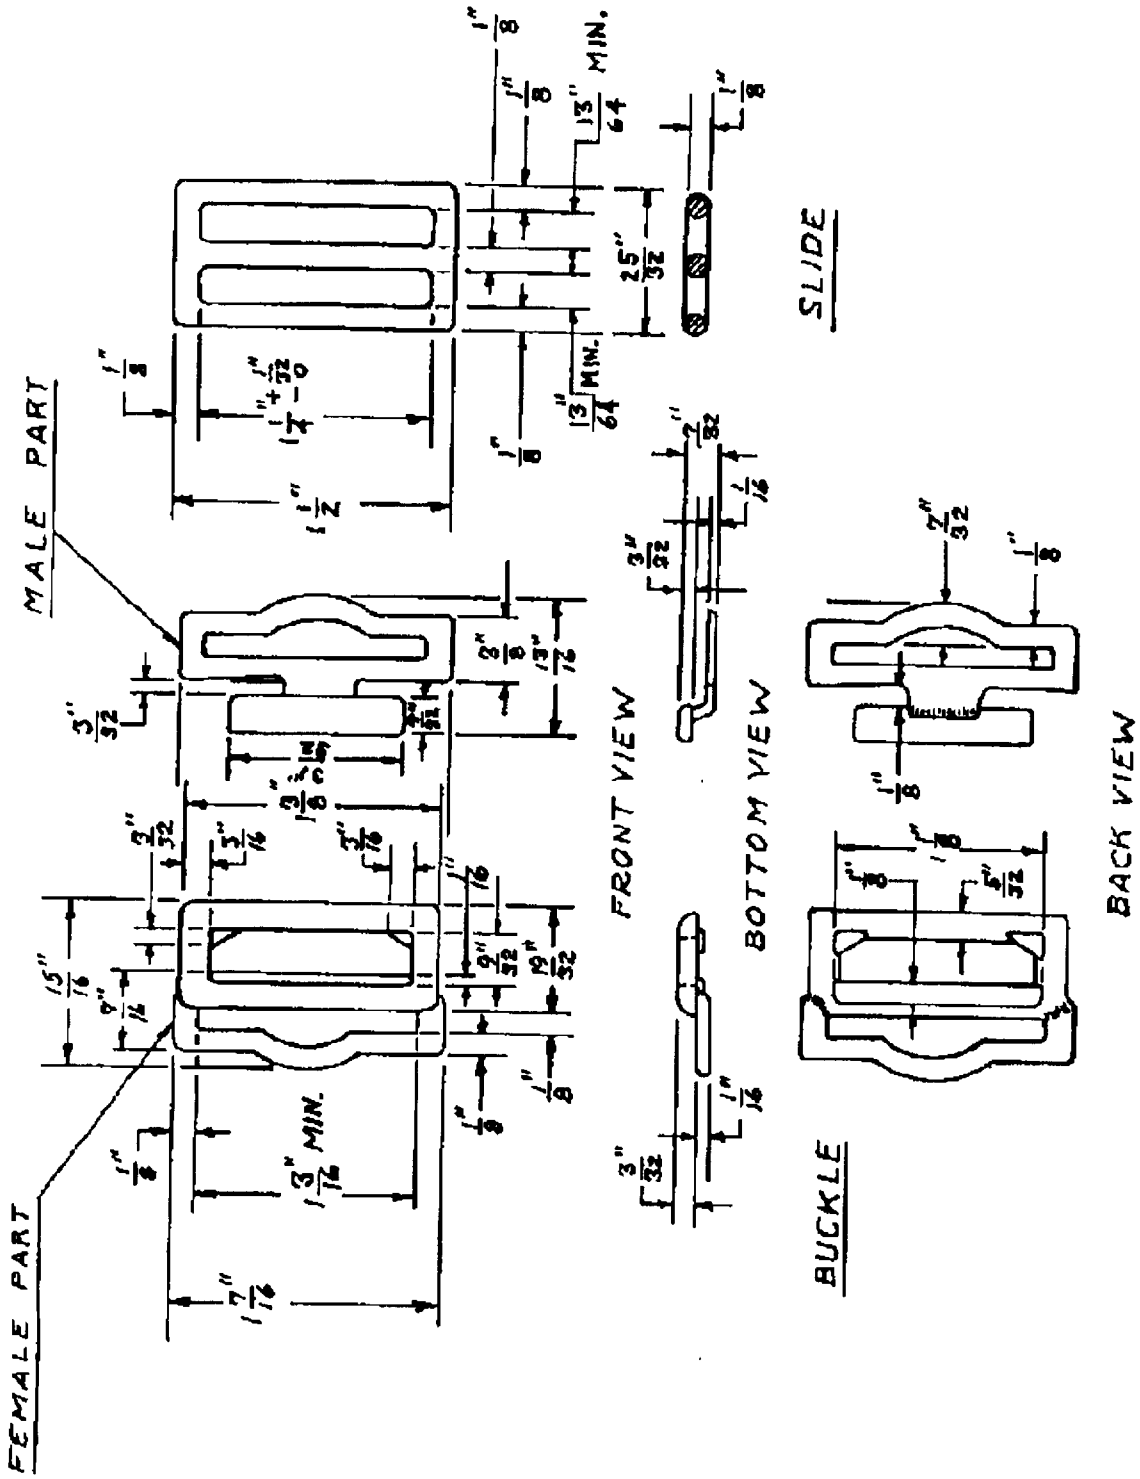


Figure 2. Cummerbund, Woman's - Evening and Mess Dress (Officer's)

Source: https://assist.dla.mil -- Downloaded: 202610-23T06:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-DTL-82121C	**2. DOCUMENT DATE (YYMMDD)** 971016

3. DOCUMENT TITLE CUMMERBUND, WOMAN'S - EVENING AND MESS DRESS (OFFICER'S)

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON *(if applicable)*	**7.DATE SUBMITTED** (YYMMDD)

8. PREPARING ACTIVITY

a. NAME COMMANDER, MARCORSYSCOM, PSE-D	b. TELEPHONE *Include Area Code)* (1) Commercial (703) 784-4584 (2) AUTOVON 278-4584
c. ADDRESS *(Include Zip Code)* 2033 BARNETT AVE, SUITE 315, QUANTICO, VA 22134-5010	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** DEFENSE QUALITY AND STANDARDIZATION OFFICE 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22401-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-03-23T06:42Z
Check the source to verify that this is the current version before use.