MILITARY SPECIFICATION

FLARE, INFRARED TRACKING, MARK 33 MOD 0 (ARMY) PARTS FOR AND LOADING, ASSEMBLING AND PACKING

This specification is approved for use by U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers parts and assembly of one type of target flare designated as Mark 33 Mod 0 (Army).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-A-48078	- Ammunition, Standard Quality Assurance Provisions, General Specification For

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-410	- Non-Destructive Testing Personnel
MIL-STD-453	- Inspection, Radiographic
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-810	- Environmental Test Methods
MIL-STD-1234	- Pyrotechnics, Sampling, Inspection and Testing

FSC 1370

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Center, Attn. DRSMC-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:36Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS (See 6.5)

U.S. ARMY ARMAMENT MUNITIONS AND CHEMICAL CENTER (ARDC)

PRODUCT AND PACKAGING DRAWINGS

9387055	- MK 33 MOD 0 (Army) Infrared Tracking Flare
8837375	- ARDC - Environmental Testing Criteria For OCONUS Shipping Container

INSPECTION AND EQUIPMENT DRAWINGS

9280372	- Standard Test Procedures for Infra-Red Flares (MG-Teflon) (Confidential Dwg.)

CODE OF FEDERAL REGULATIONS

Title 49	- Transportation, Parts 100-199

(The Code of Federal Regulations is available from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402. Orders should specify, "49 CFR 100-199 (latest revision)").

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)


2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with applicable drawings, specifications and standards.

3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on drawing 9387055 and with all requirements specified in applicable specifications and standards.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:36Z
Check the source to verify that this is the current version before use.

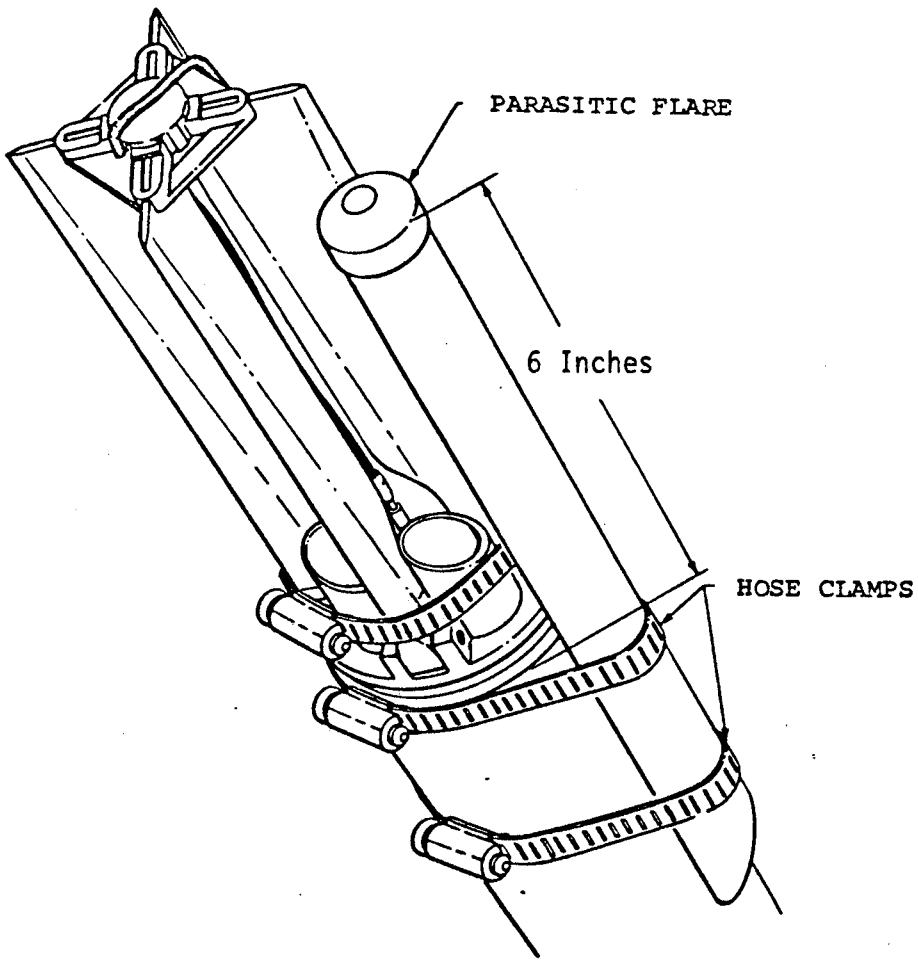

Method for Mounting the MK33 MOD 0 (Army) Flare on the 2.75 Rocket Motor

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:36Z
Check the source to verify that this is the current version before use.

3.2.1 Volatile content.

3.2.1.1 Flare, and first fire composition. The volatile content of the charge composition at the loading station at the time of loading shall not exceed 0.10 percent by weight when tested as specified in 4.5.3.1.

3.3 Environmental requirements. Prior to and following environmental tests, the flares shall comply with the visual inspection criteria of paragraph 4.4.2.5 and 4.4.2.6 and shall be X-rayed for defects specified in 3.4.

3.3.1 Transportation vibration. The packaged flares shall be capable of meeting the requirements of 3.5 after being subjected to MIL-STD-810C, Method 514.2, Procedure X, Curve AW.

3.3.2 Low-temperature. The flare shall withstand low-temperature conditioning at minus 25 ± 5°F for a minimum of 4 hours without deterioration, shall remain safe to handle and shall function when tested as specified in 3.5.

3.3.3 High-temperature. The flare shall withstand high-temperature conditioning at 125 ± 5°F for a minimum of 4 hours without deterioration, shall remain safe to handle and shall function when tested as specified in 3.5.

3.3.4 Temperature and humidity. The flares shall be capable of meeting the requirements of 3.5 after being subjected to MIL-STD-810C, Test Method 507.1, Procedure I (10 days).

3.3.5 Forty-foot drop. The packaged flares shall withstand the forty-foot drop test without burning or detonation when tested according to 4.5.1.3 and shall be safe to handle and dispose of thereafter.

3.3.6 Parasitic ignition test. When assembled to a MK40/2.75" rocket motor the flare (see Figure 1) shall ignite and burn completely within 50 seconds when tested as specified in 4.5.1.4.

3.4 Radiographic examination. Radiographic equipment procedures and evaluation shall be in accordance with MIL-STD-453. Radiographic personnel shall be qualified in accordance with MIL-STD-410. Equipment and procedures will be submitted for approval to the Government (see 6.3). Flare samples shall not exhibit any indications of loose, deformed or missing components, foreign material, or defects within the flare pellet i.e., cracks, voids or discontinuities. Minimum optical density of each radiograph in the area being inspected shall not be less than 1.25 and shall be within a density range that will permit proper identification of defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:36Z
Check the source to verify that this is the current version before use.

3.5 Functioning requirements.

3.5.1 Ignition. The flare shall ignite and burn completely within 50 seconds (sec.) when tested as specified in 4.5.4.1.

3.5.2 Rise time. The flare shall reach a minimum output of 150 watts per steradian (W/Sr) within .50 seconds and shall remain at or above the intensity for a minimum continuous time of 30 sec. when tested as per 4.5.4.1.

3.5.3 Average output. The average output (starting at the rise time and ending 30 sec. later) shall not be less than 230.0 W/Sr.

3.6 First article inspection. This specification contains technical provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

3.7 Workmanship. All parts and assemblies shall be fabricated and finished in a thorough workmanlike manner and all manufacturing, processing, and assembly operations shall be correctly performed. They shall be free of burrs, chips, sharp edges, cracks, crazes, unblended radii, porosity, warpage, burn marks, checks, chipped edges, blisters, excess flash, dirt, and other defects and foreign matter which would affect their serviceability. The cleaning method used shall not be injurious to any part or assembly nor shall the parts be contaminated by the cleaning agent. All required markings shall be neat, legible and sharply defined.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection and standard quality assurance provisions. Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detail specification.

4.2 Classification of inspections. The following types of inspection shall be conducted on this item.

a. First Article Inspection

b. Quality Conformance Inspection

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:36Z
Check the source to verify that this is the current version before use.

4.3 First article inspection.

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with provisions of 4.3.2 and 4.3.3. The first article sample shall consist of the in sample quantities as indicated in Table I.

4.3.2 Inspections to be performed. See MIL-A-48078 and Table I specified herein.

4.3.3 Rejection. See MIL-A-48078. Except as noted in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:36Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70518(AR)

PARAGRAPH	TITLE: Infrared Tracking Flare - MK 33 MOD 0 (Army)		SHEET 1 OF 2		DRAWING NUMBER: See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Hanger (Dwg. 9387059)				
	Examination for defects	5		3.2	4.4.2.1
	Cap End (Dwg. 9387057)				
	Examination for defects	5/ cavity	Note 1	3.2	4.4.2.2
	Plug (Dwg. 9387060)				
	Examination for defects	5/ cavity	Note 1	3.2	4.4.2.3
	Case (Dwg. 9387058)				
	Examination for defects	5		3.2	4.4.2.4
	Case Hanger & Loading Assembly (Dwg. 9387056)				
	Examination for defects/radiographed	100		3.2	4.4.2.5 (Omit 106)
	MK 33 MOD 0 Infrared Tracking Flare (Dwg. 9387055)				
	Examination for defects	100		3.2	4.4.2.6
	Transportation vibration	4 box	Note 2	3.3.1	4.5.1.1, 4.5.4
	Temperature-humidity	80		3.3.4	4.5.1.2, 4.5.4
	Temperature conditioning	60		3.3.2, 3.3.3	4.5.4
	Ignition and infrared output	40	Note 3	3.5.3	4.5.4.1

NOTES:
1. Quantity shall be 5/cavity but not less than 10 if only a one cavity mold is used.
2. Test sequentially as noted. Function 20 each after T-V and T-H; 10 each after low and high temp.

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:36Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-F-70518(AR)

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER
	Infrared Tracking Flare - MK 33 MOD 0 (Army)				See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Forty-foot drop	3 boxes	Note 2	3.5.5	4.5.1.3
	Parastic ignition test	10	Note 4	3.3.6	4.5.1.4

NOTES:

3. The flares will be tested at ambient temperature.
4. Ten units to be forwarded to ARDC (See Para. 6.7).

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:36Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. Inspection lots shall comply with the lot formation provisions of MIL-A-48078.

4.4.2 Examination. (See MIL-A-48078). Unless otherwise specified in the Classification of Defects and Test Tables, sampling plans for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level II. Equipment necessary for the performance of inspections listed shall be in accordance with 4.4.4.

TABLE II

Sample Plan for Infrared Output

Inspection Lot Size (1)	Normal Plan
Up to 1,000	32
1,101 - 3,000	80

(1) A minimum of two flares shall be tested from each batch (flare composition).

TABLE III

Acceptance Criteria for Infrared Output

Sample Size	Accept	Reject
32	1	2
80	2	3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:36Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70518(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.1	Hanger				9387059
					NEXT HIGHER ASSEMBLY
					9387056
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Outside diameter (groove end)		0.40%	3.2	Gage
102	Groove location		0.40%	3.2	Gage
103	Groove depth		0.40%	3.2	Gage
104	Groove width		0.40%	3.2	Gage
105	Length (groove end)		0.40%	3.2	Gage
Minor					
201	Poor workmanship		1.0%	3.7	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:36Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70518(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.2	Cap, End				9387057
					NEXT HIGHER ASSEMBLY 9387055
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Inside diameter		Note 1	3.2	Gage
102	Inside wall length		Note 1	3.2	Gage
Minor					
201	Total length		Note 1	3.2	Gage
202	Outside diameter		Note 1	3.2	Gage
203	Poor workmanship		Note 1	3.7	Visual

NOTES:

1. Plastic parts to be inspected per para. 4.5.5.

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:36Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70518(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.3	Plug				9387060
					NEXT HIGHER ASSEMBLY
					9387056
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Outside diameter		Note 1	3.2	Gage
102	Length		Note 1	3.2	Gage
Minor					
201	Poor workmanship		Note 1	3.7	Visual

NOTES:

1. Plastic parts to be inspected per para. 4.5.5.

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:36Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70518(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9387058
4.4.2.4	Case				NEXT HIGHER ASSEMBLY 9387056
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Inside diameter		0.40%	3.2	Gage
102	Length		0.40%	3.2	Gage
103	Outside diameter		0.40%	3.2	Gage
104	Hole diameter (8 holes)		0.40%	3.2	Gage
105	Hole angle		0.40%	3.2	Gage
106	Hole position		0.40%	3.2	Gage
Minor					
201	Plating incomplete		0.65%	3.2	Visual
202	Poor workmanship		1.0%	3.7	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:36Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70518(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9387056
4.4.2.5	Case Hanger and Loading Assembly				NEXT HIGHER ASSEMBLY 9387055
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Adhesive on hanger, tube or ignition hole		0.40%	3.2	Visual
102	Crimp not 360°		0.40%	3.2	Visual
103	Tape not covering holes		0.40%	3.2	Visual
104	Plug not snug		0.40%	3.2	Visual/Manual
105	Radiograph		0.40%	3.4	4.5.2
106	Functioning		(a)	3.5	4.5.4
Minor					
201	Poor workmanship		1.0%	3.7	Visual

NOTES:

(a) Sample size and accept/reject criteria shall be in accordance with Table II and Table III.

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:36Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70518(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.6	MK 33 MOD 0 (Army) Infrared Tracking Flare				9387055
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	End Cap not secured or improperly assembled		0.40%	3.2	Manual
102	Length		0.40%	3.2	Gage
103	Lacquer incorrectly applied		0.40%	3.2	Visual
104	Epoxy incorrectly applied around tape		0.40%	3.2	Visual
105	Parastic ingition test		5 Note(b)	3.3.6	4.5.1.4
Minor					
201	Marking incorrectly applied		0.65%	3.2	Gage/Visual
202	Poor workmanship		1.0%	3.7	Visual

NOTES: (b) Five units to be forwarded to ARDC (See Para. 6.7).

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:36Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70518(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.7	Packing and Marking for Container: MK33 Mod 0 (Army) Infrared Tracking Flare				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Cushions missing or damaged		0.40%	3.2	Visual
102	Partition missing or damaged		0.40%	3.2	Visual
103	Improper number of flares		0.40%	3.2	Visual
Minor					
201	Marking improper, missing or illegible		0.65%	3.2	Visual
202	Evidence of poor workmanship		1.00%	3.9	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:36Z
Check the source to verify that this is the current version before use.

4.3.4 Testing. Testing is described in the First Article and Quality Conformance Inspection tables.

4.4.4 Inspection equipment. The inspection equipment required to perform the inspections and tests prescribed in this specification is identified in the "Paragraph Reference/Inspection Method" column in the tables starting with paragraph 4.4.2.1, and the test method paragraphs (see 4.5). The contractor shall submit for approval, inspection equipment designs in accordance with the terms of the contract. See Section 6 of MIL-A-48078, and Section 6.3 herein.

4.5 Methods of inspection.

4.5.1 Environmental tests. The first article flare samples shall be mounted and subjected to the environmental tests in the order specified in Table I. Upon completion of environmental tests the flare cartridges shall be examined for obvious damage and X-rayed in accordance with 4.5.2.

4.5.1.1 Transportation vibration. This test shall be performed in accordance with MIL-STD-810C, Test Method 514.2, Procedure X, Curve AW. Observation shall be made for compliance with applicable requirements.

4.5.1.2 Temperature and humidity. This test shall be performed in accordance with MIL-STD-810C, Test Method 507.1, Procedure I, (10 days). Observation shall be made for compliance with applicable requirements.

4.5.1.3 Forty foot drop test. Flares shall be subjected to the forty-foot drop test of Dwg. 8837375 (Test No. 12), except that flares shall not be assembled in their associated (inert) equipment and shall be subjected to drops in only three (3) positions; nose-up, nose-down and horizontal, as provided in said drawing. Any flare failing to meet the requirements of 3.3.5 shall be considered defective and the lot represented shall be rejected. (Destructive Test)

4.5.1.4 Parasitic ignition test. The flare shall be assembled to a MK40/2.75" rocket motor (see Figure 1) and the motor shall be ignited. Observation shall be made for compliance with applicable requirements (Destructive Test).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:36Z
Check the source to verify that this is the current version before use.

4.5.2 Radiographic examination. Prior to functional testing, the flare samples shall be examined in accordance with MIL-STD-453 procedure. Two exposures shall be made of each flare, each forming a 90 degree angle with the other and with the longitudinal axis of the flare. Examination of the radiograph shall be made to determine compliance with the applicable requirement (see 3.4). Any flare deemed unacceptable shall be cause for lot rejection.

4.5.2.1 Radiographic sensitivity. The penetrameter used in the application specified in MIL-STD-453 shall be designed and constructed to insure a 2.0 percent sensitivity or better. The penetrameter shall be made of plastic having a density equal to the pellet. (Penetrameter for .62 inch aluminum or 1.0 inch magnesium is acceptable) One penetrameter shall be used on each film exposed. The film density measurement shall be made with a photo electric densitometer calibrated to National Bureau of Standards (Photographic Step Tablet).

4.5.3 Volatile content.

4.5.3.1 Flare, and first fire composition. The method of determining the percentage of volatile in the composition shall be in accordance with Method 102.1.1 of MIL-STD-1234. Observation shall be made for compliance with the applicable requirements.

4.5.4 Functioning tests

4.5.4.1 Ignition and infrared output. First Article samples shall be conditioned for four hours minimum at -25 + 5°F, 70 + 5°F and 125 + 5°F as required in 3.3.2, 3.3.3 and Table I. Each Flare will be temperature conditioned. All items will be functioned when they return to ambient temperature after of removal from the conditioning chamber. Quality conformance (lot acceptance) testing will be performed at ambient temperatures only. (Destructive Test)

To prepare flare for test remove end cap, remove the plug and drill a 1/4 inch diameter through hole along axis of the plug. Insert an M100 electric match until it extends 1/8" to 1/4" through center hole. Replace plug into the flare. Tape the leads of the electric match to the tube with standard paper masking tape. Proper grounding/shorting of the match leads must be accomplished as a safety precaution.

Flares shall be mounted vertically in test fixture and shall be positioned 6 inches below the radiometric axis with the cap end up. The procedures and equipment used to measure infrared output shall be in accordance with Dwg. 9280372 with the following exceptions:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:36Z
Check the source to verify that this is the current version before use.

(a) Para. 5.2: replace "5 ms/point with 50 ms/point,"
(b) "time constant 10 ms" with "time constant 30 ms".

For each flare tested, the following shall be recorded and calculated:

(a) The watts per steradian, from initiation to burnout.
(b) The burn time as per 3.5.2.
(c) The integral over the range of (b).
(d) The time above 230 watts/steradian.
(e) The average intensity = (Integral/(b)).

WARNING

The flare shall be ignited remotely and personnel protected from injury in case of explosion.

4.5.5 Dimensional control of molded or plastic parts. In place of normal sampling and inspections associated with the Classification of Defects, and after a curing time for the parts has been approved (see Note 1) a sample of three (3) parts (as molded) from each cavity shall be fully inspected dimensionally to qualify a new or reworked cavity for use in production. The molded parts shall carry the individual cavity identification. As a control of the cavity during production, the above quantity of parts from each cavity shall be inspected for at least the defects listed in paragraph 4.4.2.2 and 4.4.2.3 after continuous production of each 5,000 parts or at the end of each week, whichever occurs first. Of the three (3) samples; one (1) sample shall be the last part produced. If any defective parts are found during qualification of the cavity, the cavity producing the defective part will not be used in production. If any defective parts are found when inspection is performed for the control of the cavity, the cavity producing the defective part shall be removed from production. Further, that portion of production since the last control check shall be returned to the contractor for inspection for each separate type of defect according to MIL-STD-105, using an AQL of 0.40 percent for each major defect and an AQL of 0.65 percent for each minor defect. All cavities removed from production because of some fault may, after reworking, be returned to production providing they pass the qualification test above. The contractor may request a change of inspection frequency providing he presents objective evidence to the Contracting Officer to substantiate the request. Contractor design of gages and test equipment required to perform the inspections listed herein shall be submitted per 6.3 for approval prior to manufacture of equipment. The noted subparagraphs identify those items and minimum inspections subject to the requirements of this paragraph.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:36Z
Check the source to verify that this is the current version before use.

NOTE 1: In establishing a curing time, dimensionally check ten (10) parts from each cavity at periodic intervals (e.g. every 30, 60, etc. mins.) until dimensional stabiltiy is attained. The curing time will be from the time the part comes out of the mold until dimensional stability is attained. The inspection data used in determing the curing time shall be sent to ARDC, Dover, New Jersey 07801-5001, ATTN: AMSMC-QAT-M(D). If there is a change in material, or in the cycle time, or if a cavity is reworked, or a new cavity is used, a new curing time shall be established and approved.

5. PACKAGING

5.1 Preservation and packaging. Not applicable.

5.2 Packing.

5.2.1 Level A. Not applicable.

5.2.2 Level B. Not applicable.

5.2.3 Level C. Level C packing shall be in accordance with the Code of Federal Regulations Title 49 Transportation, Parts 100-199.

5.3 Marking.

5.3.1 Special markings. Marking of exterior containers shall be in accordance with the Code of Federal Regulations Title 49 Transportation, Parts 100-199.

5.3.2 Normal markings. In addition to the markings required by contract or order, unit packages and shipping containers shall be marked in accordance with the requirements of Standard MIL-STD-129.

6. NOTES

6.1 Intended use. The MK 33 MOD 0 flare is intended to be used on missiles and target rockets to provide infrared augmentation.

6.2 Ordering data. Procurement documents shall specify the following:

a. Title, number and date of this specification.
b. Provisions for submission of first article samples.
c. Provisions of MIL-A-48078.

6.3 Submission of inspection equipment designs for approval. (See MIL-A-48078). Submit equipment designs as required to Commander, U.S. Army Armament, Research and Development Center, ATTN: AMSMC-QAT-I(D), Dover, New Jersey 07801-5001.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:36Z
Check the source to verify that this is the current version before use.

6.4 Distribution of ammunition data cards. Distribution of data cards shall include the following: Commander, U.S. Army Armament, Research and Development Center, ATTN: AMSMC-QAT-M(D), Dover, New Jersey 07801-5001.

6.5 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament Research and Development Center (ARDC) may also include drawings prepared by, identified as, Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal, Picatinny Arsenal or ARRADCOM drawings. Technical data originally prepared by these activities is now under the cognizance of AMCCOM.

6.6 Data requirement. Deliverable data required by this specification is cited in the following paragraphs:

Paragraph 4.5.4	
Data requirement	Engineering Data
Applicable DID	DI-R-1721

(Copies of data item description required by the contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the Contracting Officer).

6.7 Forward test samples for parastic ignition test (para. 3.3.6) to Commander, U.S. Army Armament, Research and Development Center, ATTN: SMCAR-LCE-T, Dover, New Jersey 07801-5001.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1370-A182)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:36Z
Check the source to verify that this is the current version before use.