MILITARY SPECIFICATION

GRENADE, HAND, OFFENSIVE; MK3A2 w/FUZE M206A2 WITH SAFETY CLIP LOADING, ASSEMBLING AND PACKING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the loading, assembling and packing for one type of grenade, designated as Grenade, Hand, Offensive; MK3A2, with Fuze M206A2 with Safety Clip using the Charge Demolition: Block (TNT) 1/2 Pound Assembly.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-A-48078 - Ammunition, Standard Quality Assurance Provisions, General Specification For

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables For Inspection by Attributes (ABC-STD-105)

MIL-STD-1169 - Packaging, Packing and Marking For Shipment of Inert Ammunition Components

FSC: 1330

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:38Z
Check the source to verify that this is the current version before use.

DRAWINGS

U.S. ARMY PICATINNY ARSENAL

9215458 - Grenade, Hand, Offensive; MK3A2 w/Fuze M206A2 with Safety Clip
9274414 - Packing and Marking for Container, Ammunition, Fiber PA76 for Grenade, Hand, Offensive; MK3A2 w/Fuze M206A2 with Safety Clip
9274416 - Packing and Marking for Box, Ammunition for Grenade, Hand, Offensive; MK3A2 w/Fuze M206A2 with Safety Clip in Fiber Container PA76.

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the Contracting Officer).

3. REQUIREMENTS

3.1 Material. - Materials shall be in accordance with applicable drawings and specifications.

3.2 Grenade. - The grenade shall comply with all requirements specified on Drawing (dwg.) 9215458 and with all requirements specified in applicable specifications.

3.3 Functioning. - The grenade shall detonate in not less than three (3) seconds nor more than 10 seconds, without evidence of large fragments of unburned explosive.

3.4 Release resistance. - The safety clip shall not be disengaged from its assembled position over the lever by a load of twenty-five (25) ounces, minimum (min.) when tested (see 6.4).

3.5 X-ray examination of Fuze, Grenade, M206A2, prior to loading in the Grenade, Hand, Offensive, MK3A2. - Each fuze shall be X-rayed and its radiograph shall be examined before loading of the fuze into the grenade for the following defects: delay column missing; short delay column; variation in column density; voids at bottom of delay column; anvil punch penetra-

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:38Z
Check the source to verify that this is the current version before use.

tion at bottom of delay column; porosity in the fuze body; broken styphnate and azide in detonator cup; foreign matter in delay column. This examination shall be conducted as specified.

3.6 Workmanship. - All parts and assemblies shall be fabricated and loaded in a thorough workmanlike manner, and all manufacturing, processing, and assembly operations shall be correctly performed. They shall be clean and free of burrs, sharp edges, unblended radii, surface defects, chips, dirt, grease and oil (except where specifically required), corrosion products and other foreign matter. The cleaning method used shall not be injurious to any part or assembly nor shall they be contaminated by the cleaning agent. Exterior surface coatings shall be continuous except for a few light scratches not exposing base material. All required markings shall be neat and sharply defined. Required packing shall be dry.

3.7 First article inspection. - This specification contains technical provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection and standard quality assurance provisions. - Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detail specification.

4.2 Classification of inspections. - The following types of inspection shall be conducted on this item.

a. First article inspection
b. Quality conformance inspection

4.3 First article inspection

4.3.1 Submission. - The contractor shall submit a first article sample (see 6.1b) as designated by the Contracting Officer. The first article sample shall consist of twenty (20) complete sets of parts and sub-assemblies (i.e., twenty (20) each of every component and sub-assembly). The first article sample shall be evaluated in accordance with the provisions of 4.3.2 and 4.3.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:38Z
Check the source to verify that this is the current version before use.

4.3.2 Inspections to be performed. - See MIL-A-48078 and paras 4.4.2.1 thru 4.4.2.5, testing per para. 4.4.3, and Table I specified herein.

4.3.3 Rejection. - (See MIL-A-48078)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:38Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
	Grenade, Hand; Offensive; MK3A2 w/Fuze M206A2 with Safety Clip				9215458
					NEXT HIGHER ASSEMBLY N/A
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Inert Parts				
	Examination for defects	20		3.2	4.4.2.1 thru 4.4.2.5
	Fuzes, Grenade, Hand M206A2				
	Examination for defects	20		3.2	4.4.2.1
	Tests				
	Release resistance	20		3.4	4.5.2
	X-ray examination	20		3.5	4.5.3
	Assembly				
	Examination for defects	20		3.2	4.4.2.3
	Tests				
	Functioning	20		3.3	4.5.1

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:38Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection

4.4.1 Inspection lot formation. - Inspection lots shall comply with the lot formation provisions of MIL-A-48078. In addition, inspection lots of grenades shall contain:

a. Parts of one lot interfix number from one manufacturer.

b. Fuzes from not more than one serial lot of one lot interfix number from one manufacturer.

c. Charges from one supplier containing not more than two lots of TNT from one manufacturer.

4.4.2 Examination. - (See MIL-A-48078). Unless otherwise specified in the classification of defects and test tables, sampling plans for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level II. Equipment necessary for the performance of the inspections listed shall be in accordance with 4.4.4

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:38Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-G-48737 (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.1	Fuze, prior to Assembly into Charge				9215458
					NEXT HIGHER ASSEMBLY
					N/A
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:					
1.	Fiberglass sleeve not butted against shoulder, under thread		100%	3.2	Visual
2.	Fiberglass sleeve does not cover the entire housing		100%	3.2	Visual
Major A&B:	None defined				
Minor:					
201.	Evidence of poor workmanship		1.0%	3.6	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:38Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-G-48737 (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.2	Charge Demolition Block Assembly, Prior to Assembly of Fuze				9215458
					NEXT HIGHER ASSEMBLY N/A
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined				
Major B: 131.	Foreign material in fuze well		0.40%	3.2	Visual
Minor: 201.	Evidence of poor workmanship		1.0%	3.6	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:38Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
4.4.2.3	Grenade, Hand, Assembly				9215458
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Safety pin prongs cracked or incorrectly formed		100%	3.2	Visual
2	Pull ring assembly missing		100%	3.2	Visual
3	Safety clip missing or incorrectly assembled		100%	3.2	Visual
4	Either or both lever hinge ears missing		100%	3.2	Visual
5	Both lever hinge ears not bent away from the body past the vertical centerline of the body hinge bosses		100%	3.2	Visual/Figure 1B
6	Ends of both lever hinge ears not bent upwards		100%	3.2	Visual/Figure 1A
Major A					
101	Either lever hinge ear not bent away from the body past the vertical centerline of the body hinge bosses		0.40%	3.2	Visual/Figure 1B
102	End of either lever hinge ear not bent upwards		0.40%	3.2	Visual/Figure 1A
Major B					
131	Fuze of incorrect designation		0.40%	3.2	Visual
132	Washer missing		0.40%	3.2	Visual
133	Fuze not fully seated		0.40%	3.2	Visual

NOTES:

SARPA.06 FORM 2587 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:38Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-G-48737 (PA)

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER
4.4.2.3 cont	Grenade, Hand, Assembly				9215458
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Minor					
201	Overall height		0.65%	3.2	Gage
202	Marking incorrect, incomplete or illegible		0.65%	3.2	Visual
203	Evidence of poor workmanship		1.00%	3.6	Visual
Major A					
Test	Release Resistance	500	(a)	3.4	4.5.2
	(a) Note Accept with 5 or less defects Reject with 6 or more defects				

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:38Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-G-48737 (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.4	Sealed Fiber Container				9274414
					NEXT HIGHER ASSEMBLY N/A
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined				
Major B:					
131.	Container cut or punctured through all layers		0.40%	3.2	Visual
132.	Tape incomplete or badly wrinkled		0.40%	3.2	Visual
133.	Metal ends loose, distorted or punctured		0.40%	3.2	Visual
134.	Grenade missing		0.40%	3.2	Manual
Minor:					
201.	Contents loose		0.65%	3.2	Manual
202.	Tear tab missing		0.65%	3.2	Visual
203.	Marking incorrect, incomplete or illegible		0.65%	3.2	Visual
204.	Evidence of poor workmanship		1.0%	3.6	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:38Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-G-48737 (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.5	Wood Packing Box				9274416
					NEXT HIGHER ASSEMBLY N/A
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined				
Major B:					
131.	Strapping or wire missing, broken or loose		0.40%	3.2	Visual/Manual
132.	Hardware missing, broken or loose (when applicable)		0.40%	3.2	Visual/Manual
133.	Box damaged		0.40%	3.2	Visual
Minor:					
201.	Strapping or wire improperly assembled		0.65%	3.2	Visual
202.	Marking incorrect, incomplete or illegible		0.65%	3.2	Visual
203.	Evidence of poor workmanship		1.0%	3.6	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:38Z
Check the source to verify that this is the current version before use.

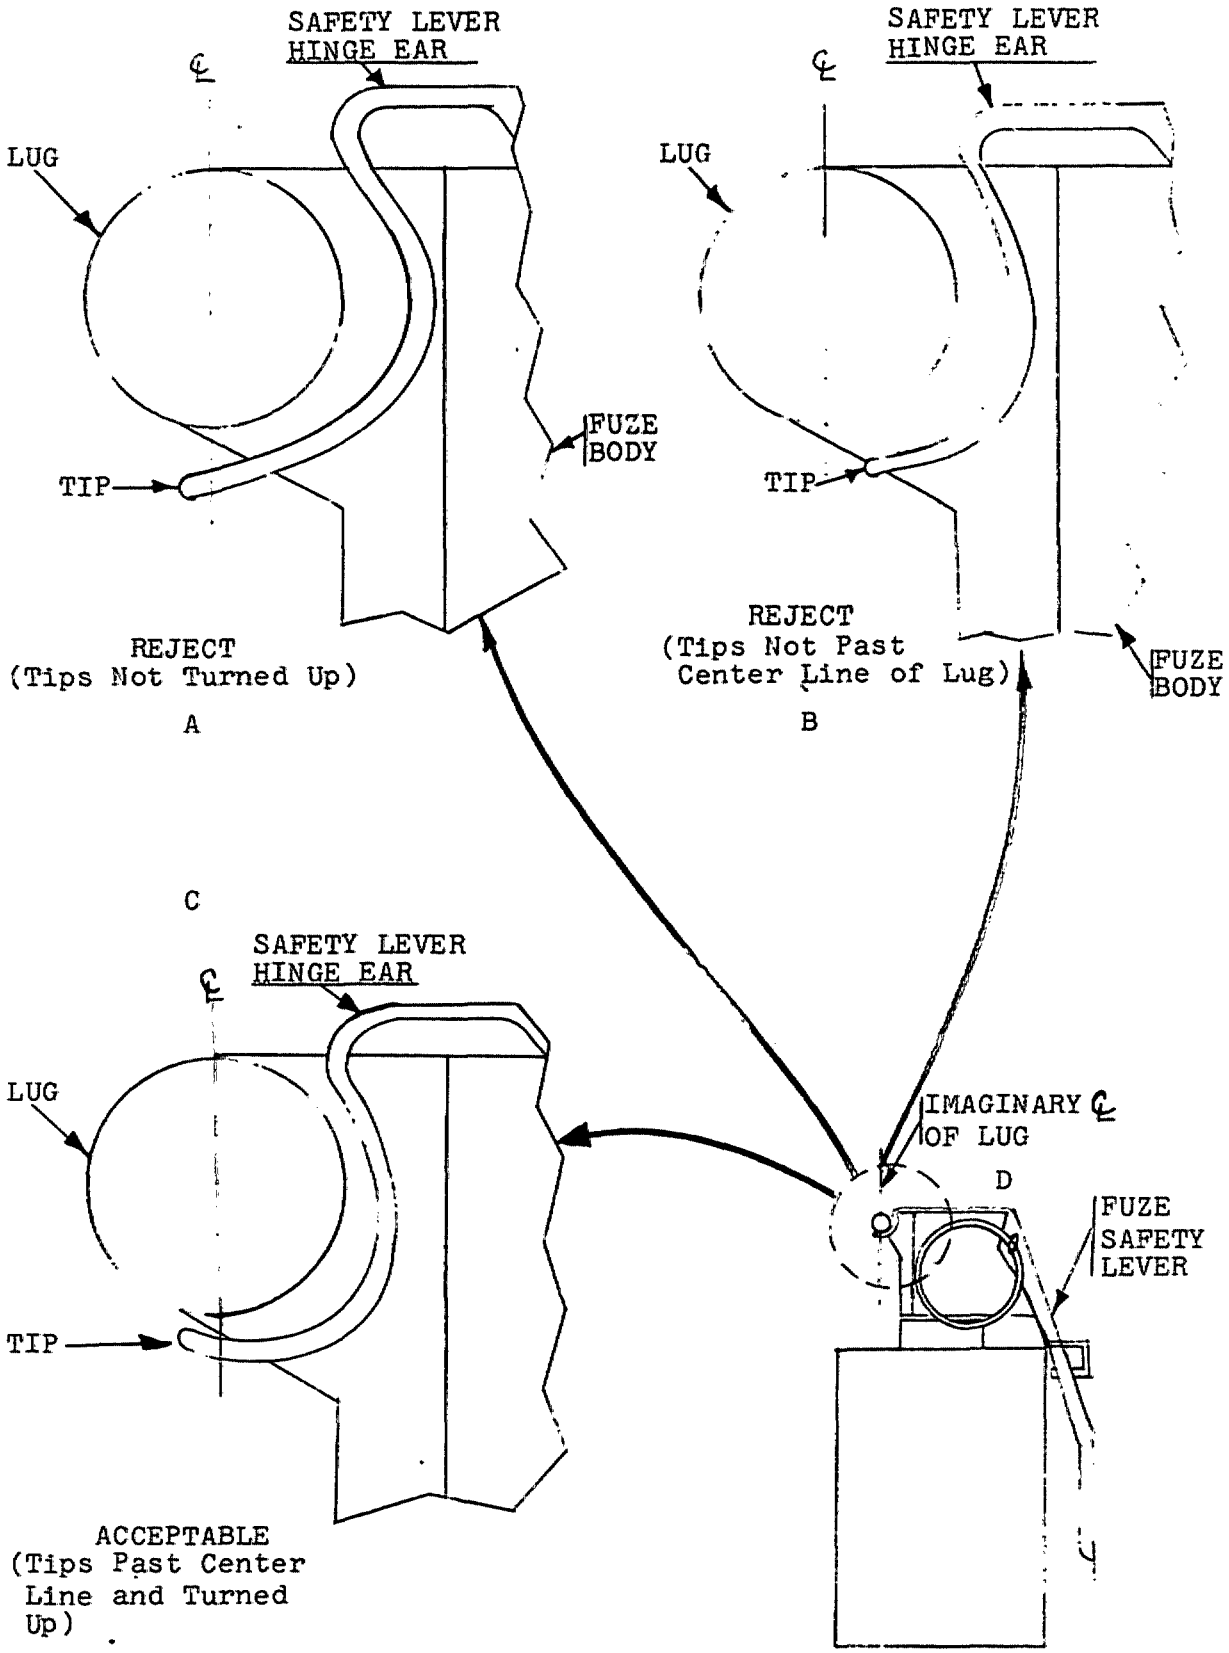


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:38Z
Check the source to verify that this is the current version before use.

4.4.3 Testing

4.4.3.1 Functioning. - The grenade assemblies shall be observed for any evidence of failure to comply with the requirements as classified in Table II.

TABLE II

Defects	Classification
Functioning time less than min. or greater than max. (See 3.3)	Critical
Failure to function (see 3.3)	Major A
Evidence of large fragments of unburned explosive (see 3.3)	Major A

4.4.3.1.1 Beginning with the first lot produced and continuing until three (3) consecutive lots have complied with the applicable requirements specified, eighty (80) grenades assemblies shall be selected for test. The lot shall be rejected if during the test a critical defect occurs or if three (3) or more assemblies exhibit any of the major defects listed in Table II.

4.4.3.1.2 After three (3) consecutive lots have complied with the acceptance criteria of 4.4.3.1.1, thirty (30) grenade assemblies shall be selected for test. The lot shall be accepted on zero failures and shall be rejected if a critical defect occurs, or if two (2) or more grenades exhibit any of the defects listed in Table II. The lot shall undergo a retest of thirty (30) samples if one major defect (see Table II) occurs in the initial sample group. Upon retesting the lot shall be rejected if a critical defect occurs or if two or more assemblies exhibit any of the major defects listed in Table II.

4.4.3.2 X-ray examination of fuze assembly prior to loading into the grenade, hand MK3A2 (see 3.5). - Each fuze prior to

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:38Z
Check the source to verify that this is the current version before use.

loading into the MK3A2 grenade shall be subject to the examination for compliance with the requirements as specified in Table III.

TABLE III

Defects	Classification
Missing delay column	Critical
Short delay column	Critical
Variation in column density	Major A
Voids at bottom of delay column	Major A
Anvil punch penetration at bottom of delay column	Major A
Porosity in fuze body	Major A
Broken styphnate and azide in detonator cup	Major A
Foreign matter in delay column	Major A

If any fuze shows evidence of any of the defects listed in Table III, it shall be classified defective and removed from the lot. (see 6.6). The method of fuze examination shall be as specified in 4.5.3. Definitions of defective fuzes are defined in 6.5.

4.4.4 Inspection equipment. - The inspection equipment required to perform the inspections and tests prescribed in this specification is identified in the 'Paragraph Reference/Inspection Method' column in the tables starting with paragraph 4.4.2.1, and the test method paragraphs (see 4.5). The contractor shall submit for approval, inspection equipment designs in accordance with the terms of the contract. (See Section 6 of MIL-A-48078, and 6.2 herein.)

4.5 Test methods and procedures

4.5.1 Functioning. - The grenade assembly shall be immersed in water maintained at seventy (70) plus or minus five (5) degrees Fahrenheit (F.) for one hour at a depth of not less than two (2) inches. The assembly shall be removed from the water and within one hour shall be mounted in the functioning test fixture specified in 4.4.4 and detonated by remotely removing the safety pin. The fixture and grenade shall be centered in a barricaded arena capable of withstanding the effects of detonation. The grenade assembly shall be observed for compliance with the requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:38Z
Check the source to verify that this is the current version before use.

4.5.2 Release resistance. - The load shall be applied slowly and steadily, parallel with the safety pin in the clip releasing direction, until the total load is supported by the clip. The clip shall be observed for compliance with the requirements.

4.5.3 X-ray examination of fuze assembly. - Inspection equipment and the image quality of the radiographs for this examination shall be satisfactory to the Procurement Contracting Officer. The direction of the x-ray beam employed in this inspection shall be perpendicular to the axis of the delay tube.

5. PREPARATION FOR DELIVERY

5.1 Preservation and Packaging

5.1.1 Level A. - The grenade or grenades, shall be packaged in accordance with dwg. 9274414.

5.2 Packing.

5.2.1 Level A. - The unit or carton packaged grenades shall be packed in accordance with dwg. 9274416.

5.3 Marking. - Marking shall be in accordance with dwgs. 9274414 and 9274416.

6. NOTES

6.1 Ordering Data. - Procurement documents shall specify the following:

a. Title, number and date of this specification.
b. Provisions for submission of first article samples.
c. Provisions of MIL-A-48078.

6.2 Submission of inspection equipment designs for approval. - (See MIL-A-48078). Submit equipment designs as required, to Commander: Picatinny Arsenal, ATTN: SARPA-QA-T Dover, New Jersey 07801.

6.3 Distribution of ammunition data cards. - Distribution of data cards shall include the following: Commander, Picatinny Arsenal, ATTN: SARPA-QA-A-M and SARPA-AD-E-C2 Dover, New Jersey 07801. Data cards for all lots of grenades and fuzes submitted to 100% x-ray screening should be annotated to reflect performance of this inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:38Z
Check the source to verify that this is the current version before use.

6.4 Release Resistance. - The safety clip shall be considered disengaged from its assembled position over the lever when the square end of the safety clip moves upon the flat surface of the lever to the extent that the clip does not return to its original assembled position when the load is removed.

6.5 Definitions of critical and major defects for use in x-ray examination of fuze assembly.

6.5.1 Missing or short delay column - (Critical Defect). - This defect is defined as critical when there is no column or when the delay column does not reach the base of the threaded portion of the fuze body.

6.5.2 Variation in column density (Major A Defect). - This defect is defined as a major defect when there is significant variation within a given delay column, of the apparent column density as viewed on the radiograph.

6.5.3 Voids at the bottom of delay column (Major A Defect). - This defect is defined as a major defect when the void at the bottom of the delay column (detonator end) extends across the entire diameter of the fuze body delay cavity.

6.5.4 Anvil punch penetration at bottom of the delay column (Major A defect). - This defect is defined as a major defect when the anvil punch penetration at the bottom of the delay column, including any breakout, extends more than 0.100 inch up into the column. (NOTE: Fuzes without any other defects which have anvil punch penetration, including breakout which does not extend more than 0.100 inch up into the column are acceptable providing the height of the delay column is at least 0.700 inch when measured from the top of the anvil punch mark or breakout. Measurement is not made from the base of the delay column).

6.5.5 Porosity in the fuze body (Major A defect). - This defect is defined as a major defect when the fuze body at the intersection of the threaded portion and the delay column, is found to be porous.

6.5.6 Broken styphnate and azide in detonator cup (Major A defect). - This defect is defined as a major defect when any broken crumbled, or loose styphnate and azide is detected in the detonator tube.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:38Z
Check the source to verify that this is the current version before use.

6.5.7 Foreign matter in delay column (Major A defect). - This defect is defined as a major defect when any foreign matter is detected in the delay column which could preclude the proper initiation and propagation of the delay element.

6.6 Disposition of defective fuze assemblies

6.6.1 Critically defective fuze assemblies. - When a critically defective fuze is found, this Arsenal (SARPA-QA-A-M) shall be notified immediately and the fuze held pending disposition and in no instance will the fuze be destroyed without permission of the Procurement Contracting Officer.

6.6.2 X-ray examination of defective fuze assemblies. - All defective fuzes shall be re-x-rayed to confirm their identity, and the effectiveness of the screening process, in addition, this Arsenal (SARPA-QA-A-M) will be notified on a continuing basis of the quantities and specific types of defects found per lot, so that remedial action may be taken at the fuze contractor's plant.

Custodian:
Army-PA

Preparing Activity:
Army-PA

Project Number: 1330-A-072

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:38Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:38Z
Check the source to verify that this is the current version before use.