MIL-G-83150A(USAF)
16 September 1974
SUPERSEDING
MIL-G-83150 (USAF)
29 July 1968

MILITARY SPECIFICATION

GLOVES, CLOTH, NYLON KNITTED (WOMEN'S, DRESS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1 SCOPE

1.1 Scope. This specification covers the requirements for women's nylon stretch gloves.

* 1.2 Classification. The gloves are furnished in one type and the following sizes as specified (see 6.2): 6, 6-1/2, 7, 7-1/2, 8, 8-1/2 and 9.

2. APPLICABLE DOCUMENTS

* 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

V-T-276	Thread, Cotton
UU-P-31	Paper; General Specification and Methods of Testing
DDD-L-20	Label; for Clothing, Equipage, and Tentage, (General Use)
PPP-B-566	Boxes, Folding, Paperboard
PPP-B-676	Boxes, Setup

Military

MIL-B-17757	Boxes, Fiberboard, Corrugated (Modular Sizes)

STANDARDS

Federal

FED-STD-191	Textile Test Methods
FED-STD-751	Stitches, Seams, and Stitchings

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage

FSC 8445

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preproduction. When required by the procuring activity (see 4.3 and 6.2), a preproduction sample that conforms to the requirements of this specification shall be submitted for approval before production is commenced.

3.2 Standard samples. Sample gloves if furnished (see 6.3) are for guidance only. Variations from the specification may appear in the sample, in which case the specification shall govern. Except for such variations, the design, quality, and workmanship, in all respects not covered by this specification, shall be equal to the sample.

3.3 Materials

* 3.3.1 Basic fabric. The basic fabric for the gloves shall be a knitted nylon simplex fabric made from a first quality regular tenacity, dull filament, 40-denier nylon and shall conform to the requirements specified in table I. Unless otherwise specified, the overall minimum width of the fabric shall be 43 inches. The fabric shall be knitted in a jersey pattern on a simplex machine and shall have nonravelling edges. The fabric shall be lightly sueded on both sides with one side finished as the face side. The cloth shall have a suppleness equal to or better than the standard sample. The color of the fabric shall be white, color shade No. 3028 (see 6.3). The color shall match the approved standard shade under natural (north sky) daylight or artificial daylight having a color temperature of 7,500 degrees Kelvin and shall be a good approximation to the standard shade under incandescent lamplight at 2,800 degrees Kelvin.

*

3.3.2 Thread. The thread used to fabricate the gloves shall conform to type IC1, 3 ply, ticket number 0 of V-T-276.

3.3.3 Paper for inserts. The inserts for the gloves shall be made of white, 70 pound basis weight index paper (22.5 by 28.5 - 500).

3.4 Design. The gloves shall be a slip-on, shortie type with an inside center vent, Bolton thumb, half pique sewn, continuous inserted fourchette, hemmed top edge, and without pointing (see figure 1). (Note: Figure 1 of the finished glove is furnished for information purposes only. In the event of any inconsistencies between this figure and the written portion of this specification, the written portion shall govern.)

3.5 Construction. The gloves shall be constructed in accordance with table II; however, the manufacturer is not required to follow the exact sequence of operations as listed therein, provided the finished gloves are identical to those produced following the exact sequence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

* TABLE I. Basic Fabric

Characteristic	Requirement
Weight, ounces per square yard	
* Maximum	7.0
Minimum	6.0
Shrinkage, percent	
* Length	6.8 ±0.5
* Width	2.5 ±0.5
Yarns per inch	
Wales, minimum	60
Courses, minimum	47
Bursting strength, pounds per square inch, minimum	150
Stretch percent	
* Length	15 ±0.5
Width, minimum	50
Water extract (pH value)	
Minimum	5.0
Maximum	8.5

3.5.1 Stitches, seams, and stitchings. Stitch, seam, and stitching types specified in table II shall conform to FED-STD-751. Wherever two stitch types are specified for the same operation, either may be used. Where stitch type 401 is specified, the looper on the lower thread shall be on the inside of the glove. Sewing machines with trimmer attachments shall not be used in the construction of the gloves. All seam ends that are not caught in other stitchings shall be properly trimmed to leave sufficient run off to lock the stitching securely or backstitched.

3.5.1.1 Stitches per inch. The range of stitches specified in table II shall be interpreted to be the maximum and minimum number of stitches per inch permitted.

3.6 Patterns. The Government will furnish standard patterns (see 6.3) for use in cutting the working patterns. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered without prior approval of the procuring activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

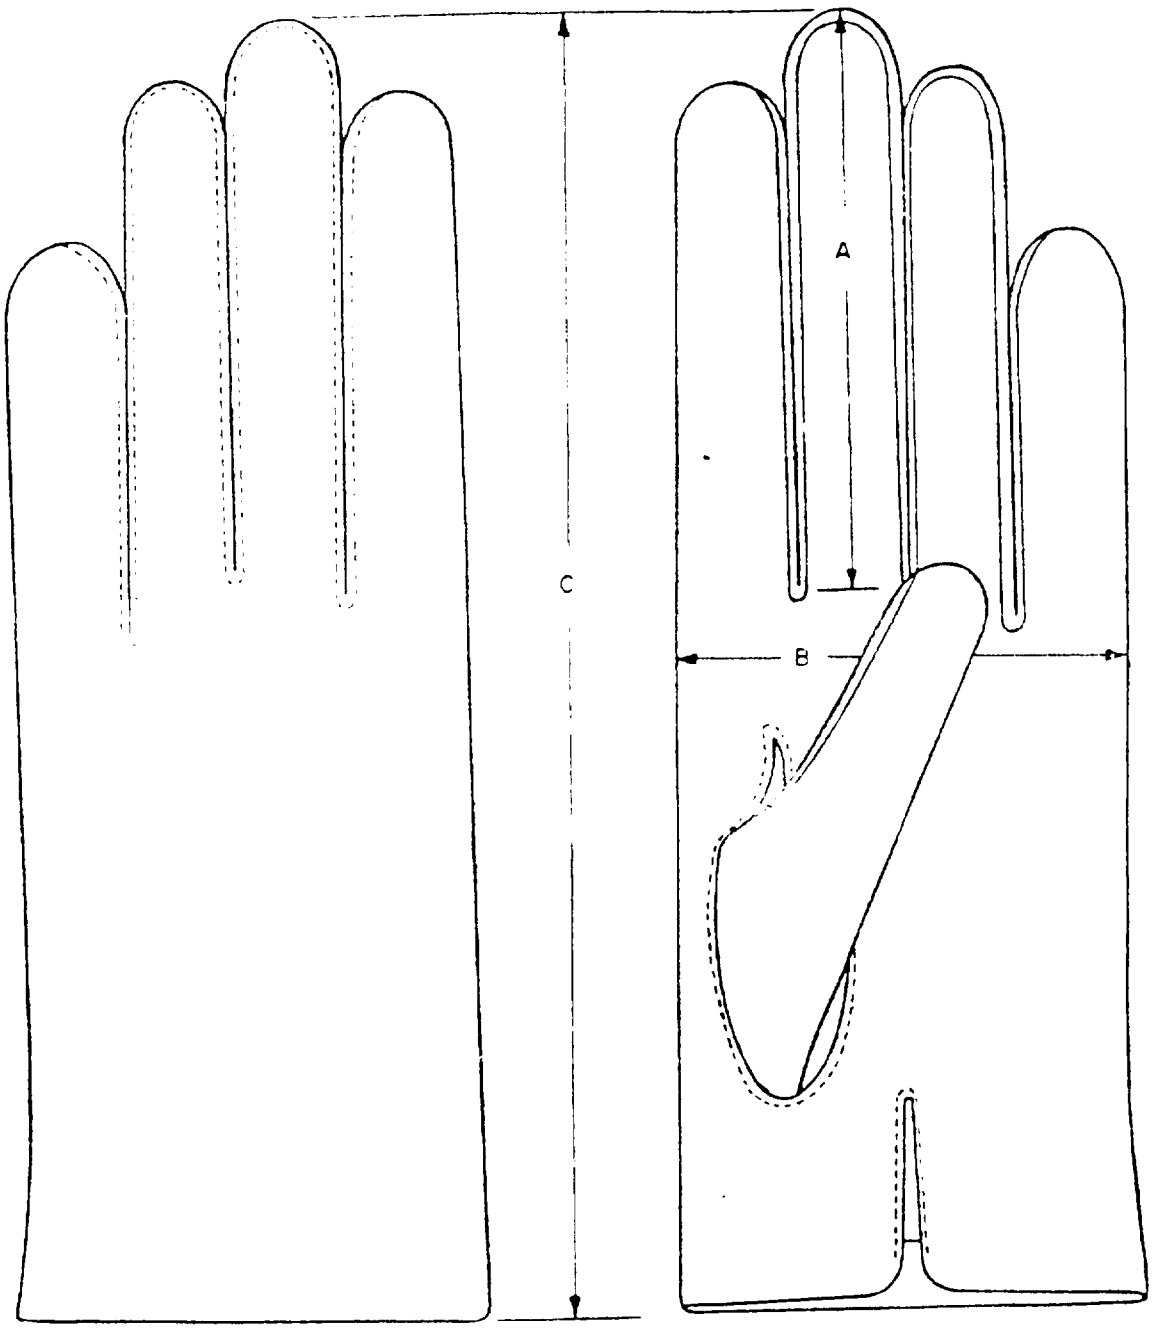


FIGURE 1. Finished Glove (Left-Hand View Shown)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing Operations

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
1	Cutting			
*	(a) Die cut the gloves in strict accordance with patterns which show size, shape, and directional lines for cutting and notches for the proper assembly of all parts.			
*	(b) Cut all parts of the gloves from one piece of material with the lengths of the parts in the direction of the minimum stretch dimension.			
2	Replacement of damaged parts			
	(a) During the spreading and cutting operations, replace any material containing defects, which might seriously affect appearance or serviceability of the end item, with correctly matched material.			
	(b) Replace any items or materials damaged during manufacturing processes, which affect or may seriously affect appearance or serviceability of the end item, with acceptable items or materials that produce a proper match.			
* 3	Thumb			
	(a) Close the thumb with a single row of stitching, 1/16-inch gage, and turn the thumb.	401	SSa-1	12-15
	(b) Join the thumb to the body with a single continuous row of stitching, catching the closing stitching for the thumb and lapping the ends of the stitching not less than 1/4 inch. The body shall overlap the thumb not more than 3/16 inch nor less than 1/16 inch.	401	LSa-1	12-15

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing Operations (Cont)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	OR			
*	(c) In lieu of No. 3(a) and 3(b), close the thumb seam; join the thumb by inseaming 1/16 to 1/32 inch from the edge.	301 or 401	SSa-1	12-16
* 4	Join fourchette (stripping) to glove trank			
	(a) Shape and stitch one edge of the continuous fourchette (stripping) to the back of the glove with a continuous row of stitching 1/16-inch gage on the outside of the glove and not less than 1/16 inch nor more than 3/32 inch on the inside of the glove. The fourchette (stripping) shall extend from the center tip of the first finger to the center tip of the fourth finger. The back of the glove shall be over the fourchette (stripping) with the chain side of the stitching to the inside of the glove.	401	LSa-1	12-15
	(b) Shape and stitch the palm side of the glove at the finger areas to the opposite side of the fourchette (stripping) with a continuous row of stitching 1/16-inch gage. Continue the stitching and close the glove along the outside edge of the fourth finger to the top of the glove. The raw edges of the seam shall be to the inside of the glove.	401	SSa-1	12-15
* 5	Vent			
*	(a) Install the vent facing in accordance with figure 2.	301 or 401	SSe-2(a) SSe-2(b)	14-16
*	NOTE: If the palm vent and the hem are a part of the glove die, No. 5(b) and 5(c) may be used in lieu of No. 5(a). The use of a continuous shaped die cut fourchette is not recommended.			
	OR			

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing Operations (Cont)


	No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
*		(b) Fold the palm vent face to face on the hem line and stitch 1/16 to 3/32 inch from the raw edge of the vent.	301 or 401	SSa-1	14-16
*		(c) Turn the palm vent and raise stitch 1/16 to 3/32 inch from the folded edge of the palm vent.	301 or 401	LSq-2(b)	14-16
*	6	Hemming			
*		(a) Hem each glove in accordance with figure 3.			
*	7	Trimming and cleaning			
*		(a) Carefully trim the seams in accordance with the methods shown on figure 4 and to the requirements for the seam gage references of No. 4(a) and 4(b). Remove all surplus materials and loose thread as well as spots and stains.	301 or 401	EF1-1	8-10
*	8	Marking			
*		(a) Mark the inside of each glove on the palm side to read from the top of the glove. The marking (see 3.9) shall be 1 (plus or minus 1/4) inch from the closed end of the vent. Care shall be taken to ensure that the marking does not show on the outside of the gloves.			
*	9	Pressing			
*		(a) The gloves shall be clean, well shaped, and pressed on a heated glove form conforming to the correct glove size.			


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.


TABLE II. Sewing Operations (Cont)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
* 10	Pairing			
*	(a) Match, pair, and tack the gloves together, palm to palm, with the thread approximately 1/8 inch in from the closing seam. The tacking shall be not less than two stitches, with thread that will permit the gloves to be pulled apart without tearing the glove fabric.			
* 11	Insert			
*	(a) Place an insert (see 3.7) in each glove.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

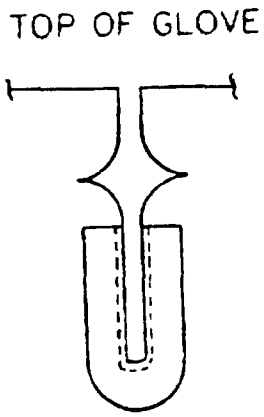

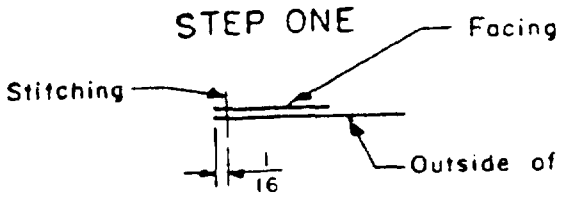

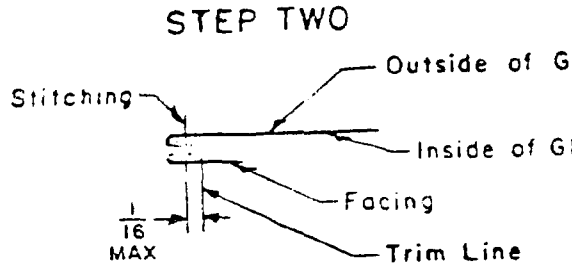

Note: Facing must be turned under properly so that seam lies flat without a twist in the vent.

Dimensions in Inches

FIGURE 2. Vent Facing Fabrication

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.


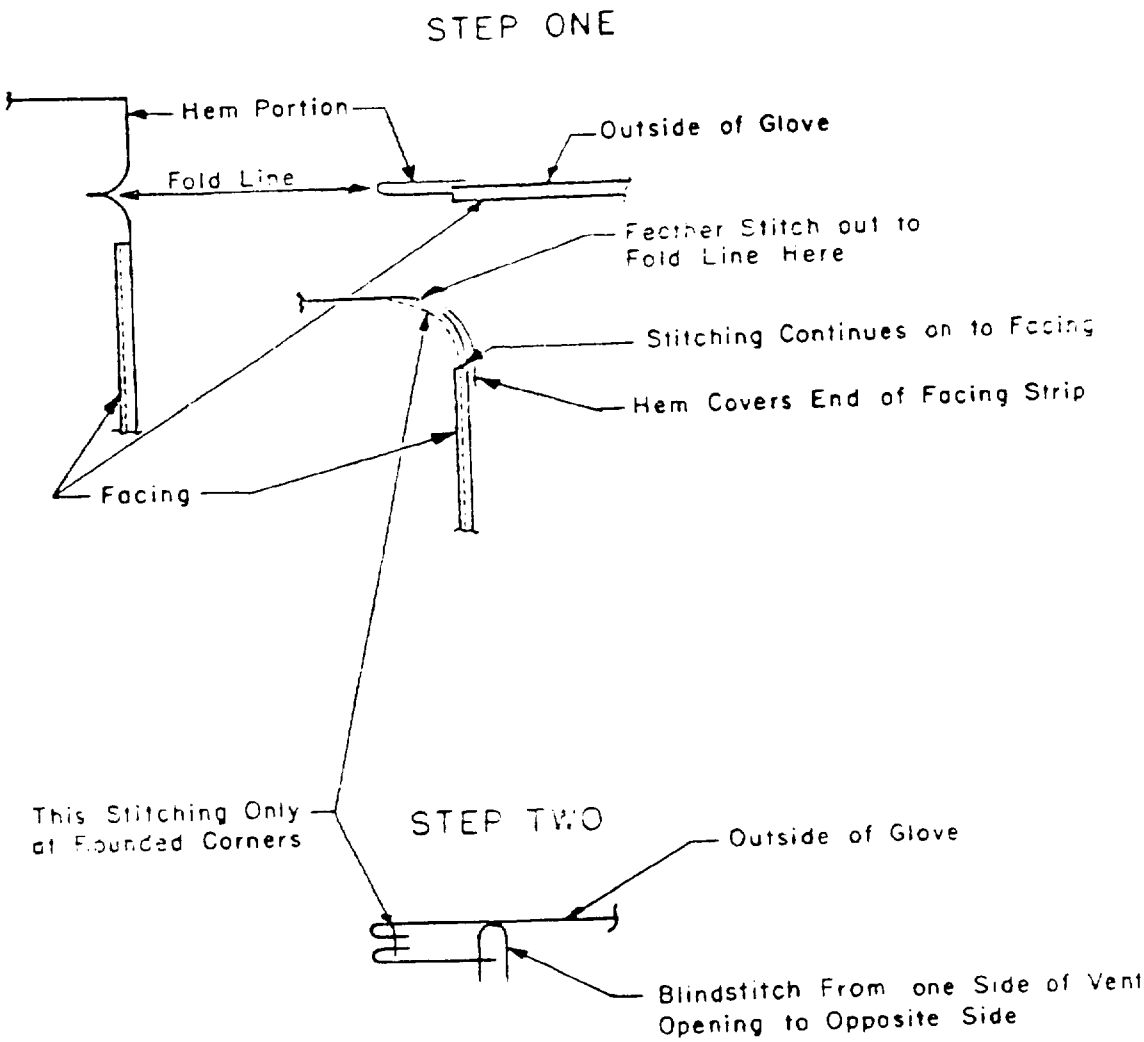


FIGURE 3. Hem Fabrication at Vent Corners

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

Dimensions in Inches

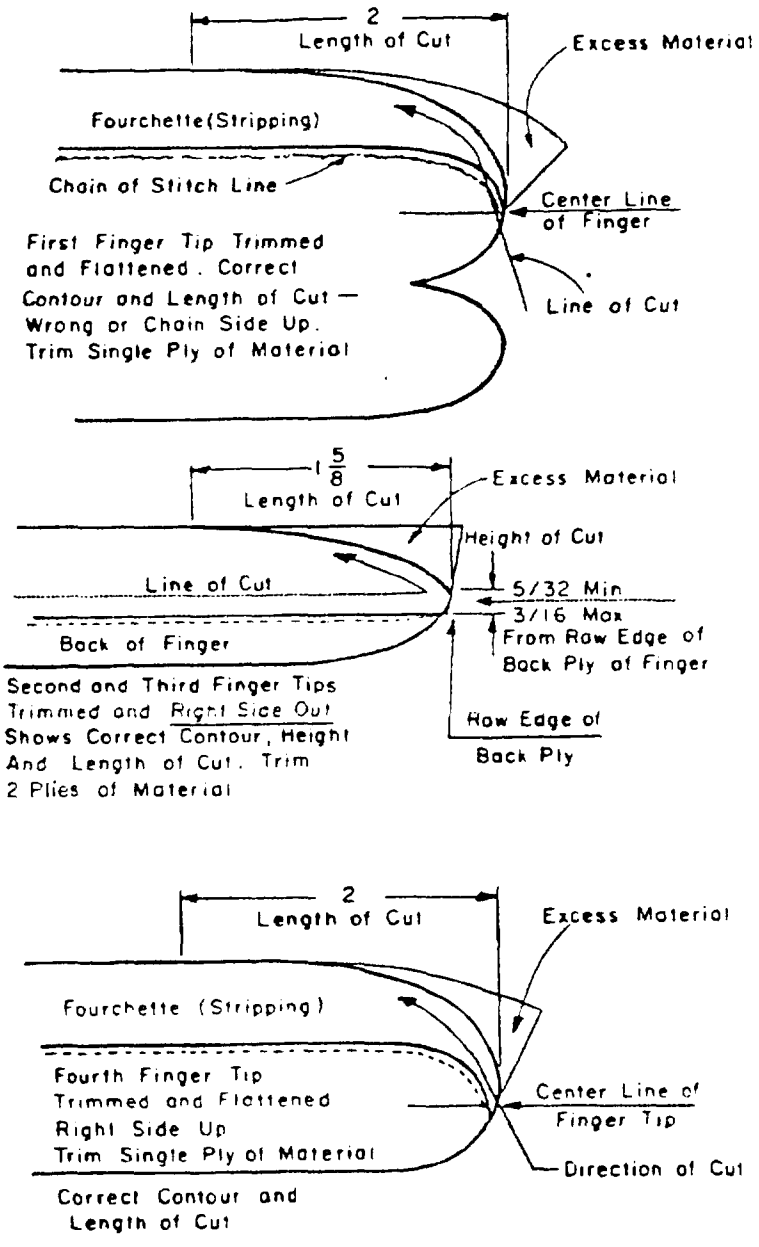

Note: Except that trimming shall start on fourth finger instead of first finger, left hand shall be trimmed exactly as right hand.

FIGURE 4. Trimming Procedures (Right-Hand Glove Shown)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

* 3.6.1 Pattern parts. The parts of each pair of gloves shall be cut, from the basic fabric (see 3.3.1), in accordance with the patterns and in the quantity specified in table III.

* TABLE III. Pattern Parts

Pattern Part	Quantity To Be Cut
Trank	2
Thumb	2
Fourchette	2
Vent binding 1/	2

1/ The binding shall be straight cut in line with the least stretch of the fabric.

3.7 Inserts. An insert shall be placed in each glove. The inserts shall be cut not less than 2-1/2 inches by 4 inches with rounded corners. The following inscription shall be printed in black indelible ink on the insert for the right-hand glove.

Washing Directions

1. Wash gloves in lukewarm water and mild soap.

2. Rinse thoroughly.

3. Squeeze gently to remove water; DO NOT WRING OR TWIST.

4. Gently pat into shape, smoothing out each finger and thumb on a dry towel, and dry at room temperature away from direct heat.

5. Proper laundering will extend the service life and appearance.

NOTE: Unless otherwise specified, the lettering shall be 3/32 inch high. The words "DO NOT WRING OR TWIST" shall be 1/8-inch-high lettering.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

3.8 Finished measurements. The measurements of the finished gloves shall conform to table IV when taken as specified herein. The measurements shall be taken without pulling or stretching and with the glove laid with the top pointing away from the body. The measurement of the length of the middle finger (see A of figure 1) shall be taken from the tip of the middle finger in a straight line to the base of the middle finger on the palm side. The measurement of the width of the palm (see B of figure 1) shall be taken across the palm, approximately 1/2 inch above the crotch of the little finger. The measurement of the overall length (see C of figure 1) shall be taken from the tip of the middle finger in a straight line to the top of the glove on the palm side.

TABLE IV. Finished Measurements

Glove Size	Measurements in Inches 1/		
	Length of Middle Finger	Width of Palm	Overall Length
6	3-1/4	2-7/8	8
6-1/2	3-5/16	3	8-1/2
7	3-3/8	3-1/8	8-5/8
7-1/2	3-7/16	3-1/4	8-7/8
8	3-1/2	3-3/8	9-1/8
* 8-1/2	3-9/16	3-1/2	9-3/8
* 9	3-5/8	3-5/8	9-5/8

* 1/ The tolerance shall be plus or minus 1/16 inch for the length of the middle finger and the width of the palm and plus or minus 1/8 inch for the overall length.

3.9 Identification of product. Each glove shall be marked for identification in contrasting color by the dry heat transfer process in accordance with type III, class 4 of DDD-L-20. The marking shall have good colorfastness to laundering. The marking shall include the nomenclature, the size, the stock number, and the name of the manufacturer of the gloves.

3.10 Workmanship. The finished gloves shall conform to the quality of product established by this specification. Defects shall not exceed the applicable acceptable quality levels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all the inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 . Inspection. The inspection of the gloves shall consist of the following:

(a) Preproduction examinations and tests

(b) Quality conformance examinations and tests.

* 4.3 Preproduction examinations and tests. When required by the procuring activity (see 3.1 and 6.2), the preproduction test sample shall be subjected to all of the examinations and tests specified herein to determine compliance with all of the requirements of this specification. The preproduction test samples shall consist of one pair of finished gloves manufactured before production is commenced.

* 4.4 Quality conformance examinations and tests

* 4.4.1 Materials and components. Materials and components listed in table V shall be tested. The methods of testing shall be as specified in FED-STD-191, wherever applicable, and as listed in table V. The physical and chemical values specified in section 3 shall apply to the results of the determinations made on the sample unit for test purposes as specified in the applicable test methods. If one or more sample units fail to meet any requirements specified, the lot shall not be acceptable. The unit for expressing the lot size of the basic fabric shall be 1 linear yard. The sample unit for testing the basic fabric shall be 3-1/2 continuous yards full width. The sample size of the basic fabric shall be as specified in table VI.

4.4.1.1 Stretch

4.4.1.1.1 Test specimen. The test specimen shall be rectangular 4 inches by not less than 5 inches. The long dimension shall be parallel to the length (wales) of the fabric for length tests and parallel to the width (courses) for width tests. The test specimen shall be taken no nearer the selvage than 1/10 the width of the cloth. Two parallel lines, 3 inches apart, shall be drawn at right angles to the long dimension of the specimen. In addition, a line shall be drawn parallel to the long dimension of the specimen and 1 inch in from either edge for properly aligning the specimen in the jaws.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

* TABLE V. Testing of Materials and Components

Characteristic	Test Method of FED-STD-191
Basic fabric (see 3.3.1 and table I)	
Material identification	1530 1/
Denier	2/
Filament	1/
Luster	1/
Type of knit	3/
Weight	5041
Yarns per inch	5070
Shrinkage	5552
Bursting strength	5120
Stretch	(see 4.4.1.1)
Water extract (pH value)	2811
Paper for inserts (see 3.3.3)	
Color	3/
Basic weight	4/

1/ A contractor's certificate of compliance will be acceptable for this characteristic.
2/ The test method shall be 4020 of FED-STD-191 except that a test specimen of 120 yards minimum shall be used.
3/ The test method shall be visual.
4/ The test method shall be 110 of UU-P-31 except that three determinations shall be made.

* TABLE VI. Sample Size

Lot Size	Sample Size
800 or less	2
801 to 22,000 inclusive	3
22,001 or more	5

4.4.1.1.2 Test apparatus. The test apparatus shall be a device wherein the specimen is held between two clamps. The design of the upper clamp shall be such that one gripping surface or jaw shall be an integral part of the rigid frame of the clamp. The face of the movable jaw shall measure 1 inch by 1 inch. The face of the fixed jaw shall measure 1 inch by 1-1/2 or more inches with the long dimension perpendicular to the direction of application of the load. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

lower clamp shall have similar jaws and, when weight is attached, shall weigh a total of 6 pounds. The jaws shall have smooth gripping surfaces, sufficiently flat and parallel to prevent slipping of the specimen during the test.

4.4.1.1.3 Procedure. The specimen shall be placed symmetrically in the clamps of the apparatus with the long dimension parallel and the short dimension at right angles to the direction of application of the load. Using the specified guidelines, the specimen shall be aligned with one outside edge of the front jaws of each clamp. The proper weight shall be added to insure a total of 6 pounds (including the weight of the lower jaws). The load shall be applied for 15 seconds, and the distance between jaws shall be measured by a pair of dividers or other suitable instrument. The elongation at the required load shall be expressed as the percent increase in length of the specimen between the jaws. The percent stretch shall be calculated as follows:

$$\text{Percent stretch} = \frac{\text{Stretch dimension - Original 3-inch dimension X 100}}{\text{Original dimension (3 inches)}}$$

* 4.4.2 End item. The end item shall be examined as specified in 4.4.2.1 and 4.4.2.2. Except for pairing defects, the sample unit for the examination shall be one glove, and the selection shall be by pairs. The sample unit for pairing defects shall be one pair of gloves. Defects in pairing shall be classified as a single defect. The inspection levels shall be III of MIL-STD-105 for 4.4.2.1 and S-3 of MIL-STD-105 for 4.4.2.2. The acceptable quality level for 4.4.2.1 shall be 1.0 defects per 100 units (dhu) for major defects, 6.0 dhu for major and minor A (combined) defects, and 15.0 dhu for total (major and minor A and B combined) defects. The acceptable quality level for 4.4.2.2 shall be 2.5 dhu (one class of defects).

4.4.2.1 Examination for defects. The end item shall be visually examined for defects. Defects found during this examination shall be classified as specified in table VII.

* 4.4.2.2 Finished measurement defects. The end item shall be measured to determine compliance with the finished measurement requirements. Any finished measurement of the end item deviating from the finished measurement specified in table IV and taken as specified in 3.8 shall be classified as a finished measurement defect.

* 4.5 Examination of packaging, packing, and marking. Shipping containers fully prepared for delivery shall be examined for the defects listed in table VIII to determine whether the packaging, packing, and marking requirements have been met. The sample unit for this examination shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. The lot size shall be the number of containers in the end item inspection lot. The inspection level shall be S-2 of MIL-STD-105, and the acceptable quality level shall be 4.0 dhu.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

* TABLE VII. Classification of Defects

Defect	Major	Minor A	Minor B
Material and workmanship			
Weakening defects such as smash, loose slub, dropped stitch, or run	X		
Shade bar, slub, or any other defect affecting appearance	X		
Hole, needle chews, scissor or knife cut, tear, mend, or burn	X		
Any part of glove shaded	X		
Cleanness			
Any permanent type of spot or stain	X		
One or more removable type of spots or stains		X	
Thread ends not trimmed according to requirements, or loose thread ends not removed, throughout the gloves		X	
Any improperly trimmed seam	X		
Component and assembly			
* Any part or required operation omitted, unless otherwise classified	X		
Cutting			
* Any part not properly cut	X		
Finishing			
Pressing omitted		X	
* Glove poorly shaped, affecting appearance		X	
Seams and stitching			
Any seam twisted, puckered, or pleated, affecting appearance		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

* TABLE VII. Classification of Defects (Cont)

Defect	Major	Minor A	Minor B
Ends of stitching (when not caught in other seams or stitchings) not securely backstitched or run off tied		X	
Shade of thread not matching color of basic fabric	X		
Any part of glove caught in unrelated operation	X		
Gage of stitching irregular, i.e., unevenly gaged or various stitchings not uniformly gaged, affecting appearance		X	
Gage of stitching more than 3/32 inch or less than 1/16 inch from edge		X	
Any open seam on outseaming of fingers, thumb, and body of glove 1/	X		
Any open seam 1/4 inch or more on top of glove 1/		X	
Any open seam on top of glove but less than 1/4 inch 1/			X
Not specified seam or stitch type	X		
Stitch tension loose, resulting in loose seam	X		
Stitch tension loose on edge stitching, resulting in loosely exposed bobbin thread or top thread		X	
Stitch tension tight (stitches breaking when moderate strain is applied to seam or stitching)	X		
Stitches per inch one stitch less than minimum specified			X
Stitches per inch two stitches less than minimum specified		X	
Stitches per inch three or more stitches less than minimum specified	X		
Stitches per inch exceeding maximum specified			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

* TABLE VII. Classification of Defects (Cont)

Defect	Major	Minor A	Minor B
Fingers and thumb			
Thumb other than Bolton thumb	X		
Fourchette spliced	X		
Fingers or thumb twisted or poorly shaped, affecting fit or appearance	X		
Vent facing			
Vent facing not securely caught on fabric, causing facing to pull away from fabric		X	
Vent facing spliced			X
Ends of vent facing not under hem			X
Vent facing twisted or not lying flat to glove trank		X	
Vent facing irregular in width, affecting appearance			X
Marking			
Marking omitted, illegible, or incorrect on one or both gloves		X	
Marking misplaced or not in contrasting color		X	
Marking ink penetrated through glove	X		
Pairing			
Gloves mispaired or mismatched (i.e., two gloves of different sizes or two gloves for the same hand)	X		
Length of fingers or thumb or overall length of two gloves uneven by 1/4 inch or more but not more than 3/8 inch		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

* TABLE VII. Classification of Defects (Cont)

Defect	Major	Minor A	Minor B
Length of fingers or thumb or overall length of two gloves uneven by more than 3/8 inch	X		
Pair not tacked together			X
* Tacking of pair of gloves insecure (less than two stitches) or misplaced			X
Tacking of pair of gloves too tight, i.e., not permitting gloves to be pulled apart without tearing glove fabric	X		
Inserts			
Inserts omitted	X		
Inscription on insert printed with other than indelible black ink		X	
Washing directions on printed insert in right-hand glove illegible or incorrect	X		
Inserts less than minimum size specified	X		
Printed insert not placed in right-hand glove		X	
Corners of insert not rounded		X	

1/ One or more broken or two or more continuous skipped or run-off stitches shall constitute an open seam. Run-offs shall be classified as open seams.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

* TABLE VIII. Packaging, Packing, and Marking

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; or improper size, location, sequence, or method of application
Materials	Any component missing or not as specified
	Any component damaged, affecting serviceability
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, or inadequate stapling
	Bulging or distortion of containers
Content	Number of items or intermediate packages more or less than required

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

* 5.1.1 Level A. Each pair of gloves, secured at the cuffs, shall be inserted into a flat style bag. The bag shall be fabricated of polyethylene film, 0.0015 inch thick. The bag shall be approximately 5-1/2 inches face-width and 13 inches in length, with one end sealed. Sealing of the opposite end is not required. Six pairs of gloves in polyethylene bags, of one size only, shall be packaged in a two-piece, telescope style, setup, white paperboard box conforming to type I or II, variety 1, class A, style 4 of PPP-B-676 or in a two-piece, telescope style, folding white paperboard box conforming to style III, type G, class i or j, subclass 1 of PPP-B-566. The depth of the lid for the partial telescope boxes shall be not less than 7/8 inch. The outside dimensions of the setup folding box including the lid shall be 11-1/2 inches in length by 5-1/8 inches in width by 2-3/8 inches in depth.

5.1.2 Level C. The gloves shall be packaged in accordance with industry's practice.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

* 5.2.1 Level A. Seventy-two pairs of gloves of one size (twelve boxes) packaged as specified in 5.1.1 shall be overpacked six in length, one in width, and two in depth in a fiberboard box conforming to class weather-resistant, size number 4 of MIL-B-17757. Closure and reinforcement of the box shall be as specified in the appendix of the box specification.

* 5.2.2 Level B. Fifty-four pairs of gloves of one size (nine boxes), packaged as specified in 5.1.1, shall be packed flat in a fiberboard shipping container with three boxes along the length and three boxes high and with the length of the boxes parallel to the end panels of the container. The shipping container shall conform to class domestic, grade 200, size number 1 of MIL-B-17757. Closure of the shipping container shall be as specified in the appendix of the container specification.

5.2.3 Level C. Gloves shall be packed in a manner that will insure acceptance and safe delivery at destination. Shipping containers shall conform to the rules of carriers and regulations as applicable to the mode of transportation.

* 5.3 Marking. Interior boxes and shipping containers shall be marked in accordance with MIL-STD-129. If level A packing is specified the fiberboard boxes (see 5.1.1) shall be marked as specified for interior packages, and the overpack box (see 5.2.1) shall be marked as specified for shipping containers.

5.3.1 Additional marking. The nomenclature, size, length, and stock number of the gloves shall be legibly stamped or printed in black block letters and numerals either on a paper label and then placed inside the bag so that it is readable through the polyethylene or across the center, face-width of the bag (see 5.1.1).

6. NOTES

* 6.1 Intended use. The gloves covered by this specification are intended to be worn by female personnel of the Department of the Air Force.

* 6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification

(b) Sizes required (see 1.2)

(c) Requirement for preproduction sample (see 3.1 and 4.3)

(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

6.3 Samples and patterns. Standard samples, color samples, and patterns may be obtained from the procuring activity or as directed by the contracting officer.

Custodian:
Air Force - 11

Reviewer:
Air Force - 82

Preparing activity:
Air Force - 11

Project No. 8445-F047

☆ U. S. GOVERNMENT PRINTING OFFICE: 1974-603-123/549

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

C16061

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

FOLD

4950/TZS
Wright-Patterson AFB, O 45433

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE
DoD-318

U.S.MAIL

4950/TZS
Wright-Patterson AFB, Ohio 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.