MILITARY STANDARD

TRANSFORMERS, INDUCTORS, AND COILS, SELECTION AND USE OF

TO ALL HOLDERS OF MIL-STD-1286C:

1. The following sections of MIL-STD-1286C have been revised and supersede the sections listed:

New section	Date	Superseded section	Date
103A		103	9 September 1980
500A		500	9 September 1980

2. The following pages of MIL-STD-1286C have been revised and supersede the pages listed:

New page	Date	Superseded page	Date
iii	9 September 1980	Reprinted without change	
iv		iv	9 September 1980
7		7	9 September 1980
8		8	9 September 1980
9		9	9 September 1980
10	9 September 1980	Reprinted without change	
101.31	9 September 1980	Reprinted without change	
101.32		101.32	9 September 1980
101.33		101.33	9 September 1980
101.34, 101.34a, 101.34b		101.34	9 September 1980
102.1		102.1	9 September 1980
102.2, 102.2a, 102.2b		102.2	9 September 1980
201.7	9 September 1980	Reprinted without change	
201.8			
201.9			
202.5		202.5	9 September 1980
202.6		202.6	9 September 1980
202.7		202.7	9 September 1980
202.8		202.8	9 September 1980
202.9			
202.10			

3. RETAIN THIS NOTICE AND INSERT BEFORE THE TABLE OF CONTENTS.

4. Holders of MIL-STD-1286C will verify that page and section changes and additions indicated above have been entered. This notice page will be retained as a check sheet. This issuance, together with appended pages, is a separate publication. Each notice is to be retained by stocking points until the Military Standard is completely revised or canceled.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME
Navy - AS, CG, MC, SH

Agent:
DLA - ES

Preparing activity:
Army - ER

(Project 5950-0594)

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

FOREWORD

This standard provides a listing of transformers, inductors, and coils, selected as standard parts for use in the design of military equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

CONTENTS

Paragraph			Page
	1.	SCOPE	1
	1.1	Scope	1
	1.2	Purpose of standard	1
	2.	REFERENCED DOCUMENTS	2
	2.1	Issues of documents	2
	3.	DEFINITIONS	3
	4.	GENERAL REQUIREMENTS	4
	4.1	Selection criteria	4
	4.1.1	Detail requirements	4
	4.1.2	Procurement information	4
	4.2	Conflict of requirements	4
	4.3	Criteria for inclusion in this standard	4
	4.4	Documentation of items not in this standard	4
	5.	DETAILED REQUIREMENTS	5
	6.	GENERAL APPLICATION INFORMATION	6
	6.1	General	6
	6.2	Transformer types	6
	6.3	Inductor types	6
	6.4	Coil types	6
	7.	SUPPLEMENTAL INFORMATION	11
	7.1	Metric equivalents	11
	7.2	International standardization agreement	11

SECTIONS

Section			
	100	TRANSFORMERS	100.1
	101	Transformers, Power	101.1
	102	Transformers, Audio Frequency	102.1
	103A	Transformers, Pulse, Low Power	103.1
	200	INDUCTORS	200.1
	201	Inductors, Audio Frequency	201.1
	202	Inductors, Power	202.1
	300	COILS, RADIOFREQUENCY	300.1
	301	Coils, Radiofrequency, Variable, Unshielded (Iron Core)	301.1
	302	Coils, Radiofrequency, Variable, Unshielded (Ferrite Core)	302.1
	400	COILS, FIXED, RADIOFREQUENCY, ESTABLISHED RELIABILITY	400.1
	401	Coils, Fixed, Radiofrequency, Molded, Micro-Miniature, Magnetically Shielded, Established Reliability (Phenolic Core-Iron Sleeve)	401.1
	402	Coils, Fixed, Radiofrequency, Molded, Micro-Miniature, Magnetically Shielded, Established Reliability (Iron Core-Iron Sleeve)	402.1
	403	Coils, Fixed, Radiofrequency, Molded, Micro-Miniature, Magnetically Shielded, Established Reliability (Ferrite Core-Ferrite Sleeve)	403.1
	404	Coils, Fixed, Radiofrequency, Molded, Established Reliability (Phenolic Core)	404.1
	405	Coils, Fixed, Radiofrequency, Molded, Established Reliability (Powdered Iron Core)	405.1
	406	Coils, Fixed, Radiofrequency, Molded, Established Reliability (Ferrite Core)	406.1
	500A	COILS, CHIP, RADIOFREQUENCY, FIXED OR VARIABLE	500.1
	501	Coils, Chip, Radiofrequency, Fixed	501.1
	502	Coils, Chip, Radiofrequency, Variable	502.1

Supersedes page iv
of 9 September 1980

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

TABLE I. Power transformers (see section 101).

Applicable MIL-T-27 specification sheet	Primary voltage (volts rms)	Secondary 1/ voltage (volts rms)	Secondary current 2/ (amperes rms)	Volt-ampere rating
60 HERTZ TRANSFORMERS				
127	100	21.2, 21.2, 7.78 CT	.1, .1, .225	1.75
104	105, 115, 125	2.5	3	7.5
35	105, 115, 125	6.3	2	12.6
106	105, 115, 125	5	3	15
34, 105	105, 115, 125	2.5	10	25
107	105, 115, 125	6.3	5	31.5
12, 110	105, 115, 125	5	10	50
108	105, 115, 125	6.3	10	63
109	105, 115, 125	6.3	20	126
18	115	48	12	5.76
157	115	8.25 to 13.44	.4	16
181	115	6.3 CT, 450 CT	2, 30 mA	26.1
254	115	9.7, 9.7	2.6, 1.7	42
19	115	6.3, 52 CT	3, 1	52
140	115	50	2	100
268	115	115	1	115
109	115	230	.65	126
400 HERTZ TRANSFORMERS				
82	26	3.8 CT	.002	.008
177	26	18	1	18
180	57.5, 99.7, 115	12.6, 12.6 CT	2, 2	51
221	107	49 CT, 5.3, 10	.01, 1.63, .6	37
220	107	49 CT, 6.35	.01, .01	100
223	107	49 CT, 5.55, 8.45	.01, 2.86, 16.4	125
223	107	49 CT, 5.57	.01, 22.5	130
222	107	49 CT, 5.68	.01, 27.8	160
224	107	49 CT, 5.76, 8.24	.01, 30, 2.14	214
131	108, 120, 132	66	1.8	123
73	115	3, 3	6 mA, 6 mA	.036
225	115	37 CT	.015	.6
37, 39, 48, 49	115	6 CT to 300 CT	.25 to .005	1.5
227	115	13.1, 11.7	.1, .05	1.9
39, 40, 50, 51	115	6 CT to 300 CT	.5 to .01	3
118	115	40 CT	.078	3.12
41, 42, 52, 53	115	6 CT to 300 CT	1.0 to .02	6
43, 54	115	6 CT to 300 CT	1.5 to .03	9
13, 15	115	26	.5	13
44, 45, 55, 61	115	6 CT to 300 CT	2.667 to .053	16
46, 47, 56, 62	115	6 CT to 300 CT	4.167 to .083	25
100	115	92, 5	20 mA, 5	27
80	115	12, 46 CT	.3, 1	49.6
57, 63	115	6 CT to 300 CT	8.33 to .167	50
77	115	115	.45	57
269	115	115	.5	57.5
58, 64	115	10 CT to 300 CT	7.5 to .25	75
59, 65	115	12 CT to 300 CT	8.33 to .33	100
60, 66	115	26 CT to 300 CT	9.62 to .83	250
256	115	129.5	3.2	350
134	120	28.6	.385	12
210	250	1	.5	.5
211	250	30	.5	15
212	250	250, 25	.2, .01	50

1/ CT indicates center-tap.
2/ Where a range is given, the specification covers two or more parts.

Supersedes page 7
of 9 September 1980

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

TABLE II. Audio frequency transformers (see section 102).

Applicable MIL-T-27 specification sheet	Power 1/ rating (milliwatts)	Frequency response (hertz)	Primary 1/ impedance range (ohms)	Secondary 1/ impedance range (ohms)
197	4 to 10,000	30 to 20,000	20 to 30K	16 to 80K
166	3 to 250	50 to 10,000	82 to 20K	8 to 1M
67	500	60 to 10,000	250 to 10K	4 to 10K
68	500	100 to 10,000	250 to 10K	4 to 25K
78	631	200 to 15,000	4K	600
69	500	100 to 20,000	250 to 25K	4 to 25K
165	10 to 250	200 to 20,000	50 to 100K	3.2 to 250K
70	60, 150	200 to 50,000	600 to 100K	4 to 10K
1	2 watts	250 to 500	4K	8
2	2 watts	250 to 500	4K	8
170	1	300 to 3400	600	1200
116	18 dBm	300 to 3500	600	600
277	1	300 to 3000	150	150
200	30	300 to 10,000	30K	50
3	15 dBm	↓	10K CT	22.5K CT,90 K CT
4	2 watts	↓	600 CT/150 SP	16,8,4
5	15 dBm	↓	600 CT/150 SP	135K CT
6	15 dBm	↓	600 CT/150 SP	600 CT/150 SP
7	2 watts	↓	7.6K, 4.8K	600 CT/150 SP
8	2 watts	↓	7.6K, 4.8K	16,8,4
9	2 watts	↓	15K CT	600 CT/150 SP
10	1 watt	↓	24K CT	600 CT/150 SP
11	.5 watt	↓	60K CT	600 CT/150 SP
172	25 to 500	300 to 20,000	80 to 200K	3.2 to 12K
167	5, 100	↓	50 to 50K	3.2 to 90K
96	100	↓	1.2K	3.2
76	25, 50, 100	↓	1K to 200K	50 to 12K
72	10, 50	300 to 100,000	600 to 100K	60 to 10K
71	10, 30	300 to 100,000	600 to 100K	4 to 25K
173	40, 75, 80	300 to 250,000	1K to 25K	12 to 8K
103	50 to 500	400 to 100,000	80 to 30K	32 to 12K
144	60 to 600	400 to 100,000	80 to 20K	3.2 to 10K
97	125	400 to 100,000	2K	8K
125	.001	10,000 to 20,000	15	100K

1/ Where a range is given, the specification covers two or more parts.

TABLE III. Audio inductors (see section 202).

Applicable MIL-T-27 specification sheet	Inductance range (millihenries)	DC current (milliamperes)	DC resistance (ohms)
142	.01 H to 2 H @ 1 kHz	70 to 5	2.5 to 500
241	.6 to 40 @ 1 kHz	90 to 11	1.9 to 132
214	1 to 10	0	2.3 to 26
146	1 to 100 @ 1 kHz	60 to 6	1.4 to 132
240	3 to 120 @ 1 kHz	50 to 8	4.8 to 94
124	5	28	7
145 1/	6 mH to 150 H	100 to 1.5	.5 to 15.6K
205	7 mH to 35 H @ 1 kHz, 500 Hz	250 to 3	.6 to 3.2K
215	10	0	90
111, 112	10 @ 400 Hz	.05	.5
147	10 mH to 60 H @ 500 Hz, 400 Hz	400 to 4	.3 to 1.67K
161	50 mH to 5 H @ 1 kHz	25 to 3	27 to 2.5K
285	100 to 750 @ 1 kHz	7 to 2.5	70 to 540
163	100 mH to 10 H @ 400 Hz	55 to 1.1	14 to 8.5K
164	150 mH to 60 H	12 to .2	33 to 5.16K
162	2.0/.5 H to 600/150 H 2/ @ 60 Hz 2/	0	21 to 5.72K
175	1/.25 H to 2500/652 H @ 60 Hz	0	5 to 13K

1/ Variable audio inductor.
2/ The first entry indicates a series connection, the second entry indicates a parallel (split) connection.

Supersedes page 8
of 9 September 1980

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

TABLE IV. Power inductors (see section 201).

Applicable MIL-T-27 specification sheet	Inductance range (henries)	DC current (amperes)	DC resistance (ohms)
119	25 µH @ 20 kHz	35	.004
84	40 µH @ 20 kHz	1.5	.045
191	40 µH min @ 16 kHz 60 µH max	4.8	
86	50 µH @ 10 kHz	.5	.25
135	60 µH @ 10 kHz	3	.025
229	60 µH @ 10 kHz	6	.025
289	60 µH to 10,000 µH @ 10 kHz	1.1 to 13.6	2.1 to .014
137	67.5 µH min @ 2.4 kHz 86.25 µH max	2.7	.045
88	72 µH @ 10 kHz	1	.3
120	120 µH @ 2.4 kHz	1.5	.0584
286	120 µH to 5,000 µH @ 20 kHz	1.6 to .25	.14 to 5.60
190	250 µH @ 20 kHz	.75	2
85	374 µH min @ 10 kHz 506 µH max	1.0	.07
89	450 µH @ 400 Hz	.5	.2
123	1 mH @ 20 kHz	3	.124
234	1 mH @ 1 kHz	1.5	.36
261	1.35 mH @ 800 Hz	3.85	.2
189	1.5 mH @ 16 kHz	1.5	1.6
259	2.2 mH @ 800 Hz	2.35	.15
98	3.9 mH @ 1 kHz	2.0	.41
160	1 H @ 60 Hz	.200	69
179	1 H @ 60 Hz	.325	44
279	4 H @ 60 Hz	.08	150
174	11 H @ 60 Hz	.2	85
209	16 H/4H 1/ @ 120 Hz	.08/.160 1/	324.5/385 1/
298	25 H @ 60 Hz	.04	600

1/ The first entry indicates series connection, the second entry indicates parallel (split) connection.

TABLE V. Coils, chip, radiofrequency (see section 500).

COILS, CHIP, RADIOFREQUENCY, FIXED (SECTION 501)									
Applicable MIL-C-83446 specification sheet	Inductance range (µH) ±10% tolerance		Q range		Self resonant frequency range (MHz)		Maximum current range (mA)		Maximum operating temperature
	Min	Max	Min	Max	Min	Max	Min	Max	
5	.01	10	42	60	33	2000	87	750	125°C
8	.01	56	30	60	8.5	2000	33	750	125°C
10	.01	1000	30	75	1.7	2000	25	1000	125°C
11	.10	10,000	85	115	.70	600	21	1000	125°C
COILS, CHIP, RADIOFREQUENCY, VARIABLE (SECTION 502)									
Applicable MIL-C-83446 specification sheet	Inductance range (µH)		Q range		Self resonant frequency range (MHz)		Maximum current range (mA)		Maximum operating temperature
	Min	Max	Min	Max	Min	Max	Min	Max	
7	.018	68	19	52	7	1200	32	750	125°C
9	.018	120	22	55	3	1200	22	750	125°C

Supersedes page 9
of 9 September 1980

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

TABLE VI. Coils, radiofrequency, variable (see section 300).

Applicable MIL-C-15305 MS sheet number	Inductance 1/ range (µH)		Q range		Self resonant frequency range (MHz)		Current range (mA)		Core	Maximum operating temperature
	Min	Max	Min	Max	Min	Max	Min	Max		
53229	.020	8.2	25	50	20	1000	25	50	Iron	105°C
53230	5.5	1 MH	20	30	1.1	34	11	57	Ferrite	105°C

TABLE VII. Coils, fixed, radiofrequency, established reliability (see section 400).

Applicable MIL-C-39010 specification sheet	Inducatance range (µH)		Inductance tolerance (±%)	Q range		Self resonant frequency range (MHz)		Current range (mA)		Core	Maximum operating temperature
	Min	Max		Min	Max	Min	Max	Min	Max		
1	.10	.82	10	40	50	180	250	370	1790	Phenolic	105°C
2	1.00	12.0	10	44	55	44	140	200	1070	Iron	105°C
3	15.00	1000	10	18	60	.11	49	11	315	Ferrite	105°C
4	.15	2.7	10, 20	30	55	120	510	460	2900	Phenolic	105°C
5	3.30	27.0	10	30	65	22	70	205	945	Powdered iron	105°C
6	.15	4.7	10, 20	33	50	90	525	260	2450	Phenolic	125°C
7	5.6	33	10	45	75	19	60	165	495	Powdered iron	105°C
8	.10	1.00	10	25	40	230	680	385	1350	Phenolic	125°C
9	1.2	27	10	25	50	20	150	135	590	Iron	105°C
10	33	1000	10	30	50	3.4	24	28	130	Ferrite	105°C

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part no. and dash no.	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temp.	Figure and dimensions
MIL-T-27/66								See figure 101-3
-01	115, 400 Hz	26 CT	9.62.	325	250	4	130°C	A - 2.875 in.
-02		28	8.93					B - 2.000 in.
-03		30	8.33					
-04		33	7.58					
-05		36	6.94					
-06		39	6.41					
-07		43	5.81					
-08		47	5.32					
-09		51	4.90					
-10		56	4.46					
-11		62	4.03					
-12		68	3.68					
-13		75	3.33					
-14		82	3.05					
-15		91	2.75					
-16		100	2.50					
-17		110	2.27					
-18		115	2.17					
-19		120	2.08					
-20		130	1.92					
-21		150	1.66					
-22		180	1.39					
-23		200	1.25	440				
-24		220	1.14	440				
-25		240	1.04	440				
-26		270	0.93	580				
-27		300	0.83	580				

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part no. and dash no.	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temp.	Figure and dimensions
MIL-T-27/73 -01	115 400 Hz (1-2)	3 (3-4) 3 (5-6)	6 mA (3-4) 6 mA (6-6)	185	.036 SH	4	105°C	See MIL-T-27/73
MIL-T-27/77 -01	115 400 Hz (1-2)	115 (3-4)	.45 (3-4)	326 (1-2) 326 (3-4)	56.9	5	170°C	See MIL-T-27/77
MIL-T-27/80 -01	115 400 Hz (1-2)	12 (3-4) 46 CT (5-7)	.3 (3-4) 1 (5-7)	525 (1-2) 525 (3-4) (5-7)	49.6	5	105°C	See MIL-T-27/80
MIL-T-27/82 -01	26 400 Hz (1-2)	3.8 CT (3-5)	.002	50 (1-2) 50 (1-2)	.008	5	155°C	See MIL-T-27/82
MIL-T-27/100 -01	115 400 Hz (1-2)	92 (3-4) 5 (5-6)	20 mA (3-4) 5 (5-6)	175(1-2) (5-6) 350 (3-4)	27	5	155°C	See MIL-T-27/100
MIL-T-27/104 -01	105/115/125 60 Hz (1-2-3-4)	2.5 (5-6)	3	175 (1-4) 1000 (5-6)	7.5	4	105°C	See MIL-T-27/104
MIL-T-27/105 -01	105/115/125 60 Hz (1-2-3-4)	2.5 (5-6)	10	175 (1-4) 1000 (5-6)	25	4	105°C	See MIL-T-27/105
MIL-T-27/106 -01	105/115/125 60 Hz (1-2-3-4)	5 (5-6)	3	175 (1-4) 1000 (5-6)	15	4	105°C	See MIL-T-27/106

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part no. and dash no.	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temp.	Figure and dimensions
MIL-T-27/107 -01	105/115/125 60 Hz (1-2-3-4)	6.3 (5-6)	5	175 (1-4) 1000 (5-6)	18	4	105°C	See MIL-T-27/107
MIL-T-27/108 -01	105/115/125 60 Hz (1-2-3-4)	6.3 (5-6)	10	175 (1-4) 1000 (5-6)	63	4	105°C	See MIL-T-27/108
MIL-T-27/109 -01	105/115/125 60 Hz (1-2-3-4)	6.3 (5-6)	20	175 (1-4) 1000 (5-6)	126	4	105°C	See MIL-T-27/109
MIL-T-27/110 -01	105/115/125 60 Hz (1-2-3-4)	5 (5-6)	10	175 (1-4) 6300 (5-6)	50	4	105°C	See MIL-T-27/110
MIL-T-27/118 -01	115 400 Hz (1-2)	40 CT (3-5)	.078	165 (1-2) 57 (3-5)	3.12	5	130°C	See MIL-T-27/118
MIL-T-27/127 -01	100 60 Hz (1-2)	42.4 CT (3-5) 7.78 (6-7)	100 mA (3-5) .225 (6-7)	175 (1-2) 37 (3-5) 14 (6-7)	1.75	5	130°C	See MIL-T-27/127
MIL-T-27/131 -01	108/120/132 400 Hz (1-2-3-4)	66 CT (5-7)	1.8	350 (1-4) 350 (5-7)	123	4	170°C	See MIL-T-27/131
MIL-T-27/134 -01	120 400 Hz (1-2)	28.6 (3-4)	.385	250	12	5	155°C	See MIL-T-27/134

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part no. and dash no.	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temp.	Figure and dimensions
MIL-T-27/140 -01	115 60 Hz (1-2)	50 (3-4)	2	357	100	4	130°C	See MIL-T-27/140
MIL-T-27/153 -01	115,220 50/60 Hz (1-2-3)	6.3 CT (4-6)	2	535 (1-3) 1070 (4-6)	12.6	4	130°C	See MIL-T-27/153
MIL-T-27/155 -01	115 50/60 Hz (1-2)	20 CT (3-5)	.6	535	12	4	130°C	See MIL-T-27/155
MIL-T-27/157 -01	115 50/60 Hz (2-4),(1-4) (1-3),(2-3)	20.25 (5-7) 20.25 (8-10)	.4 (5-7) .4 (8-10)	535	16	4	130°C	See MIL-T-27/157
MIL-T-27/177 -01	26 400 Hz (1-2)	18 (3-4)	1	161 (1-2) 161 (3-4)	18	4	105°C	See MIL-T-27/177
MIL-T-27/180 -01	57.5/99.7/115 400 Hz (1-2-3-4)	12.6 (5-6) 12.6 CT (7-9)	2 (5-6) 2 (7-9)	535	51	4	130°C	See MIL-T-27/180
MIL-T-27/181 -01	115 60 Hz (1-2)	6.3 CT (3-5) 450 CT (6-8)	30 mA(6-8) 2 (3-5)	535	26.1	4	130°C	See MIL-T-27/181
MIL-T-27/210 -01	250 400 Hz (1-2)	1 (4-5)	.5	250	.5 SH	5	170°C	See MIL-T-27/210
MIL-T-27/211 -01	250 400 Hz (1-2)	30 (4-5)	.5	250	15 SH	5	170°C	See MIL-T-27/211

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part no. and dash no.	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temp.	Figure and dimensions
MIL-T-27/212 -01	250 400 Hz (1-2)	250 (4-5) 25 (6-7)	.2 (4-5) .01 (6-7)	250	50 SH	5	170°C	See MIL-T-27/212
MIL-T-27/220 -01	107 400 Hz (1-2)	49 CT (3-5) 6.35 (6-7)	.01 (3.5) 15.9 (6-7)	120	100	5	170°C	See MIL-T-27/220
MIL-T-27/221 -01	107 400 Hz (1-2)	49 CT (3-5) 5.3 (6-7) 10 (7-8)	.01 (3-5) 1.63 (6-7) .60 (7-8)	120	37	5	170°C	See MIL-T-27/221
MIL-T-27/222 -01	107 400 Hz (1-2)	49 CT (3-5) 5.68 (6-7)	.01 (3-5) 27.8 (6-7)	120	160	5	170°C	See MIL-T-27/222
MIL-T-27/223 -01	107 400 Hz (1-2)	49 CT (3-5) 5.57 (6-7)	.01 (3-5) 22.5 (6-7)	120	125	5	170°C	See MIL-T-27/223
-02	107 400 Hz (1-2)	49 CT (3-5) 5.55 (6-7) 8.45 (7-8)	.01 (3-5) 2.86 (6-7) 16.4 (7-8)	120	130	5	170°C	
MIL-T-27/224 -01	107 400 Hz (1-2)	49 CT (3-5) 5.76 (6-7) 8.24 (7-8)	.01 (3-5) 30 (6-7) 2.14 (7-8)	120	214	5	170°C	See MIL-T-27/224
MIL-T-27/225 -01	115 400 Hz (1-2)	37 CT (3-5)	.015	120	.6	5	170°C	See MIL-T-27/225

Supersedes page 101.34 of 9 September 1980

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER


(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part no. and dash no.	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temp.	Figure and dimensions
MIL-T-27/227 -01	115 400 Hz (1-2)	13.1 (3-4) 11.7 (5-6)	.1 (3-4) .05 (5-6)	115	1.9	5	170°C	See MIL-T-27/227
MIL-T-27/254 -01	115 60 Hz (1-2)	9.7 (3-4) 9.7 (5-6)	2.6 (3-4) 1.7 (5-6)	200 (1-2) 50 (3-6)	42	4	130°C	See MIL-T-27/254
MIL-T-27/256 -01	115 400 Hz (1-3)	129.5 (4-5)	3.2	130	350	5	170°C	See MIL-T-27/256
MIL-T-27/268 -01	115 60 Hz (1-2)	115 (3-4)	1	165	115	4	155°C	See MIL-T-27/268
MIL-T-27/269 -01	115 400 Hz (1-2)	115 (3-4)	.5	165	57.5	5	155°C	See MIL-T-27/269
MIL-T-27/284 -02	115 400 Hz (1-2)	26 (3-4)	1 mA	127 (1-2) 27 (3-4)	.26	5	130°C	See MIL-T-27/284

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

SECTION 102

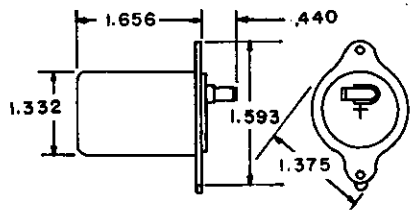
TRANSFORMERS, AUDIO FREQUENCY

Part no. and dash no.	Primary impedance (ohms)	Secondary impedance (ohms)	Maximum primary power level (mW)	Frequency response	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/1 -01, -02	4K	8	2W at 1 kHz	±2 dB (over frequency range 250 to 5000 Hz)	4	105°C, 130°C	
MIL-T-27/2 -01, -02	600	8	2W at 1 kHz	±2 dB (250 to 5000 Hz)	4	105°C, 130°C	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z.
Check the source to verify that this is the current version before use.

TRANSFORMERS, AUDIO FREQUENCY


Part no. and dash no.	Primary impedance (ohms)	Secondary impedance (ohms)	Maximum primary power level (mW)	Frequency response	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/3 -01A, -01B	10,000 CT	22,500 CT 90,000 CT	+15 dBm max -8 dBm min	±2 dB (300 to 10,000 Hz)	4	105°C	
MIL-T-27/4 -01A, -01B	600 CT 150 SPLIT	16 8 4	2 W max .1 W min				
MIL-T-27/5 -01A, -01B	600 CT 150 SPLIT	135,000 CT	+15 dB max -8 dB min				
MIL-T-27/6 -01A, -01B	600 CT 150 SPLIT	600 CT 150 SPLIT	+15 dB max -8 dB min				
MIL-T-27/7 -01A, -01B	7,600 4,800	600 CT 150 SPLIT	2 W max .1 W min				
MIL-T-27/8 -01A, -01B	7,600 4,800	16 8 4	2 W max .1 W min				
MIL-T-27/9 -01A, -01B	15,000 CT	600 CT 150 SPLIT	2 W max .1 W min				
MIL-T-27/10 -01A, -01B	24,000 CT	600 CT 150 SPLIT	2 W max .1 W min				
MIL-T-27/11 -01A, -01B	60,000 CT	600 CT 150 SPLIT	.5 W max .1 W min				

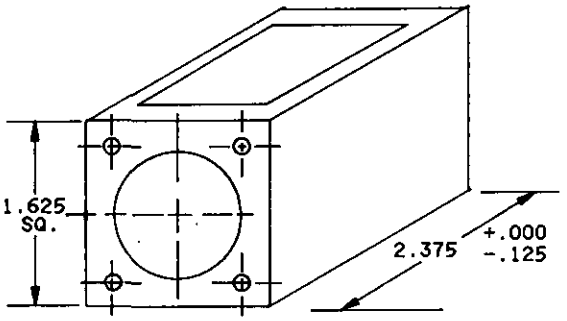

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

SECTION 102

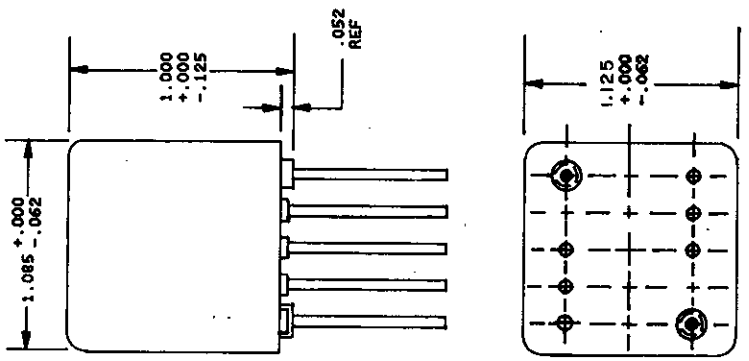TRANSFORMERS, AUDIO FREQUENCY

Part no. and dash no.	Primary impedance (ohms)	Secondary impedance (ohms)	Maximum primary power level (mW)	Frequency response	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/67-01	10K CT	10K CT	500 at 60 Hz	±1 dB (60 Hz to 10 kHz)	5	130°C	
MIL-T-27/67-02	10K CT	600 CT					
MIL-T-27/67-03	10K CT	4					
MIL-T-27/67-04	1.5K CT	15					
MIL-T-27/67-05	1K CT	600 CT					
MIL-T-27/67-06	1K CT	4					
MIL-T-27/67-07	600 CT	600 CT					
MIL-T-27/67-08	600 CT	60 CT					
MIL-T-27/67-09	600 CT	15					
MIL-T-27/67-10	600 CT	4					
MIL-T-27/67-11	250 CT	600 CT					


Supersedes page 102.2
of 9 September 1980

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.




SECTION 102


TRANSFORMERS, AUDIO FREQUENCY

Part no. and dash no.	Primary impedance (ohms)	Secondary impedance (ohms)	Maximum primary power level (mW)	Frequency response	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/68-01	10K CT	10K CT	500 at 100 Hz	±1 dB (100 Hz to 8 kHz)	5	130°C	
MIL-T-27/68-02	10K CT	600 CT		±1 dB (100 Hz to 10 kHz)			
MIL-T-27/68-03	10K CT	4					
MIL-T-27/68-04	1.5K CT	15					
MIL-T-27/68-05	1K CT	600 CT					
MIL-T-27/68-06	1K CT	4					
MIL-T-27/68-07	600 CT	25K CT					
MIL-T-27/68-08	600 CT	600 CT					
MIL-T-27/68-09	600 CT	60					
MIL-T-27/68-10	600 CT	15					
MIL-T-27/68-11	600 CT	4					
MIL-T-27/68-12	250 CT	600 CT					

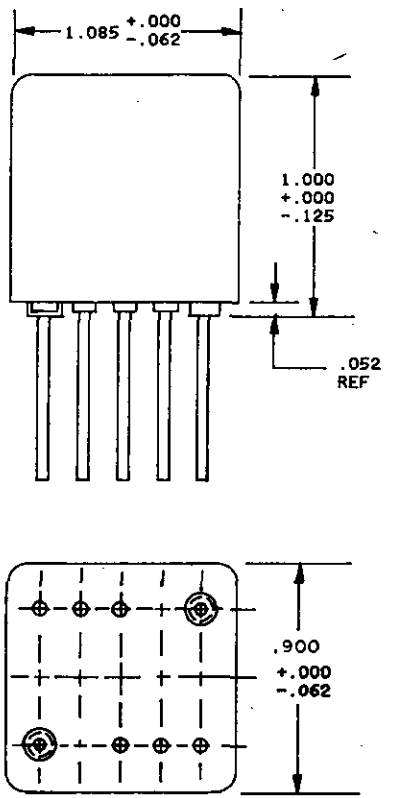

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

Specification sheet and dash nos.	Impedance (ohms)		Current (mA)		Voltage peak		DCR ±20% (ohms)		Turns ratio	Pulse duration (µs)	Pulse rise time (µs)	Pulse repetition frequency (kHz)	Inductance (mH)	Nominal dimensions (excluding terminals)	
	Source	Load	PRI	SEC	PRI	SEC	PRI	SEC							
MIL-T-21038/2 -001	---	---	---	---	3	4.7	32	40	1:1	60	0.8	100	200 min at 1 V, 1 kHz	.425 x .416 x .372	
MIL-T-21038/25 -001	7.5	60	4.0	0.5	30	30	.144	.75	1:1	3.0	.15	3,300 Hz	.25 µH @ 1 V 1 kHz	3.80 x 3.120 x 1.50	
MIL-T-21038/26 -001	40	10	40	80	16	8	.048 min .065 max	.029 min .041 max	2:1	3.0	.05	200	---	1.125 dia x .484	

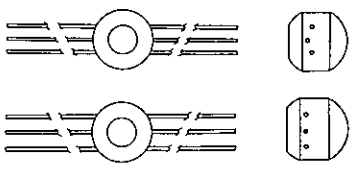
Specification sheet and dash nos.	DCR (ohms)			Blocking oscillator pulse		Coupling circuit characteristic				Frequency response ±2 dB		Turns ratio	Nominal dimensions (excluding terminals)	
				Pulse width (µs)	Rise time (µs)	Pulse width (µs)	Volts out	Rise time (µs)	Impedance in, out (ohms)					
	1-2	3-4	5-6							kHz	MHz			
MIL-T-21038/8 -001	3	3.5	4	.05	.022	.05	17	.01	250	260 to 34		1:1:1	.375 x .375 dia	
-002	5.5	6.5	7	.10	.024	.10	19	.01	250	220 to 34		1:1:1		
MIL-T-21038/9 -005	28	31	33	3	.10	3	26	.07	500	12.6 to 5.65		1:1:1		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.




SECTION 201

INDUCTORS, AUDIO FREQUENCY

Part no. and dash no.	Inductance (H)	DC current (mA)	DCR (ohms)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/205-01	.007	250	.6	4	105°C	
MIL-T-27/205-02	.012	200	1.1			
MIL-T-27/205-03	.020	150	1.6			
MIL-T-27/205-04	.030	125	2.5			
MIL-T-27/205-05	.050	100	3.9			
MIL-T-27/205-06	.070	80	5.7			
MIL-T-27/205-07	.120	60	9.1			
MIL-T-27/205-08	.2	50	16			
MIL-T-27/205-09	.3	40	25			
MIL-T-27/205-10	.5	30	39			
MIL-T-27/205-11	.7	25	58			
MIL-T-27/205-12	1.0	20	84			
MIL-T-27/205-13	1.5	17	130			
MIL-T-27/205-14	2.5	13	215			
MIL-T-27/205-15	4.0	10	335			
MIL-T-27/205-16	6.0	9	510			
MIL-T-27/205-17	10	7	840			
MIL-T-27/205-18	15	5	1350			
MIL-T-27/205-19	22	4	1960			
MIL-T-27/205-20	35	3	3200			

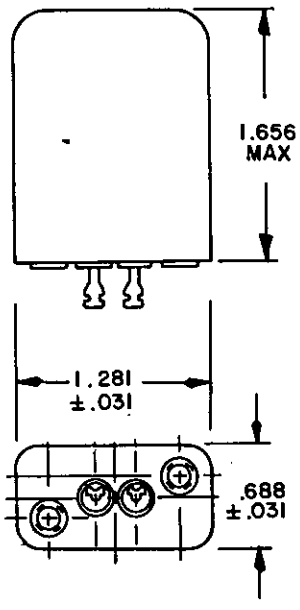


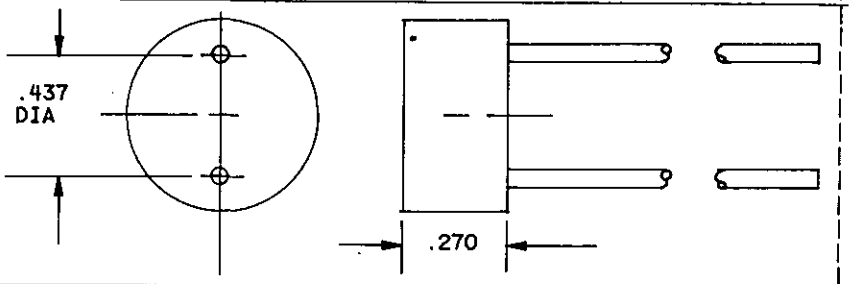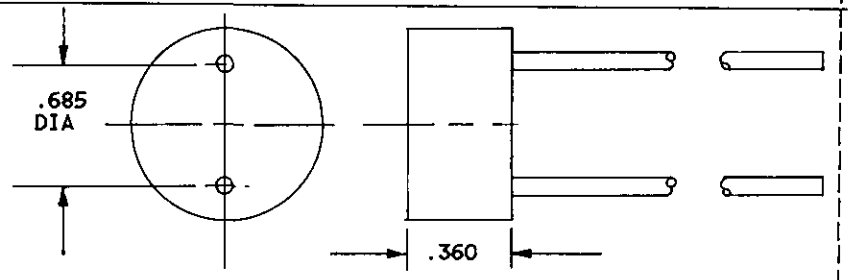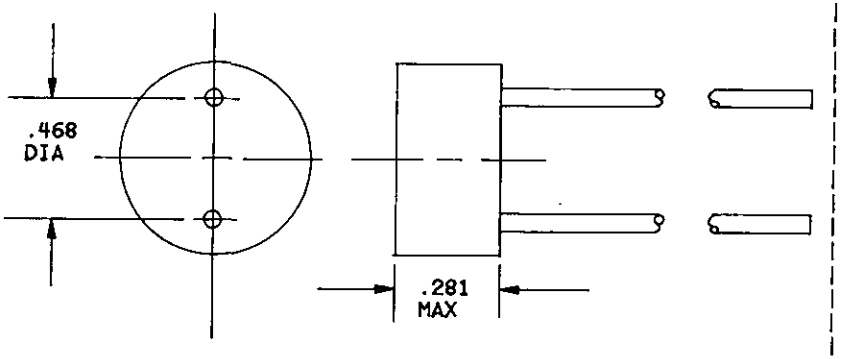Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

Part no. and dash no.	Inductance (H)	DC current (mA)	DCR (ohms)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/214-08	1.00 mH ±2%	0	2.30	5	130°C	
-11	3.30 mH ±1%	0	5.50			
-14	10.0 mH ±1%	0	26.0			
MIL-T-27/215-14	10.0 mH ±1%	0	90.0	5	130°C	
MIL-T-27/240-01	3.0 mH ±2%	50	4.8	5	105°C	
-02	5.0 mH ±2%	40	8.0			
-03	8.0 mH ±2%	30	13.0			
-04	12.5 mH ±2%	25	19.0			
-05	20.0 mH ±2%	20	31.0			
-06	30.0 mH ±2%	16	47.0			
-07	60.0 mH ±2%	11	94.0			
-08	120.0 mH ±2%	8	186.0			

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.



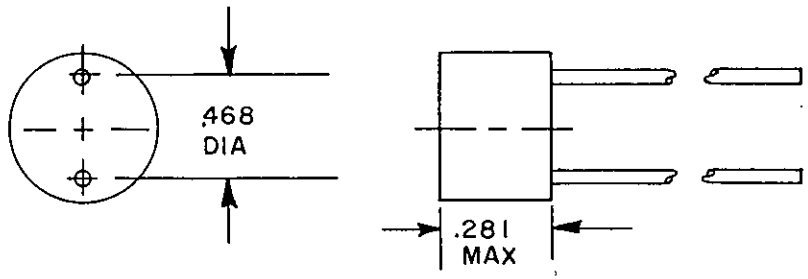
INDUCTORS, AUDIO FREQUENCY

Part no. and dash no.	Inductance (H)	DC current (mA)	DCR (ohms)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/241-01	.6 mH ±2%	90	1.9	5	105°C	
-02	1.5 mH ±2%	57	4.9			
-03	2.5 mH ±2%	44	8.2			
-04	6.0 mH ±2%	28	19.0			
-05	10.0 mH ±2%	22	32.0			
-06	15.0 mH ±2%	18	49.0			
-07	25.0 mH ±2%	14	82.0			
-08	4.0 mH ±2%	11	132.0			
MIL-T-27/285-01	100 mH ±2%	7.0	70.0	5	105°C	See figure for MIL-T-27/241
-02	150 mH ±2%	6.0	110			
-03	250 mH ±2%	4.5	180			
-04	350 mH ±2%	3.7	265			
-05	500 mH ±2%	3.0	360			
-06	750 mH ±2%	2.5	540			

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

SECTION 202

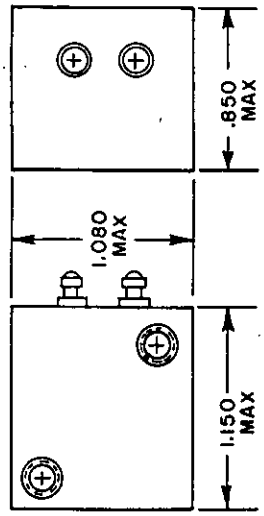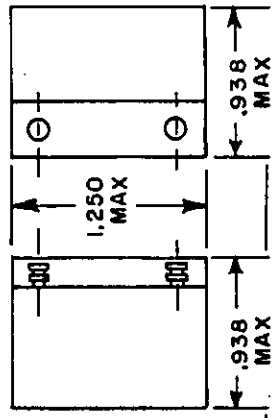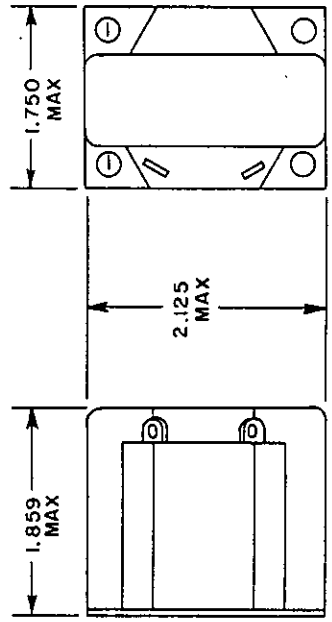INDUCTORS, POWER


Part no. and dash no.	Inductance (H)	DC current (amperes)	Voltage	DCR (max) (ohms)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/137-01	67.5 µH min 86.25 µH max	2.7	6.2 Vrms 2.4 kHz	.045	5	130°C	
	48.5 µH min	4.05					
MIL-T-27/149-01	1.5 min	45 mA	10 Vrms 60 Hz	225	5	130°C	
MIL-T-27/160	1.0 min	200 mA	10 Vrms 60 Hz	69	5	130°C	


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

Part no. and dash no.	Inductance (mH)	DC current (amperes)	Voltage	DCR (max) (ohms)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/171	(Connected) (Series) 9 to 45 (parallel) 2.25 to 11.25	(Connected) (Series) .75 to .035 (parallel) 1.5 to .07	(Series) 3 Vrms 60 Hz (parallel) 1.5 Vrms 60 Hz	0.52 (1-2) 0.68 (3-4)	4	130°C	
MIL-T-27/174-01	11 H	.2	10 Vrms 60 Hz	85	4	130°C	
MIL-T-27/179	1H	.325	10 Vrms 60 Hz	44	5	130°C	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

Part no. and dash no.	Inductance (mH)	DC current (amperes)	Voltage	DCR (max) (ohms)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/189-01	1.5	1.5	30 Vrms 16 kHz	1.6	5	130°C	
MIL-T-27/190-01	.25	.75	2.5 Vrms 20 kHz	2	5	130°C	
MIL-T-27/209-01	Series 16H Parallel 4H	Series .08 Parallel .160	Series 250 Vrms 120 Hz Parallel 125 Vrms 120 Hz	324.5 (1-2) 385 (3-4)	4	105°C	



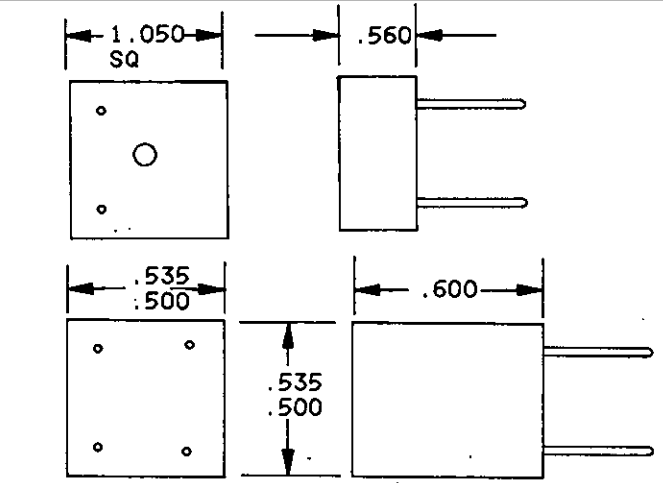


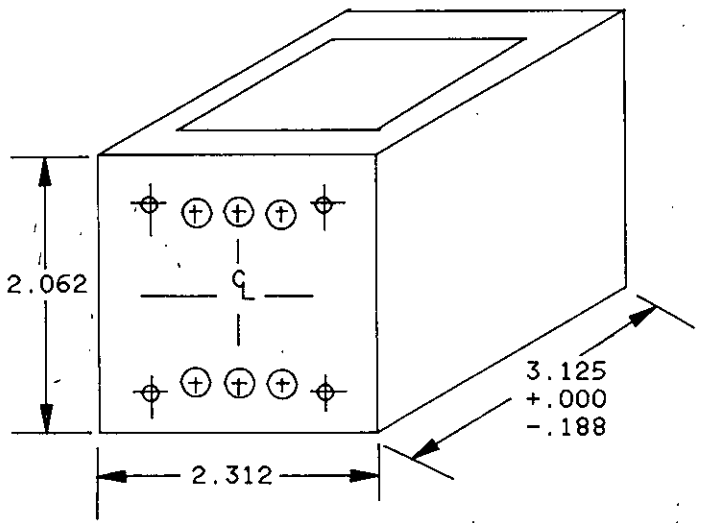

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

SECTION 202

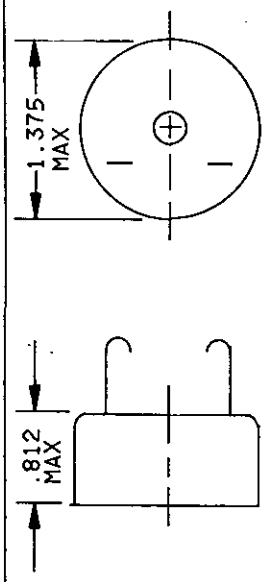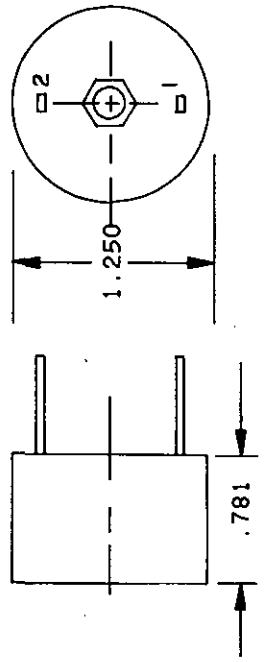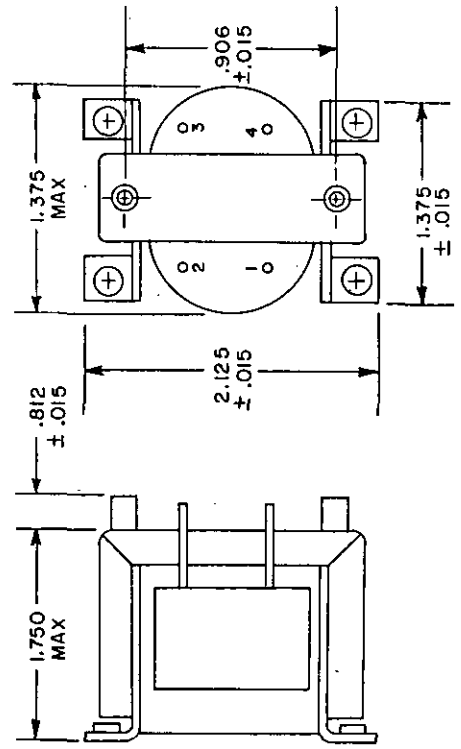INDUCTORS, POWER




Part no. and dash no.	Inductance (mH)	DC current (amperes)	Voltage	DCR (max) (ohms)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/229-01	60 µH	6	28 V pK to pK 10 kHz	.025	5	170°C	
MIL-T-27/234-01	1 mH	1.5	10 Vrms 1 kHz	.36	5	130°C	
MIL-T-27/259-01	2.2 min	2.35	26 Vrms 800 Hz	.15	5	170°C	

Supersedes page 202.8
of 9 September 1980

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.


SECTION 202

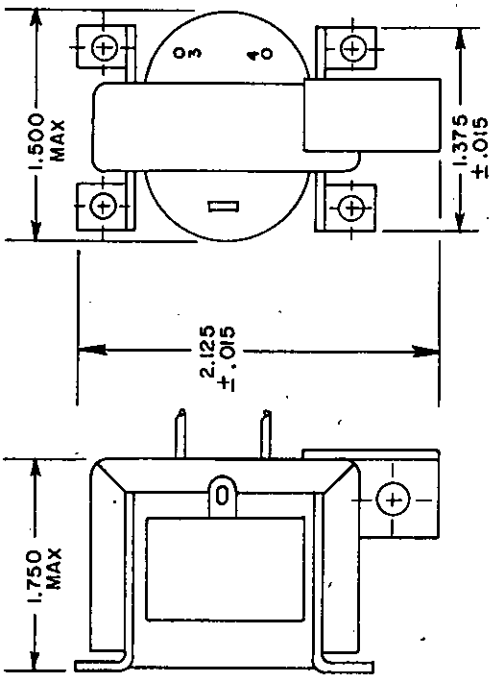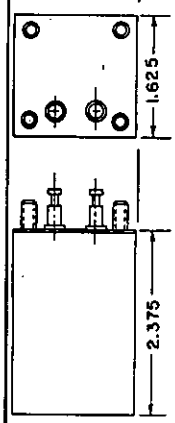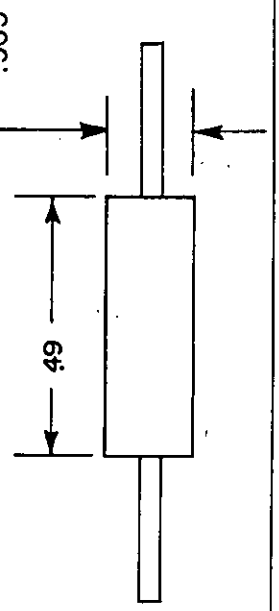
INDUCTORS, POWER

Part no. and dash no.	Inductance (mH)	DC current (amperes)	Voltage	DCR (max) (ohms)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/261-01	1.35 mH	3.85	26 Vrms 800 Hz	.2	5	170°C	
MIL-T-27/279-01	4 H	.08	50 Vrms 60 Hz	150	4	105°C	
MIL-T-27/286-01	120 µH	1.6	1 Vrms 20 kHz	.14	5	105°C	
-02	300 µH	1.0		.35			
-03	500 µH	.75		.56			
-04	1200 µH	.50		1.40			
-05	3000 µH	.30		3.50			
-06	5000 µH	.25		5.60			

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

Part no. and dash no.	Inductance (mH)	DC current (amperes)	Voltage	DCR (max) (ohms)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/289-01	10,000 µH	1.1	1 Vrms 10 kHz	2.1	5	130°C	
-02	6,400 µH	1.35		1.4			
-03	2,500 µH	2.2		.55			
-04	1,600 µH	2.8		.34			
-05	1,000 µH	3.5		.21			
-06 1/	640 µH 160 µH	4.5 9		.13 .033			
-07 1/	400 µH 100 µH	5.4 10.8		.088 .022			
-08 1/	240 µH 60 µH	6.8 13.6		.056 .014			
MIL-T-27/298-01	25 H	.04	160 Vrms 60 Hz	600	5	105°C	

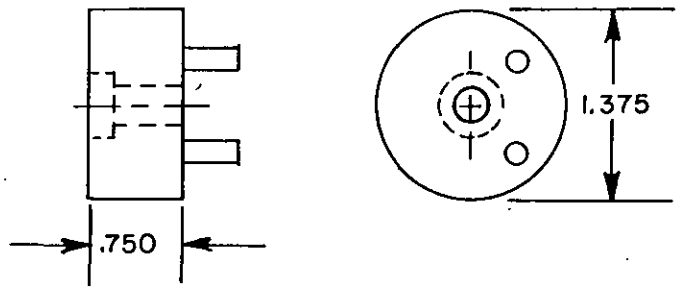

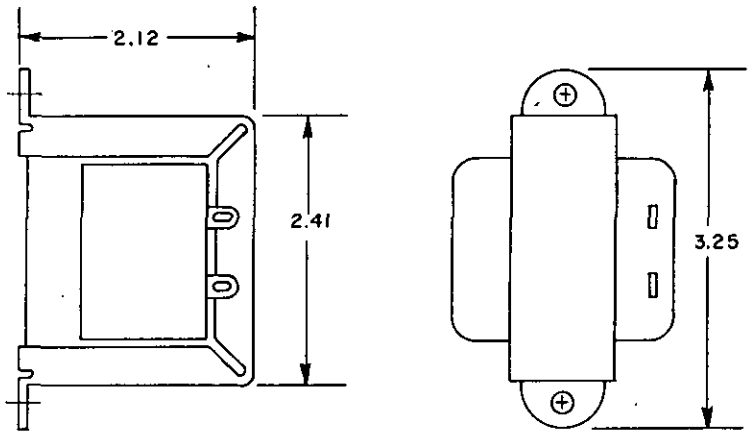

1/ Electrical values written one above the other indicate the values for a series or parallel connections respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

SECTION 500A


COILS, CHIP, RADIO FREQUENCY, FIXED OR VARIABLE

1. Scope. This section covers fixed or variable chip radiofrequency coils primarily intended for incorporation into hybrid microelectronic circuits.

Section		Applicable specification
501	Coils, Chip, Radiofrequency, Fixed - - - - - - -	MIL-C-83446
502	Coils, Chip, Radiofrequency, Variable - - - - -	MIL-C-83446

2. Identification.

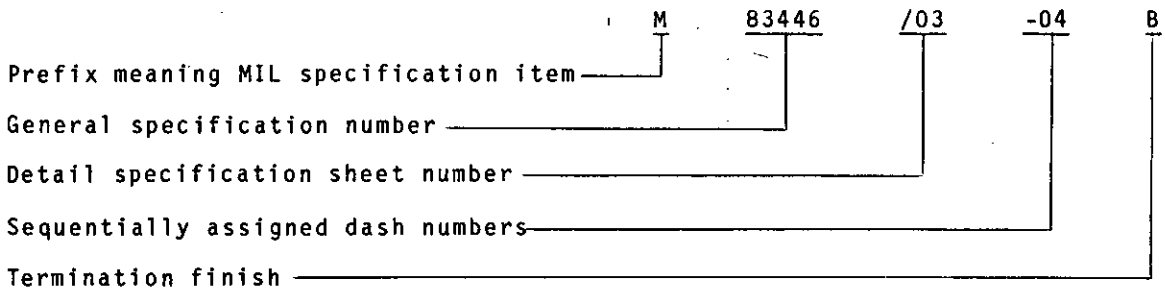2.1 Part number. The part number is used for identifying a discrete chip radiofrequency coil and shall be in the following form:



Termination finish.


Code	Final finish	Method of assembly
A	Gold over nickel	Weldable
B	Tin - lead over nickel	Solderable
C	Tin plated	Solderable
D	Platinum - gold	Solderable/weldable
E	Palladium - silver	Solderable/weldable

Supersedes section 500
of 9 September 1980.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

SECTION 501

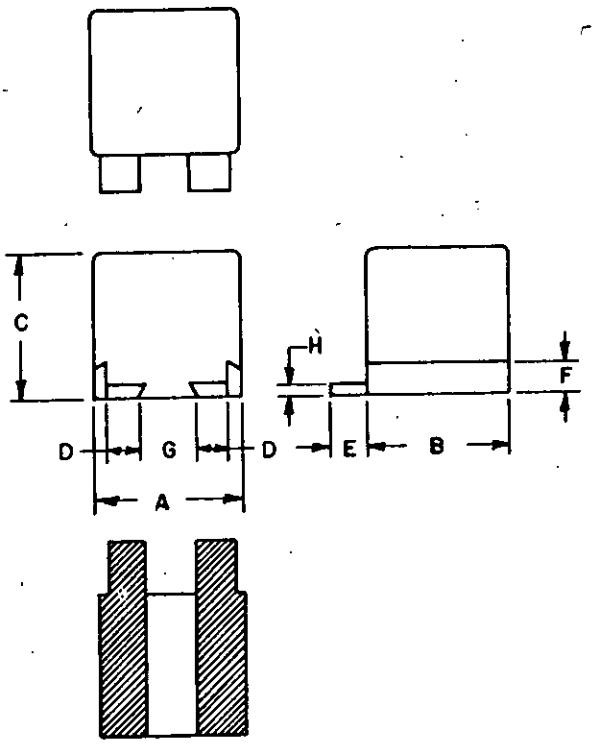MIL-C-83446/5, COILS, CHIP, RADIOFREQUENCY, FIXED



	INCHES
A	.110 Max
B	.105 Max
C	.085 Max
D	.030 ±.005
E	.040 ±.010
F	.018 ±.005
G	.038 ±.010
H	.005 ±.002

REQUIREMENTS:

Weight: 0.5 gram maximum.

Operating temperature range: -55° to +125°C.

Storage temperature range: -55° to +125°C.

Temperature rise (@ 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 500 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202, (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

SECTION 501

MIL-C-83446/5, COILS, CHIP, RADIOFREQUENCY, FIXED - Continued.

TABLE I. Electrical characteristics (initial).


Part number M83446/5- 1/	Inductance ±10% (μH)	Q (min)	Test frequency (MHz)	Self resonant frequency (min)(MHz)	DC resistance (max) (ohms)	Current (max) (mA)
1	0.010	60	150	2000	0.025	750
2	0.012	↓	↓	2000	0.025	↓
3	0.015	↓	↓	1800	0.040	↓
4	0.018	↓	↓	1500	↓	↓
5	0.022	51	100	1400	↓	↓
6	0.027	51	↓	1200	↓	↓
7	0.033	47	↓	1200	0.050	640
8	0.039	↓	↓	1200	0.070	600
9	0.047	↓	↓	1000	0.080	550
10	0.056	↓	↓	900	0.090	520
11	0.068	↓	↓	900	0.10	480
12	0.082	↓	↓	750	0.11	470
13	0.100	↓	50	700	0.11	470
14	0.120	↓	↓	600	0.11	470
15	0.150	↓	↓	500	0.12	450
16	0.180	51	↓	450	0.14	430
17	0.220	↓	↓	420	0.20	350
18	0.270	↓	↓	400	0.25	310
19	0.330	↓	↓	320	0.30	280
20	0.390	47	↓	270	0.45	240
21	0.470	47	25	250	0.50	230
22	0.560	52	↓	200	0.55	220
23	0.680	↓	↓	180	0.58	210
24	0.820	↓	↓	150	0.60	200
25	1.00	↓	↓	120	0.65	190
26	1.20	42	7.90	110	0.75	180
27	1.50	42	↓	100	1.1	160
28	1.80	48	↓	95	1.2	150
29	2.20	↓	↓	90	1.3	140
30	2.70	↓	↓	65	1.5	130
31	3.30	↓	↓	55	1.8	120
32	3.90	↓	↓	45	2.0	110
33	4.70	↓	↓	43	2.3	100
34	5.60	↓	↓	40	2.5	100
35	6.80	46	↓	38	2.6	98
36	8.20	46	↓	35	2.8	95
37	10.0	46	↓	33	3.3	87

1/ Complete part number shall include code letter for termination material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

SECTION 501

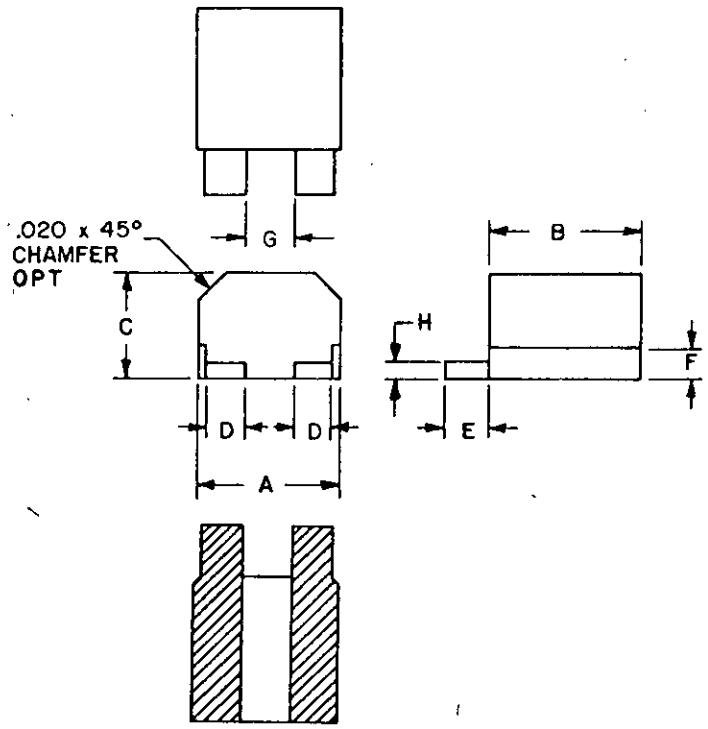MIL-C-83446/8, COILS, CHIP, RADIOFREQUENCY, FIXED



	INCHES
A	.120 Max
B	.105 Max
C	.065 Max
D	.100 Max
E	.040 $^{+.015}_{-.010}$
F	.018 ±.005
G	.038 ±.010
H	.005 ±.002

REQUIREMENTS:

Weight: 0.5 gram maximum.

Operating temperature range: -55° to +125°C.

Storage temperature range: -55° to +125°C.

Temperature rise (@ 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 500 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202, (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): See table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

SECTION 501

MIL-C-83446/8, COILS, CHIP, RADIOFREQUENCY, FIXED - Continued.

TABLE II. Electrical characteristics (initial).


Part number M83446/8- 1/	Inductance ±10% (µH)	Q (min)	Test frequency (MHz)	Self resonant frequency (min)(MHz)	DC resistance (max) (ohms)	Current (max) (mA)
1	0.010	60	150	2000	0.025	750
2	0.012	↓	↓	2000	0.025	↓
3	0.015	↓	↓	1800	0.040	↓
4	0.018	↓	↓	1500	↓	↓
5	0.022	51	100	1400	↓	↓
6	0.027	51	↓	1200	↓	↓
7	0.033	47	↓	1100	0.05	640
8	0.039	↓	↓	1000	0.07	600
9	0.047	↓	↓	900	0.08	550
10	0.056	↓	↓	850	0.09	520
11	0.068	↓	↓	840	0.10	480
12	0.082	↓	↓	750	0.11	470
13	0.100	↓	50	580	0.11	470
14	0.120	↓	↓	240	0.11	470
15	0.150	↓	↓	230	0.12	450
16	0.180	51	↓	↓	0.14	430
17	0.220	↓	↓	↓	0.20	350
18	0.270	↓	↓	↓	0.25	310
19	0.330	↓	↓	200	0.30	280
20	0.390	47	↓	190	0.45	240
21	0.470	47	25	180	0.50	230
22	0.560	45	↓	170	↓	↓
23	0.680	↓	↓	160	↓	↓
24	0.820	↓	↓	150	↓	↓
25	1.00	↓	↓	130	↓	↓
26	1.20	36	7.90	120	0.60	200
27	1.50	36	↓	100	1.1	160
28	1.80	38	↓	90	1.1	160
29	2.20	38	↓	85	1.5	130
30	2.70	41	↓	80	1.7	125
31	3.30	42	↓	75	1.8	120
32	3.90	42	↓	65	2.0	110
33	4.70	41	↓	55	2.3	100
34	5.60	41	↓	45	2.6	98
35	6.80	36	↓	40	2.8	94
36	8.20	↓	↓	35	3.0	90
37	10.0	↓	↓	33	3.3	87
38	12.0	↓	↓	26	4.0	79
39	15.0	32	2.50	24	4.2	79
40	18.0	↓	↓	21	4.4	75
41	22.0	↓	↓	19	7.5	57
42	27.0	↓	↓	14	8.0	55
43	33.0	30	↓	12	13	45
44	39.0	↓	↓	10	17	38
45	47.0	↓	↓	9.0	19	36
46	56.0	↓	↓	8.5	23	33

1/ Complete part number shall include code letter for termination material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

SECTION 501

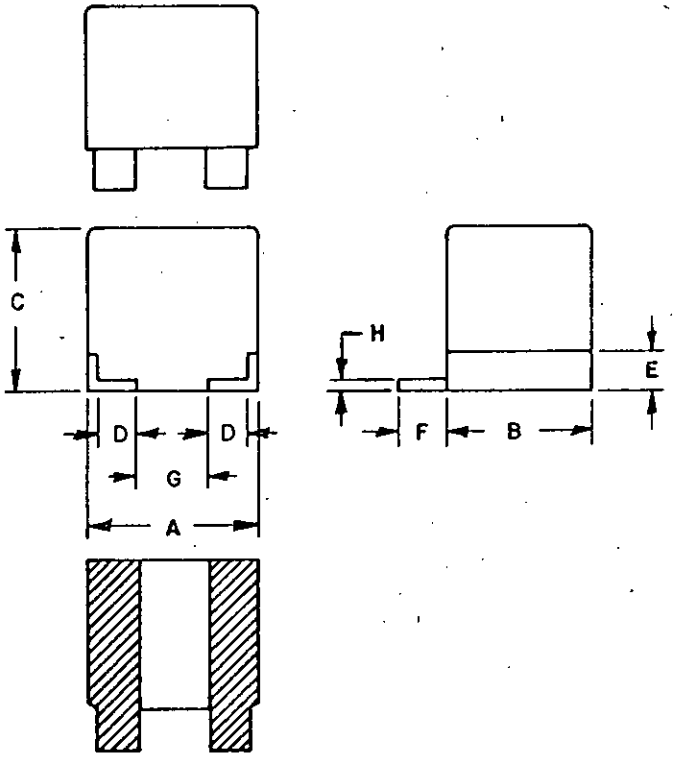MIL-C-83446/10, COILS, CHIP, RADIOFREQUENCY, FIXED



	INCHES
A	.155 ±.008
B	.125 ±.008
C	.130 Max
D	.037 ±.003
E	.020 ±.005
F	.040 +.015 -.010
G	.073 Min
H	.005 ±.002

REQUIREMENTS:

Weight: 0.5 gram maximum.

Operating temperature range: -55° to +125°C.

Storage temperature range: -55° to +125°C.

Temperature rise (@ 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 500 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202, (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): See table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

MIL-C-83446/10, COILS, CHIP, RADIOFREQUENCY, FIXED - Continued.

TABLE III. Electrical characteristics (initial).


Part number M83446/10- 1/	Inductance ±10% (µH)	Q (min)	Test frequency (MHz)	Self resonant frequency (min)(MHz)	DC resistance (max) (ohms)	Current (max) (mA)
1	0.010	60	150	2000	0.04	1000
2	0.012	70	↓	1800	↓	↓
3	0.015	75	↓	1500	↓	↓
4	0.018	75	↓	1500	↓	↓
5	0.022	60	100	1300	0.05	↓
6	0.027	↓	↓	1300	0.05	↓
7	0.033	↓	↓	1000	0.05	↓
8	0.039	↓	↓	1000	0.06	900
9	0.047	65	↓	800	0.06	900
10	0.056	↓	↓	760	0.06	900
11	0.068	↓	↓	700	0.07	840
12	0.082	↓	↓	650	↓	↓
13	0.100	↓	50	570	↓	↓
14	0.120	↓	↓	520	↓	↓
15	0.150	75	↓	400	0.08	790
16	0.180	75	↓	360	0.08	790
17	0.220	70	↓	320	0.08	790
18	0.270	↓	↓	270	0.10	700
19	0.330	↓	↓	240	0.10	700
20	0.390	↓	↓	220	0.10	700
21	0.470	↓	25	190	0.14	590
22	0.560	↓	↓	170	0.19	510
23	0.680	↓	↓	160	0.26	430
24	0.820	75	↓	150	0.30	400
25	1.00	75	↓	130	0.34	380
26	1.20	65	7.9	120	0.45	330
27	1.50	↓	↓	110	0.57	290
28	1.80	↓	↓	100	0.72	260
29	2.20	↓	↓	80	0.9	230
30	2.70	↓	↓	60	1.1	210
31	3.30	60	↓	50	1.2	200
32	3.90	60	↓	45	1.4	180
33	4.70	60	↓	42	1.6	170
34	5.60	65	↓	40	1.8	160
35	6.80	↓	↓	37	2.4	140
36	8.20	↓	↓	34	3.0	130
37	10.0	↓	↓	29	3.5	120
38	12.0	60	2.5	27	3.6	118
39	15.0	↓	↓	22	3.7	115
40	18.0	↓	↓	17	3.8	114
41	22.0	↓	↓	16	3.9	113
42	27.0	65	↓	15	4	110
43	33.0	65	↓	14	5	100
44	39.0	65	↓	13	7	84
45	47.0	70	↓	12	8	79
46	56.0	70	↓	11	10	70
47	68.0	65	↓	10	11	67
48	82.0	60	↓	9	12	64
49	100.	60	↓	8	13	62
50	120.	40	0.79	7	14	59
51	150.	↓	↓	6	16	56
52	180.	↓	↓	5	18	52
53	220.	↓	↓	4	24	45
54	270.	↓	↓	3.3	25	44
55	330.	↓	↓	3.1	29	41
56	390.	↓	↓	2.9	32	39
57	470.	35	↓	2.4	35	37
58	560.	35	↓	2.1	45	33
59	680.	35	↓	1.9	55	30
60	820.	30	↓	1.8	70	26
61	1000.	30	↓	1.7	80	25

1/ Complete part number shall include code letter for termination material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

SECTION 501

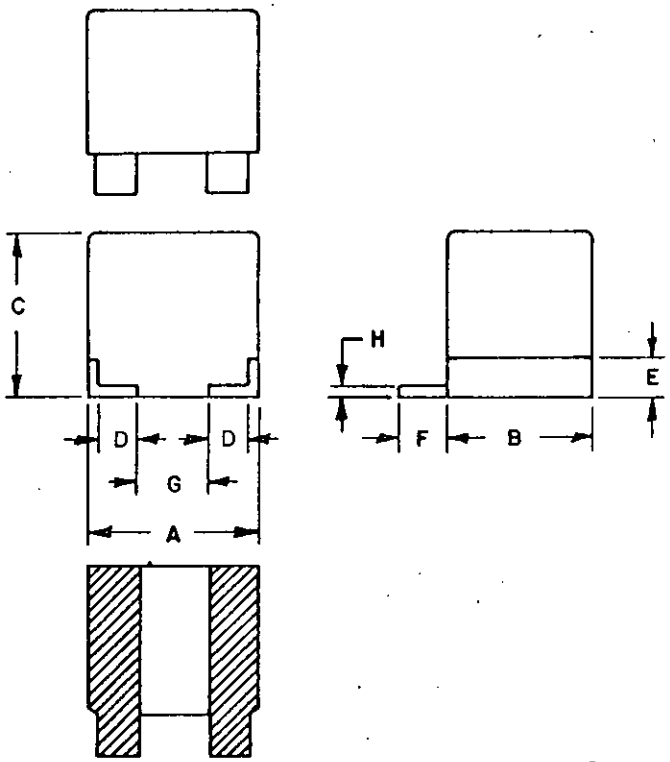MIL-C-83446/11, COILS, CHIP, RADIOFREQUENCY, SHIELDED FIXED



	INCHES
A	.155 ±.008
B	.125 ±.008
C	.130 Max
D	.037 ±.003
E	.020 ±.005
F	.040 $^{+.015}_{-.010}$
G	.073 Min
H	.005 ±.002

REQUIREMENTS:

Weight: 0.5 gram maximum.

Operating temperature range: -55° to +125°C.

Storage temperature range: -55° to +125°C.

Temperature rise (@ 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 500 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202, (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): See table IV.
Percent coupling = 3 percent maximum, mounted with the X-Y surfaces, side by side but not touching.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

MIL-C-83446/11, COILS, CHIP, RADIOFREQUENCY, SHIELDED FIXED - Continued.

TABLE IV. Electrical characteristics (initial).


Part number M83446/11- 1/	Inductance ±10% (μH)	Q (min)	Test frequency (MHz)	Self resonant frequency (min)(MHz)	DC resistance (max) (ohms)	Current (max) (mA)	Incremental current (max) (mA)
1	0.10	90	25	600	0.03	1000	280
2	0.12	↓	↓	520	0.03	↓	↓
3	0.15	↓	↓	490	0.03	↓	↓
4	0.18	↓	↓	460	0.04	↓	↓
5	0.22	↓	↓	430	0.04	↓	↓
6	0.27	100	↓	370	0.04	↓	↓
7	0.33	105	↓	310	0.05	750	200
8	0.39	115	↓	280	0.05	750	200
9	0.47	↓	↓	260	0.05	750	200
10	0.56	↓	↓	240	0.06	700	190
11	0.68	↓	↓	200	0.06	700	190
12	0.82	↓	↓	185	0.06	700	190
13	1.0	↓	↓	175	0.09	650	170
14	1.2	90	7.9	150	0.09	650	170
15	1.5	100	↓	135	0.14	600	150
16	1.8	↓	↓	120	0.20	500	130
17	2.2	↓	↓	105	0.30	400	100
18	2.7	↓	↓	85	0.40	350	88
19	3.3	↓	↓	80	0.46	330	83
20	3.9	105	↓	64	0.52	310	78
21	4.7	115	↓	56	0.54	300	75
22	5.6	↓	↓	49	0.60	285	72
23	6.8	↓	↓	45	0.66	270	68
24	8.2	↓	↓	41	1.00	225	57
25	10.	↓	↓	39	1.20	200	50
26	12.	100	2.5	34	1.5	180	43
27	15.	100	↓	30	1.8	170	41
28	18.	100	↓	26	1.9	160	38
29	22.	105	↓	23	2.1	150	36
30	27.	110	↓	20	2.4	140	34
31	33.	115	↓	18	2.7	130	32
32	39.	115	↓	17	3.1	125	29
33	47.	115	↓	16	3.2	125	29
34	56.	110	↓	14	3.5	120	28
35	68.	↓	↓	12	4.0	111	26
36	82.	↓	↓	10	4.8	102	23
37	100.	↓	↓	4.4	5.7	93	20
38	120.	85	0.79	8.0	6.2	89	20
39	150.	↓	↓	8.0	6.3	89	20
40	180.	↓	↓	6.9	6.4	88	19
41	220.	↓	↓	6.1	7.4	82	18
42	270	↓	↓	5.2	8.1	78	17
43	330	100	↓	4.6	8.8	75	16
44	390	↓	↓	4.0	9.7	72	16
45	470	↓	↓	3.6	10.0	69	15
46	560	↓	↓	2.8	11	66	14
47	680	↓	↓	2.3	12	64	13
48	820	95	↓	2.1	17	53	11
49	1000	95	↓	2.0	22	47	10
50	1200	75	0.25	1.7	24	45	9
51	1500	↓	↓	1.6	25	44	9
52	1800	↓	↓	1.5	27	43	9
53	2200	↓	↓	1.4	30	40	8
54	2700	↓	↓	1.3	34	38	8
55	3300	↓	↓	1.2	39	35	7.5
56	3900	↓	↓	1.1	56	29	5.5
57	4700	↓	↓	1.0	70	26	5.0
58	5600	↓	↓	0.90	80	25	5.0
59	6800	↓	↓	0.80	90	23	4.5
60	8200	↓	↓	0.70	100	22	4.5
61	10000	↓	↓	0.70	110	21	4.0

1/ Complete part number shall include code letter for termination material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

SECTION 502

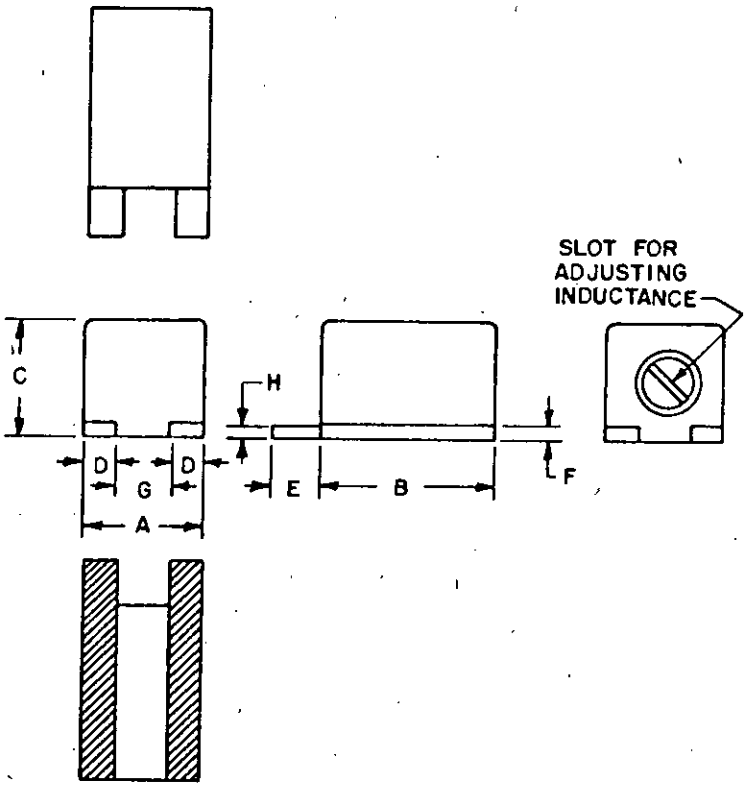MIL-C-83446/7, COILS, CHIP, RADIOFREQUENCY, VARIABLE



	INCHES
A	.115 Max
B	.170 Max
C	.115 Max
D	.030 ±.005
E	.040 $^{+.015}_{-.010}$
F	.007 ±.003
G	.038 ±.010
H	.005 ±.002

REQUIREMENTS:

Weight: 0.5 gram maximum.

Operating temperature range: -55° to +125°C.

Storage temperature range: -55° to +125°C.

Temperature rise (@ 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 700 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202, (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

SECTION 502

MIL-C-83446/7, COILS, CHIP, RADIOFREQUENCY, VARIABLE - Continued.

TABLE I. Electrical characteristics (initial).


Part number M83446/7- 1/	Inductance (µH) Min	Nom	Max	Q (min) over L range	Test frequency (MHz)	Self-resonant frequency (min) (MHz)	DC resistance at 25°C (max) (ohms)	Current (max) (mA)	Incremental current (max) (mA)
1	0.016	0.018	0.019	52	150	1200	0.02	750	---
2	0.019	0.022	0.024	55	↓	1100	0.02	↓	---
3	0.024	0.027	0.030	55	↓	1000	0.03	↓	---
4	0.029	0.033	0.037	52	↓	900	0.03	↓	---
5	0.035	0.039	0.043	52	↓	750	0.03	↓	---
6	0.042	0.047	0.052	52	100	660	0.04	↓	---
7	0.049	0.056	0.062	55	↓	610	0.04	↓	---
8	0.060	0.068	0.076	55	↓	550	0.05	↓	---
9	0.072	0.082	0.092	55	↓	520	0.06	640	---
10	0.090	0.100	0.110	50	50	490	0.07	600	---
11	0.105	0.120	0.135	50	↓	460	0.07	600	---
12	0.13	0.15	0.17	45	↓	430	0.10	480	---
13	0.16	0.18	0.20	↓	↓	385	0.12	450	---
14	0.19	0.22	0.25	↓	↓	330	0.15	400	---
15	0.24	0.27	0.31	↓	↓	275	0.20	350	---
16	0.29	0.33	0.37	↓	↓	240	0.25	300	---
17	0.35	0.39	0.44	42	↓	210	0.35	260	---
18	0.42	0.47	0.52	40	25	190	0.40	250	---
19	0.50	0.56	0.62	↓	↓	165	0.50	230	---
20	0.60	0.68	0.76	↓	↓	155	0.75	180	---
21	0.73	0.82	0.92	↓	↓	145	0.90	160	---
22	0.88	1.0	1.12	↓	↓	130	1.8	120	---
23	1.05	1.2	1.35	↓	↓	120	1.9	115	---
24	1.3	1.5	1.7	22	7.9	105	3.0	90	---
25	1.5	1.8	2.0	22	↓	95	3.5	85	---
26	1.9	2.2	2.5	19	↓	85	6.5	62	---
27	2.4	2.7	3.0	↓	↓	80	7.0	60	---
28	2.9	3.3	3.7	↓	↓	75	7.5	55	---
29	3.5	3.9	4.3	↓	↓	70	10.	50	---
30	4.2	4.7	5.2	↓	↓	38	2.5	100	---
31	5.0	5.6	6.2	22	↓	36	2.5	100	---
32	6.0	6.8	7.5	22	↓	35	3.5	85	---
33	7.3	8.2	9.1	21	↓	30	4.5	75	---
34	8.8	10	11.2	21	↓	25	5.0	70	---
35	10.6	12	13.4	21	↓	20	5.5	65	---
36	13.2	15	16.8	22	2.5	18	6.5	60	---
37	15.8	18	20.1	↓	↓	17	11.0	47	---
38	19.4	22	24.6	↓	↓	16	12.0	45	---
39	23.7	27	30.2	↓	↓	13	13.5	43	---
40	29.1	33	36.9	↓	↓	11	14.0	42	---
41	34.3	39	43.6	↓	↓	10	18	37	7.5
42	41.3	47	52.6	↓	↓	9	20	35	7.0
43	49.2	56	62.7	↓	↓	8	22	34	6.8
44	59.8	68	76.1	↓	↓	7	24	32	6.4

1/ Complete part number shall include code letter for termination material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

SECTION 502

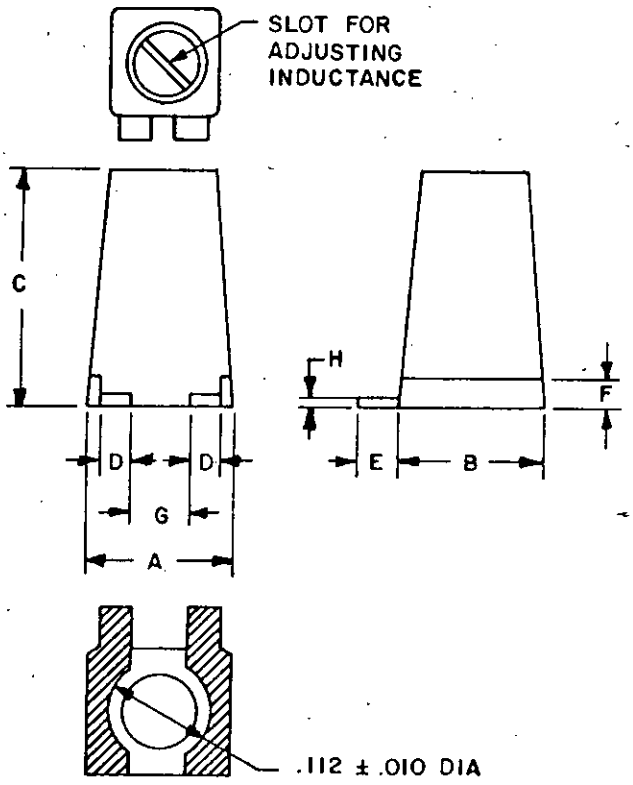MIL-C-83446/9, COILS, CHIP, RADIOFREQUENCY, VARIABLE



	INCHES
A	.165 Max
B	.130 Max
C	.225 Max
D	.030 ±.010
E	.040 $^{+.015}_{-.010}$
F	.020 ±.005
G	.073 Min
H	.005 ±.002

REQUIREMENTS:

Weight: 0.5 gram maximum.

Operating temperature range: -55° to +125°C.

Storage temperature range: -55° to +125°C.

Temperature rise (@ 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 700 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202, (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): See table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.

SECTION 502

MIL-C-83446/9, COILS, CHIP, RADIOFREQUENCY, VARIABLE - Continued.

TABLE II. Electrical characteristics (initial).

Part number M83446/9-1/	Inductance (µH) Min	Nom	Max	Q (min) over L range	Test frequency (MHz)	Self-resonant frequency (min) (MHz)	DC resistance at 25°C (max) (ohms)	Current (max) (mA)	Incremental current (max) (mA)
1	0.015	0.018	0.021	50	150	1200	0.03	750	---
2	0.018	0.022	0.026	55		1100	0.03		---
3	0.022	0.027	0.032			1000	0.03		---
4	0.027	0.033	0.039			900	0.04		---
5	0.033	0.039	0.047			750	0.04		---
6	0.039	0.047	0.056		100	660	0.04		---
7	0.047	0.056	0.068			610	0.05	700	---
8	0.055	0.068	0.083			550	0.05	700	---
9	0.067	0.082	0.099			520	0.06	645	---
10	0.080	0.100	0.120			490	0.06	645	---
11	0.096	0.120	0.144	50	50	460	0.07	600	---
12	0.12	0.15	0.18			430	0.08	560	---
13	0.14	0.18	0.22			385	0.09	525	---
14	0.17	0.22	0.27			330	0.10	500	---
15	0.21	0.27	0.33			300	0.15	400	---
16	0.26	0.33	0.40			275	0.19	360	---
17	0.32	0.39	0.47	40		240	0.25	300	---
18	0.37	0.47	0.57		25	210	0.30	280	---
19	0.46	0.56	0.68			190	0.40	250	---
20	0.54	0.68	0.82			165	0.60	200	---
21	0.68	0.82	1.00			155	0.70	180	---
22	0.75	1.00	1.25			140	0.90	160	---
23	0.90	1.20	1.50			125	1.1	150	---
24	1.13	1.50	1.87	35	7.9	115	1.3	135	---
25	1.35	1.80	2.25	35		105	1.7	120	---
26	1.65	2.20	2.75	35		100	2.3	100	---
27	2.02	2.70	3.37	25		85	3.0	90	---
28	2.48	3.30	4.12			75	3.9	80	---
29	2.92	3.90	4.87			47	3.9	80	---
30	3.52	4.70	5.88			30	3.9	80	---
31	4.2	5.6	7.0	22		24	4.0	75	---
32	5.1	6.8	8.5			23	4.0	75	---
33	6.1	8.2	10.2			22	4.5	72	---
34	7.5	10.0	12.5			21	4.5	72	---
35	9.0	12.0	15.0			17	5.0	70	---
36	11.2	15.0	18.7		2.5	15	6.0	65	---
37	13.5	18.0	22.5			14	8.0	55	---
38	16.5	22.0	27.5			13	10.	50	---
39	20.2	27.0	31.3			11	11.	45	---
40	24.7	33.0	41.2			10	13.	43	---
41	29.2	39.0	48.8			9	14.	42	---
42	35.2	47.0	58.8			8	15.	40	---
43	42.0	56.0	70.0			7	19.	36	---
44	51.0	68.0	85.0			6	24.	32	---
45	62.0	82.0	102.0	25		5	31.	28	5.6
46	75.0	100.0	125.0	25		4	40.	25	5.0
47	90.0	120.0	150.0	25		3	50.0	22	4.4

1/ Complete part number shall include code letter for termination material.

☆U.S. GOVERNMENT PRINTING OFFICE: 1982-505-022/3513

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:36Z
Check the source to verify that this is the current version before use.