MIL-STD-406
1 February 1957

MILITARY STANDARD

VISUAL INSPECTION STANDARDS

FOR

TERNE PLATE CANS AND

STEEL BOXES USED IN SMALL

ARMS AMMUNITION PACKAGING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:31Z
Check the source to verify that this is the current version before use.

OFFICE OF THE ASSISTANT SECRETARY OF DEFENSE
WASHINGTON 25, D. C.

Supply and Logistics

Visual Inspection Standards for
Terne plate Cans and Steel Boxes
Used in Small Arms Ammunition Packaging
MIL-STD-406

1. This standard has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force, effective 1 March 1957.

2. In accordance with established procedure, the Standardization Division has designated the Ordnance Corps, the Bureau of Ordnance, and the Air Force, respectively, as Army-Navy-Air Force custodians of this standard.

3. Recommended corrections, additions, or deletions should be addressed to the Standardization Division, Office of the Assistant Secretary of Defense (Supply and Logistics), Washington 25, D. C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:31Z
Check the source to verify that this is the current version before use.

FOREWORD

This standard was prepared under the direction of the Office, Chief of Ordnance, to be used to supplement specifications for steel boxes and terne plate cans used in the packaging of small-arms ammunition. It replaces the following publications on the same subject: ORD–SIP–S327, 1 April 1954, and ORD–SIP–S327, Amendment 1, 1 November 1955.

This publication serves to create a military standard which evaluates and illustrates a practical majority of defects assembled as a result of extensive surveys covering box, can and small arms ammunition manufacturing facilities.

The format used retains most of the features of the formats of the publications it replaces because experience has proved that the numbering of illustrations to conform to the numbering of visual defects in the applicable detail specifications, special treatment of indexes and specialized grouping have served to facilitate inspection, training, and general use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:31Z
Check the source to verify that this is the current version before use.

CONTENTS

1. SCOPE AND PURPOSE
1.1 Scope
1.2 Purpose
2. REFERENCED DOCUMENTS
2.1 Standards
3. DEFINITIONS
3.1 General
3.2 Specific
3.2.1 Permissible defect
3.2.2 Incidental defect
4. GENERAL REQUIREMENTS
4.1 General
5. DETAIL REQUIREMENTS
5.1 Classification
5.1.1 Defect grouping

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:31Z
Check the source to verify that this is the currentversion before use.

1. SCOPE AND PURPOSE

1.1 Scope. This standard provides procedures for determining and evaluating defects in steel boxes and terne plate cans used in the packaging of small-arms ammunition and the standard shall be used as a supplement to pertinent specifications.

1.2 Purpose. The purpose of this standard is to—

a. Create standardization of defect nomenclature and establish the limits of defectiveness for steel box and terne plate can acceptance inspection at vendors' plants, and receiving inspection at ammunition facilities.

b. Provide visual defect standards for use in connection with acceptance inspection of packed ammunition.

c. Serve as a visual aid in the training of personnel engaged in the manufacture and inspection of boxes and cans.

d. Provide visual standards to be used as a guide in the evaluation of the resistance to corrosion of surface treated, painted steel boxes.

2. REFERENCED DOCUMENTS

2.1 Standards.

MIL–STD–105—Sampling Procedures and Tables for Inspection by Attributes.

3. DEFINITIONS

3.1 General. Definitions of Standard MIL–STD–105 are applicable.

3.2 Specific. For the purpose of this standard the following definitions shall apply:

3.2.1 *Permissible defect.* A condition which, though not desirable from an appearance standpoint, may be permitted for reasons of economy.

3.2.2 *Incidental defect.* A condition least desirable from an appearance standpoint, and the frequency of occurrence of boxes and cans having such defects is limited for acceptable lots by means of an Acceptable Quality Level.

4. GENERAL REQUIREMENTS

4.1 General. The descriptions and definitions of defects established in this standard are those commonly occurring. Any other defects not listed, present in the lot, shall be reported. If, in the opinion of the Government inspector, the other defects be serious, complete information, recommendations and request for disposition shall be submitted through proper channels.

5. DETAIL REQUIREMENTS

5.1 Classification.

5.1.1 *Defect grouping.* For convenience in referencing, the defect lists, defect photographs, and color tolerances are grouped as follows:

Page

Boxes, Ammunition, Cal. .30, M19A1, and Cal. .50, M2A1, List of Defects 2–3
Boxes, Ammunition, Cal. .30, M19A1, and Cal. .50, M2A1, Defect Photographs ..... 4 thru 30
Boxes, Ammunition, Cal. .30, M19A1, and Cal. .50, M2A1:
  Rust Tolerances (After Corrosion Resistance Test) ..... 31 thru 34
  Color Tolerances 35
Cans, Ammunition, Universal, M20 and M21, List of Defects 36
Cans, Ammunition, Universal, M20 and M21, Defect Photographs ..... 37 thru 51

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:31Z
Check the source to verify that this is the currentversion before use.

LIST OF DEFECTS

Boxes, Ammunition, Cal. .30, M19A1, and Cal. .50, M2A1

No.	Defect	Page(s)
1.	Incomplete Manufacture	4
1-A.	Incomplete Latch	4
1-B.	Cover Emboss and/or Embossed Stop Missing	4
1-C.	Hinge Pin Missing	4
1-D.	Gasket Retainer Improperly Flanged	4
1-E.	End Handle Missing	5
2.	Incorrect Assembly	5
2-A through 2-C.	Bent or Malformed Cover Handle Clip	5
2-D.	Body Hinge Off-Center More Than 1/32"	5
2-E.	Incomplete Spot Welding	5
2-F and 2-G.	Cover Handle Clip Misaligned	6
2-H.	Cover Handle Clip Deformed	6
2-I.	Cover Handle Clip Not Welded	6
2-J.	Cover Handle Inverted	6
2-K through 2-M.	Gasket Retainer Not Centered	7
2-N and 2-O.	Gasket Out of Retainer	7
2-P.	Gasket Retainer Loose	8
2-Q.	Gasket Improperly Seated	8
2-R.	Gasket Incorrectly Seated on Body Hem	8
2-S.	Gasket Retainer Bent or Not Properly Seated at Hasp End	8
2-T.	Hasp Misaligned	9
2-U.	Hasp Not Welded	9
2-V.	Embossed Stops Not Engaging Underside of Hem	9
2-W.	Front of Body Distorted at Hem	9
2-X.	Manufacturer's Symbol Reversed	9
2-Y.	End Handle Reversed	9
2-Z.	Latch Link Retainer Off-Center More Than 1/32"	10
2-AA.	Latch Link Retainer and/or Cover Hinge Not Flush With Cover With Gap Exceeding 1/32"	10
2-BB.	Radius Outside Bottom	10
2-CC.	Body Seam on Opposite End	10
3.	Unsatisfactory Workmanship: Burrs, Rough Spots, Sharp Projections, Cracks, Splits, Buckles	10
3-A.	Burred and Sintered Bottom	10
3-B through 3-F.	Burrs	10, 11
3-G through 3-I.	Rough Spots	12
3-J and 3-K.	Sharp Projection	12
3-L through 3-N.	Buckles, Bottom	13
3-O and 3-P.	Buckles, End	13
3-Q.	Buckles or Rough Spots, Seam End, Exterior	13
3-R.	Convex Bottom	14
3-S and 3-T.	Buckle, Side	14
3-U.	Buckles and Convex Bottom	14
3-V.	Pronounced Convexity, Side	14
3-W and 3-X.	Concave Bottom	15
3-Y.	Split Hem at Seam Weld	15
3-Z.	Offset Seam Weld	15
3-AA.	Rough Seam Edge	15
3-BB.	Rough Bottom Mash Weld	15
3-CC through 3-FF.	Improper Weld Pattern	16
3-GG.	Double Seam, Bottom	16

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:31Z
Check the source to verify that this is the currentversion before use.

No.	Defect	Page(s)
3.	Unsatisfactory Workmanship: Burrs, Rough Spots, Sharp Projections, Cracks, Splits, Buckles—Con.	
	3–HH. Bent Cover Handle Clip	17
	3–II through 3–LL. Dents	17
	3–MM. Bulge	17
	3–NN through 3–PP. Gasket Defects	17
	3–QQ through 3–SS. Scratches	18
	3–TT and 3–UU. Stress Marks	18
	3–VV through 3–AAA. Bent Gasket Retainer	19
4.	Unsatisfactory Workmanship: Chips, Dirt, Grease, Other Foreign Material, Other Defects Excluding Rust	20
	4–A through 4–C. Foreign Material, Interior	20
	4–D. Insufficient Curl	20
	4–E. Acid Spots, Interior or Exterior	20
	4–F. Foreign Material, Gasket and Gasket Retainer	20
	4–G. Shallow Embossed Stops	21
5.	Paint Defects: Incomplete or Inadequate Coverage and Rust	21
	5–A and 5–B. Incomplete Coverage, Exterior	21
	5–C and 5–D. Incomplete Coverage, Interior	21
	5–E and 5–F. Rust, Interior	22
	5–G and 5–H. Rust, Exterior	22
	5–I and 5–J. Rust, Hardware	22
	5–K through 5–P. Inadequate Coverage	23–24
	5–Q. Bare Spots, Latch	24
	5–R. Inadequate Coverage, (Broken Blister)	24
6.	Paint Defects: Surface Imperfection, Excessive Paint, Paint Not Dry	25
	6–A through 6–D. Surface Imperfection	25
	6–E. Roughness, Interior or Exterior	26
	6–F and 6–G. Blisters, Interior or Exterior	26
	6–H through 6–M. Excessive Paint	27–28
	6–N. Paint Appearance	28
	6–O through 6–W. Paint Runs	29–30
	6–X. Incomplete Paint Agitation	30
	Rust Tolerances (After Corrosion Resistance Test)	31, 32, 33, 34
	Color Tolerances	35


NOTE.—In general, except for defects where severity is not pertinent, the illustrations define the following degrees of defectiveness:

"Worst" Permissible
"Worst" Incidental
Example of Major (Minor when applicable).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:31Z
Check the source to verify that this is the current version before use.


BOXES, AMMUNITION, CAL. .30, M19A1 AND CAL. .50, M2A1

No. 1. Incomplete Manufacture

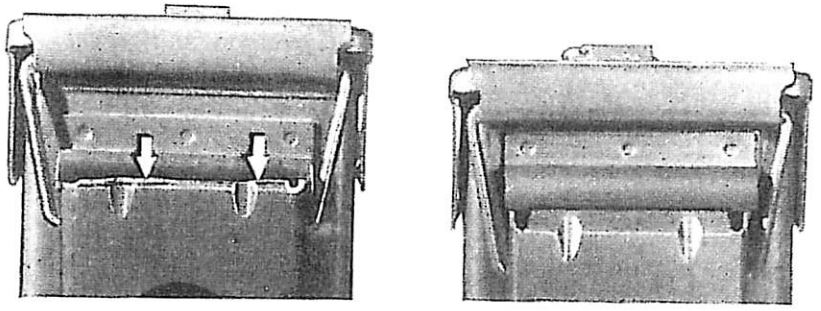


Defect Perfect


1–A. Incomplete Latch—Major

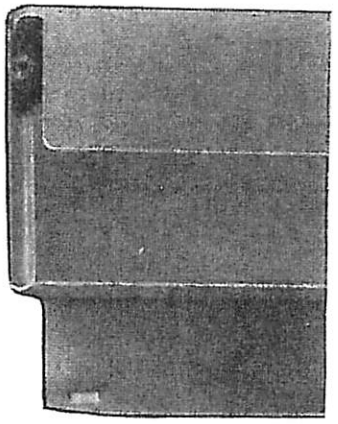

1–B. Cover Emboss and/or Embossed Stop Missing—Major

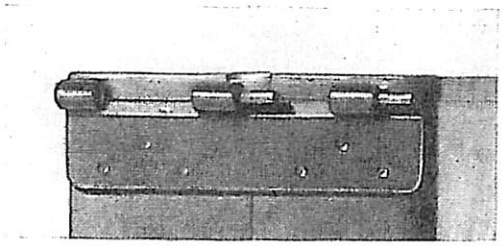


1–C. Hinge Pin Missing—Major

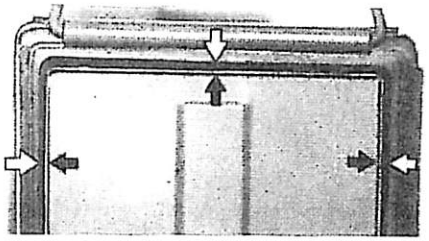


1–D. Gasket Retainer Improperly Flanged—Major

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:31Z
Check the source to verify that this is the current version before use.

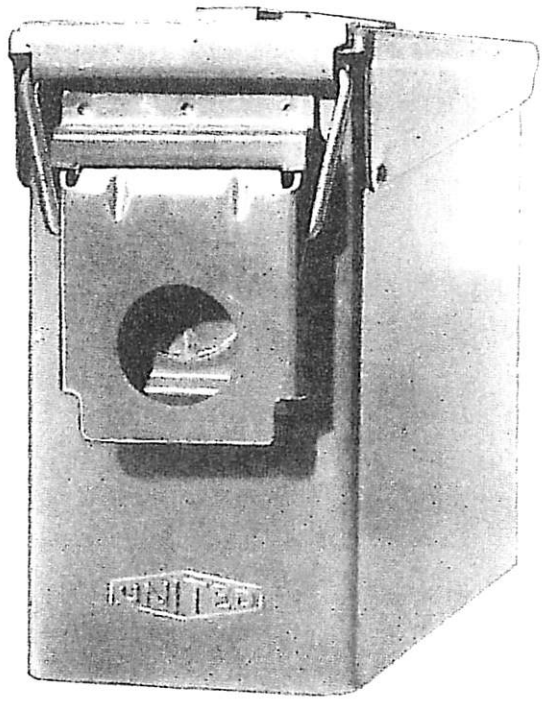


1–E. End Handle Missing—Major


No. 2. Incorrect Assembly

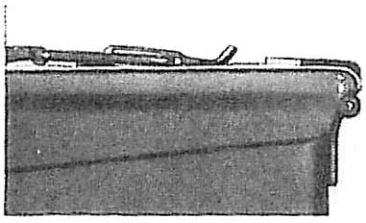

2–A. Major

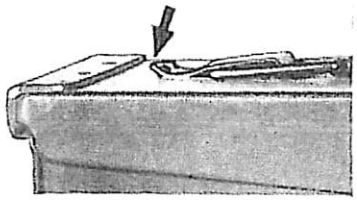


2–B. Incidental

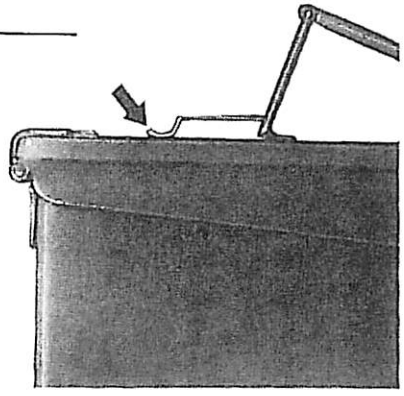


2–C. Permissible

Bent or Malformed Cover Handle Clip

(Incidental or permissible only if clip has no sharp projections and box stacks properly; otherwise major.)

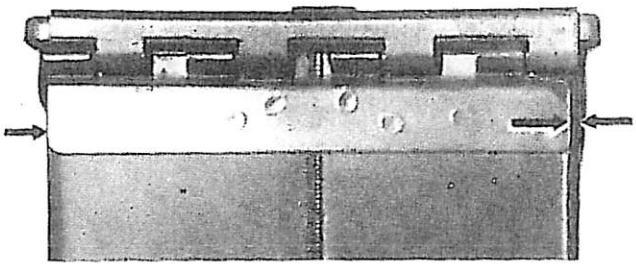


2–D. Body Hinge Off-Center More Than 1/32″—Major
(Defect is also applicable to cover hinge.)




2–E. Incomplete Spot Welding, Hinge—Major

(Body hinge illustrated; defect is also applicable to cover hinge and latch link retainer.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:31Z
Check the source to verify that this is the current version before use.

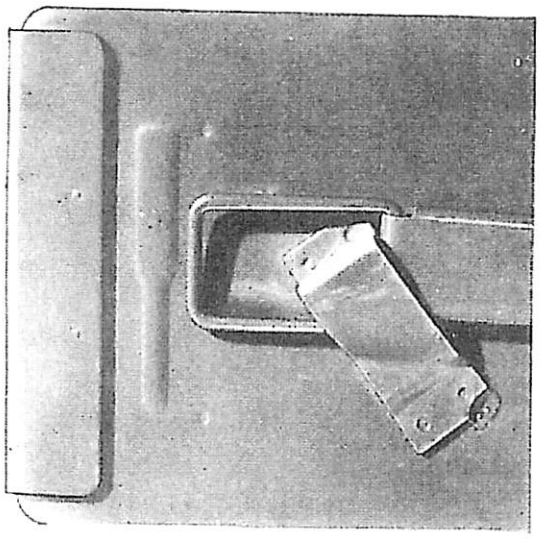


2–F. Major

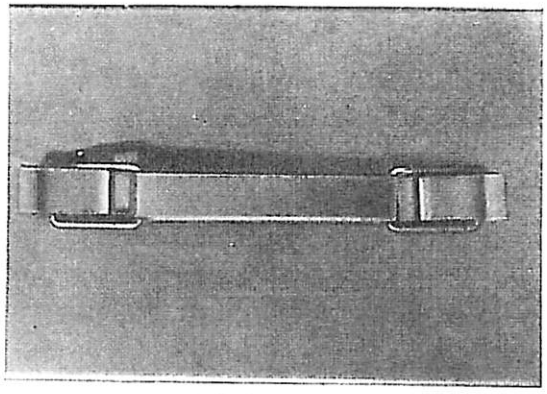


2–G. Permissible


Cover Handle Clip Misaligned

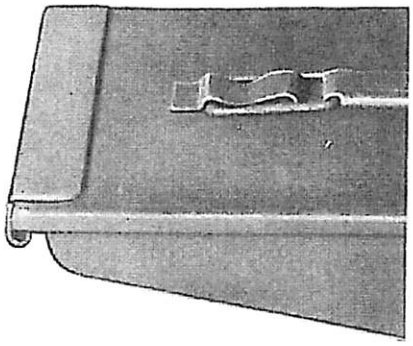

2–H. Cover Handle Clip Deformed—Major

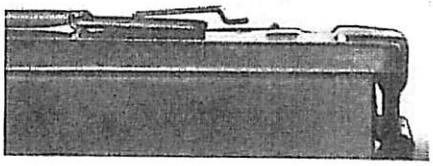


2–I. Cover Handle Clip Not Welded—Major

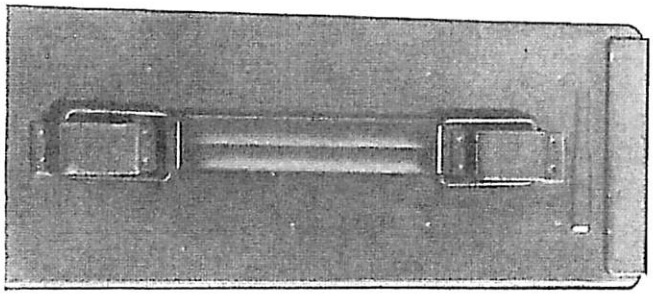


2–J. Cover Handle Inverted—Incidental

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:31Z
Check the source to verify that this is the current version before use.

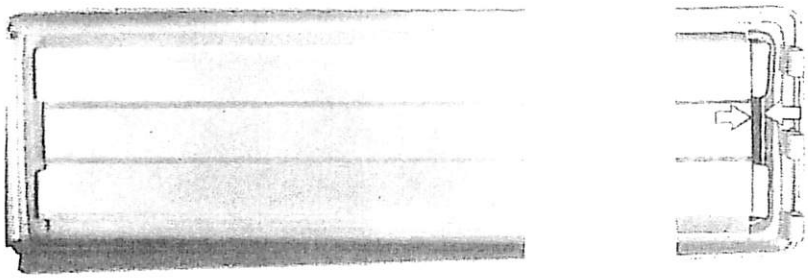


2–K. Major

(Both ends of cover assembly illustrated, showing gasket retainer too far to left.)

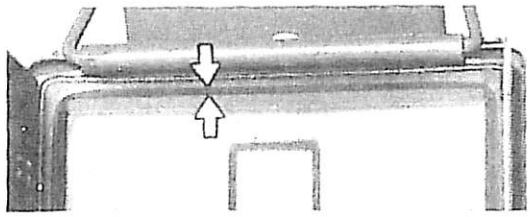

2–L. Major

(Causing poor seating of gasket on body hem.)

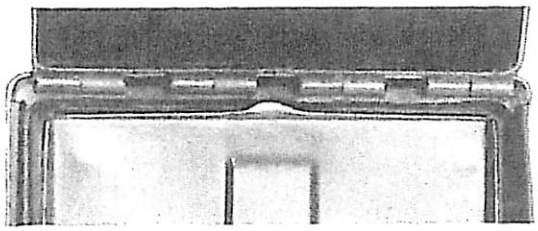


2–M. Major

(Gasket retainer located too close to cover hinge, resulting in flange interference with body hem.)

Gasket Retainer Not Centered




2–N. End—Major

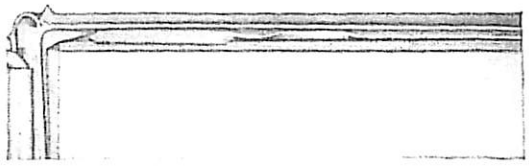


2–O. Side—Major

Gasket Out of Retainer


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:31Z
Check the source to verify that this is the current version before use.

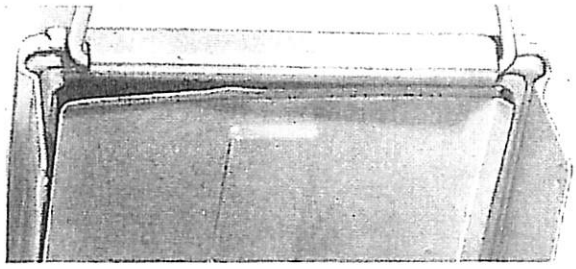

2–P. Gasket Retainer Loose—Major

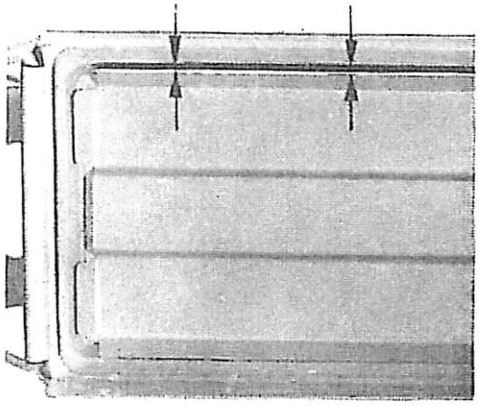


2–Q. Gasket Improperly Seated—Incidental

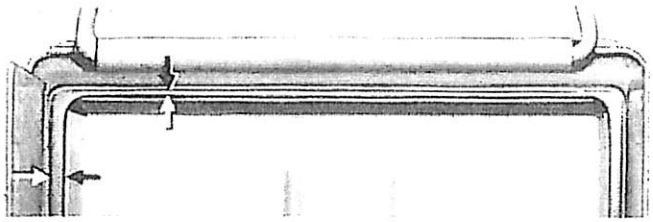

2–R. Gasket Incorrectly Seated on Body Hem—Incidental


(Gasket retainer centered. Impression of body hem too close to retainer due to unsatisfactory assembly of box.)

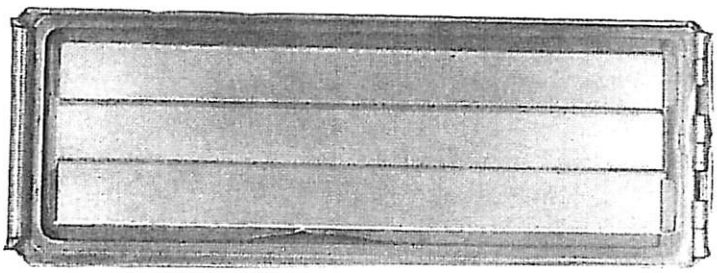


2–S. Gasket Retainer Bent or Not Properly Seated at Hasp End—Incidental

(Two defects are illustrated, either of which defines a defective box. Comparable improper seating at hinge end constitutes a major defect.)


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:31Z
Check the source to verify that this is the current version before use.

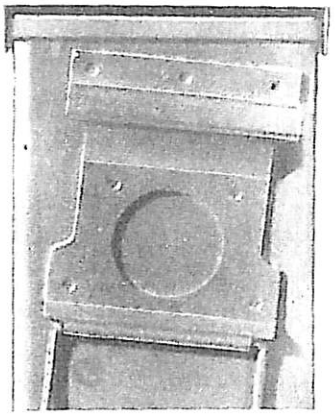


2–T. Hasp Misaligned—Major

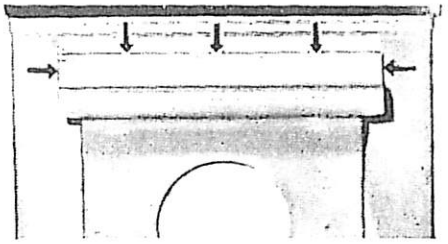

2–U. Hasp Not Welded, Top—Major

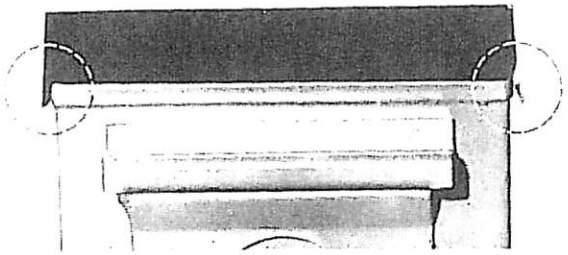


2–V. Embossed Stops Not Engaging Underside of Hem—Major

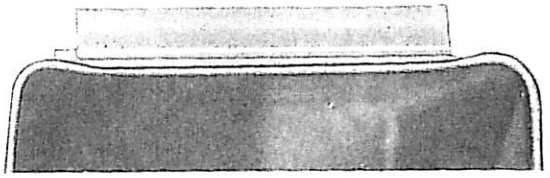

2–W. Front of Body Distorted at Hem—Major




2–X. Manufacturer's Symbol Reversed—Incidental

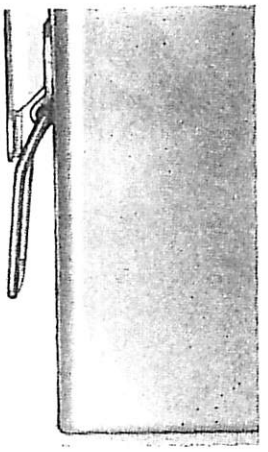


2–Y. End Handle Reversed—Incidental


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:31Z
Check the source to verify that this is the current version before use.

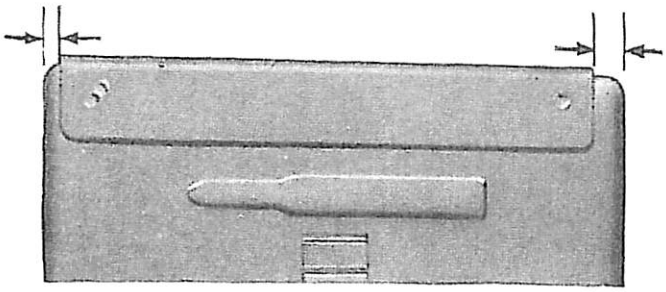

2–Z. Latch Link Retainer Off-Center More Than 1/32''—Incidental



2–AA. Latch Link Retainer and/or Cover Hinge Not Flush With Cover With Gap Exceeding 1/32''—Incidental

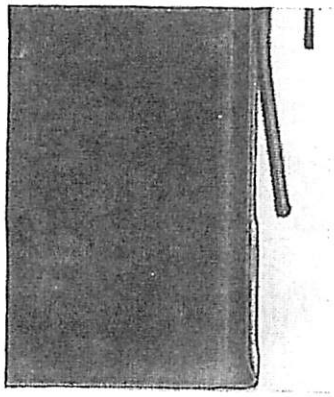

2–BB. Radius Outside Bottom—Permissible


(One or more bottom corners flared, not exceeding 1/32'' each corner.)

(Not Illustrated)


2–CC. Body Seam on Opposite End—Incidental

No. 3. Unsatisfactory Workmanship:

Burrs, Rough Spots, Sharp Projections, Cracks, Splits, Buckles

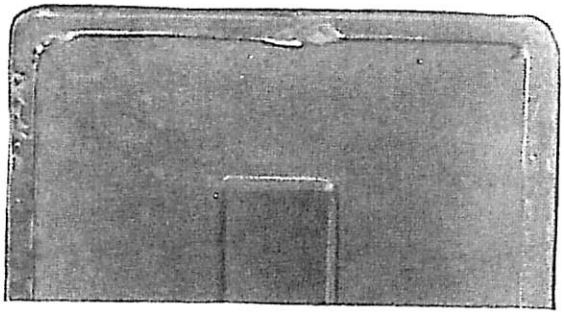


3–A. Burred and Sintered Bottom—Major



3–B. Burr, Bottom—Incidental


(Incidental only if there are no sharp projections, otherwise major.)

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:31Z
Check the source to verify that this is the current version before use.

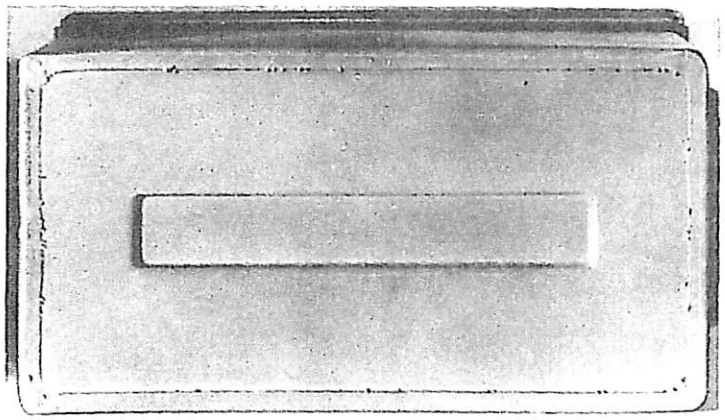


3–C. Burrs, Bottom—Permissible

(Permissible only if there are no sharp projections, otherwise major.)

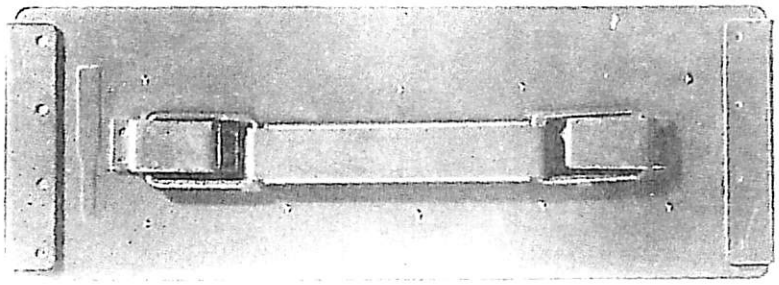


3–D. Burrs, Top—Incidental

(Incidental only if there are no sharp projections, otherwise major.)

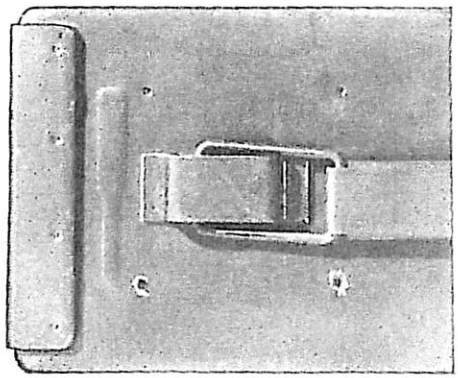

3–E. Burrs, Top—Incidental


(Weld burns. Incidental only if there are no sharp projections, otherwise major.)

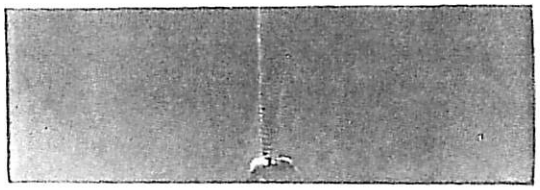


3–F. Burr, Back—Permissible

(Permissible only if there are no sharp projections, otherwise major.)


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:31Z
Check the source to verify that this is the currentversion before use.

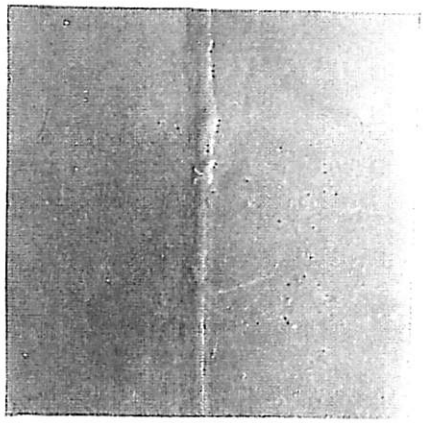


3–G. Rough Spots, Seam End, Exterior—Incidental

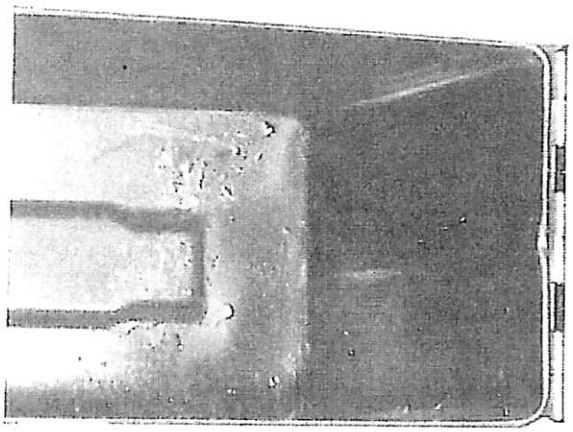


3–H. Rough Spots, Inside Bottom—Incidental

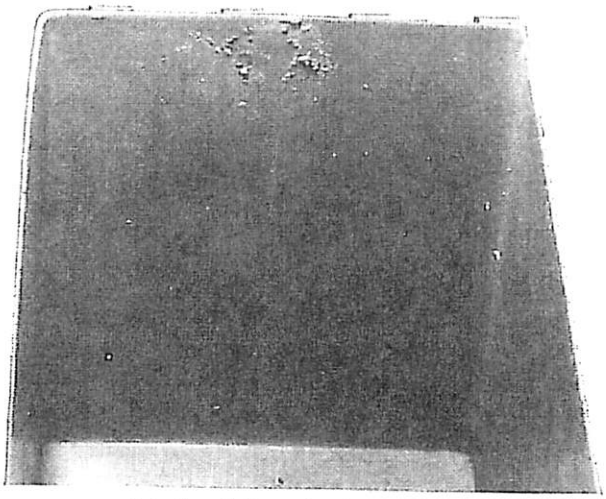

3–I. Rough Spots, Inside—Incidental



3–J. Cover Handle Clip

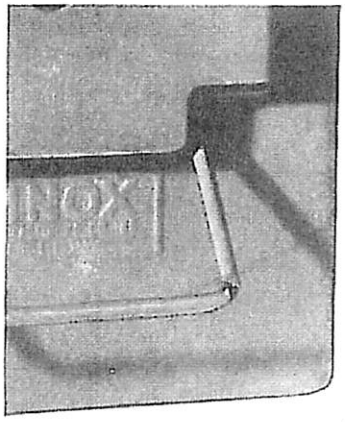


3–K. End Handle


Sharp Projection—Major

(Any sharp projection on box interior or exterior, regardless of location, is a major defect.)


Source: https://assist.dla.mil -- Downloaded: 202640-26T07:31Z
Check the source to verify that this is the currentversion before use.

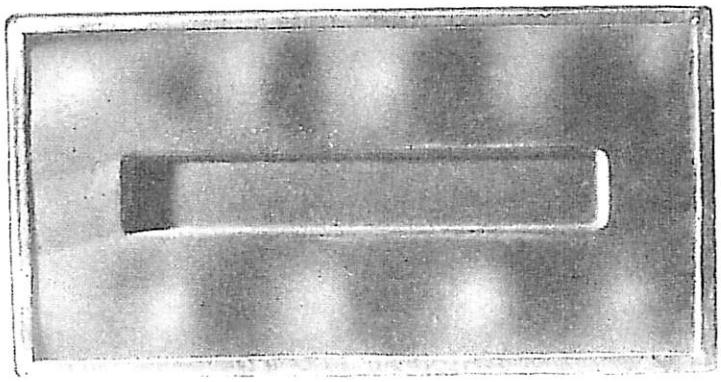


3–L. Incidental

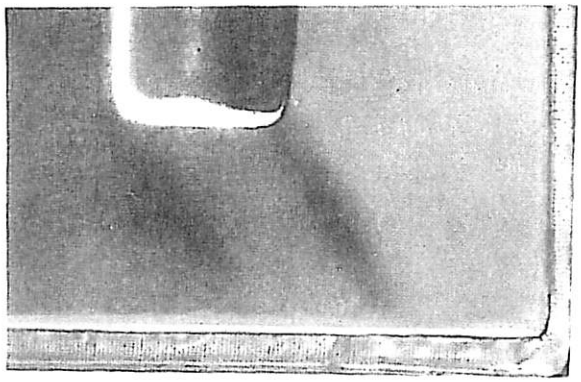


3–M. Incidental

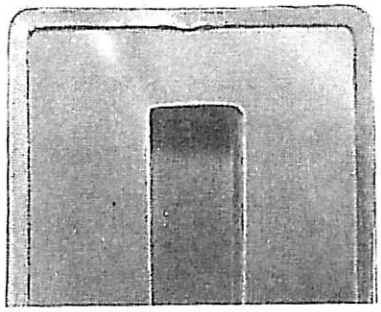


3–N. Permissible
Buckles, Bottom
(Incidental or permissible if box stacks properly, otherwise major.)

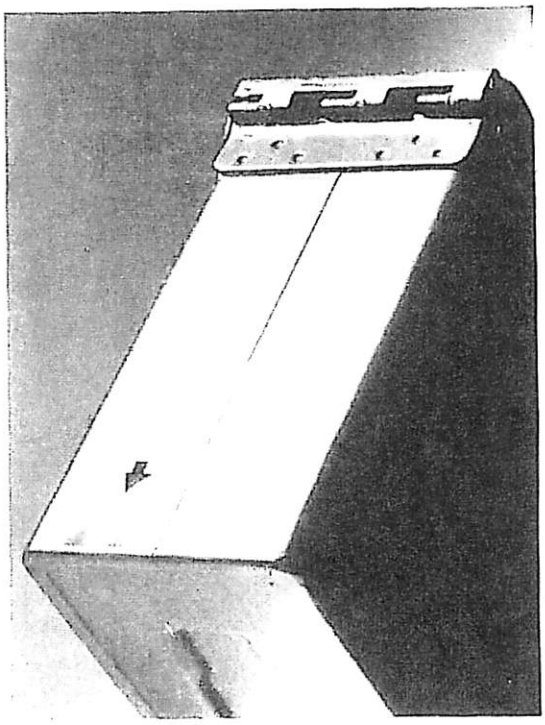

3–O. Permissible

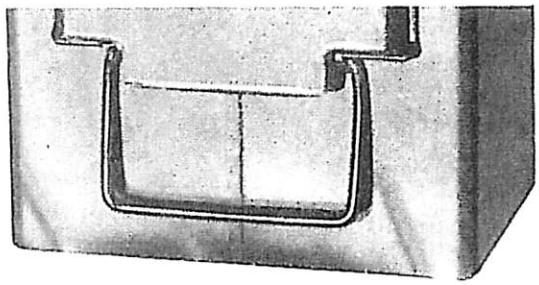


3–P. Permissible
Buckles, End

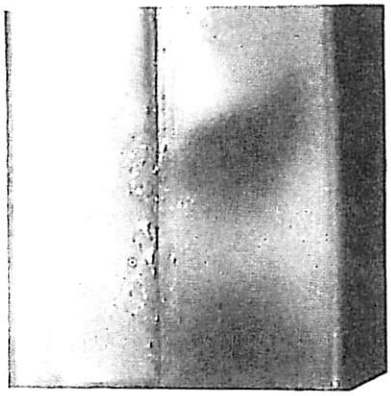


3–Q. Buckles or Rough Spots, Seam End, Exterior—Incidental
(Two defects are illustrated, either of which defines a defective box.)


Source: https://assist.dla.mil -- Downloaded: 202640-26T07:31Z
Check the source to verify that this is the current version before use.

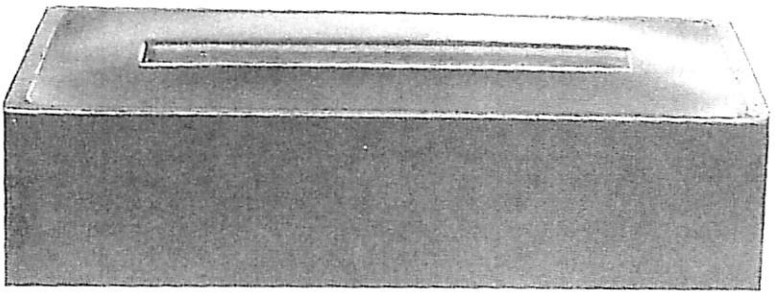


3–R. Convex Bottom—Major

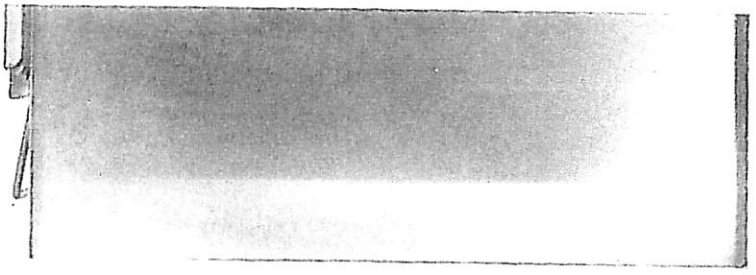


3–S. Incidental
Buckle, Side

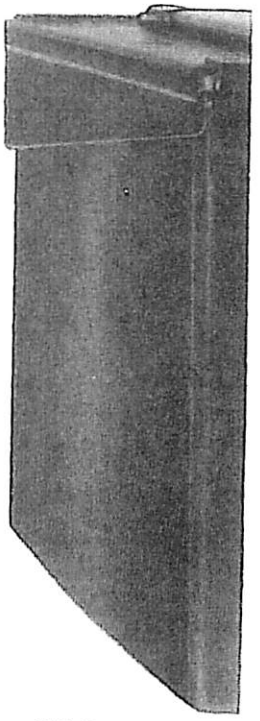

3-T. Permissible

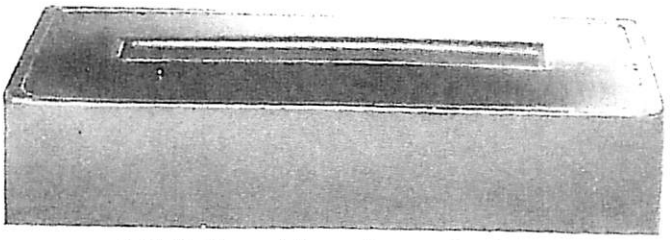


3–U. Buckles and Convex Bottom—Incidental
(Incidental if box stacks properly, otherwise major. Two defects are illustrated, either of which defines a defective box.)

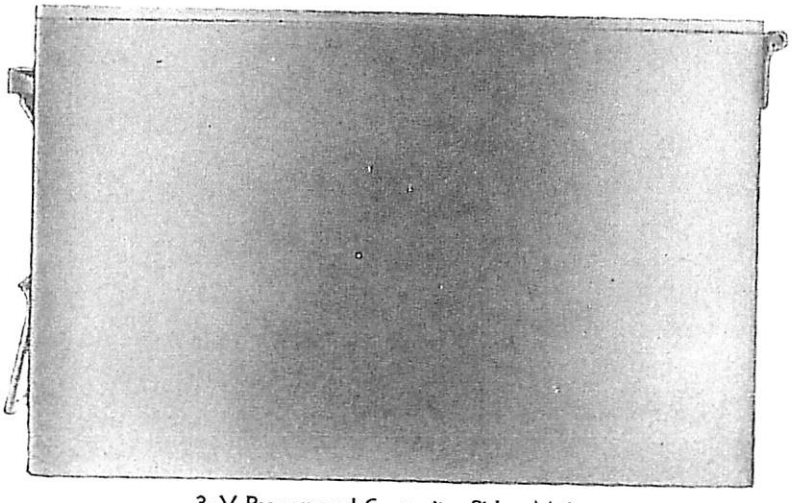


3–V Pronounced Convexity, Side—Major

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:31Z
Check the source to verify that this is the current version before use.

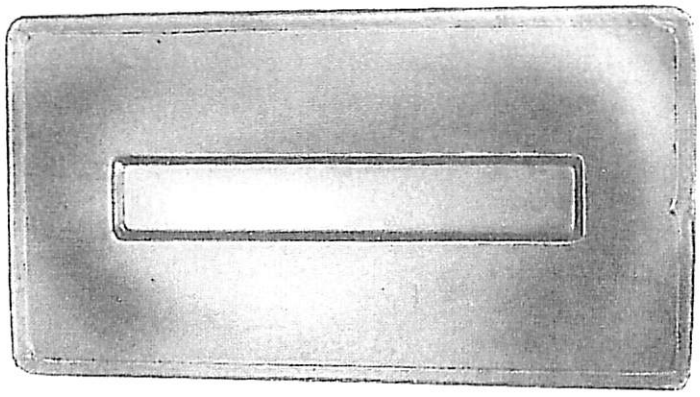


3–W. Major

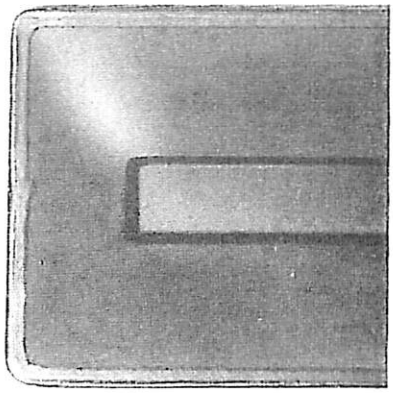


3–X. Incidental


Concave Bottom

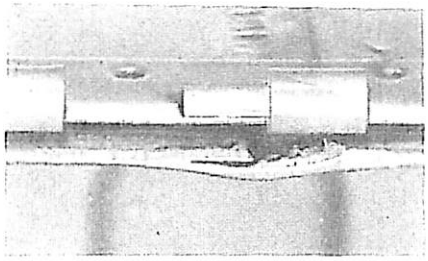

3–Y. Split Hem at Seam Weld—Major

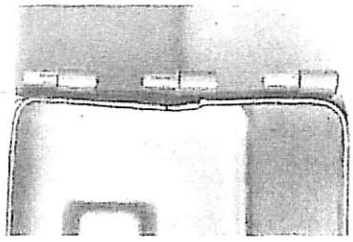


3–Z. Offset Seam Weld—Major

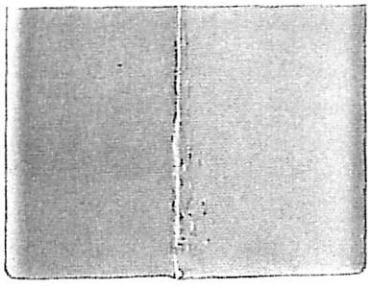

3–AA. Rough Seam Edge—Major


(Illustration also shows improperly turned bottom flange at seam weld, which is a major defect.)




3–BB. Rough Bottom Mash Weld—Incidental

(Incidental only if there are no sharp projections, otherwise major.)


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:31Z
Check the source to verify that this is the current version before use.

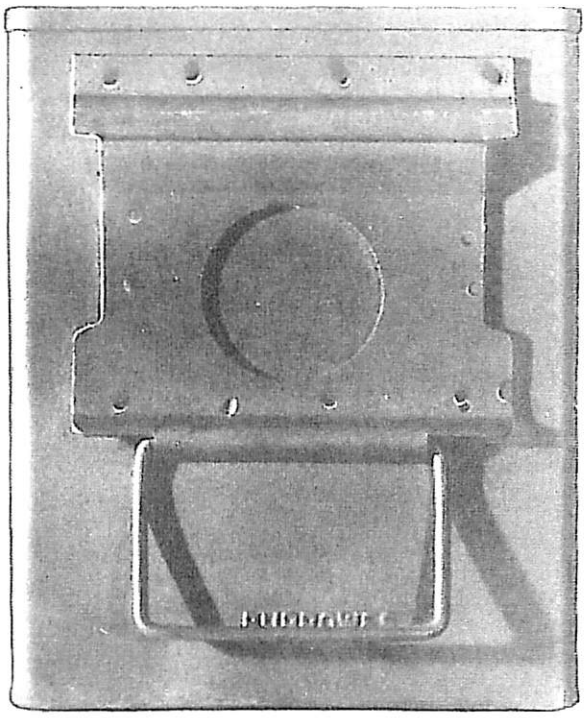

3–CC. Incidental

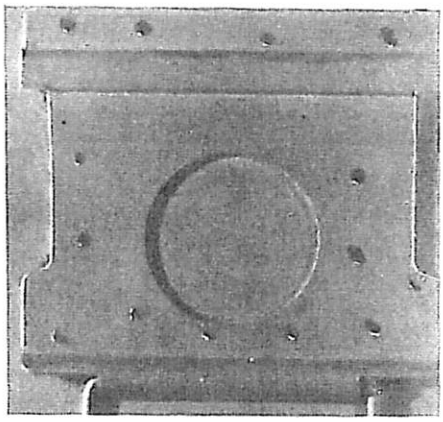


3–DD. Incidental

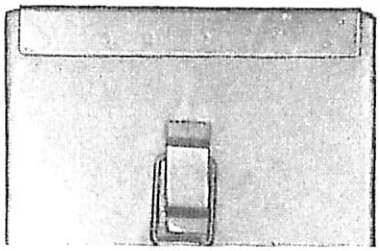

3–EE. Weld Pattern, Hinge—Permissible
(Cover hinge illustrated but comparable improper weld pattern on body hinge or latch link retainer is also permissible.)


Improper Weld Pattern, Hasp

(Box shall be included in inspection Sample B and subjected to hasp weld strength test. Defect is major if test is unsatisfactory, otherwise incidental. Box also shall be considered a defective in Sample B if it fails the strength test.)

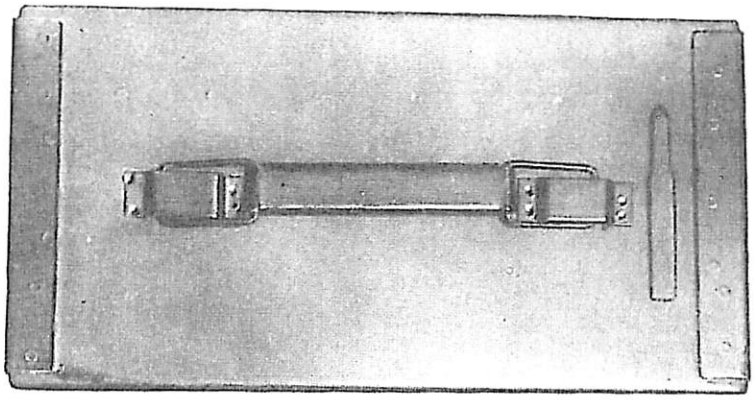


3–FF. Weld Pattern, Cover Handle Clips—Permissible

(Box shall be included in inspection Sample B and subjected to pertinent weld and assembly strength test. Defect is major if test is unsatisfactory, otherwise permissible. Box also shall be considered a defective in Sample B if it fails the pertinent weld and assembly strength test.)

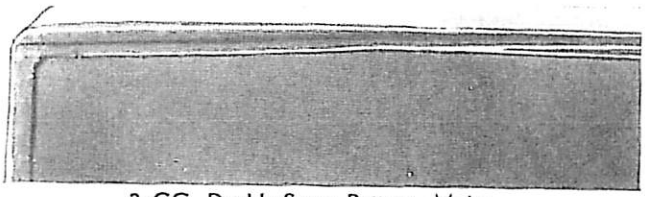


3–GG. Double Seam, Bottom—Major


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:31Z
Check the source to verify that this is the currentversion before use.

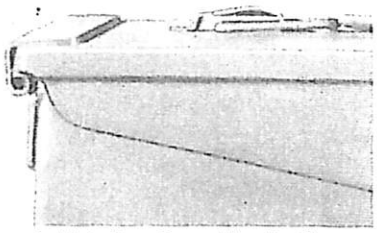


3–HH. Bent Cover Handle Clip —Incidental
(Incidental if box stacks properly, otherwise major.)




3–II. Major

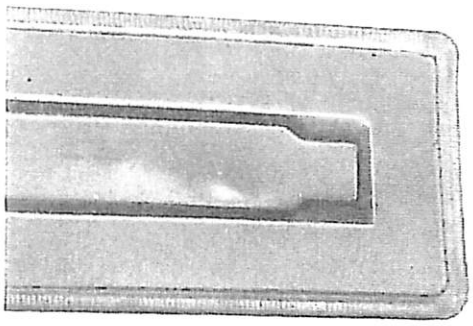

3–JJ. Incidental

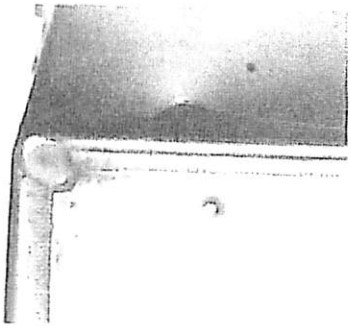


3–KK. Incidental

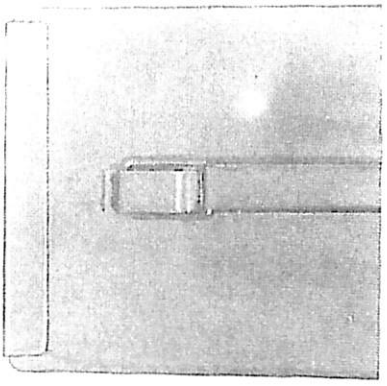


3–LL. Incidental


Dents
(Defect is incidental only if box stacks properly, otherwise major.)

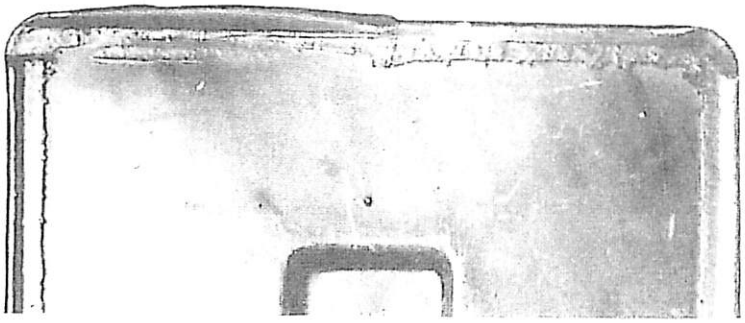


3–MM. Bulge—Major

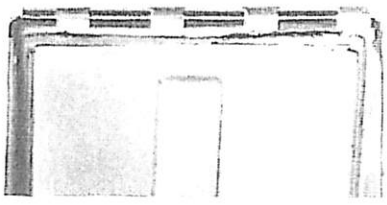

3–NN. Split—Major




3–OO. Cut—Major




3–PP. Gas Pocket—Major

Gasket Defects


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:31Z
Check the source to verify that this is the current version before use.

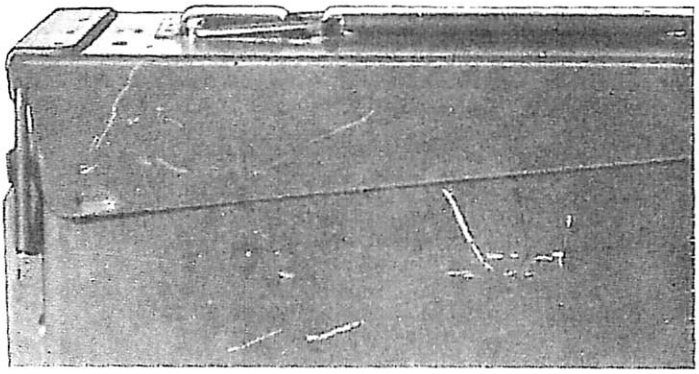

3–RR. Incidental

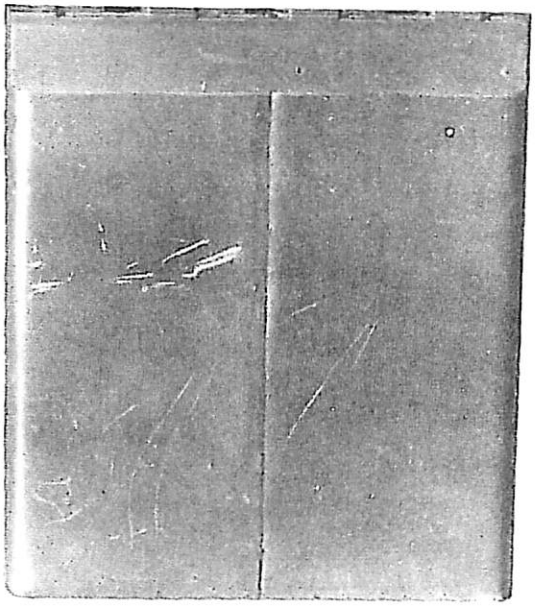


3–QQ. Incidental

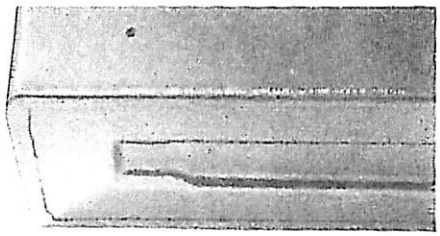


3–SS. Permissible

(Bottom Edge)

Scratches

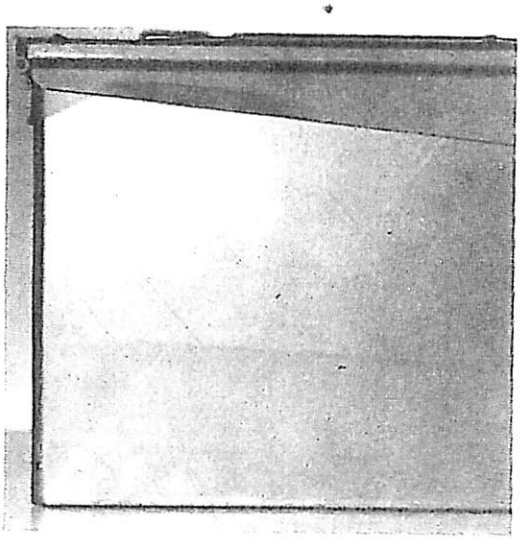


3–TT. Incidental

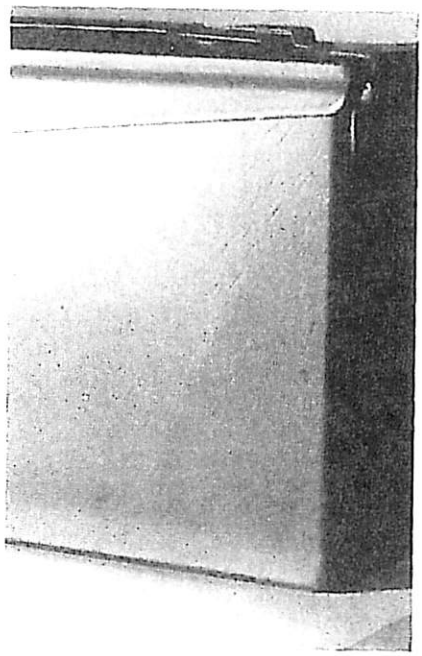


3–UU. Permissible

Stress Marks


Source: https://assist.dla.mil -- Downloaded: 202640-26T07:31Z
Check the source to verify that this is the currentversion before use.

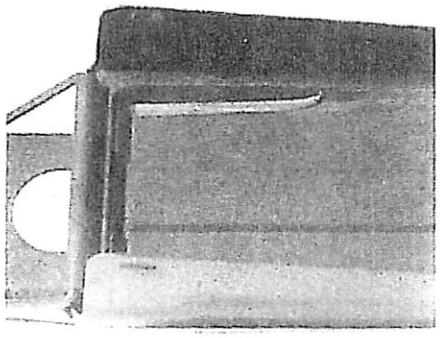


3–VV. Major




3–WW. Incidental




3–XX. Incidental

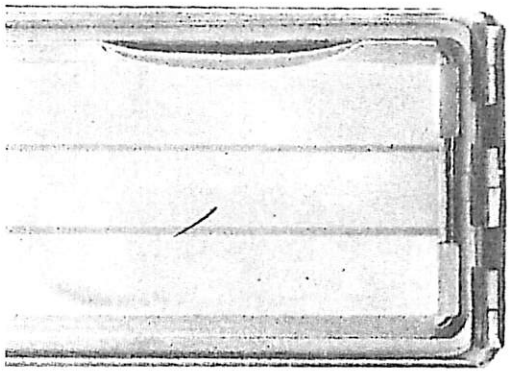

3–YY. Incidental



3–ZZ. Permissible




3–AAA. Permissible

Bent Gasket Retainer


(Defect is permissible or incidental only if there are no sharp projections. See 3–J and 3–K.)

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:31Z
Check the source to verify that this is the current version before use.


No. 4. Unsatisfactory Workmanship:
Chips, Dirt, Grease, Other Foreign Material, Other Defects Excluding Rust

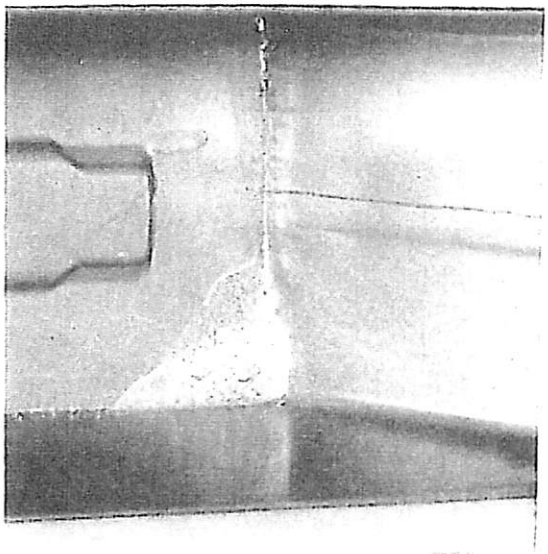


4–A. Minor

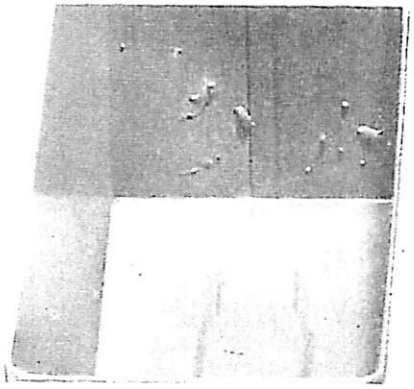



4–B. Incidental

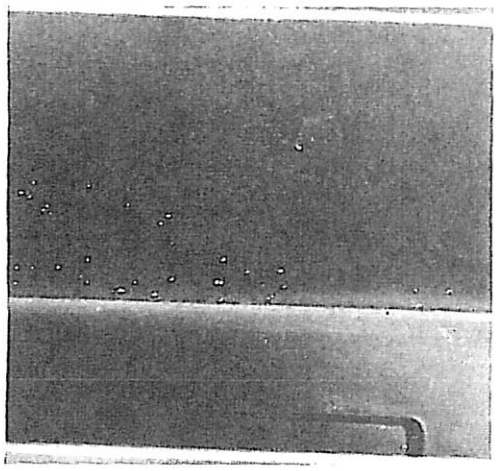

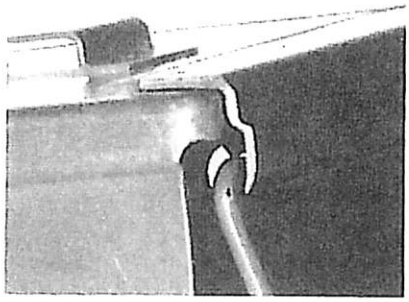

4–D. Insufficient Curl—Incidental
(Applicable also to body and cover hinge. Permissible up to 1/32″ gap for Cal. .50 and 1/32″ for Cal. .30. If gap exceeds allowance, box shall be subjected to latch, cover and hinge assembly strength test. Defect is minor if test is unsatisfactory, otherwise incidental. Box also shall be considered a defective in Sample B if it fails the strength test.)

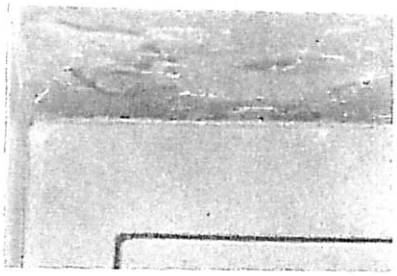


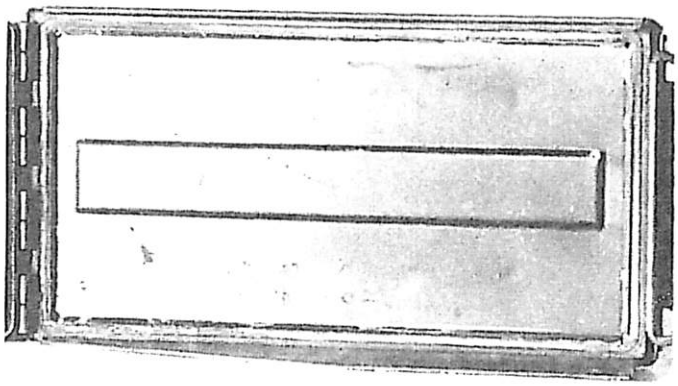

4–F. Foreign Material, Gasket and Gasket Retainer—Minor

4–C. Permissible
Foreign Material, Interior
(Defect includes imbedded as well as surface adhering foreign material.)


Source: https://assist.dla.mil -- Downloaded: 202640-26T07:31Z
Check the source to verify that this is the current version before use.

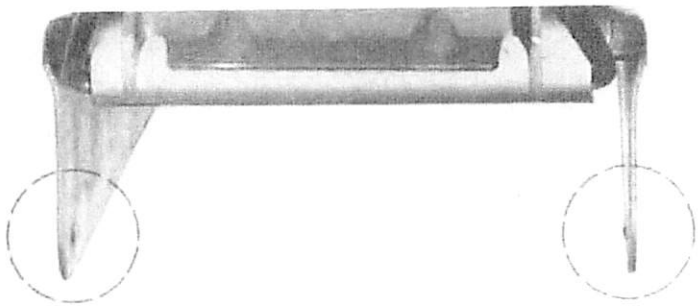


4–G. Shallow Embossed Stops—Permissible

(Permissible only if both stops engage body hem, otherwise minor.)

No. 5. Paint Defects: Incomplete or Inadequate Coverage and Rust

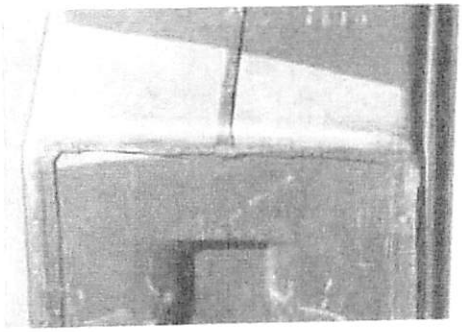


5–A. Major

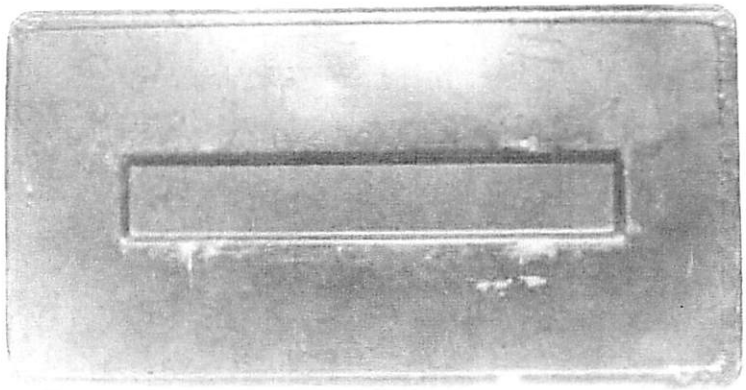


5–B. Incidental

Incomplete Coverage, Exterior

(No permissible incomplete coverage on exterior of body or cover except slight scratches such as illustrated in 3-SS. Any degree of incomplete coverage, exceeding permissible, up to ¼ square inch is incidental. The ¼ square inch allowance is applicable to either a single spot or the sum of several spots.)

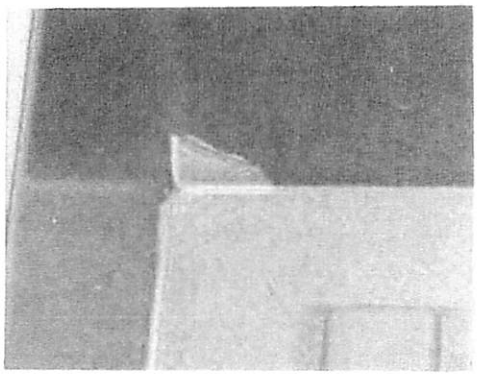

5–C. Incidental

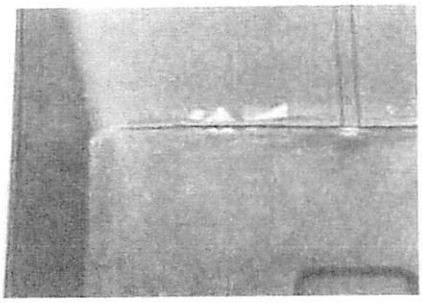


5–D. Permissible


Incomplete Coverage, Interior

(Incomplete coverage exceeding ¼ square inch, either a single spot or the sum of several spots, is a major defect.)

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:31Z
Check the source to verify that this is the current version before use.

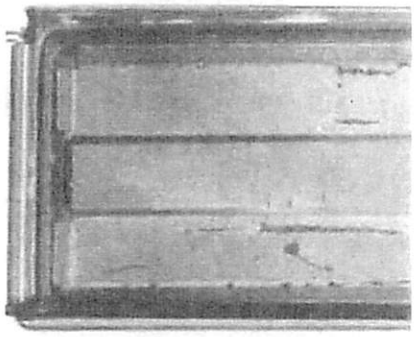


5–E. Gasket Retainer—Major

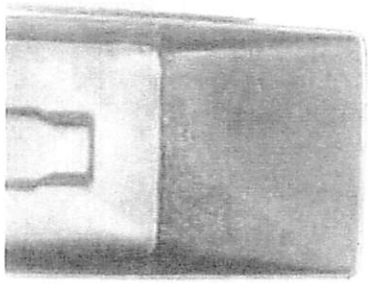


5–F. Body—Major

Rust, Interior

(Any amount of rust on interior shall be considered a major defect.)

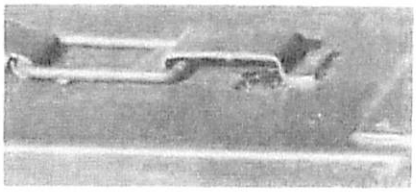

5–G. Under Cover Handle Clip—Incidental




5–H. Body—Incidental


Rust, Exterior

(Hardware excluded. See 5–I and 5–J.)

(Rust up to ¼ square inch incidental, either a single spot or the sum of several spots—cover or body. Rust exceeding ¼ square inch—major.)

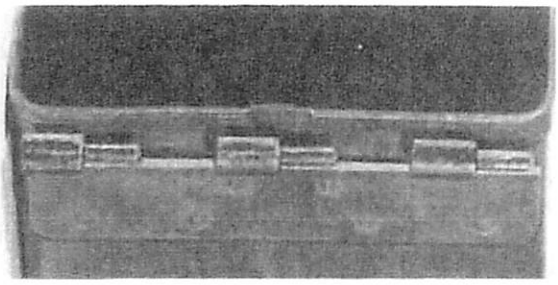

5–I. Hinge—Incidental

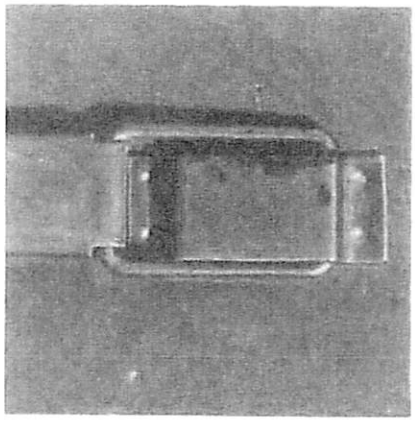


5–J. Cover Handle Clip—Incidental


Rust, Hardware

(Rust on any hardware greater than amount shown is a major defect.)


Source: https://assist.dla.mil -- Downloaded: 202640-26T07:31Z
Check the source to verify that this is the current version before use.

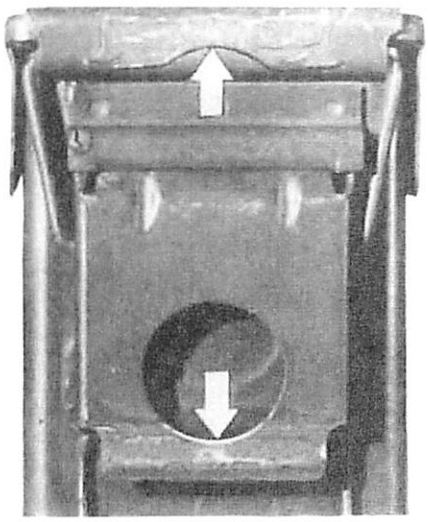


5–K. Latch—Major

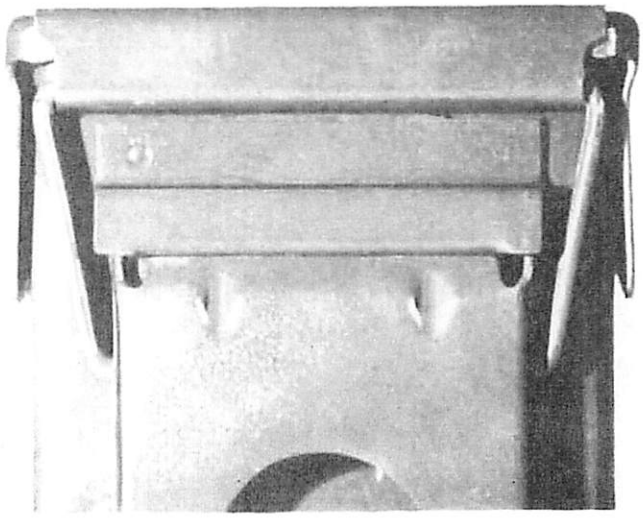

5–L. Hasp and Latch—Incidental

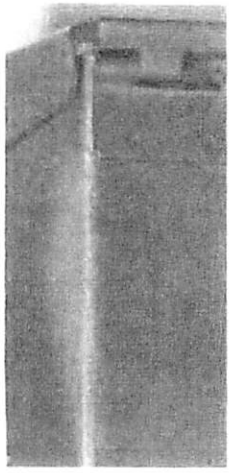


5–M. Outside Corner—Incidental

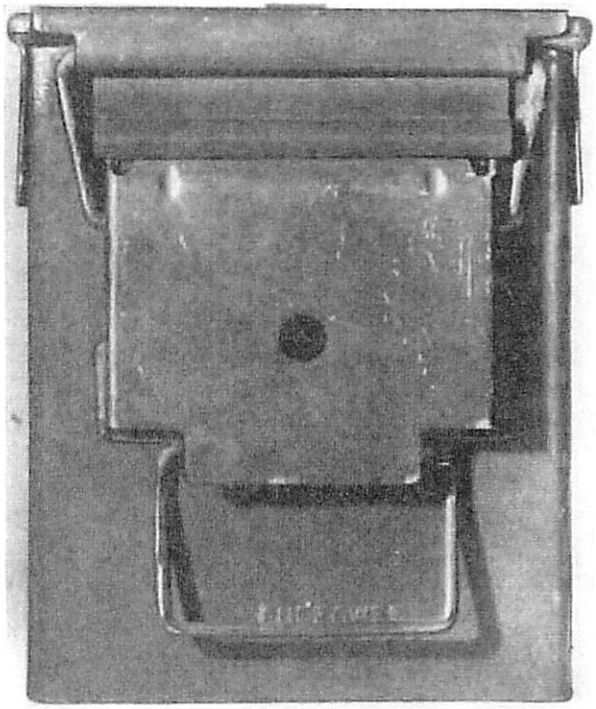


5–N. Front, Exterior—Incidental

(Incomplete and inadequate coverage both illustrated, either of which defines a defective box.)

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:31Z
Check the source to verify that this is the current version before use.

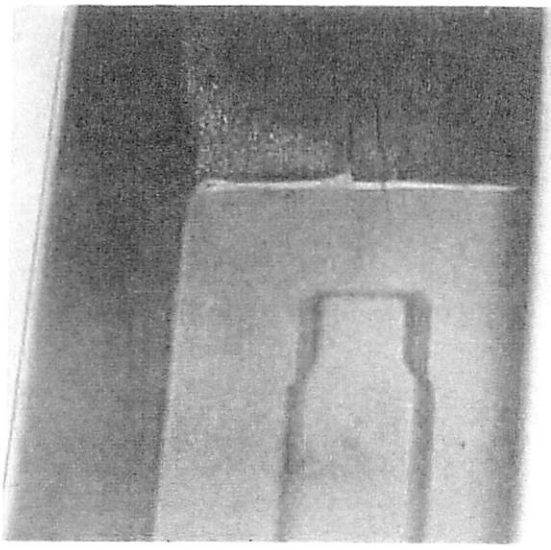


5–O. Inside—Incidental

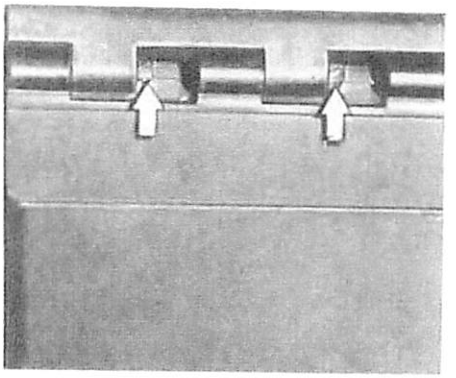


5–P. Body Hem—Permissible

Inadequate Coverage

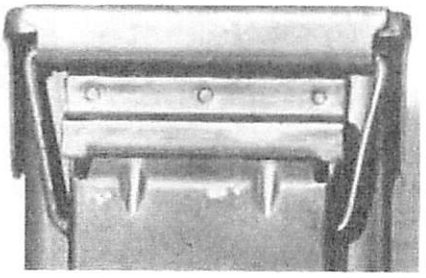

5–Q. Bare Spots, Latch—Permissible

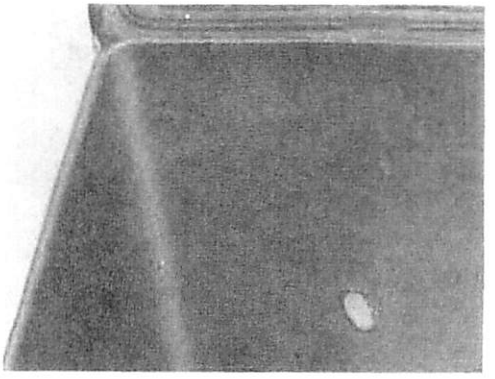


5–R. Inadequate Coverage—Permissible

(Broken Blister)


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:31Z
Check the source to verify that this is the current version before use.

No. 6. Paint Defects:


Surface Imperfection, Excessive Paint, Paint Not Dry

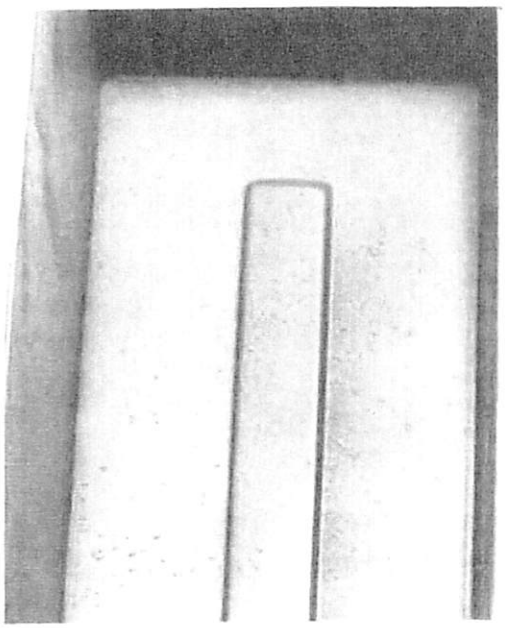


6–A. Inside Bottom—Incidental

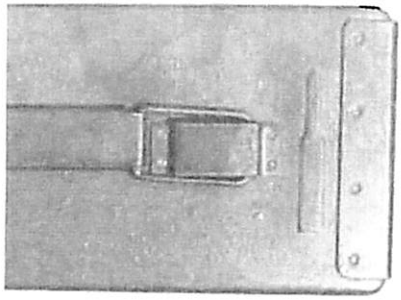

6–B. Cover—Incidental

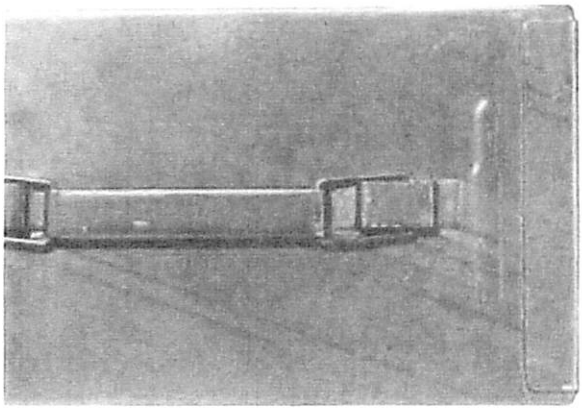


6–C. Cover—Permissible

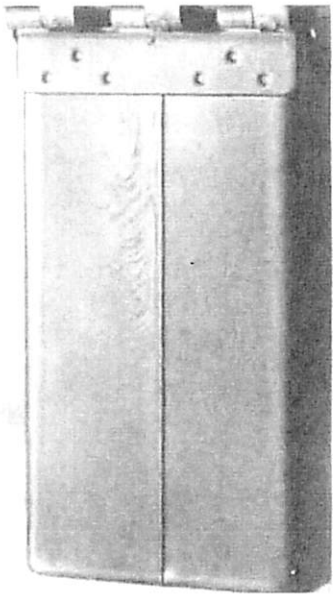

6–D. Seam End of Body—Permissible

Surface Imperfection


Source: https://assist.dla.mil -- Downloaded: 202640-26T07:31Z
Check the source to verify that this is the current version before use.

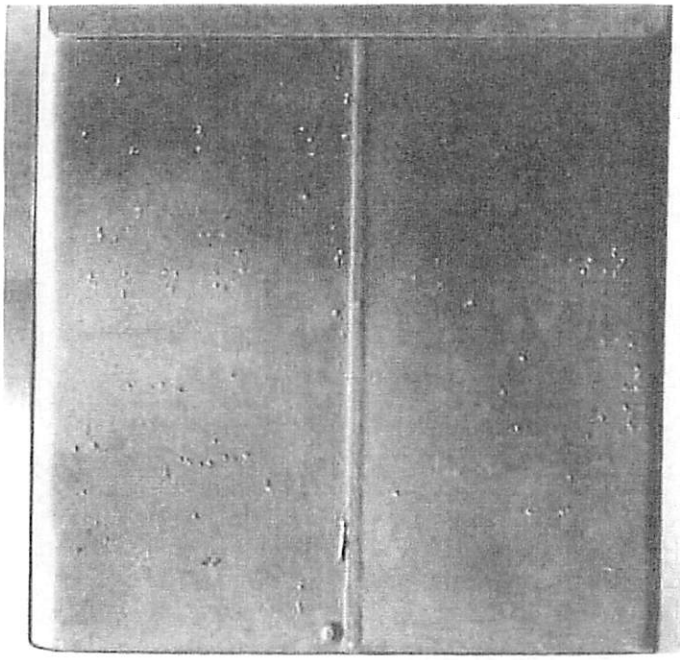

6–E. Roughness, Interior or Exterior Body—Permissible




6–F. Minor

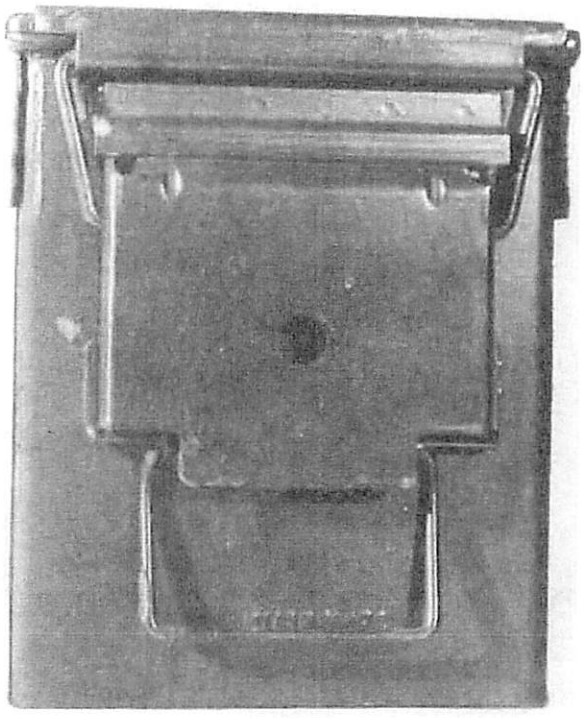


6–G. Minor

Blisters, Interior or Exterior

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:31Z
Check the source to verify that this is the current version before use.

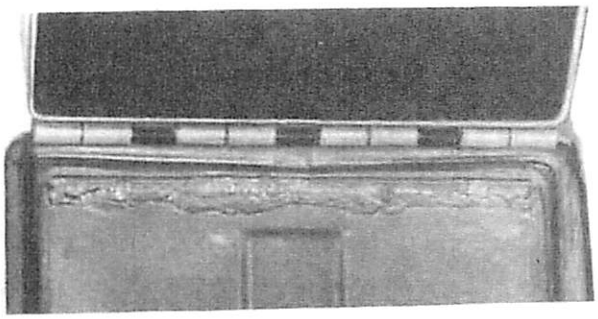


6–H. Minor

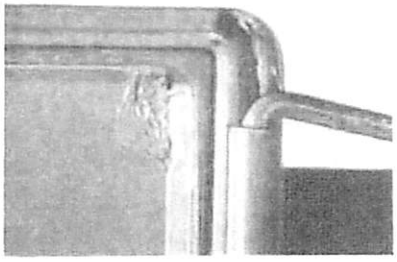


6–I. Permissible

Excessive Paint, Gasket Retainer

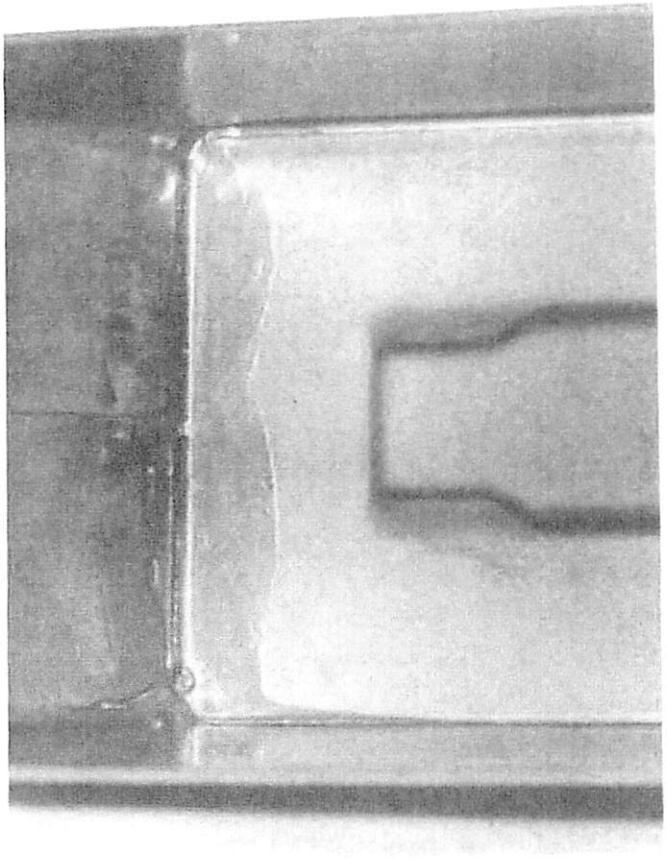


6–J. Permissible

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:31Z
Check the source to verify that this is the current version before use.

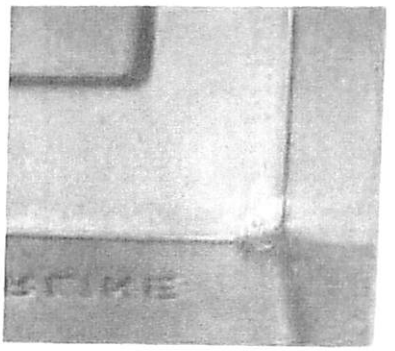


6–K. Permissible

Excessive Paint, Interior

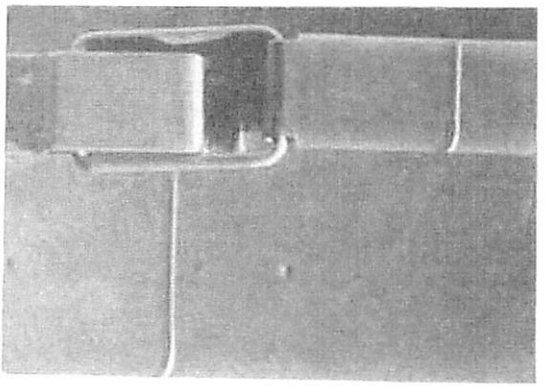


6–L. Cover and/or Handle—Permissible

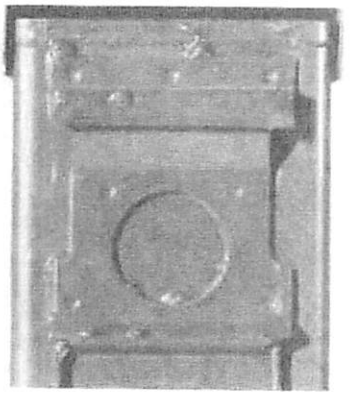


6–M. Hardware and Adjacent Box Areas—Permissible

Excessive Paint

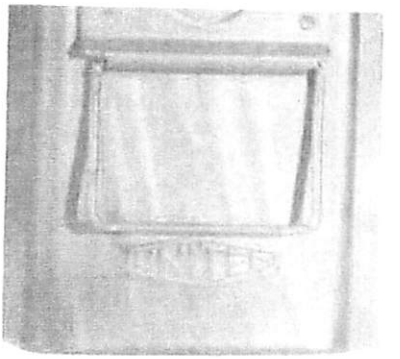


6–N. Paint Appearance—Permissible


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:31Z
Check the source to verify that this is the current version before use.

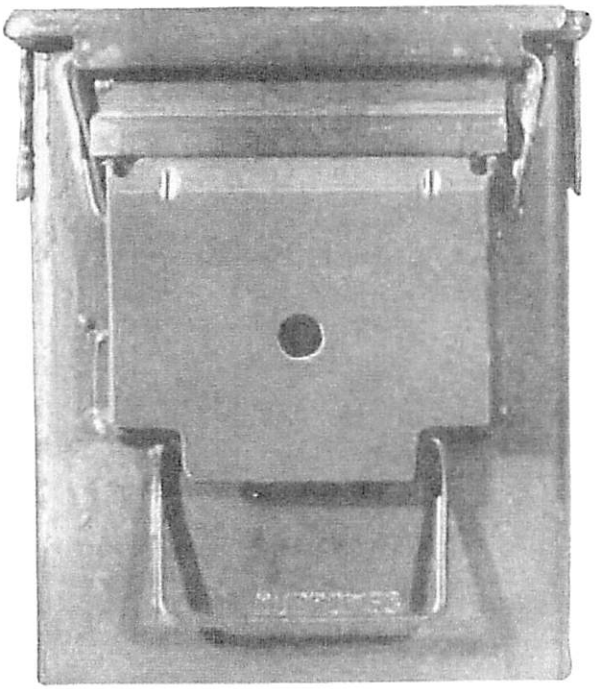


6–O. Minor

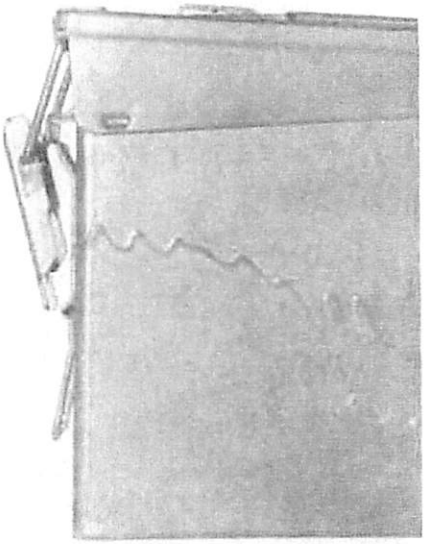


6–P. Minor

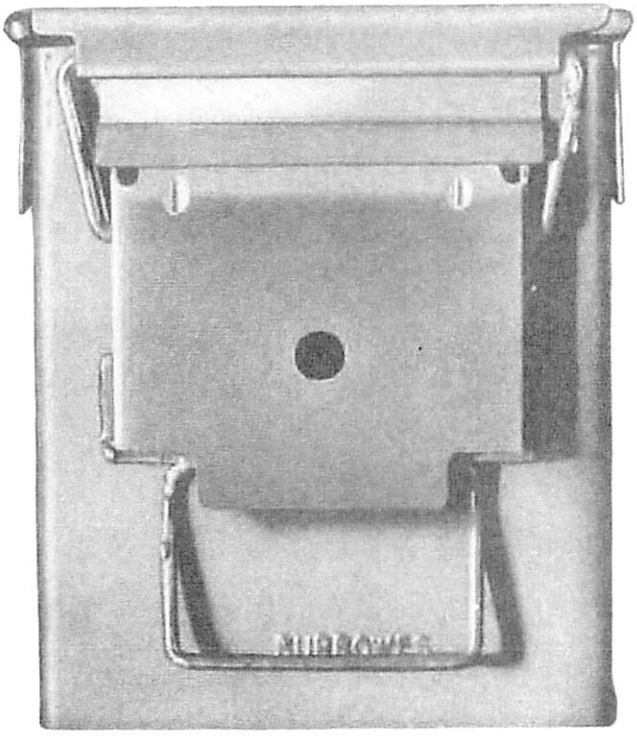

6–Q. Incidental

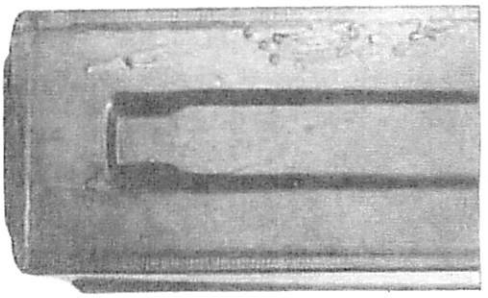

6–R. Incidental
(Incidental if box stacks properly, otherwise minor.)

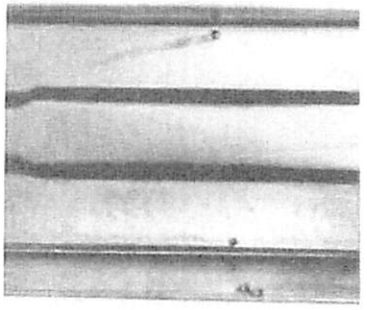


6–S. Incidental

Paint Runs


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:31Z
Check the source to verify that this is the current version before use.




6–T. Incidental

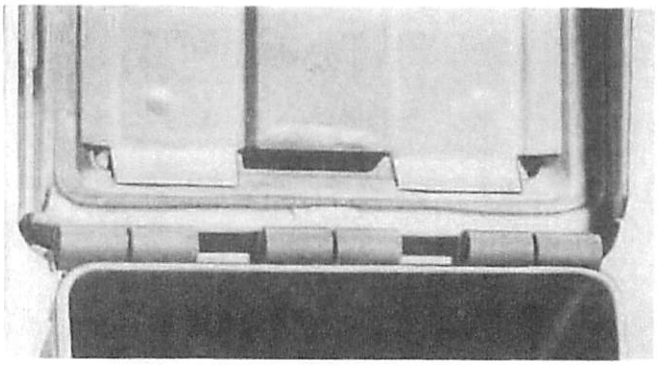

6–U. Permissible

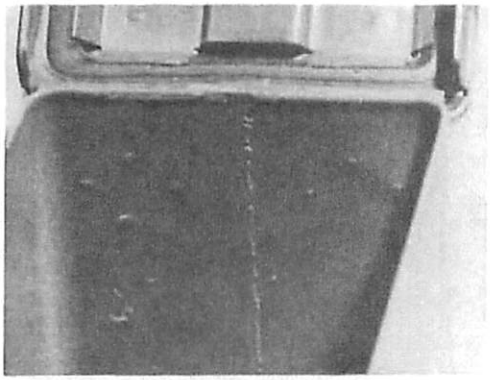

6–V. Permissible

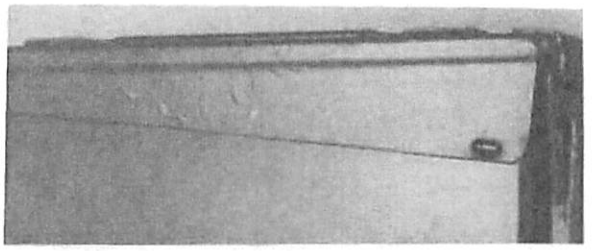


6–W. Permissible

(Note impressions of body hinge weld pattern which are not to be considered as paint runs.)

Paint Runs

(If runs are soft, defect is minor.)

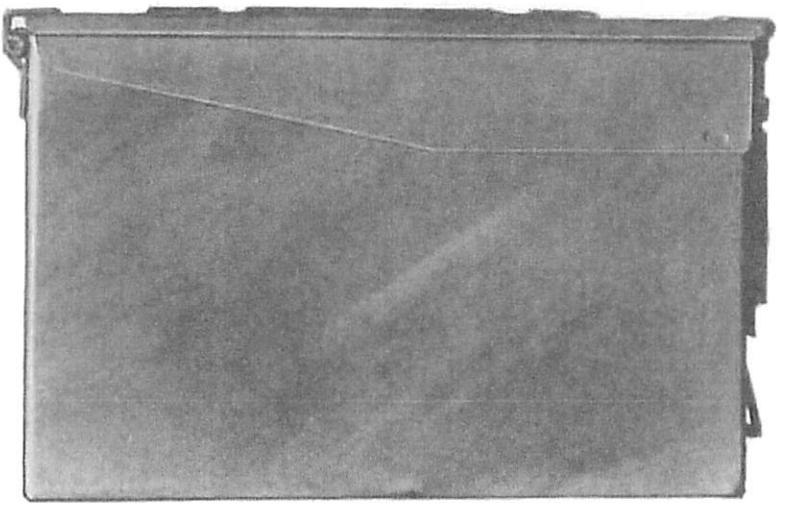

6–X. Incomplete Paint Agitation—Incidental

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:31Z
Check the source to verify that this is the current version before use.




"WORST" PERMISSIBLE DEGREE OF RUST AFTER CORROSION RESISTANCE TEST

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:31Z
Check the source to verify that this is the current version before use.




"WORST" PERMISSIBLE DEGREE OF RUST AFTER CORROSION RESISTANCE TEST

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:31Z
Check the source to verify that this is the current version before use.

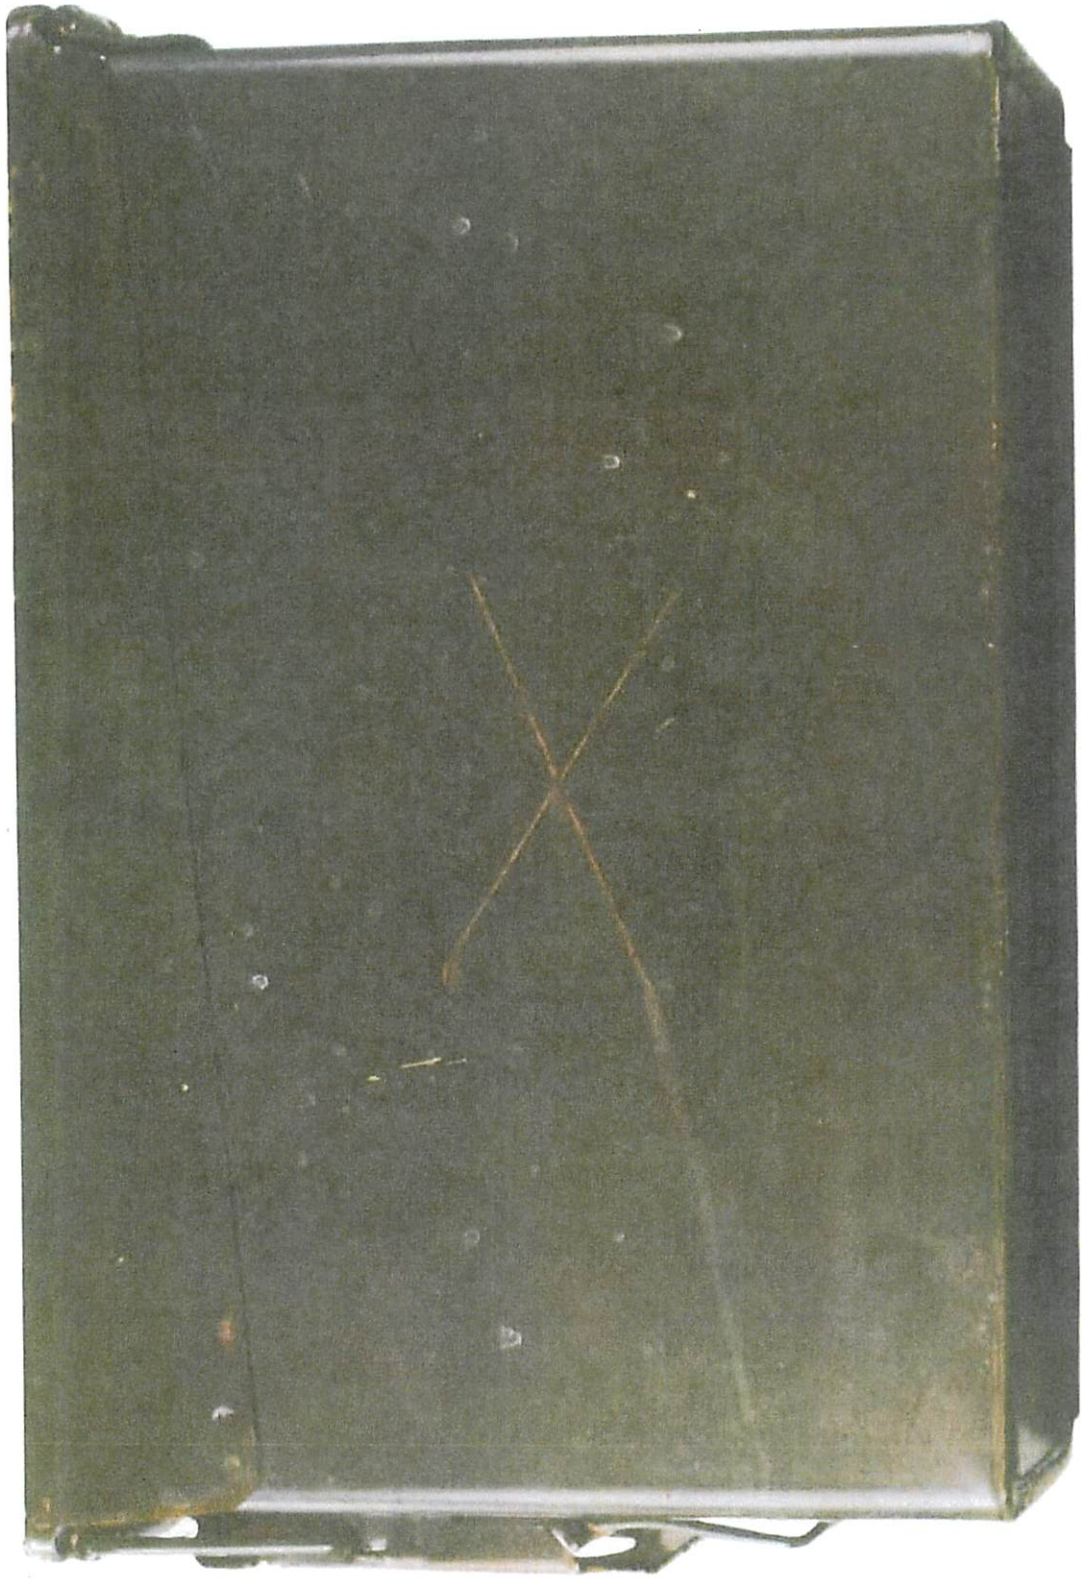


"WORST" PERMISSIBLE DEGREE OF RUST AFTER CORROSION RESISTANCE TEST

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:31Z
Check the source to verify that this is the current version before use.

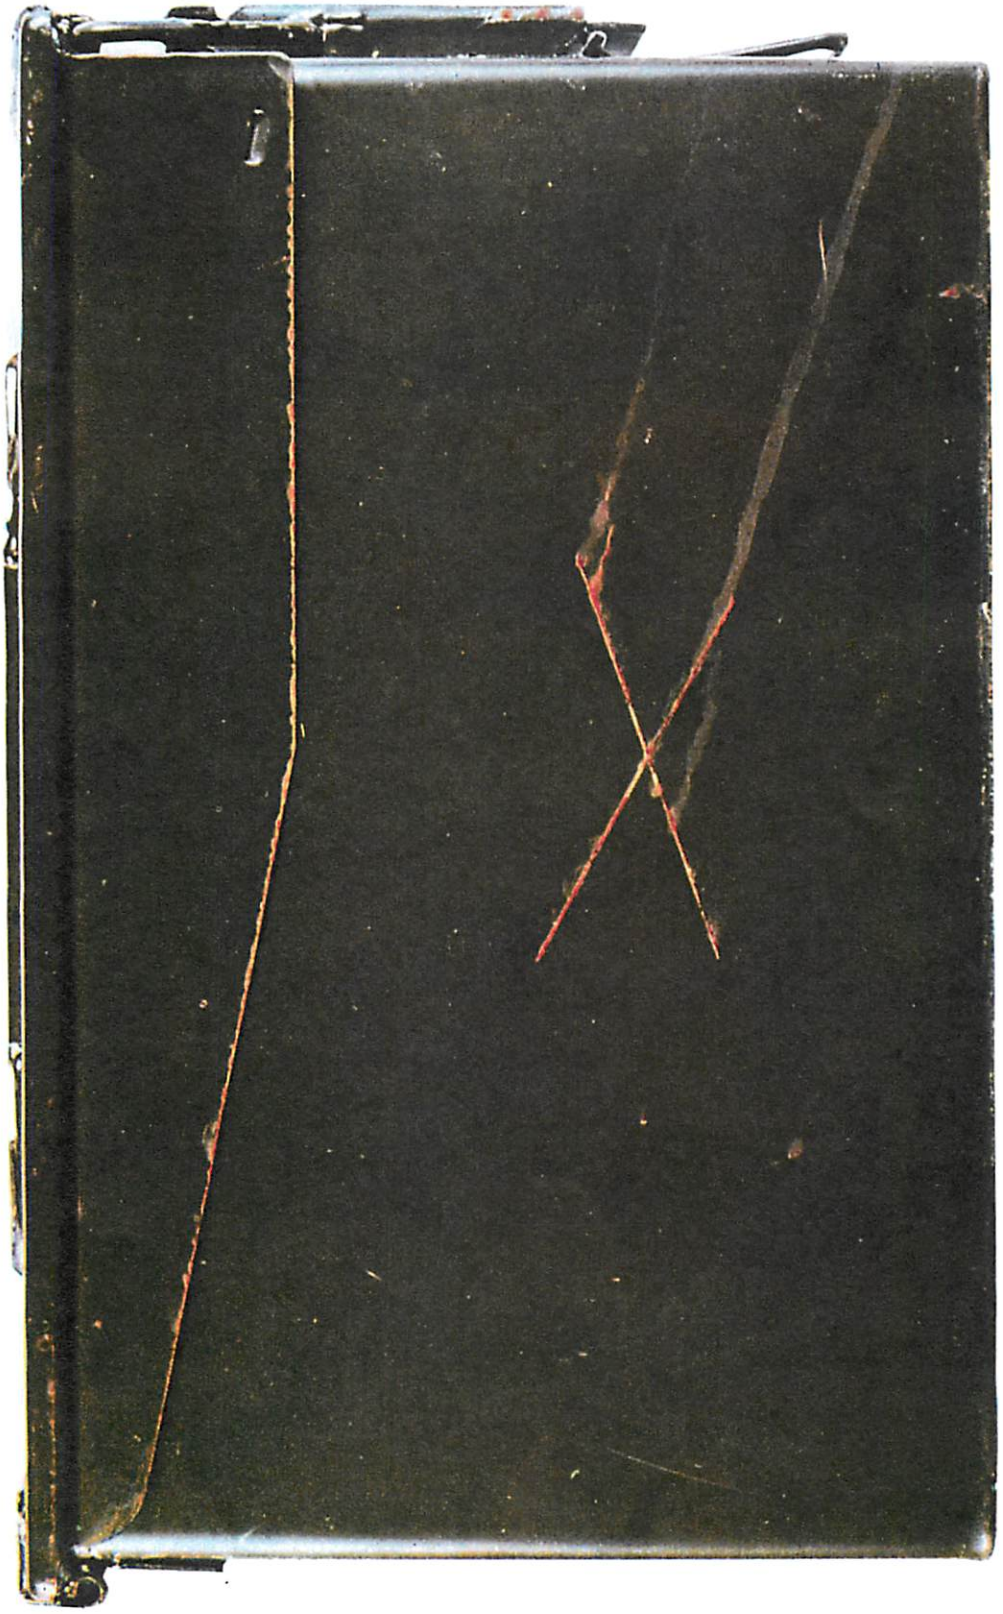

"WORST" PERMISSIBLE DEGREE OF RUST AFTER CORROSION RESISTANCE TEST

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:31Z
Check the source to verify that this is the current version before use.

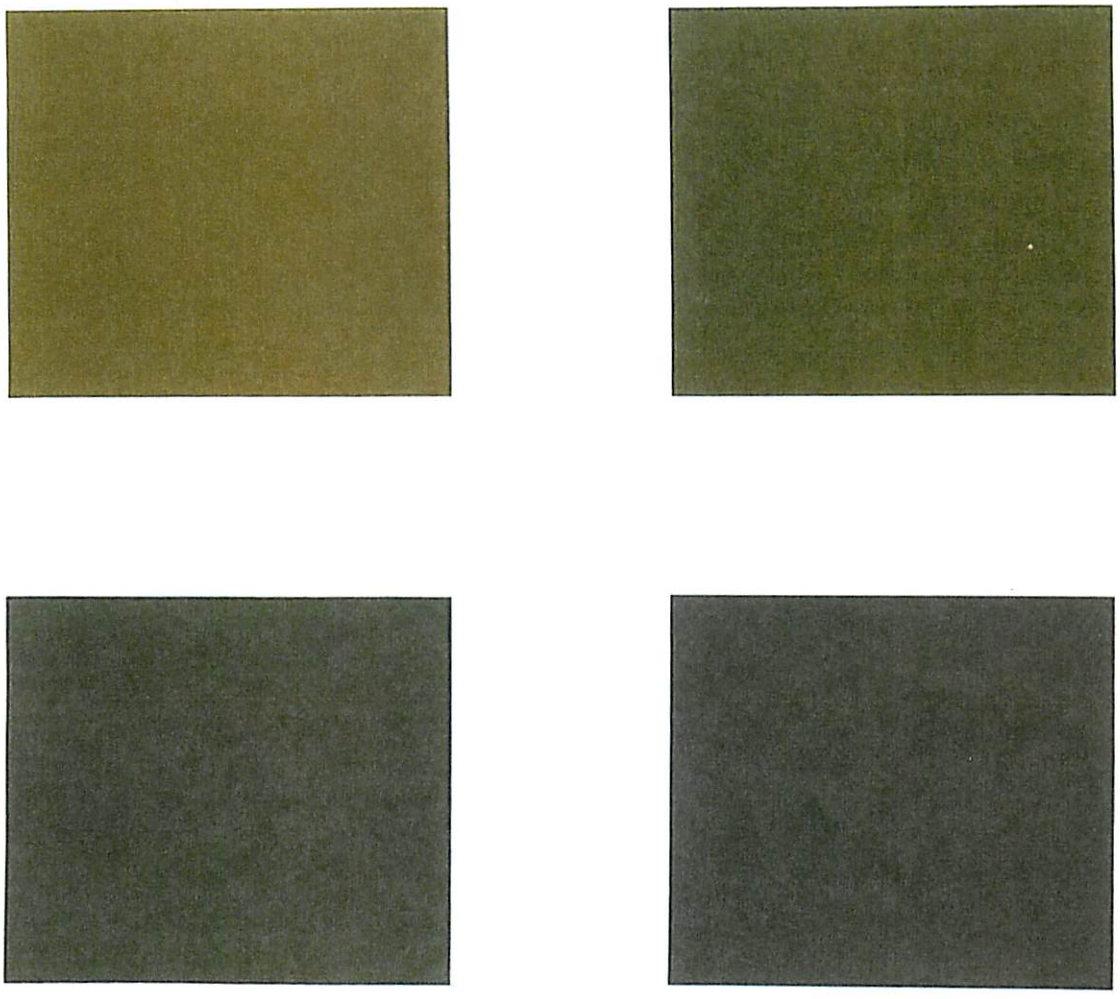

Color Tolerances

(Paint chips show permissible variation in color from that specified-Semi-Gloss Green No. 2430, Federal Specification TT-C-595.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:31Z
Check the source to verify that this is the current version before use.

LIST OF DEFECTS

Cans, Ammunition, Universal, M20 and M21

No.	Defect	Page(s)
	BOTTOM COVER	
1.	Absence of Lining Compound or Presence of Skip One Inch or More in Length	37
	1–A. Skip One Inch or More in Length	37
2.	Absence of Curl or Grossly Incorrect Curl	37
	2–A. Absence of Curl	37
	2–B through 2–E. Grossly Incorrect Curl	37–38
	2–F. Partially Formed Curl	38
3.	Chips, Dirt, Grease or Other Foreign Material	39
	3–A. Dirt, Either Side	39
	3–B. Spattered Lining Compound, Interior or Exterior	39
	3–C. Rust	39
	3–D and 3–E. Imbedded Chip	39
4.	Burrs, Dents or Buckles	40
	4–A and 4–B. Buckle	40
	4–C and 4–D. Dented Curl	40
	4–E and 4–F. Dents	40–41
	4–G. Small Buckles on Radius	41
5.	Lining Compound Containing Skips Less Than One Inch in Length; Excessive Overlap, Incomplete or Inadequate Coverage	41
	5–A and 5–B. Inadequate Lining Compound	41
	5–C through 5–E. Incomplete Lining Compound	41
	5–F. Lining Compound Containing Skips Less Than One Inch in Length	41
	5–G and 5–H. Excessive Overlap	42
	ASSEMBLY, ONE END OPEN	
10.	Missing or Incorrectly Positioned Component	42
	10–A. Top on Wrong End	42
	10–B. Incorrectly Positioned Tear Strip Tongue	42
	10–C. Bent Tear Strip Tongue	42
	10–D. Missing Key	43
	10–E through 10–G. Incorrectly Positioned Components	43–44
11.	Absence of Flange or Grossly Incorrect Flange	45
	11–A. Absence of Flange	45
	11–B. Grossly Incorrect Flange	45
12.	Chips, Dirt, Grease and Other Foreign Material	45
	12–A. Excessive Solder, Tear-Strip Tongue	45
	12–B. Metal Chip in Rolled Seam	45
	12–C. Grease (Interior or Exterior)	45
	12–D. Foreign Material, Interior	45
	12–E and 12–F. Foreign Material, Exterior	46
13.	Burrs, Dents, Buckles or Deformed Flanges	47
	13–A and 13–B. Excessive Solder, Side Seam	47
	13–C through 13–I. Dent	47–48–49
	13–J through 13–Q. Buckle	49–50
	13–R. Fluting	50
	13–S. Weld Burns	50
	13–T through 13–W. Deformed Flange	51

NOTE.—In general, except for defects where severity is not pertinent, the illustrations define the following degrees of defectiveness:
"Worst" Permissible
"Worst" Incidental
Example of Major (Minor when applicable).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:31Z
Check the source to verify that this is the current version before use.

CANS, AMMUNITION, UNIVERSAL, M20 AND M21


BOTTOM COVER

No. 1. Absence of Lining Compound or Presence of Skip One Inch or More in Length



1–A. Skip One Inch or More in Length—Major

No. 2. Absence of Curl or Grossly Incorrect Curl

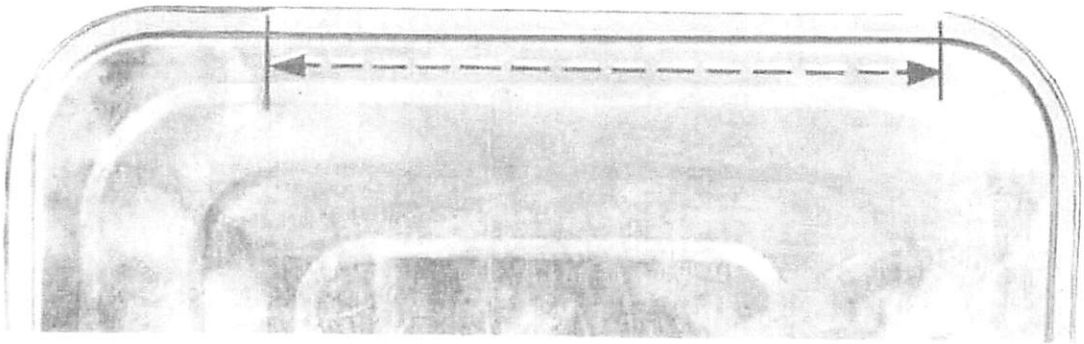


2–A. Absence of Curl—Major

(Insufficient metal in blank to form curl. Defect is major regardless of length.)




2–B. Major

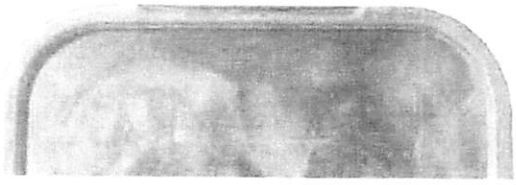


2–C. Major

Grossly Incorrect Curl

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:31Z
Check the source to verify that this is the current version before use.

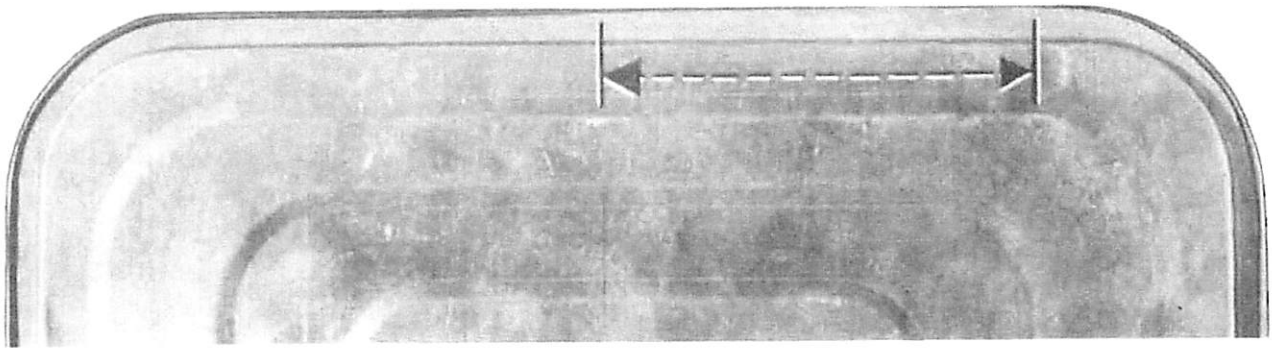

2–D. (Bottom View)—Major

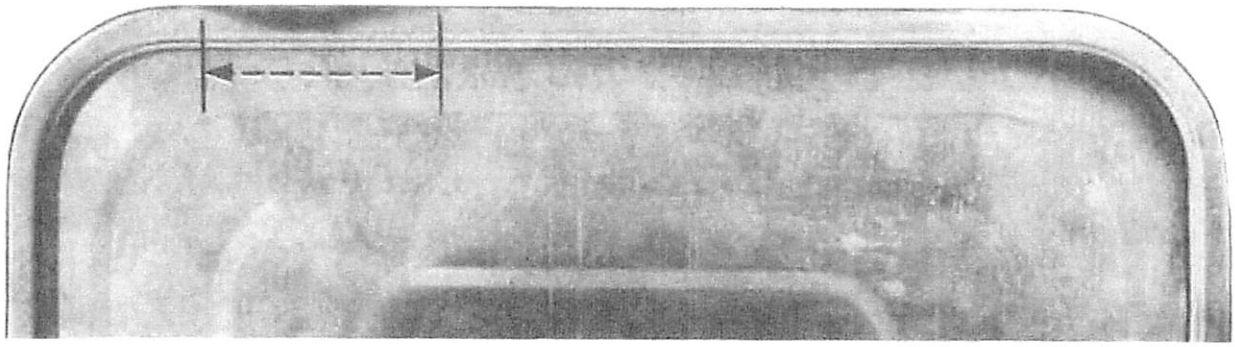


2–E. (Top View)

(Area marked indicates only presence of defect. Judgment as to length of defective curl is to be made from reverse side of cover as indicated in 2–D.)

Grossly Incorrect Curl

(Up to one and one-half inches per bottom cover is an incidental defect. Defect, regardless of length, is major on corners.)

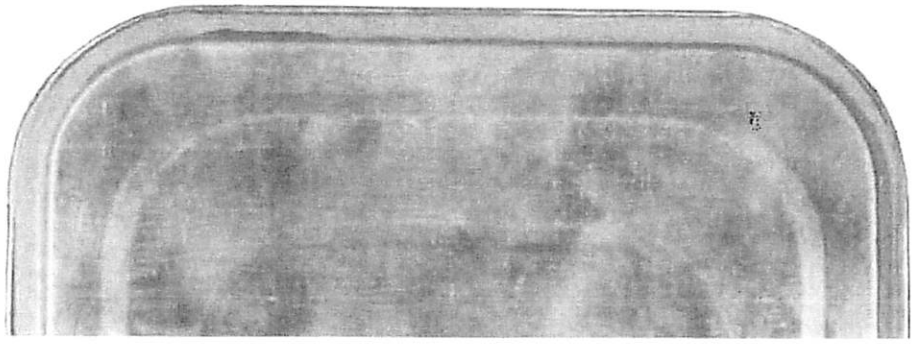


2–F. Partially Formed Curl—Permissible


(Defect is shown on right corner. Permissible on all four corners.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:31Z
Check the source to verify that this is the current version before use.


No. 3. Chips, Dirt, Grease or Other Foreign Material

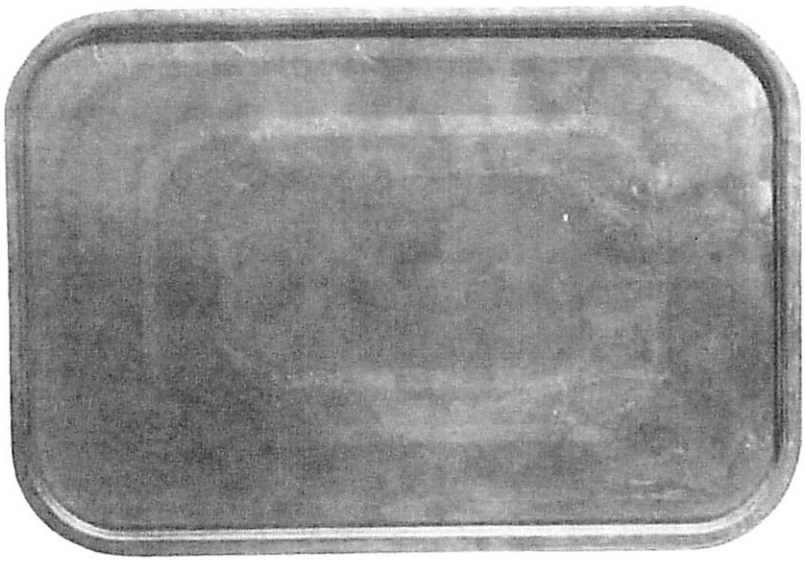


3–A. Dirt, Either Side—Minor




3–B. Spattered Lining Compound, Interior or Exterior—Permissible

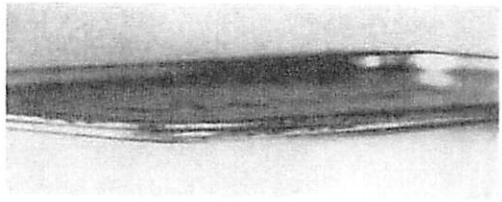

3–C. Rust—Incidental



3–D. Incidental




3–E. Incidental

Imbedded Chip

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:31Z
Check the source to verify that this is the current version before use.

No. 4. Burrs, Dents or Buckles

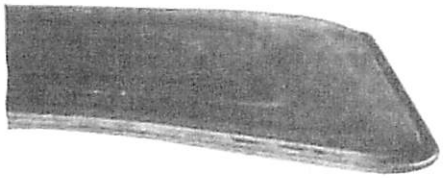


4–A. Minor



4–B. Incidental

Buckle

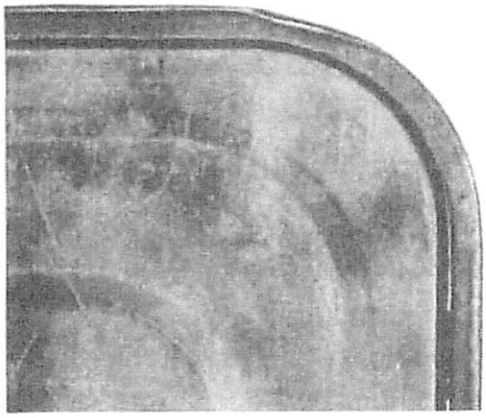


4–C. Minor



4–D. Incidental

Dented Curl

(Incidental only if opening is greater than maximum body flange width shown on drawings.)

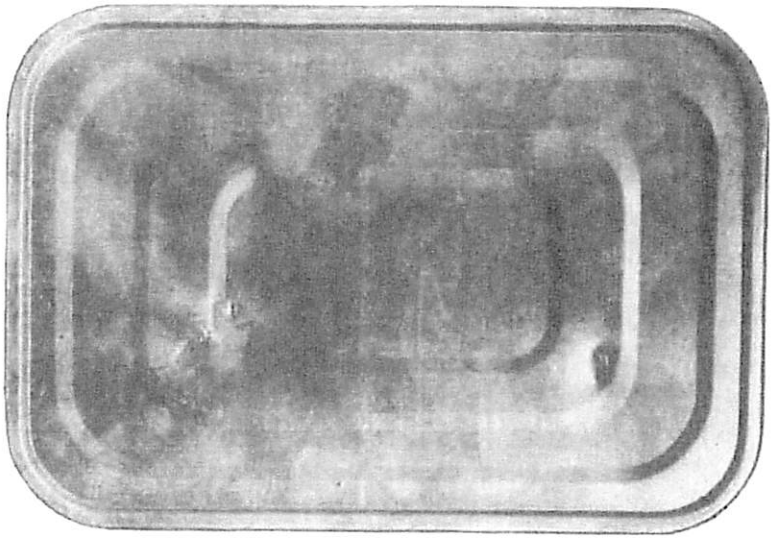

4–E. Dents—Minor

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:31Z
Check the source to verify that this is the current version before use.




4–F. Dent—Permissible




4–G. Small Buckles on Radius—Permissible
(All four corners)

No. 5. Lining Compound Containing Skips

Less Than One Inch in Length; Excessive Overlap, Incomplete or Inadequate Coverage

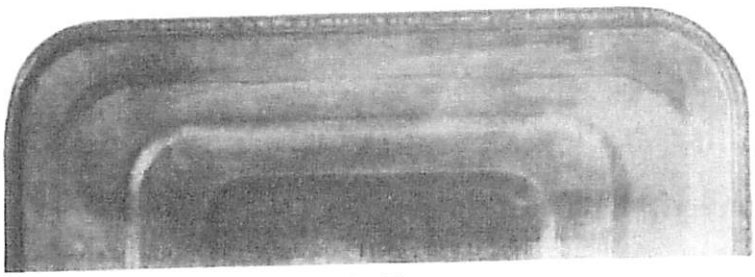

5–A. Minor

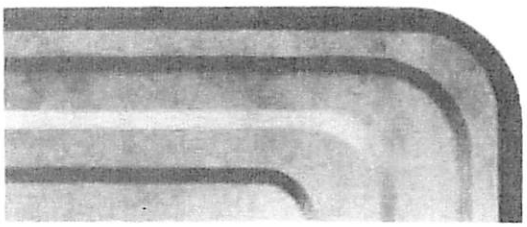


5–B. Permissible


Inadequate Lining Compound




5–C. Minor

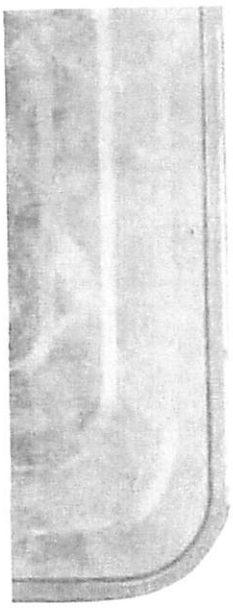

5–D. Minor

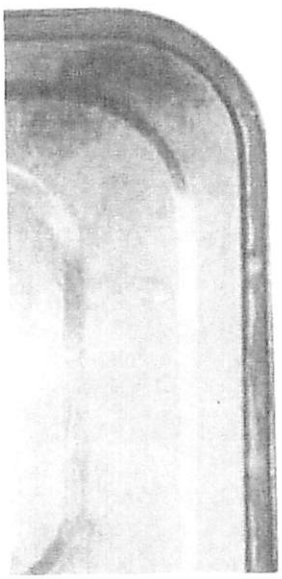

5–E. Permissible




5–F. Lining Compound Containing Skips

Less Than One Inch in Length—Minor


Incomplete Lining Compound

(5–E illustrates "worst" permissible condition and may be present on one or more areas of a bottom cover. A condition more pronounced than that shown in 5–E, but where the incompleteness of coverage is confined to inside edge of flange and not more than half the width of the finished flange, shall be considered an incidental defect provided that the cover be included as an assembled can component in the airtightness test sample and the assembly be satisfactory. Assembly shall also be considered as defective in the airtightness test if it fails the test.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:31Z
Check the source to verify that this is the current version before use.

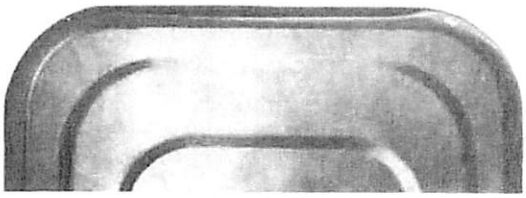

5–G. Minor

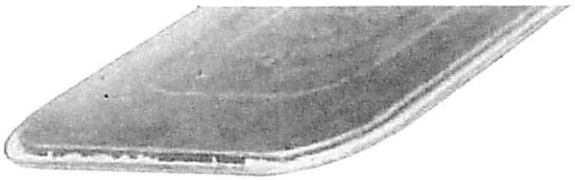


5–H. Permissible

Excessive Overlap

ASSEMBLY, ONE END OPEN


No. 10. Missing or Incorrectly Positioned Component

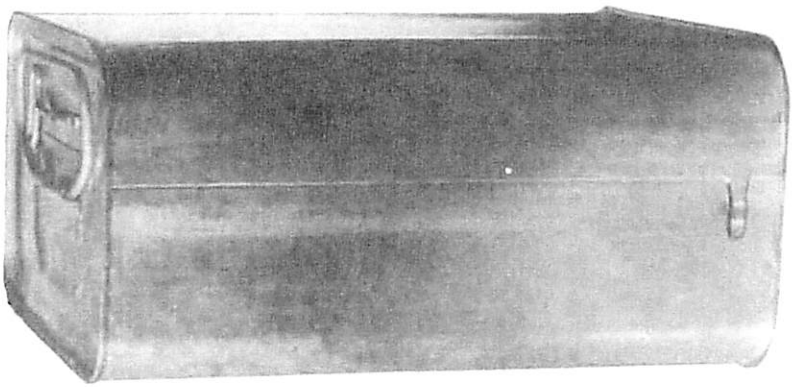

10–A. Top on Wrong End—Major




10–B. Incorrectly Positioned Tear Strip Tongue—Major

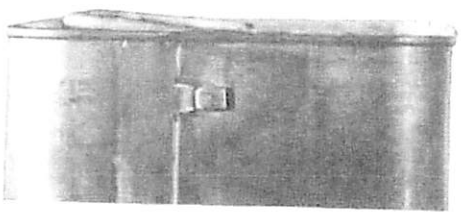


10–C. Bent Tear Strip Tongue—Major

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:31Z
Check the source to verify that this is the current version before use.

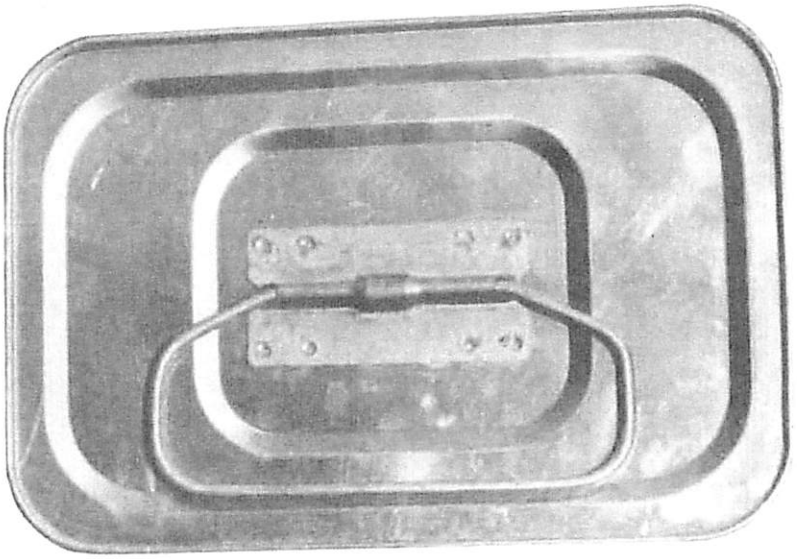


10-D. Missing Key—Major

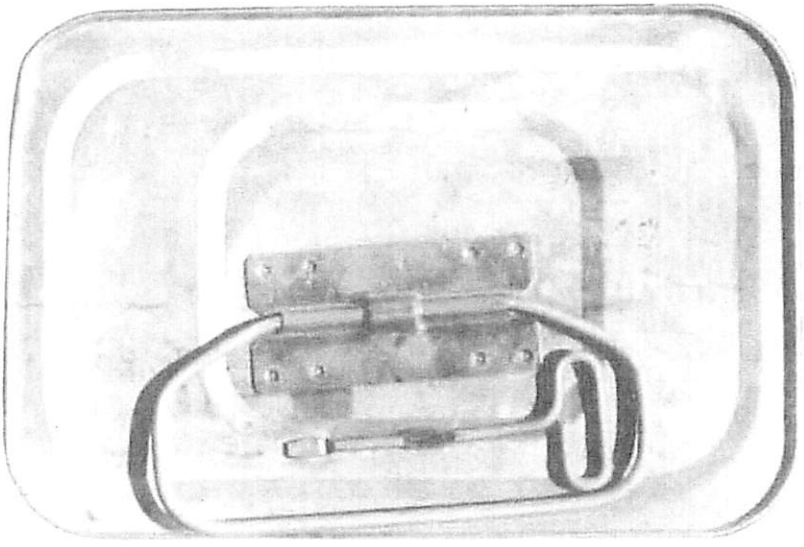


10-E. Incorrectly Positioned Handle and Cleat Assembly, and Key—Major

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:31Z
Check the source to verify that this is the current version before use.

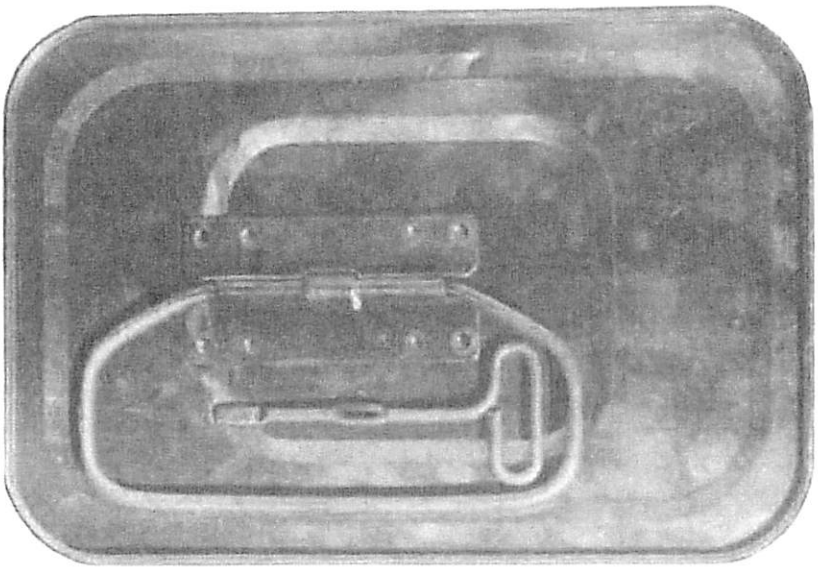


10–F. Incorrectly Positioned Handle and Cleat Assembly, and Key—Major

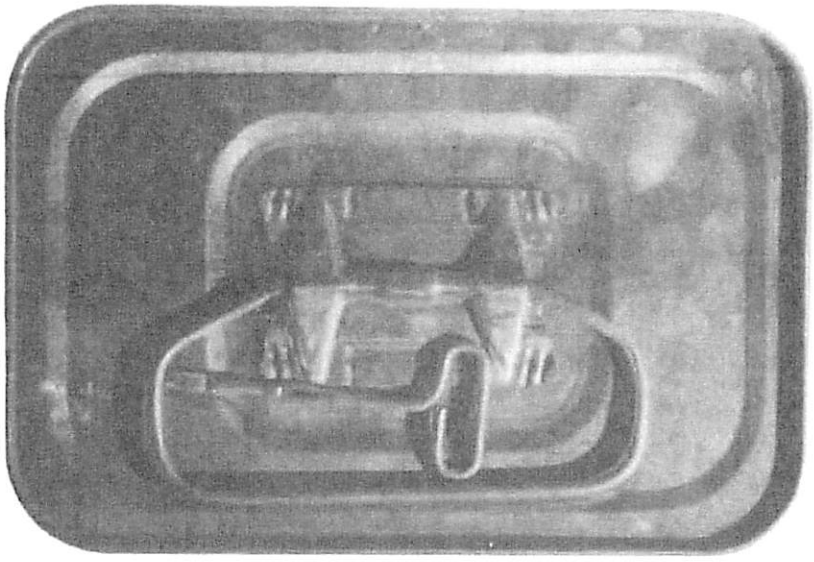


10–G. Incorrectly Positioned Key—Major

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:31Z
Check the source to verify that this is the current version before use.

———No. 11. Absence of Flange or Grossly Incorrect Flange———

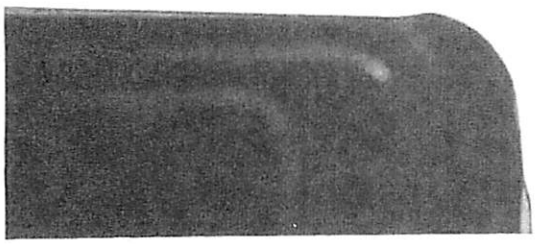


11–A. Absence of Flange—Major

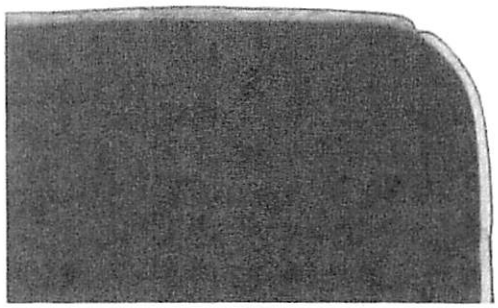


11–B. Grossly Incorrect Flange—Major

———No. 12. Chips, Dirt, Grease and Other Foreign Material———

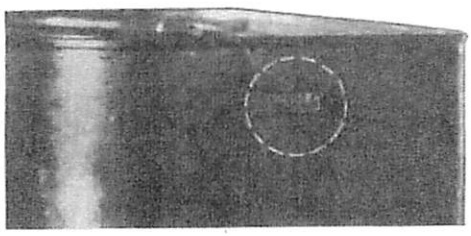


12–A. Excessive Solder, Tear Strip Tongue—Minor

(Defect is permissible only if thickness of tongue with solder is less than minimum key slot.)

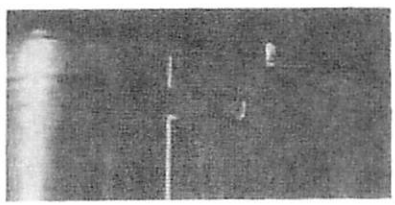


12–B. Metal Chip in Rolled Seam—Minor

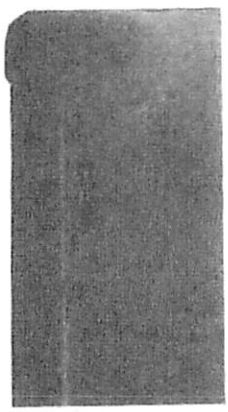


12–C. Grease—Minor

(Interior or Exterior)

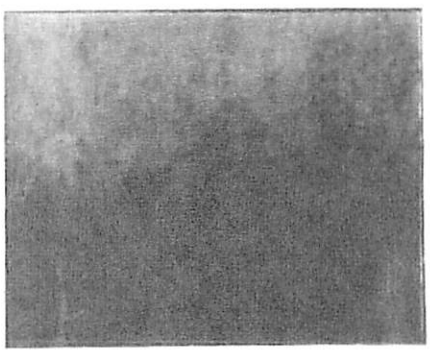


12–D. Foreign Material, Interior—Minor

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:31Z
Check the source to verify that this is the current version before use.

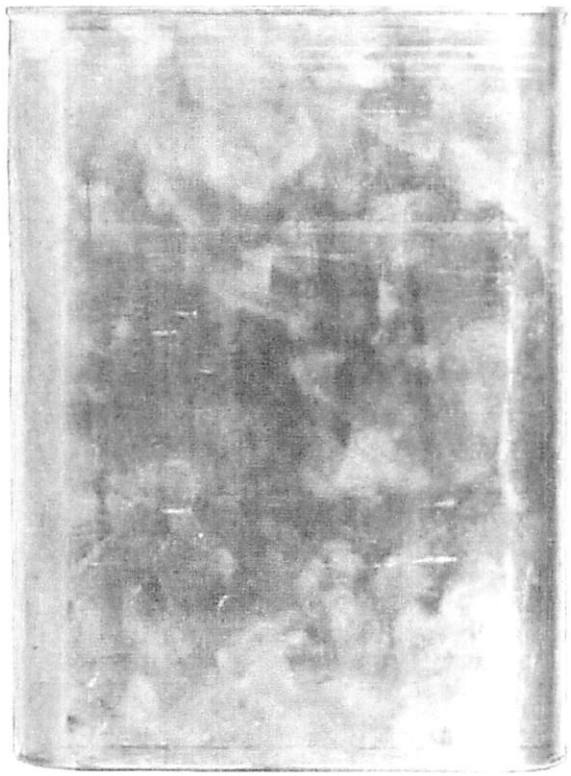

12–E. Incidental

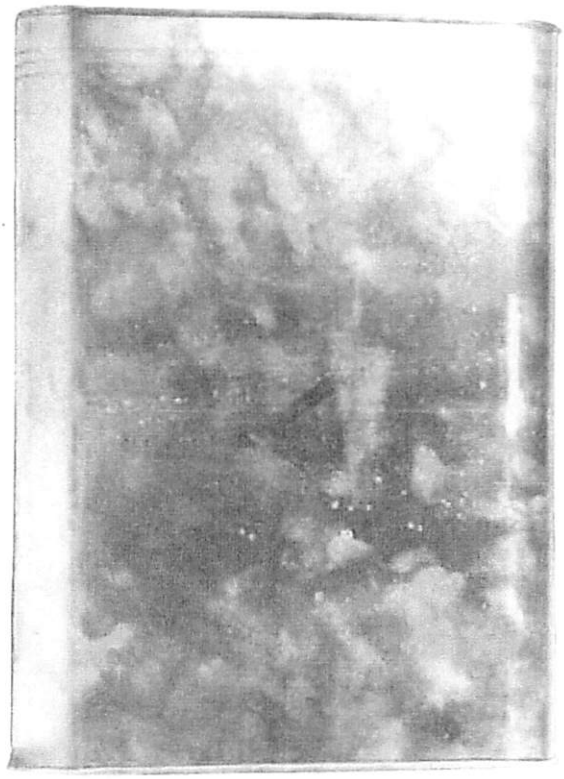


12–F. Incidental


Foreign Material, Exterior

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:31Z
Check the source to verify that this is the current version before use.

No. 13. Burrs, Dents, Buckles or Deformed Flanges

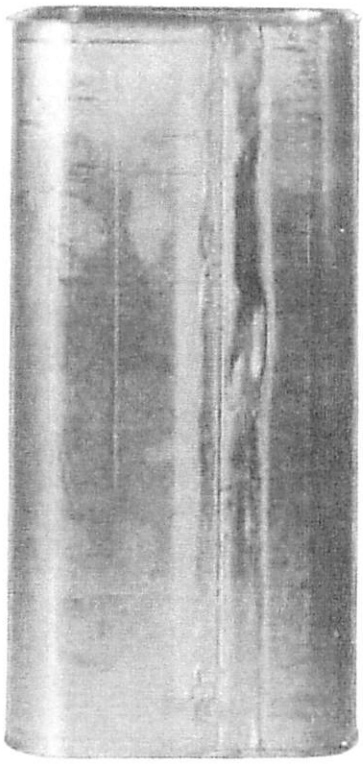


13–A. Incidental

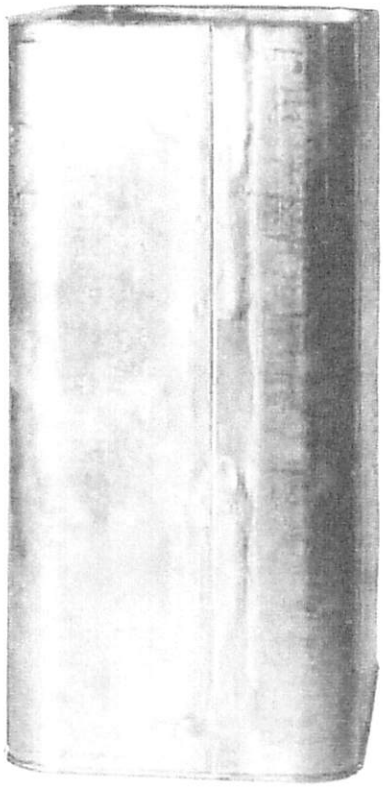


13–B. Permissible

Excessive Solder, Side Seam

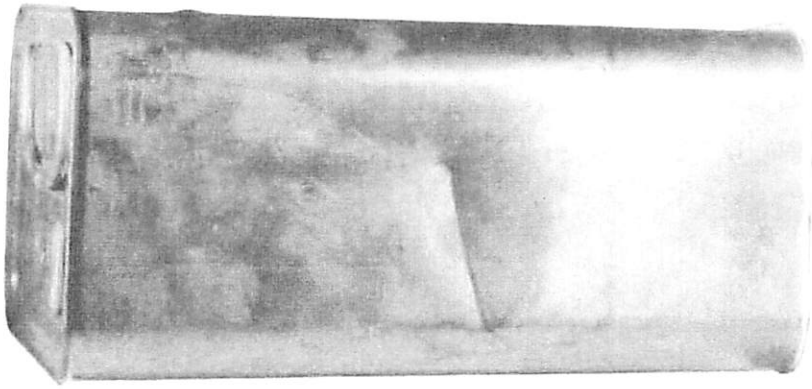

13–C. Minor

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:31Z
Check the source to verify that this is the current version before use.

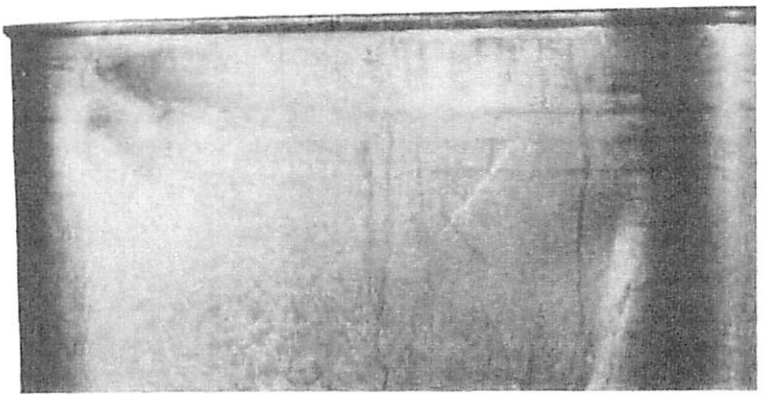


13–D. Minor

(Minor only if on tear strip as shown; if not on tear strip, defect is permissible.)




13–F. Permissible

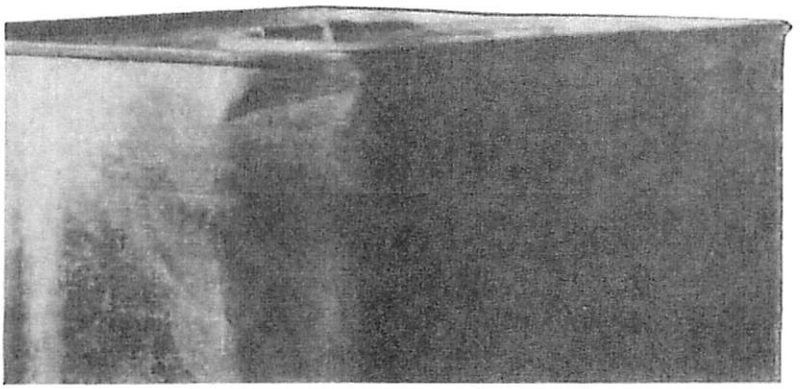

13–E. Incidental

(Incidental only if not on tear strip as shown; if on tear strip, defect is minor.)

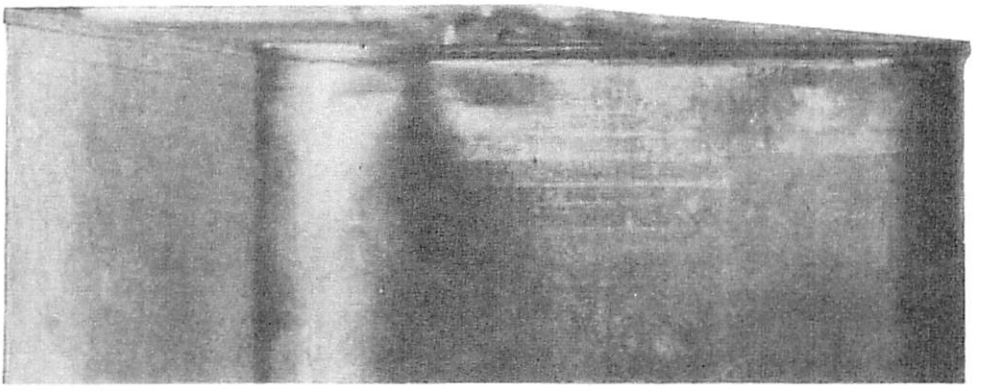


13–G. Permissible


(Permissible only if not on tear strip as shown; if on tear strip, defect is minor.)

Dent

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:31Z
Check the source to verify that this is the current version before use.

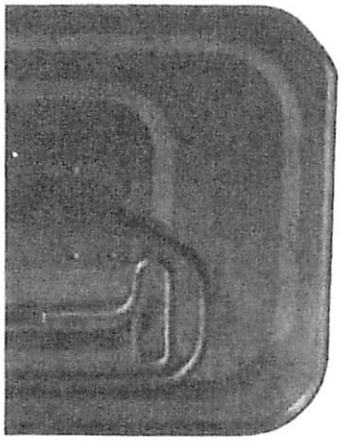


13-H. Corner—Minor

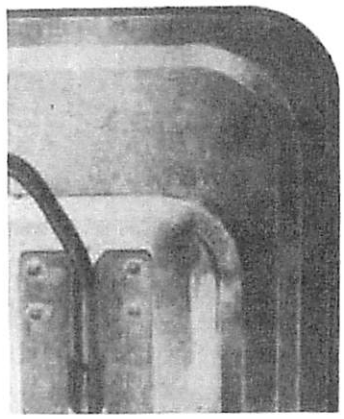


13-I. Top—Permissible


Dent

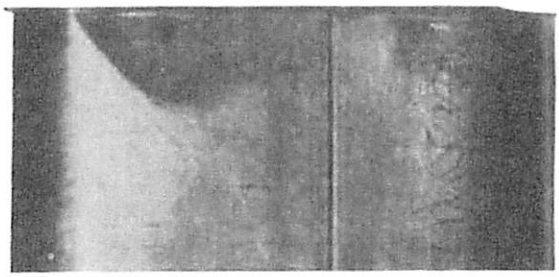


13-J. Minor

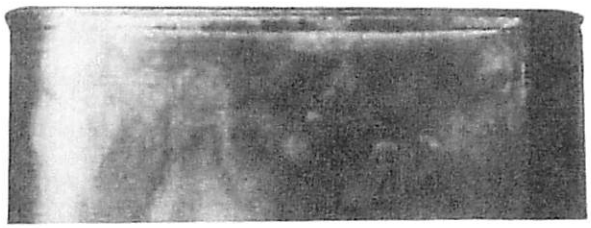


13-M. Minor

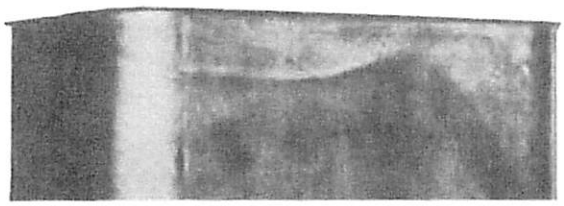

13-K. Incidental

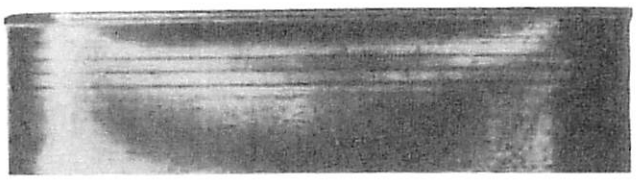


13-N. Incidental

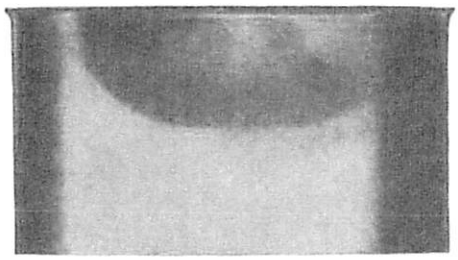

13-L. Incidental


Buckle

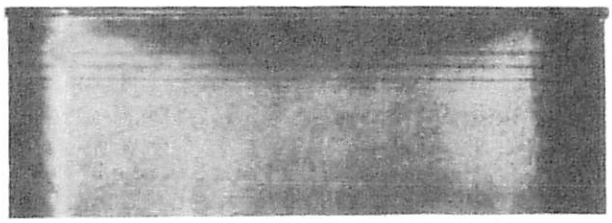


13-O. Permissible

Buckle

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:31Z
Check the source to verify that this is the current version before use.

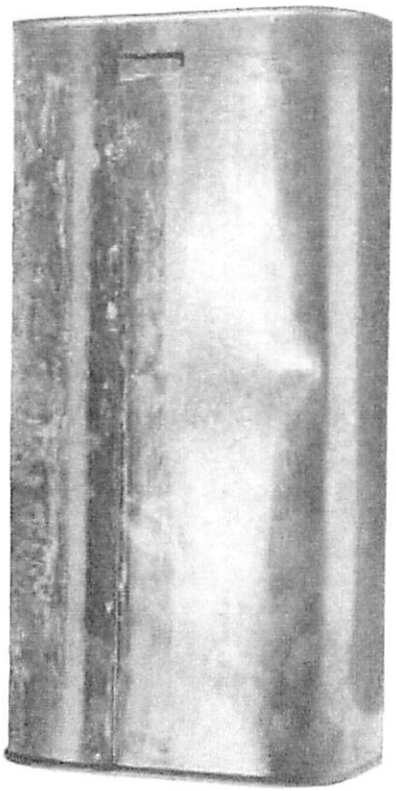


13–P. Minor

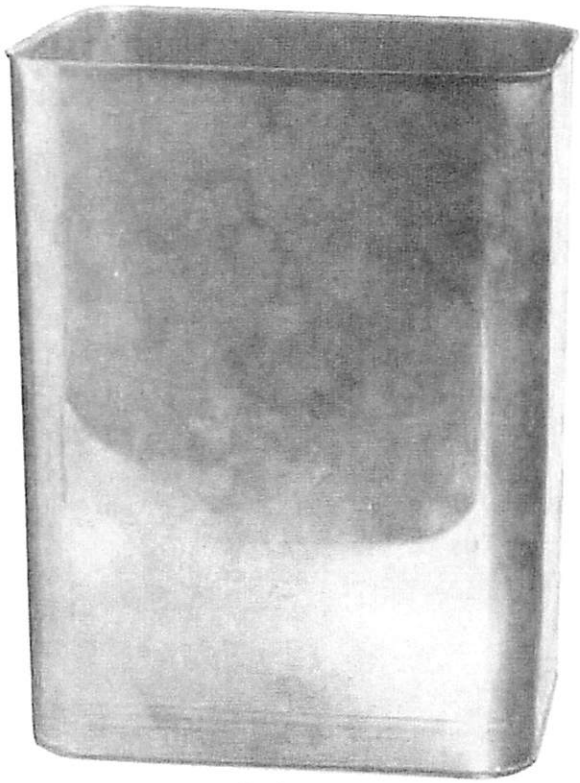


13–Q. Permissible

Buckle

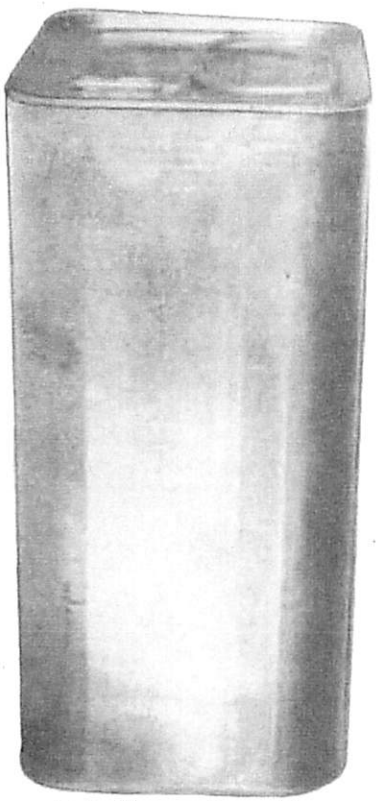


13–R. Fluting—Permissible

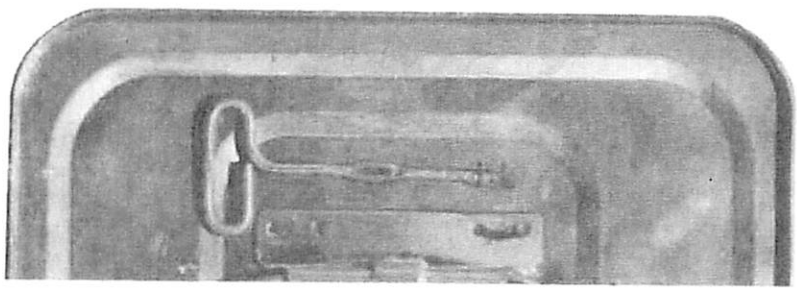


13–S. Weld Burns—Minor


Source: https://assist.dla.mil -- Downloaded: 202640-26T07:31Z
Check the source to verify that this is the current version before use.

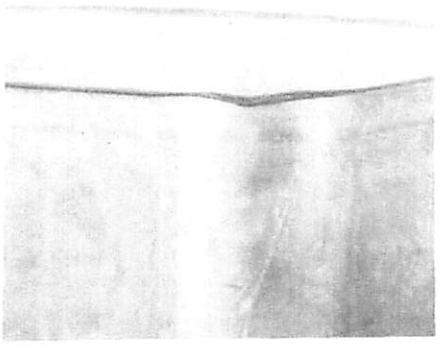


13–T. Minor

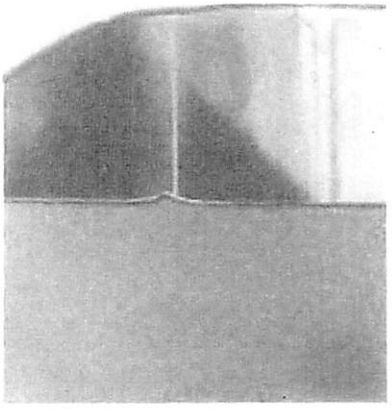

13–U. Minor

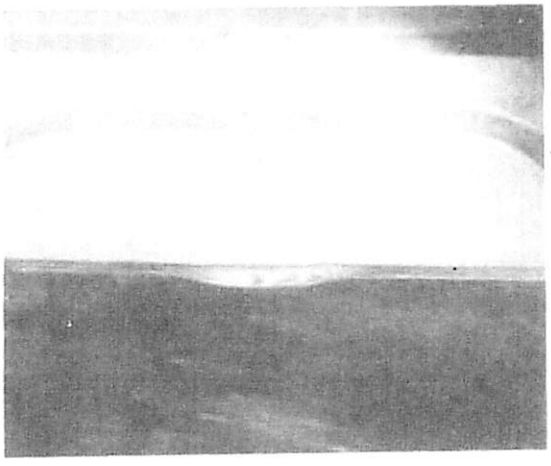

3–V. Incidental

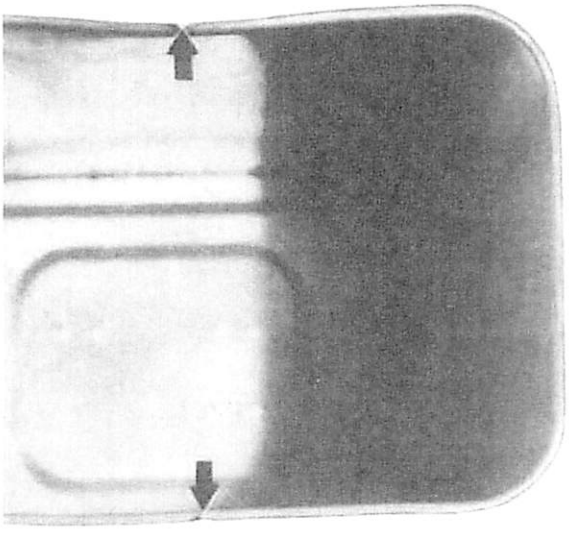

13–W. Permissible

Deformed Flange

(Note 13–T which illustrates a deformed flange on a corner radius. The defect in that location, although less pronounced than 13–V, is classified minor because it is more likely to result in airtightness failure.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:31Z
Check the source to verify that this is the current version before use.

Patent Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Copy Availability Notice.

Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.

Copies of this standard for Military use may be obtained as indicated in the foreword to the Index of Military Specifications and Standards.

Copies of this standard may be obtained for other than official use by individuals, firms, and contractors from the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

Both the title and the identifying symbol number should be stipulated when requesting copies of Military Standards.

Custodians:
Army—Ordnance Corps
Navy—Bureau of Ordnance
Air Force

Preparing activity:
Army—Ordnance Corps

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:31Z
Check the source to verify that this is the current version before use.