
MILITARY SPECIFICATION SHEET

FLANGES, WAVEGUIDE (COVER) (SQUARE, 4 HOLE) (CIRCULAR BACK)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the flanges described herein shall consist of this document and the latest issue of Specification MIL-F-3922.

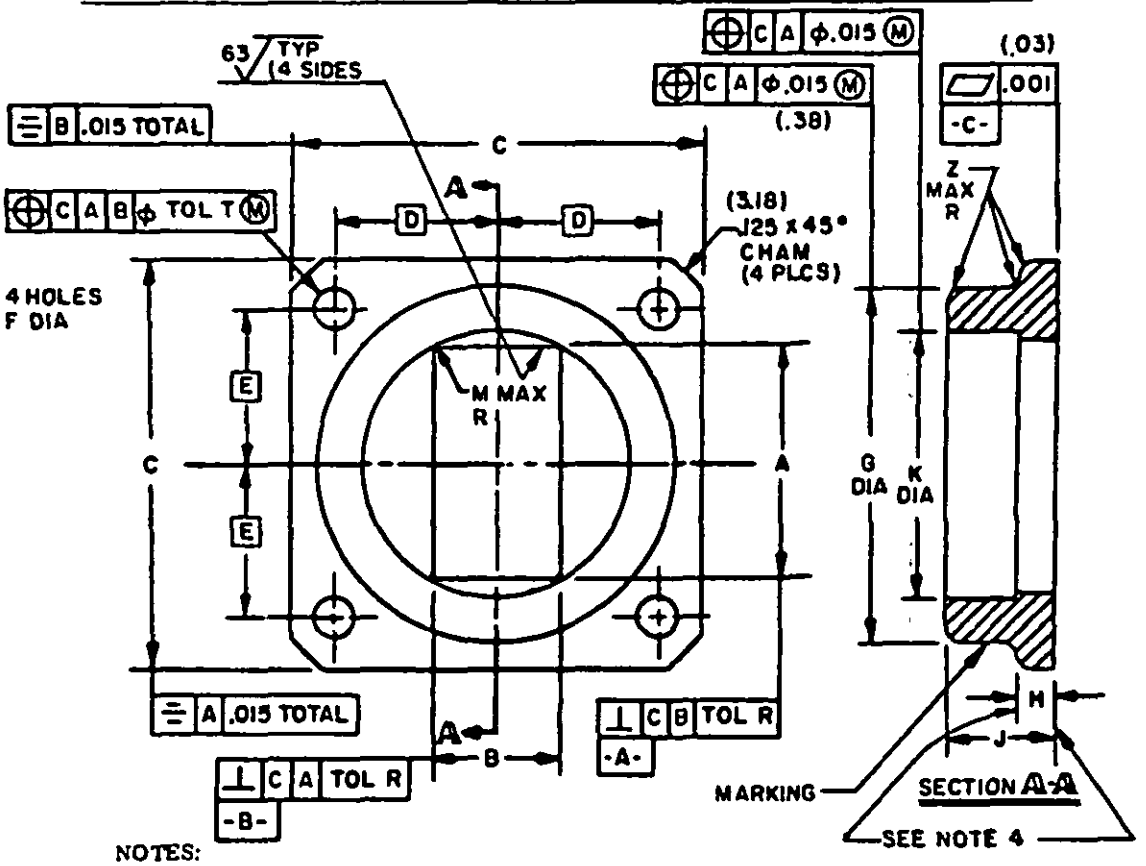

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Metric equivalents are in parentheses.
4. These surfaces to be parallel within .0005 (.01 mm) after drilling and reaming for part numbers M3922/53-005 and M3922/53-006 to facilitate the use of quick disconnect couplings covered by MIL-C-39004.
5. Roughness of mating surfaces shall not exceed 63 microinches in accordance with ANSI - B46.1 - 1962, except that flaws shall be included in the roughness height measurement.

FIGURE 1. Flange configuration.

FSC 5985

Source: https://assist.dla.mil - Downloaded: 202640-16T22:04Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and dimensions.

Dash No. 4/	Part No. M3922/53- Used with Waveguide M85/1-	Used with Mating flange M3922/59-	Dash No. 5/	Used with Waveguide M85/1-	Used with Mating flange M3922/59-	Dimensions 1/ 2/ 3/ A	B
001	079 075	006	003	077 078 178	008	1.005 +.003 (25.53) (.08) -.000	.505 +.003 (12.83) (.08) -.000
002	073 069	007	004	071 072 177	009	1.255 +.003 (31.88) (.08) -.000	.630 +.003 (16.00) (.08) -.000
005	089 093 087	001	006	090 091 180	002	.706 +.002 (17.93) (.05) -.000	.395 +.002 (10.03) (.05) -.000
007	081 085	010	008	083 084 179	011	.854 +.002 (21.69) (.05) -.000	.479 +.002 (12.17) (.05) -.000
009	079 075	006	010	077 078 178	008	1.005 +.003 (25.53) (.08) -.000	.505 +.003 (12.83) (.08) -.000
011	089 093	001	012	090 091 180	002	.706 +.002 (17.93) (.05) -.000	.395 +.002 (10.03) (.05) -.000
013	081 085	010	014	083 084 179	011	.854 +.002 (21.69) (.05) -.000	.479 +.002 (12.17) (.05) -.000
015	075 079	013	016	077 078 178	014	1.005 +.003 (25.53) (.08) -.000	.505 +.003 (12.83) (.08) -.000
017	087 089 093	---	018	090 091 180	---	.706 +.002 (17.93) (.05) -.000	.395 +.002 (10.03) (.05) -.000

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-16T22:04Z
Check the source to verify that this is the current version before use.

Dash No. 4/	Dash No. 5/	Dimensions 1/ 2/ 3/					
		C ±.015 (.38)	D BSC.	E BSC.	F	G Dia. ±.015 (.38)	H
001	003	1.625 (41.28)	.640 (16.26)	.610 (15.49)	.169 +.003 -.000 (4.29) (.08)	1.422 (36.12)	.160 ±.010 (6.22) (.25)
002	004	1.875 (47.63)	.737 (18.72)	.676 (17.17)	.169 +.003 -.000 (4.29) (.08)	1.531 (38.89)	.250 ±.015 (6.35) (.38)
005	006	1.313 (33.35)	.478 (12.14)	.497 (12.62)	.144 +.003 -.000 (3.66) (.08)	1.000 (25.40)	.125 ±.015 (3.18) (.38)
007	008	1.500 (38.10)	.561 (14.25)	.520 (13.21)	.144 +.003 -.000 (3.66) (.08)	1.141 (28.98)	.203 ±.015 (7.89) (.38)
009	010	1.625 (41.28)	.640 (16.25)	.610 (15.49)	.169 +.003 -.000 (4.29) (.08)	1.422 (36.19)	.250 ±.015 (6.35) (.38)
011	012	1.313 (33.35)	.478 (12.14)	.497 (12.62)	.144 +.003 -.000 (3.66) (.08)	1.000 (25.40)	.250 ±.015 (6.35) (.38)
013	014	1.500 (38.10)	.561 (14.25)	.520 (13.21)	.144 +.003 -.000 (3.66) (.08)	1.141 (28.98)	.250 ±.015 (6.35) (.38)
015	016	1.625 (41.28)	.640 (16.25)	.610 (15.49)	.164-32 UNC-2B	1.422 (36.19)	.160 ±.010 (6.22) (.25)
017	018	1.313 (33.35)	.478 (12.14)	.497 (12.62)	.138-32 UNC-2B	1.000 (25.40)	.125 ±.015 (3.18) (.38)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-16T22:04Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and dimensions - Continued.

Dash No. 4/	Dash No. 5/	Dimensions 1/ 2/ 3/					
		J ±.015 (.38)	K Dia. ±.015 (.38)	M Max R	R	T	Z Max R
001	003	.438 (11.12)	1.062 (26.97)	.046 (1.17)	.0015 (.04)	.002 (.05)	.062 (1.57)
002	004	.438 (11.12)	1.312 (33.32)	.031 (.79)	.0015 (.04)	.002 (.05)	.062 (1.57)
005	006	.313 (7.95)	---	.010 (.25)	.001 (.02)	.002 (.05)	.031 (.79)
007	008	.391 (9.93)	---	.010 (.25)	.001 (.02)	.002 (.05)	.062 (1.57)
009	010	.438 (11.12)	1.062 (26.97)	.046 (1.17)	.0015 (.04)	.002 (.05)	.062 (1.57)
011	012	.313 (7.95)	---	.010 (.25)	.001 (.02)	.002 (.05)	.031 (.79)
013	014	.391 (9.93)	---	.010 (.25)	.001 (.02)	.002 (.05)	.062 (1.57)
015	016	.438 (11.12)	1.062 (26.97)	.046 (1.17)	.0015 (.04)	.004 (.10)	.062 (1.57)
017	018	.313 (7.95)	---	.010 (.25)	.001 (.02)	.004 (.10)	.031 (.79)

1/ Dimensions are in inches.
2/ Metric equivalents (to the nearest .01 mm) are given for general information only, and are based upon 1 inch = 25.4 mm.
3/ Metric equivalents are in parentheses.
4/ Material shall be copper alloy.
5/ Material shall be aluminum alloy.

Source: https://assist.dla.mil -- Downloaded: 202610-16T22:04Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Material: Metallic alloy as specified in table I.

Marking: See figure 1.
Part number: M3922/53- (and dash number from table I).

TABLE II. Cross reference and engineering information.

Part number M3922/53-	AN nomenclature	Frequency range (GHz)
001	UG-39/U	8.20 - 12.40
002	UG-51/U	7.05 - 10.00
003	UG-135/U	8.20 - 12.40
004	UG-138/U	7.05 - 10.00
005	UG-419/U	12.40 - 18.00
006	UG-1665/U	12.40 - 18.00
007	---	10.00 - 15.00
008	---	10.00 - 15.00
009	---	8.20 - 12.40
010	---	8.20 - 12.40
011	---	12.40 - 18.00
012	---	12.40 - 18.00
013	---	10.00 - 15.00
014	---	10.00 - 15.00
015	---	8.20 - 12.40
016	---	8.20 - 12.40
017	---	12.40 - 18.00
018	---	12.40 - 18.00

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - MI, SG
Navy - OS
Air Force - 11, 80
DSA - ES

User activities:
Army - AV, MU
Navy - AS, MC, SH

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5985-0818-1)

U.S. GOVERNMENT PRINTING OFFICE 1976—603-766/4250

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:04Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMSNT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:04Z
Check the source to verify that this is the current version before use.