INCH-POUND

MIL-DTL-3922/56C
6 March 2000
SUPERSEDING
MIL-F-3922/56B
4 May 1976

DETAIL SPECIFICATION SHEET

# FLANGES, WAVEGUIDE (COVER)
# (ROUND, 8 HOLE)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the flanges described herein shall consist of this document and the latest issue of MIL-DTL 3922.

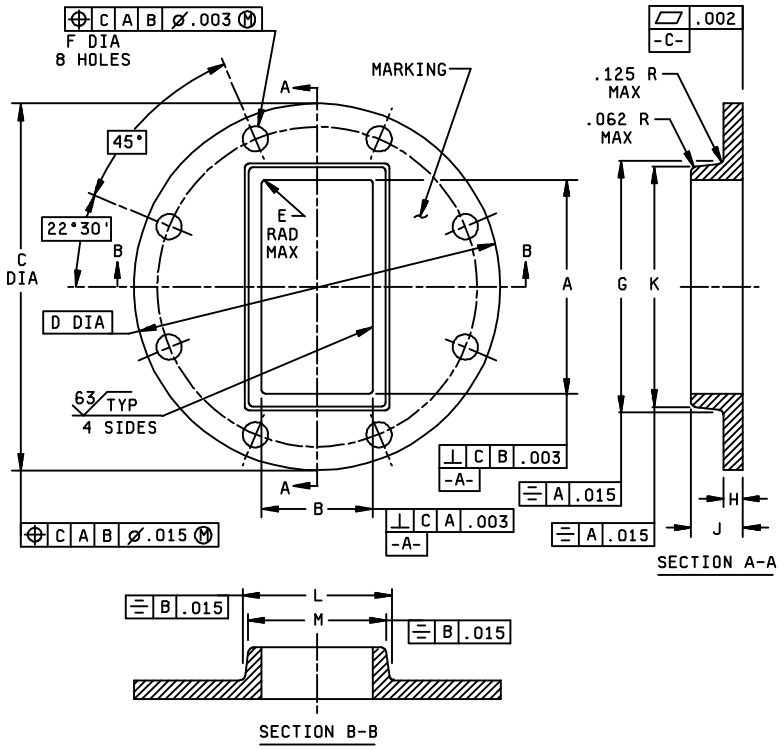


| Inches | mm |
|---|---|
| .002 | 0.05 |
| .003 | 0.08 |
| .004 | 0.10 |
| .015 | 0.38 |
| .062 | 1.57 |
| .125 | 3.18 |
| .313 | 7.95 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Metric equivalents are in parentheses.
4. Roughness of mating surfaces shall not exceed 63 microinches in accordance with ASME B46-1, except that flaws shall be included in the roughness height measurement.

FIGURE 1. Flange configuration.


DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:05Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number and dimensions.

| PIN M3922/56- | | | Dimensions 1/ | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Dash no. | Used with | | A | B | C | D | E | F | G | H | J | K | L | M |
| | Waveguide M85/1- | Mating flange M3922/61- | +.003 (0.08) -.000 | +.003 (0.08) -.000 | ±.015 (0.38) | BSC | Max Rad | +.003 (0.08) -.000 | ±.015 (0.38) | ±.015 (0.38) | ±.015 (0.38) | ±.015 (0.38) | Nom | ±.015 (0.38) |
| 001 2/ | 043 | 002 | 3.007 (76.38) | 1.507 (38.28) | 5.313 (134.95) | 4.750 (120.65) | .062 (1.57) | .257 (6.53) | 3.500 (88.90) | .250 (6.35) | .750 (19.05) | 3.375 (85.73) | 2.000 (50.80) | 1.875 (47.63) |
| 002 3/ | 041 | 001 | | | | | | | | | | | | |

1/ Dimensions are in inches (millimeters are in parentheses).
2/ Copper alloy.
3/ Aluminum alloy.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Material: Metallic alloy as specified in table I.

Marking: See figure 1.

Part or Identifying Number (PIN): M3922/56- (and PIN from table I).

TABLE II. Cross-reference and engineering information.

| PIN M3922/56- | AN nomenclature | Frequency range (GHz) |
|---|---|---|
| 001 | UG-53/U | 2.60-3.95 |
| 002 | UG-584/U | 2.60-3.95 |

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - AR, AV, MI
Navy - AS, MC, OS
Air Force - 99

Preparing activity:
DLA - CC

(Project 5985-1130)



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:05Z
Check the source to verify that this is the current version before use.