MILITARY SPECIFICATION SHEET

FLANGES, WAVEGUIDE (CHOKE)
(SQUARE, 4 HOLE)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the flanges described herein shall consist of this document and the latest issue of Specification MIL-F-3922.


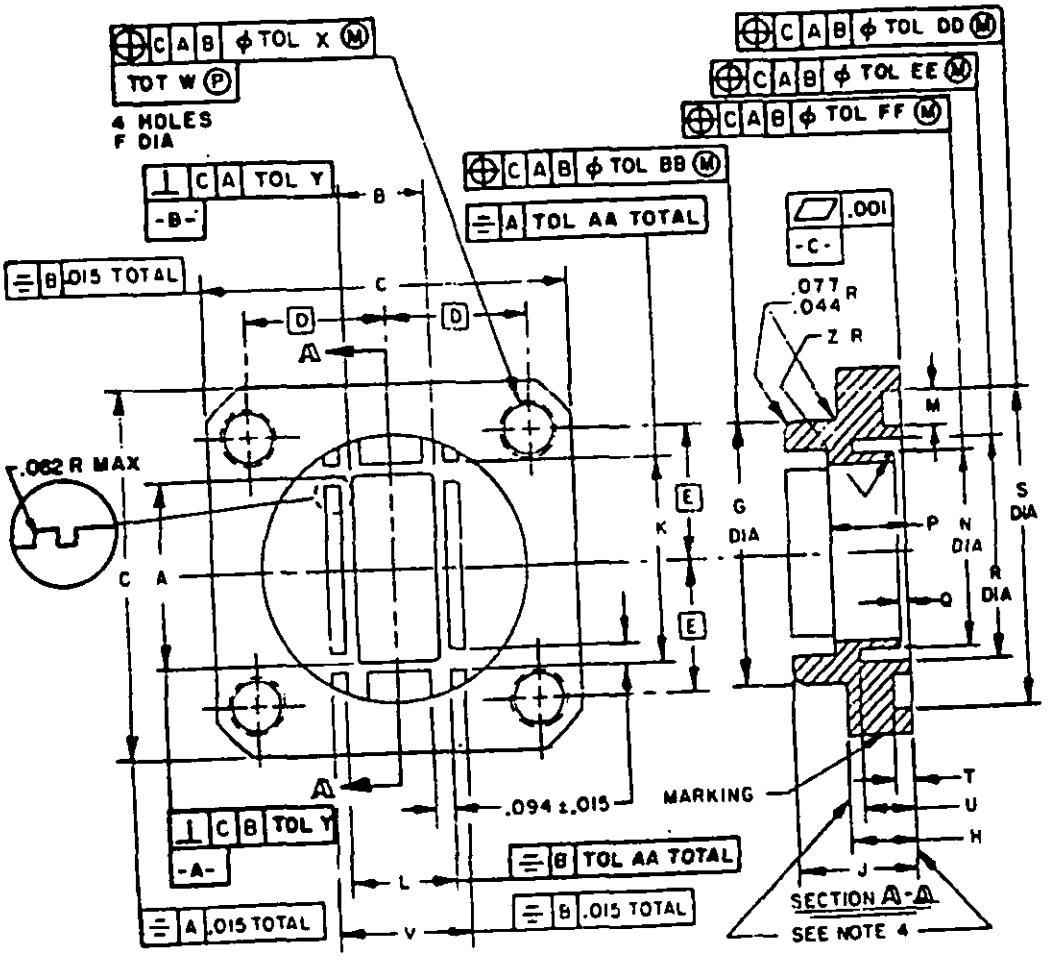


FIGURE 1. Flange configuration.

Source: https://assist.dla.mil -- Downloaded: 202610-16T22:06Z
Check the source to verify that this is the current version before use.

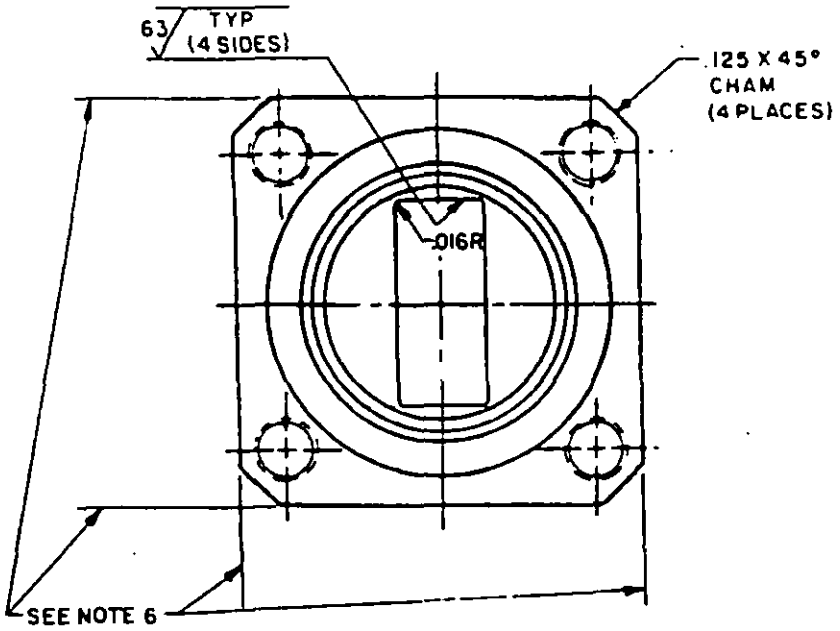

INCHES	MM
.001	.03
.015	.38
.016	.41
.044	1.12
.077	1.96
.094	2.39
.125	3.18

NOTES:
1. Dimensions are in inches
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Metric equivalents are in parentheses.
4. These surfaces to be parallel within .0005 (.01 mm) after drilling and reaming for part numbers M3922/59-001 through -005 to facilitate the use of quick disconnect couplings covered by MIL-C-39004.
5. Roughness of mating surfaces, including seal groove, shall not exceed 63 microinches in accordance with ANSI - B46.1 - 1962, except that flaws shall be included in the roughness height measurement.
6. Surfaces to be parallel within .002 (.05 mm) for part M3922/59-012 only.

FIGURE 1. Flange configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:06Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and dimensions.

Dash No. 2/	Part No. M3922/59- Used with Waveguide M85/	Used with Mating flange M3922/	Dash No. 3/	Used with Waveguide M85/	Used with Mating flange M3922/	Dimensions 1/ A	Dimensions 1/ B
001	1-089 & 1-093	53-005	002	1-090 1-091 1-180	53-006	.622 ±.002 (15.80) (.05)	.311 ±.002 (7.90) (.05)
003	1-102 & 1-106	54-001	004	1-103	54-002	.420 ±.002 (10.67) (.05)	.170 ±.002 (4.32) (.05)
005	3-006	54-003				.2800 ±.0014 (7.11) (.04)	.1400 ±.0014 (3.56) (.04)
006	1-079 1-075	53-001	008	1-077 1-078 1-178	53-003	.900 ±.004 (22.86) (.10)	.400 ±.004 (10.16) (.10)
007	1-073 1-069	53-002	009	1-071 1-072 1-177	53-004	1.122 ±.004 (28.50) (.10)	.497 ±.004 (12.62) (.10)
010	1-081 & 1-085	53-007	011	1-083 1-084	53-008	.750 ±.003 (19.05) (.08)	.375 ±.003 (9.53) (.08)
012	3-006	54-003	---	---	---	.2800 ±.0014 (7.11) (.04)	.1400 ±.0014 (3.56) (.04)
013	1-075 1-079	54-007	014	1-077 1-078 1-178	54-008	.900 ±.004 (22.86) (.10)	.400 ±.004 (10.16) (.10)
015	1-069 1-073	54-005	016	1-071 1-072 1-177	54-006	1.122 ±.004 (28.50) (.10)	.497 ±.004 (12.62) (.10)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-16T22:06Z
Check the source to verify that this is the currentversion before use.

Dash No. 2/	Dash No. 3/	Dimensions 1/ (Continued)					
		C ±.015 (.38)	D BSC.	E BSC.	F	G	H
001	002	1.312 (33.32)	.478 (12.14)	.497 (12.62)	.138-32 UNC-2B	1.000 ±.015 (25.40) (.38)	.188 ±.015 (4.78) (.38)
003	004	.875 (22.23)	.335 (8.51)	.320 (8.13)	.112-40 UNC-2B	.625 ±.015 (15.88) (.38)	.156 ±.005 (3.96) (.13)
005		.750 (19.05)	.265 (6.73)	.250 (6.35)	.112-40 UNC-2B	.500 ±.015 (12.70) (.38)	.109 ±.015 (2.77) (.38)
006	008	1.625 (41.28)	.640 (16.26)	.610 (15.49)	.164-32 UNC-2B	1.422 +.015 (36.12) (.38) -.016 (.41)	.160 ±.010 (4.06) (.25)
007	009	1.875 (47.63)	.737 (18.72)	.676 (17.17)	.164-32 UNC-2B	1.625 ±.015 (41.28) (.38)	.250 ±.015 (6.35) (.38)
010	011	1.500 (38.10)	.5610 (14.25)	.5200 (13.21)	.138-32 UNC-2B	1.141 ±.015 (28.98) (.38)	.203 ±.015 (5.16) (.38)
012	---	.750 (19.05)	.2650 (6.73)	.2500 (6.35)	.112-40 UNC-2B	.469 ±.005 (11.91) (.13)	.156 +.005 (3.96) (.13) -.000
013	014	1.625 (41.28)	.640 (16.26)	.610 (15.49)	.169 +.003 (4.29) (.08) -.000	1.422 ±.015 (36.12) (.38)	.250 ±.015 (6.35) (.38)
015	016	1.875 (47.63)	.737 (18.72)	.676 (17.17)	.169 +.003 (4.29) (.08) -.000	1.625 ±.015 (41.28) (.38)	.203 ±.015 (5.16) (.38)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-16T22:06Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and dimensions - Continued.

Dash No. 2/	Dash No. 3/	Dimensions 1/ (Continued)				
		J ±.015 (.38)	K	L	M	N
001	002	.375 (9.53)	.707 ±.002 (17.96) (.05)	.396 ±.002 (10.06) (.05)	.158 ±.002 (4.01) (.05)	.710 ±.002 (18.03) (.05)
003	004	.285 (7.24)	.504 ±.001 (12.80) (.03)	.254 ±.001 (6.45) (.03)	.087 ±.003 (2.21) (.08)	.472 ±.002 (11.99) (.05)
005		.210 (5.33)	.364 ±.002 (9.25) (.05)	.224 ±.002 (5.69) (.05)	.096 ±.002 (2.44) (.05)	.321 ±.002 (8.15) (.05)
006	008	.438 (11.13)	1.007 ±.003 (25.58) (.08)	.507 ±.003 (12.88) (.08)	.128 ±.003 (3.25) (.08)	1.015 ±.002 (25.78) (.05)
007	009	.625 (15.88)	1.257 ±.003 (31.93) (.08)	.632 ±.003 (16.05) (.08)	.118 ±.002 (3.00) (.05)	1.270 ±.003 (32.26) (.08)
010	011	.500 (12.70)	.854 ±.001 (21.69) (.03)	.478 +.002 -.000 (12.14) (.05)	.099 ±.002 (2.51) (.05)	.880 ±.002 (22.35) (.05)
012	---	.250 ±.005 (6.35) (.13)	.362 +.002 -.000 (9.19) (.05)	.222 +.002 -.000 (5.64) (.05)	.081 ±.002 (2.06) (.05)	.321 ±.002 (8.15) (.05)
013	014	.625 (15.88)	1.007 ±.003 (25.58) (.08)	.507 ±.003 (12.88) (.08)	.128 ±.003 (3.25) (.08)	1.015 ±.002 (25.78) (.05)
015	016	.500 (12.70)	1.257 ±.003 (31.93) (.08)	.632 ±.003 (16.05) (.08)	.118 ±.002 (3.00) (.05)	1.270 ±.003 (32.26) (.08)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:06Z
Check the source to verify that this is the current version before use.

Dash No. 2/	Dash No. 3/	Dimensions 1/ (Continued)				
		P ±.005 (.13)	Q	R	S	T
001	002	.250 (6.35)	.0075 ±.0010 (.19) (.03)	.828 ±.002 (21.03) (.05)	1.208 ±.002 (30.68) (.05)	.113 ±.002 (2.87) (.05)
003	004	.160 (4.06)	.005 ±.001 (.13) (.03)	.536 ±.002 (13.61) (.05)	.761 ±.002 (19.33) (.05)	.042 ±.003 (1.07) (.08)
005		.110 (2.79)	.003 ±.001 (.08) (.03)	.372 ±.002 (9.45) (.05)	.596 ±.002 (15.14) (.05)	.050 ±.002 (1.27) (.05)
006	008	.312 (7.92)	.0115 ±.0010 (.29) (.03)	1.225 ±.002 (31.12) (.05)	1.551 ±.003 (39.40) (.08)	.067 ±.003 (1.70) (.08)
007	009	.437 (11.10)	.015 ±.001 (.38) (.03)	1.495 ±.003 (37.97) (.08)	1.800 ±.002 (45.72) (.05)	.071 ±.002 (1.80) (.05)
010	011	.281 (7.14)	.0095 +.0010 -.0000 (.24) (.03)	1.050 ±.002 (26.67) (.05)	1.314 ±.002 (33.38) (.05)	.050 +.002 -.000 (1.27) (.05)
012	---	1.56 +.005 -.000 (3.96) (.13)	.003 +.001 -.000 (.08) (.03)	.372 ±.002 (9.45) (.05)	.574 ±.002 (14.58) (.05)	.056 ±.002 (1.42) (.05)
013	014	.312 (7.92)	.0115 ±.0010 (.29) (.03)	1.225 ±.002 (31.12) (.05)	1.551 ±.003 (39.40) (.08)	.067 ±.003 (1.70) (.08)
015	016	.437 (11.10)	.015 ±.001 (.38) (.03)	1.495 ±.003 (37.97) (.08)	1.800 ±.002 (45.72) (.05)	.071 ±.002 (1.80) (.05)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-16T22:06Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and dimensions - Continued.

Dash No. 2/	Dash No. 3/	Dimensions 1/ (Continued)				
		U	V Min	W	X	Y
001	002	.190 ±.003 (4.83) (.08)	1.000 (25.40)	.125 (3.18)	.004 (.10)	.002 (.05)
003	004	.129 ±.002 (3.28) (.05)	.625 (15.88)	.188 (4.78)	.002 (.05)	.002 (.05)
005		.086 ±.002 (2.18) (.05)	.500 (12.70)	.187 (4.75)	.002 (.05)	.0014 (.04)
006	008	.265 ±.003 (6.73) (.08)	.750 (19.05)	.160 (4.05)	.004 (.10)	.003 (.08)
007	009	.345 ±.003 (8.76) (.08)	.875 (22.23)	.250 (6.35)	.004 (.10)	.004 (.10)
010	011	.220 ±.003 (5.59) (.08)	1.141 (28.98)	.203 (5.16)	.004 (.10)	.002 (.05)
012	---	.086 ±.002 (2.18) (.05)	.469 (11.91)	.187 (4.75)	.002 (.05)	.0014 (.04)
013	014	.265 ±.003 (6.73) (.08)	.750 (19.05)	.160 (4.05)	.002 (.05)	.003 (.08)
015	016	.345 ±.003 (8.76) (.08)	.875 (22.23)	.250 (6.35)	.002 (.05)	.004 (.10)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:06Z
Check the source to verify that this is the current version before use.

Dash No. 2/	Dash No. 3/	Dimensions 1/ (Continued)					
		Z	aa	bb	dd	ee	ff
001	002	.016 ±.005 (.41) (.13)	.002 (.05)	.015 (.38)	.002 (.05)	.002 (.05)	.002 (.05)
003	004	.008 ±.002 (.20) (.05)	.001 (.03)	.015 (.38)	.002 (.05)	.002 (.05)	.002 (.05)
005		.006 ±.002 (.15) (.05)	.002 (.05)	.015 (.38)	.002 (.05)	.002 (.05)	.002 (.05)
006	008	.030 ±.005 (.76) (.13)	.003 (.08)	.015 (.38)	.003 (.08)	.002 (.05)	.002 (.05)
007	009	.030 ±.005 (.76) (.13)	.003 (.08)	.015 (.38)	.002 (.05)	.003 (.08)	.003 (.08)
010	011	.016 ±.005 (.41) (.13)	.001 (.03)	.015 (.38)	.002 (.05)	.002 (.05)	.002 (.05)
012	---	.006 ±.002 (.15) (.05)	.001 (.03)	.005 (.13)	.002 (.05)	.002 (.05)	.002 (.05)
013	014	.030 ±.005 (.76) (.13)	.003 (.08)	.015 (.38)	.003 (.08)	.002 (.05)	.002 (.05)
015	016	.030 ±.005 (.76) (.13)	.003 (.08)	.015 (.38)	.002 (.05)	.003 (.08)	.003 (.08)

1/ Dimensions are in inches (millimeters are in parentheses).
2/ Material shall be copper alloy.
3/ Material shall be aluminum alloy.

Source: https://assist.dla.mil -- Downloaded: 20260-16T22:06Z
Check the source to verify that this is the current version before use.

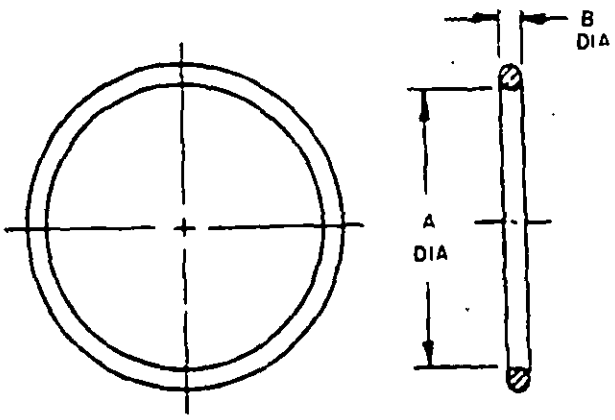


FIGURE 2. Gasket.

TABLE II. Gasket dimensions.

Dimensions 1/ 2/						Former MS part number
DIM	INCHES		MILLIMETERS		Gasket U/W M3922/59-	
	MIN	MAX	MIN	MAX		
A	.915	.927	23.24	23.55	001 & 002	MS90064-12
B	.136	.142	3.45	3.61		
A	.565	.585	14.35	14.86	004 & 003	MS90064-11
B	.057	.063	1.45	1.60		
A	.421	.431	10.69	10.95	005 & 012	MS90064-10
B	.067	.073	1.70	1.85		
A	1.333	1.343	33.86	34.11	006, 008, 013, 014	MS90064-13
B	.089	.095	2.26	2.41		
A	1.545	1.555	39.24	39.50	007, 009, 015, 016	MS90064-14
B	.089	.095	2.26	2.41		
A	1.108	1.120	28.14	28.45	010 & 011	
B	.067	.073	1.70	1.85		

1/ Dimensions are in inches.
2/ Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

TABLE III. Materials supplied with flanges.

Item	M3922/59-001, 002, 010, and 011	M3922/59-003, 004, 005, and 012	M3922/59-006, 007, 008, 009, 013, 014, 015, and 016	Quantity
Gasket	Silicone rubber (see figure 2)	Silicone rubber (see figure 2)	Silicone rubber (see figure 2)	1
Socket-head cap screw	.138-32 UNC-2A, .375 (9.53) long, -001, 002) .500 (12.70) long, -010-011)	.112-40 UNC-2A, .375 (9.53) long	.164-32 UNC-2A, .375 (9.53) long	4
Lockwasher	#6-.031 (.79) thick	#4-.022 (.56) thick	#8-.031 (.79) thick	4

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:06Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration:
Flange - See figure 1 and table I.
Gasket - See figure 2 and table II.

Material: Metallic alloy as specified in table I.

Marking: See figure 1.
Part number: M3922/59- (and dash number from table I).

Materials supplied with flange: See table III.

TABLE IV. Cross reference and engineering information.

Part number M3922/59-	AN nomenclature	Frequency range (GHz)
001	UG-541A/U	12.4 - 18.0
002	UG-1666/U	12.4 - 18.0
003	UG-596A/U	18.0 - 26.5
004	UG-595A/U	18.0 - 26.5
005	UG-600A/U	26.5 - 40.0
006	UG-40B/U	8.20 - 12.4
007	UG-52B/U	7.05 - 10.0
008	UG-136B/U	8.20 - 12.4
009	UG-137B/U	7.05 - 10.0
010	---	10.0 - 15.0
011	---	10.0 - 15.0
012	---	26.5 - 40.0
013	---	8.20 - 12.4
014	---	8.20 - 12.4
015	---	7.05 - 10.0
016	---	7.05 - 10.0

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - MI, SC
Navy - OS
Air Force - 11, 80
DSA - ES

User activities:
Army - AV, MU
Navy - AS, MC, SH
Air Force - None

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5985-0818-6)

Source: https://assist.dla.mil -- Downloaded: 202610-16T22:06Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Defense Standardization Program Branch (
Washington, DC 20360

Source: https://assist.dla.mil -- Downloaded: 202610-16T22:06Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions - Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* - Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* - Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* - Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 20260116T22:06Z
Check the source to verify that this is the current version before use.