INCH-POUND

MIL-DTL-3922/60D
23 July 2013
SUPERSEDING
MIL-DTL-3922/60C
27 May 2008

DETAIL SPECIFICATION SHEET

FLANGES, WAVEGUIDE (CHOKE) (ROUND, 6 HOLE)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

INACTIVE FOR NEW DESIGN
AFTER 18 SEPTEMBER 1998

The requirements for acquiring the flanges described herein shall consist of this document and MIL-DTL 3922.


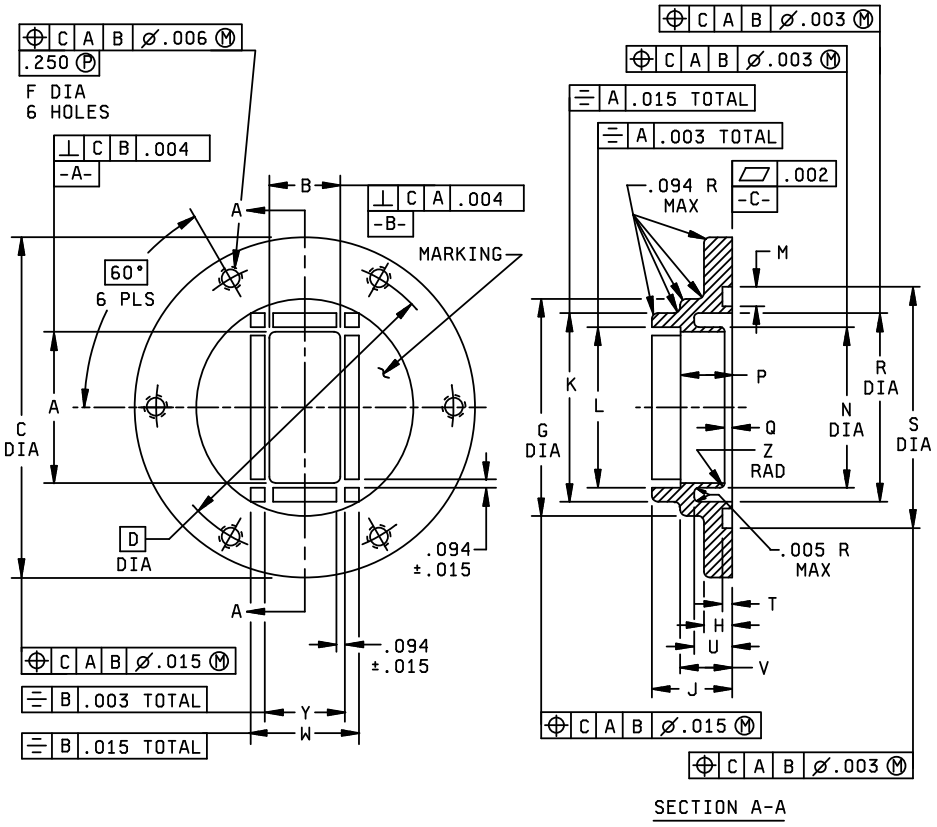


FIGURE 1. Flange configuration.

AMSC N/A

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:06Z
Check the source to verify that this is the current version before use.

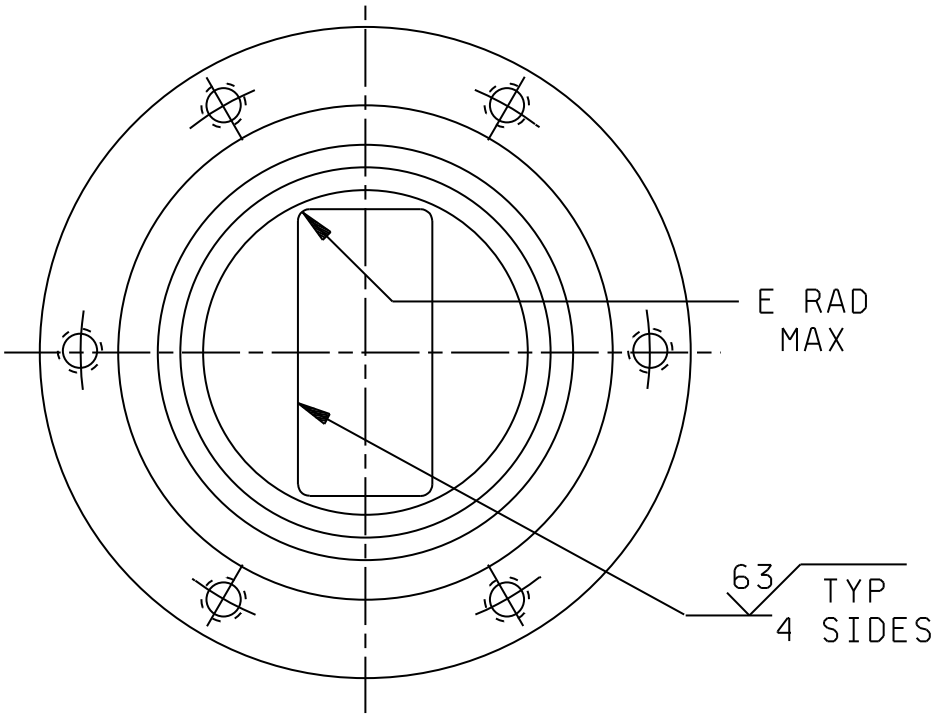

Inches	mm
.002	0.05
.003	0.08
.004	0.10
.005	0.13
.015	0.41
.094	2.39
.250	6.35

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Metric equivalents are in parentheses.
4. Roughness of mating surfaces, including seal groove, shall not exceed 63 microinches in accordance with ASME-B46.1, except that flaws shall be included in the roughness height measurement.

FIGURE 1. Flange configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:06Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number and dimensions.


PIN M3922/60-			1/ Dimensions								
Dash no.	Used with		A +.004 (0.10)	B +.004 (0.10)	C ±.015 (0.38)	D BSC	E Max	F	G ±.015 (0.38)	H ±.015 (0.38)	J ±.015 (0.38)
	Waveguide M85/1-	Mating flange M3922/62-									
001 2/	067	001	1.372 (34.85)	.622 (15.80)	3.125 (79.38)	2.750 (69.85)	.016 (0.41)	.190-32 UNF-2B	2.000 (50.80)	.250 (6.35)	.750 (19.05)
002 3/	065	002									

Dash no.	Dimensions - Continued. 1/								
	K ±.015 (0.38)	L +.003 (0.08) -.000	M ±.005 (0.13)	N ±.003 (0.08)	P ±.005 (0.13)	Q +.001 (0.3)	R ±.003 (0.08)	S ±.005 (0.14)	T ±.005 (0.13)
001 2/	1.750 (44.45)	1.503 (38.17)	.188 (4.78)	1.598 (40.59)	.500 (12.70)	.017 (0.43)	1.860 (47.24)	2.380 (60.45)	.105 (2.67)
002 3/									

Dash no.	Dimensions - Continued. 1/				
	U ±.003 (0.08)	V ±.015 (0.38)	W ±.015 (0.38)	Y +.003 (0.08)	Z ±.005 (0.13)
001 3/	.405 (10.29)	.500 (12.70)	1.000 (25.40)	.753 (19.13)	.040 (1.02)
002 2/					

1/ Dimensions are in inches (millimeters are in parentheses). Dimensions are in accordance with ASME-Y14.5M.
2/ Copper alloy.
3/ Aluminum alloy.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:06Z
Check the source to verify that this is the current version before use.

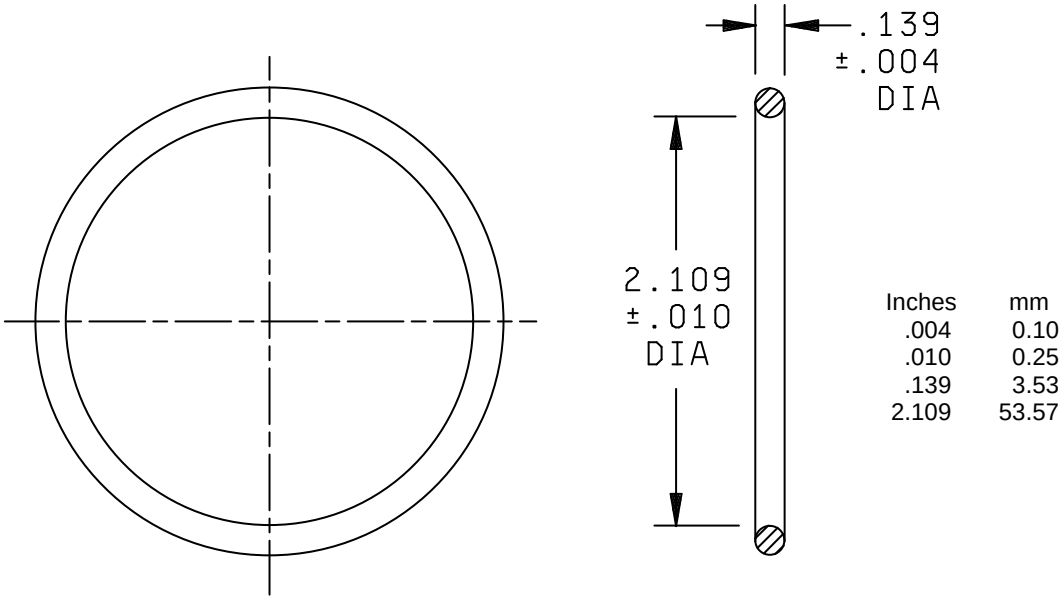

NOTES:
1. Dimensions are in inches. Dimensions are in accordance with ASME-Y14.5M.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Gasket used with flanges M3922/60-001 and M3922/60-002.
4. Formerly MS PIN MS90064-15.

FIGURE 2. Gasket dimensions and configuration.

TABLE II. Materials supplied with flange.

Item	Description	Quantity
Gasket -	Silicone rubber (see figure 2)	1
Socket-head cap screw - - - - - - - - - - - -	190-32, UNF-2A, .625 (15.88) long	6
Lockwasher -	#10-.047 (1.19) thick	6

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:06Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration.

Flange: See figure 1 and table I.
Gasket: See figure 2.

Material: Metallic alloy as specified in table I.

Marking: See figure 1.

Part or Identifying Number (PIN): M3922/60- (and PIN from table I).

Materials supplied with flange: See table II.

TABLE III. Cross-reference and engineering information.

PIN M3922/60-	AN nomenclature	Frequency range (GHz)
001	UG-343B/U	5.85-8.20
002	UG-440B/U	5.85-8.20

Referenced documents. In addition to MIL-DTL-3922, this specification sheet references the following documents:
ASME B46.1
ASME-Y14.5M

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5985-2013-035)

Review activities:
Army - AV, MI
Navy - AS, MC, OS, SH
Air Force - 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:06Z
Check the source to verify that this is the current version before use.