MILITARY SPECIFICATION SHEET

FLANGES, WAVEGUIDE (CHOKE)
(ROUND, 8 HOLE)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the flanges described herein shall consist of this specification and the latest issue of MIL-F-3922.


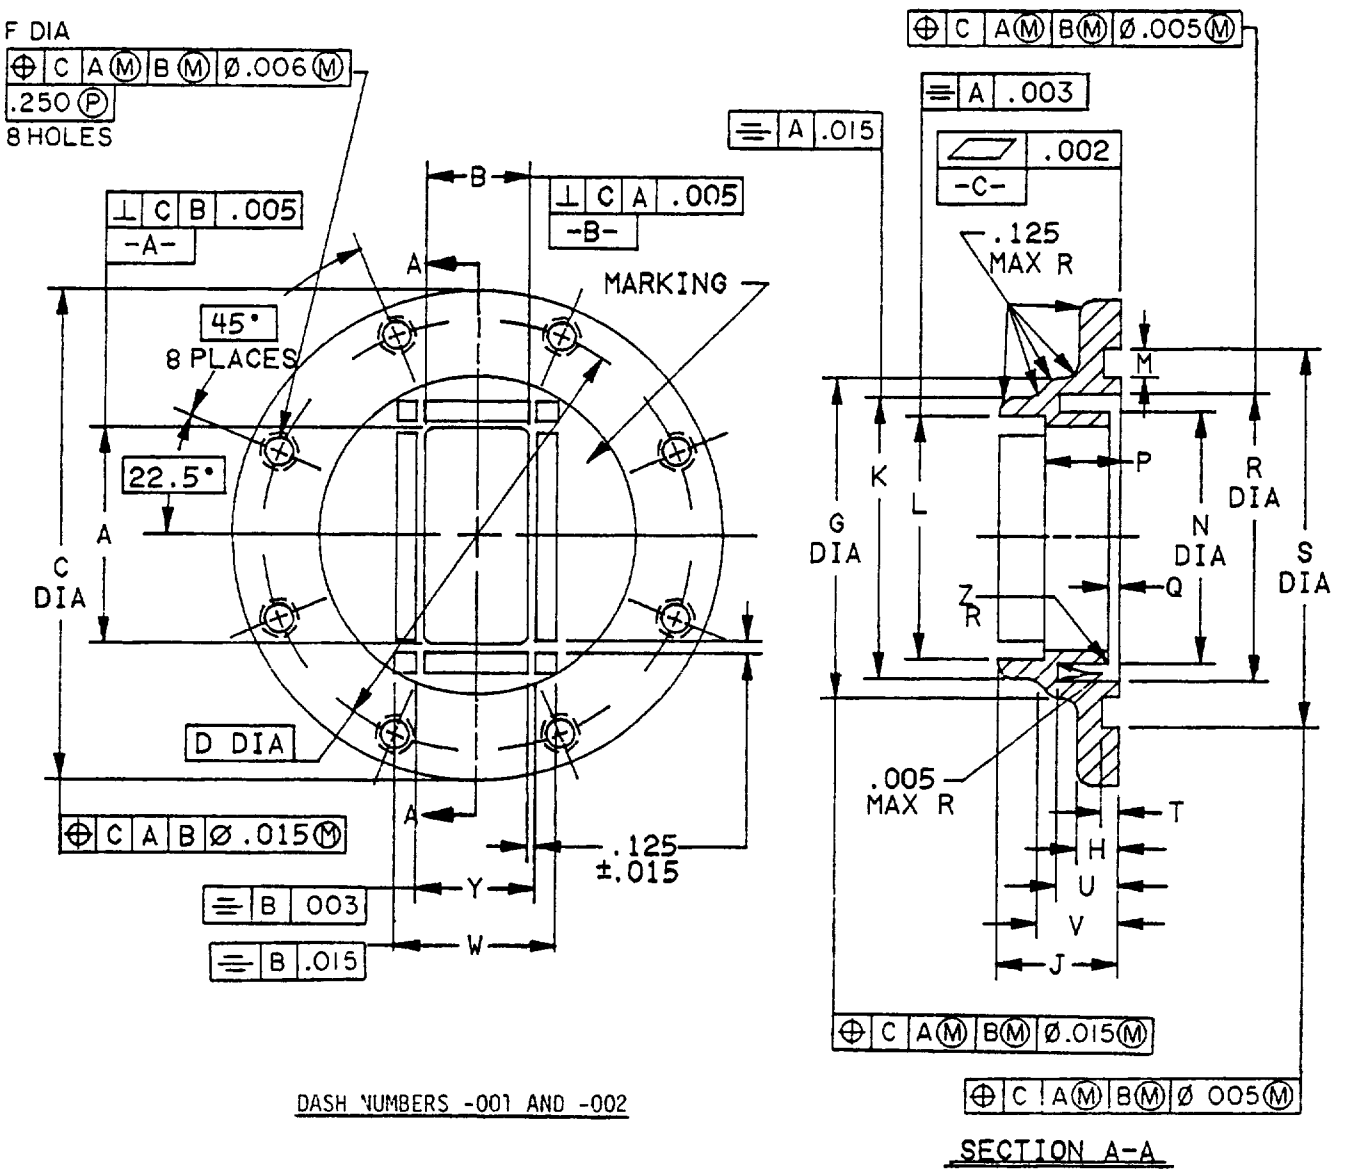


FIGURE 1 Flange configurations


Ⓒ denotes changes

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:07Z
Check the source to verify that this is the current version before use.

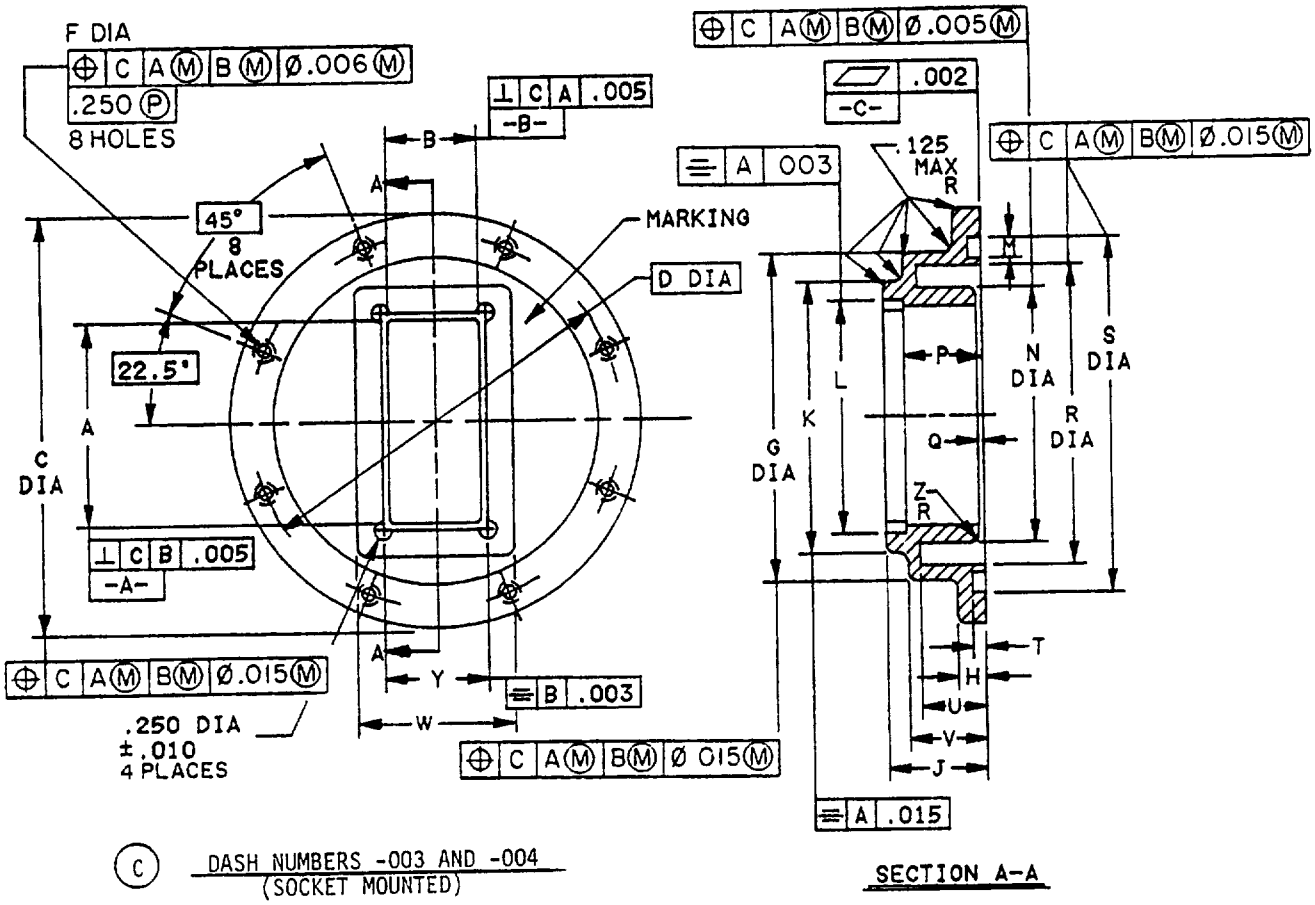

(C) DASH NUMBERS -003 AND -004
(SOCKET MOUNTED)

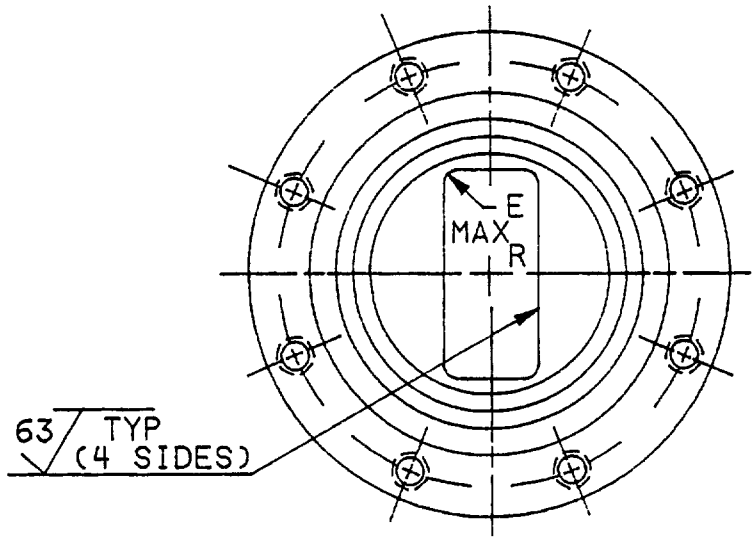

INCHES	MM
.002	.05
.003	.08
.005	.13
.006	.15
.010	.25
.015	.38
.125	3.18
.250	6.35

FIGURE 1. Flange configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:07Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and dimensions.

Part No. M3922/61-			Dimensions					
	Used with							
Dash No.	Waveguide M85/1-	Mating flange M3922/56-	A ±.006 (.15)	B ±.006 (15)	C ± 015 (.38)	D BSC.	E Max R	F
001 1/	041	002	2.840 (72.14)	1.340 (34.04)	5.313 (134.95)	4.750 (120.65)	.046 (1.17)	.250-20 UNC-2B
002 2/	043	001	↓	↓	↓	↓	↓	↓
(C) 003 1/	041	002	↓	↓	↓	↓	↓	↓
(C) 004 2/	043	001	↓	↓	↓	↓	↓	↓

Dash No.	Dimensions - Continued							
	G ±.015 (.38)	H ±.015 (.38)	J ±.015 (.38)	K ±.015 (.38)	L ±.003 (.08)	M ±.004 (.10)	N ±.005 (.13)	P ±.015 (.38)
001 1/	4.188 (106.38)	.313 (7.95)	1 250 (31 75)	3.500 (88.90)	3.002 (76.25)	.250 (6.35)	3.320 (84.33)	1.000 (25.40)
002 2/	↓	↓	↓	↓	3.002 (76.25)	↓	↓	↓
(C) 003 1/	↓	↓	↓	↓	3.006 (76.35)	↓	↓	↓
(C) 004 2/	↓	↓	↓	↓	3.006 (76.35)	↓	↓	↓


Dash No.	Dimensions - Continued								
	Q ±.001 (03)	R ±.005 (.13)	S ±.005 (.13)	T ±.005 (.13)	U ±.005 (.13)	V ±.015 (38)	W ±.015 (.38)	Y ±.003 (.08)	Z Max R
001 1/	.036 (.91)	3.880 (98.55)	4.458 (113.23)	.170 (4.32)	.860 (21.84)	1.000 (25.40)	2.000 (50.80)	1.500 (38.10)	.090 (2.29)
002 2/	↓	↓	↓	↓	↓	↓	2.000 (50.80)	1.500 (38.10)	↓
(C) 003 1/	↓	↓	↓	↓	↓	↓	2.000 (50.80)	1.506 (38.25)	↓
(C) 004 2/	↓	↓	↓	↓	↓	↓	2.000 (50.80)	1.506 (38.35)	↓

1/ Aluminum alloy.
2/ Copper alloy.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
4. Roughness of mating surfaces, including seal groove, shall not exceed 63 microinches in accordance with ANSI B46.1 - 1962, except that flaws shall be included in the roughness height measurement.

FIGURE 1. Flange configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:07Z
Check the source to verify that this is the current version before use.

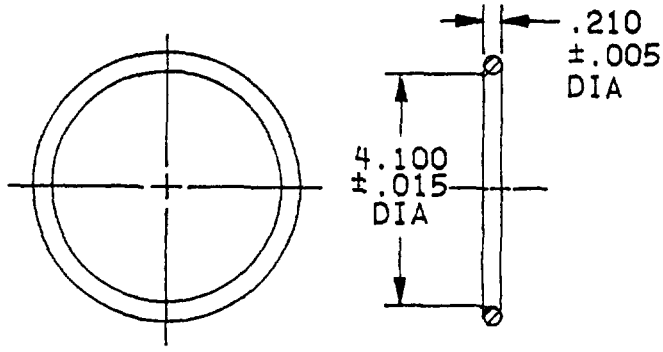

INCHES	MM
.005	.13
.015	.38
.210	5.33
4.100	104.14

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Gasket used with flanges M3922/61-001, M3922/61-002, M3922/61-003, and M3922/61-004.
4. MS part number MS90064-17.

FIGURE 2. Gasket dimensions and configurations.

TABLE II. Materials supplied with flange.

Item	Description	Quantity
Gasket - - - - - - - - - -	Silicone rubber (see figure 2)	1
Hex-head cap screw - - -	.250-20 UNC-2A, .750 (19.05) long	8
Lockwasher - - - - - - -	.250 (6 35), .046 (1.17) thick	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Dimensions and configurations.

Flange - See figure 1.

Gasket - See figure 2.

Material. Metallic alloy as specified in table I.

Materials supplied with flange: See table II.

Marking: See figure 1.

Part number: M3922/61-(dash number from figure 1).

ENGINEERING INFORMATION.

Cross reference and engineering information: See table III.

TABLE III. Cross reference and engineering information.

Part number M3922/61-	AN nomenclature	Frequency range (GHz)
001	UG-585A/U	2.60 - 3.95
002	UG-54B/U	2.60 - 3.95

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS
Air Force - 11, 17, 99
DLA - ES

User activities.
Army - AV
Navy - AS, MC, SH

Agent:
DLA - ES

Preparing activity.
Navy - EC

(Project 5985-0963)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:07Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-F-3922/61C, Flanges, Waveguide, Choke

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:07Z
Check the source to verify that this is the current version before use.

OLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
ELEX 8111
DEPARTMENT OF THE NAVY
WASHINGTON, D.C. 2036

OLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:07Z
Check the source to verify that this is the current version before use.