INCH-POUND

MIL-DTL-3922/61D
6 March 2000
SUPERSEDING
MIL-F-3922/61C
7 October 1982

DETAIL SPECIFICATION SHEET

# FLANGES, WAVEGUIDE (CHOKE)
# (ROUND, 8 HOLE)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the flanges described herein shall consist of this document and the latest issue of MIL-DTL-3922.


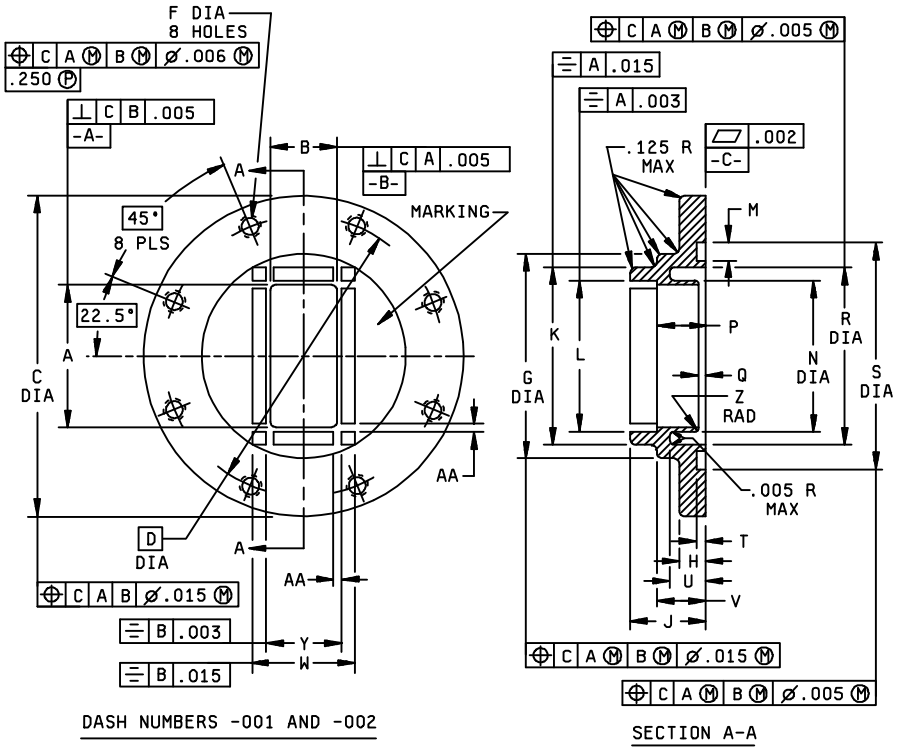



FIGURE 1. Flange configurations.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:07Z
Check the source to verify that this is the current version before use.

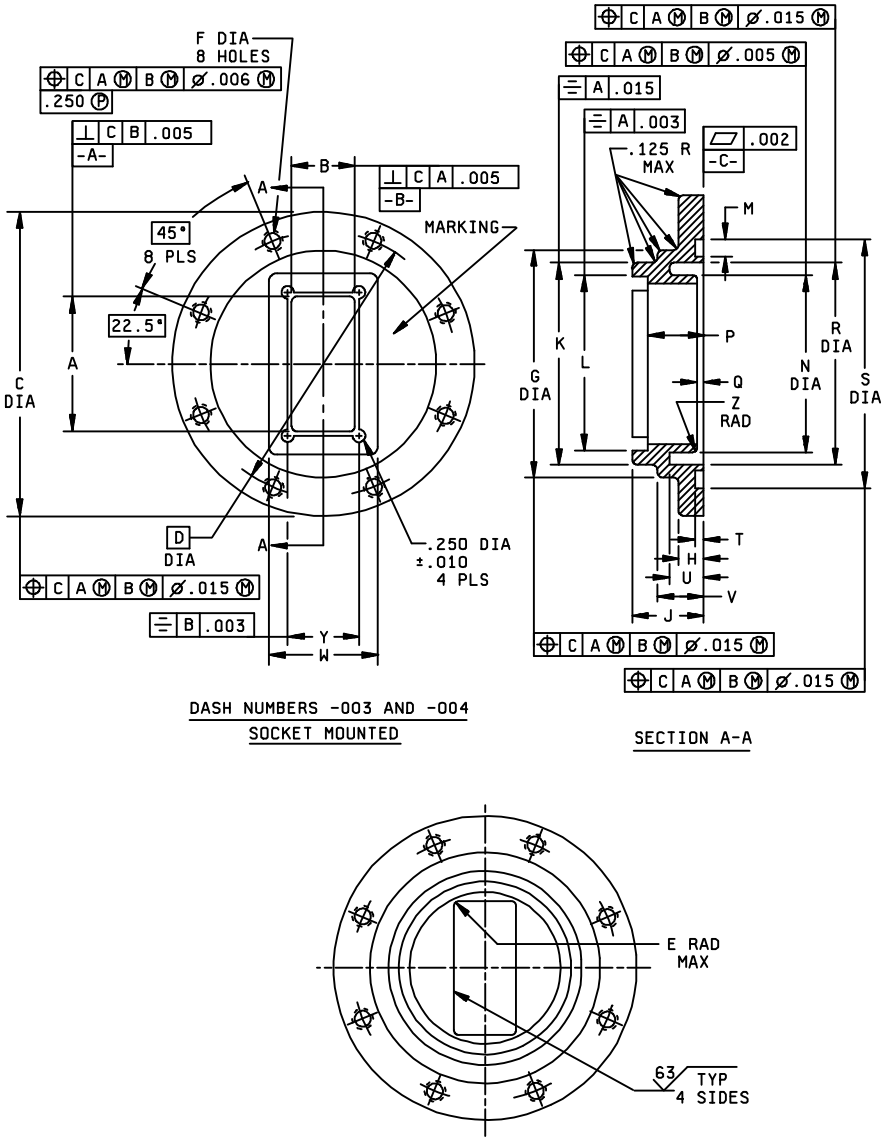


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
4. Roughness of mating surfaces, including seal groove, shall not exceed 63 microinches in accordance with ASME B46.1, except that flaws shall be included in the roughness height measurement.

| Inches | mm |
|---|---|
| .002 | 0.05 |
| .003 | 0.08 |
| .005 | 0.13 |
| .006 | 0.15 |
| .010 | 0.25 |
| .015 | 0.38 |
| .125 | 3.18 |
| .250 | 6.35 |

FIGURE 1. Flange configurations - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:07Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and dimensions.

| PIN M3922/61- | | | Dimensions | | | | | |
|---|---|---|---|---|---|---|---|---|
| Dash no. | Used with | | A ±.006 (0.15) | B ±.006 (0.15) | C ±.015 (0.38) | D BSC | E Max R | F |
| | Waveguide M85/1- | Mating flange M3922/56- | | | | | | |
| 001 1/ | 041 | 002 | 2.840 (72.14) | 1.340 (34.04) | 5.313 (134.95) | 4.750 (120.65) | .046 (1.17) | .250-20 UNC-2B |
| 002 2/ | 043 | 001 | " | " | " | " | " | " |
| 003 1/ | 041 | 002 | " | " | " | " | " | " |
| 004 2/ | 043 | 001 | " | " | " | " | " | " |

| Dash no. | Dimensions | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| | G ±.015 (0.38) | H ±.015 (0.38) | J ±.015 (0.38) | K ±.015 (0.38) | L ±.003 (0.08) | M ±.004 (0.10) | N ±.005 (0.13) | P ±.015 (0.38) |
| 001 1/ | 4.188 (106.38) | .313 (7.95) | 1.250 (31.75) | 3.500 (88.90) | 3.002 (76.25) | .250 (6.35) | 3.320 (84.33) | 1.000 (25.40) |
| 002 2/ | " | " | " | " | 3.002 (76.25) | " | " | " |
| 003 1/ | " | " | " | " | 3.006 (76.35) | " | " | " |
| 004 2/ | " | " | " | " | 3.006 (76.35) | " | " | " |

| Dash no. | Dimensions | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | Q ±.001 (0.03) | R ±.005 (0.13) | S ±.005 (0.13) | T ±.005 (0.13) | U ±.005 (0.13) | V ±.015 (0.38) | W ±.015 (0.38) | Y ±.003 (.08) | Z Max Rad | AA ±.015 (0.38) |
| 001 1/ | .036 (0.91) | 3.880 (98.55) | 4.458 (113.23) | .170 (4.32) | .860 (21.84) | 1.000 (25.40) | 2.000 (50.80) | 1.500 (38.10) | .090 (2.29) | .125 (3.18) |
| 002 2/ | " | " | " | " | " | " | " | 1.500 (38.10) | " | " |
| 003 1/ | " | " | " | " | " | " | " | 1.506 (38.25) | " | " |
| 004 2/ | " | " | " | " | " | " | " | 1.506 (38.25) | " | " |


1/ Aluminum alloy. 2/ Copper alloy.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
4. Roughness of mating surfaces, including seal groove, shall not exceed 63 microinches in accordance with ASME B46.1, except that flaws shall be included in the roughness height measurement.

FIGURE 1. Flange configurations - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:07Z
Check the source to verify that this is the current version before use.

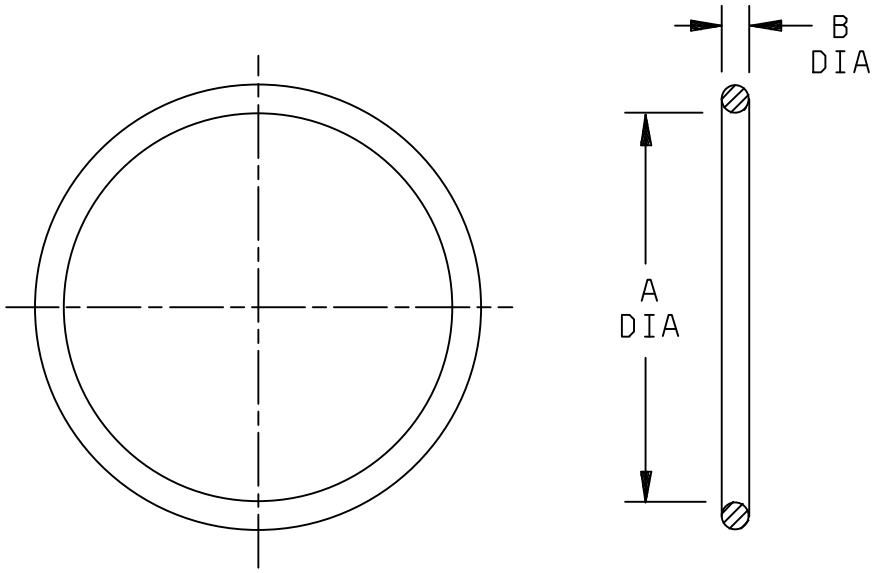


| Ltr | Dimensions | | | |
|---|---|---|---|---|
| | Inches | | Millimeters | |
| | Min | Max | Min | Max |
| A | 4.085 DIA | 4.115 DIA | 103.76 DIA | 104.52 DIA |
| B | .205 DIA | .215 DIA | 5.21 DIA | 5.46 DIA |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Gasket used with flanges M3922/61-001, M3922/61-002, M3922/61-003, and M3922/61-004.
4. MS PIN MS90064-17.

FIGURE 2. Gasket dimensions and configurations.

TABLE II. Materials supplied with flange.

| Item | Description | Quantity |
|---|---|---|
| Gasket - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - | Silicone rubber (see figure 2) | 1 |
| Hex-head cap screw - - - - - - - - - - - - - - - - - - - - - | .250-20 UNC-2A, .750 inch (19.05 mm) long | 8 |
| Lockwasher - - - - - - - - - - - - - - - - - - - - - - - - - - - | .250 inch (6.35 mm), .046 inch (1.17 mm) thick | 8 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations:

Flange: See figure 1.

Gasket: See figure 2.

Material: Metallic alloy as specified in table I.

Materials supplied with flange: See table II.

Marking: See figure 1.

Part or Identifying Number (PIN): M3922/61- (dash number from figure 1).

ENGINEERING INFORMATION:

Cross reference and engineering information: See table III.

TABLE III. Cross-reference and engineering information.

| PIN M3922/61- | AN nomenclature | Frequency range (GHz) |
|---|---|---|
| 001 | UG-585A/U | 2.60 - 3.95 |
| 002 | UG-54B/U | 2.60 - 3.95 |

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - AV, MI
Navy - AS, MC, OS, SH
Air Force - 99

Preparing activity:
DLA - CC

(Project 5985-1132)



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:07Z
Check the source to verify that this is the current version before use.