MIL-F-3922/58C
4 May 176
SUPERSEDING
MIL-F-3922/58B
11 June 1971

MILITARY SPECIFICATION SHEET

FLANGES, WAVEGUIDE (CONTACT)

(RECTANGULAR, 10 HOLE)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the flanges described herein shall consist of this document and the latest issue of Specification MIL-F-3922.


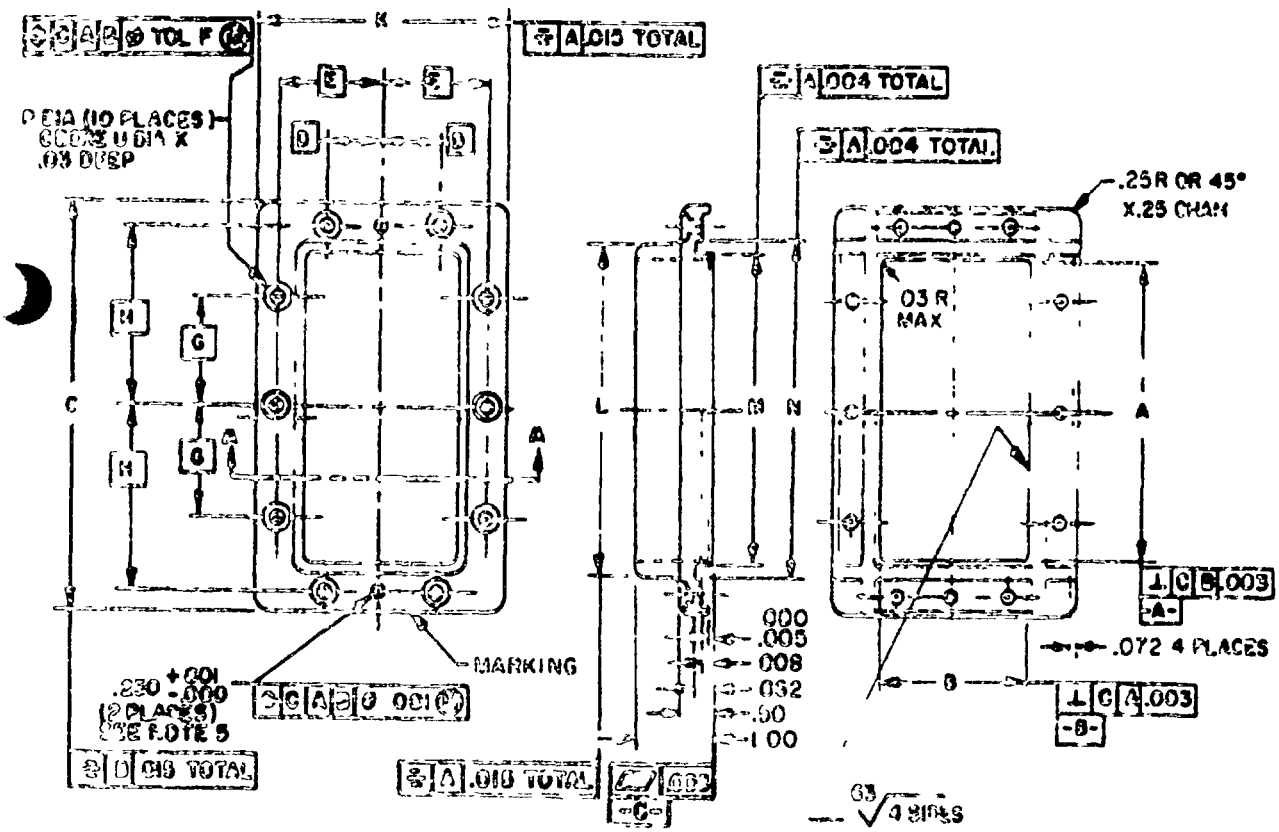


FIGURE 1. Waveguide.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:06Z
Check the source to verify that this is the current version before use.

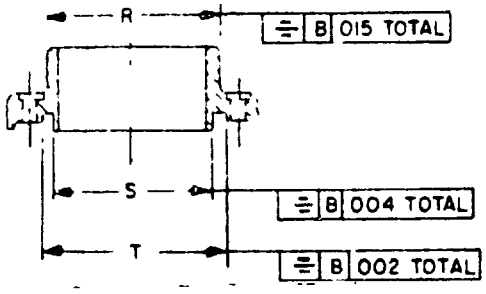

SECTION - /A-/A

INCHES	MM	INCHES	MM
.001	.03	.062	1.57
.002	05	.078	1 98
003	.08	.248	6.30
.004	.10	.250	6.35
.005	.13	.3125	7.94
008	20	.500	12.70
015	.38	1.00	25.40
.03	.76	1.25	31.75
.045	1.14		

NOTES
1. Dimensions are in inches.
2. Metric equivalents (to the nearest 01 mm) are given for general information only and are based upon 1 inch = 25 4 mm
3 Unless otherwise specified, tolerances are ± 02 (.51 mm) on two place decimals and ±.005 (.13 mm) on three place decimals.
4. Roughness of mating surfaces shall not exceed 63 microinches in accordance with ANSI - B46.1 - 1962, except that flaws shall be included in the roughness height measurement.
5. These holes to be drilled after assembly of flange to waveguide. For alinement pins used with these holes, see table III
6. For lettered dimensions, see table I.

FIGURE 1. Flange - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:06Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and dimensions.

Part No. M3922/58						Dimensions 1/			
	Used with			Used with					
Dash No. 2/	Waveguide M85/1-	Mating flange M3922/58-	Dash No. 3/	Waveguide M85/1-	Mating flange M3922/58-	A +.000 -.005 (.13)	B +.000 -.005 (.13)	C ±.015 (.38)	D BSC.
007	015 017	007	008	018 019 168	008	6.670 (169 42)	3.420 (86.87)	8.688 (220.68)	1.249 (31.72)
009	027 031	009	010	029 030 170	010	4.470 (113.54)	2.320 (58.93)	6.344 (161.44)	.938 (23.82)
011	033 037	011	012	035 036 171	012	3.570 (90.68)	1 870 (47.50)	5.438 (138.13)	.671 (17.04)

Dash No 2/	Dash No. 3/	E BSC.	F	G BSC	H BSC.	K ±.015 (.38)	L ±.015 (.38)	M ± 004 (.10)
007	008	2.311 (58.70)	.012 (.30)	2.374 (60.30)	3.937 (100.00)	5.438 (138.13)	7.063 (179.40)	6.880 (174.75)
009	010	1.720 (43.69)	.010 (.25)	1.787 (45.39)	2.795 (70.99)	4.188 (106.38)	4.875 (123.83)	4 660 (118 36)
011	012	1.500 (38.10)	.010 (.25)	1.344 (34.14)	2.344 (59.54)	3.750 (95.25)	4.000 (101.60)	3.762 (95.55)

Dash No. 2/	Dash No. 3/	N ±.004 (.10)	P ±.005 (.13)	R ±.015 (.38)	S ±.004 (.10)	T ±.002 (.10)	U ±.005 (.13)
007	008	7.452 (189.28)	.328 (8.33)	3.813 (96.85)	3.630 (92.20)	4.202 (106.73)	687 (17.45)
009	010	5.232 (132.89)	.264 (6.71)	2.688 (68.28)	2.510 (63.75)	3.082 (78.28)	625 (15.88)
011	012	4.334 (110.08)	.264 (6.71)	2.250 (57.15)	2.063 (52.40)	2.635 (66.93)	.625 (15 88)

1/ Metric equivalents are in parentheses.
2/ Copper alloy.
3/ Aluminum alloy.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:06Z
Check the source to verify that this is the current version before use.

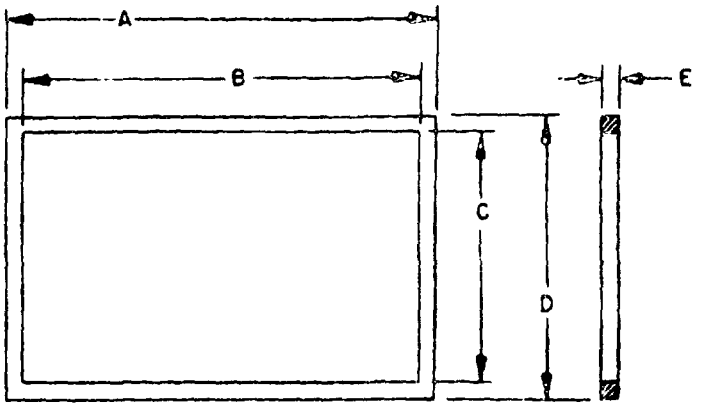


TABLE II. Gasket dimensions.

Used with flange dash number	Dimensions 1/				
	A ±.015 (.38)	B ±.015 (.38)	C ±.015 (.38)	D ±.015 (.38)	E ±.015 (.38)
007, 008	7.390 (187.71)	7.140 (181.36)	3.890 (98.81)	4.140 (105.16)	.187 (4.75)
009, 010	5.172 (131.37)	4.922 (125.02)	2.766 (70.26)	3.015 (76.58)	.187 (4.75)
011, 012	4.266 (108.36)	4.015 (101.98)	2.328 (59.13)	2.578 (65.48)	.187 (4.75)

1/ Metric equivalents are in parentheses.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 2. Gasket.

TABLE III. Items supplied with flange.

Item	Item description for part No. M3922/58-		Quantity
Gasket	007 and 008 Dimensions as shown in table II	009, 010, 011, and 012 Dimensions as shown in table II	1
Hex-head cap screw	(5/16) 3125-18 UNC-2A, 1 25 lg	(1/4) .250-20 UNC-2A, 1.25 lg	5
Lockwasher	.3125 x .078 thick	250 x 062 thick	5
Hex nut	(5/16) .3125-18 UNC-2B	(1/4) .250-20 UNC-2B	5
Alinement pin	.248 $^{+.000}_{-.001}$ Dia. x 1.0 inch long Corrosion resistant steel per QQ-S-763, 300 series	.248 $^{+.001}_{-.000}$ Dia x 1 0 inch long Corrosion resistant steel per QQ-S-763, 300 series	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:06Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration:
Flange - See figure 1 and table I.
Gasket - See figure 2 and table II.

Material.
Flange - Metallic base alloy as specified in table I.

Marking: See figure 1.
Part number M3922/58- (and dash number from table I).

Items supplied with flange See table III.

AN nomenclature and engineering data See table IV.

TABLE IV. Cross-reference of part numbers/AN nomenclature and engineering data.

Part No. M3922/58-	AN nomenclature	Frequency range
		GHz
007	UG-417B/U	1.12 - 1.70
008	UG-418B/U	1.12 - 1.70
009	UG-435B/U	1.70 - 2.60
010	UG-437B/U	1.70 - 2.60
011	UG-553A/U	2.20 - 3.30
012	UG-554A/U	2.20 - 3.30

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - MI, SG, EL
Navy - None
Air Force - 11, 85, 80
DSA - ES

User activities
Army - AV
Navy - MC, CG, SH, AS, OS
Air Force - 14, 19

Preparing activity.
Navy - EC

Agent:
DSA - ES

(Project 5985-0822-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:06Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: **In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.**

NOTE **This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.**

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Defense Standardization Program Branch
Department of the Navy
Washington DC 20360

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:06Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:06Z
Check the source to verify that this is the current version before use.