AA-F-00799A(GSA-FSS)
March 18, 1970
SUPERSEDING
Int. Fed. Spec. AA-O-00799A(GSA-FSS)
August 17, 1965

INTERIM FEDERAL SPECIFICATION

FURNITURE, RECEPTION ROOM AND LOBBY, METAL, UPHOLSTERED

This Interim Federal Specification was developed by General Services Administration, Federal Supply Service, Washington, D. C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers partially upholstered free-standing, add-on, and drop-in modular furniture units, of metal and wood construction, for individual or correlated group arrangements.

1.2 Classification.

1.2.1 Types, classes, and styles. The items covered by this specification shall be of the following types, classes, and styles, as specified: (See 6.2).

Type I - Free standing

Class 1 - Chair, arm, single width.

Style A - Two arms (see figure 1).
Style B - Right arm.
Style C - Left arm.

Class 2 - Chair, without arms, single width (see figure 2).

Class 3 - Chair, arm, double width.

Style A - Three arms.
Style B - Two outside arms (see figure 3).
Style C - Right arm.
Style D - Left arm.

Class 4 - Chair, without arms, double width (see figure 4).

Class 5 - Bench.

Style A - Single width (see figure 9).
Style B - Double width.

Class 6 - Tables, occasional.

Style A - Coffee table, 47 inches long by 22 inches wide by 16 inches high (see figure 10).
Style B - Coffee table, 36 inch diameter by 16 inches high (see figure 11).
Style C - Corner table, 24 inches long by 22 inches wide by 16 inches high (see figure 10).

Type II - Add-on units.

Class 1 - Chair, arm, single width.

Style A - Left arm (see figure 12).

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Class 2 - Chair, without arms, single width.

Class 3 - Chair, arm, double width.

Style A - Left arm (see figure 13).
Style B - Center and left arms.

Class 4 - Chair, without arms, double width (see figure 14).

Class 5 - Bench.

Style A - Single width.
Style B - Double width (see figure 15).

Class 6 - Tables, straight.

Style A - 23 inches long by 22 inches wide by 15 inches high (see figure 16).
Style B - 36 inches long by 22 inches wide by 15 inches high (see figure 16).
Style C - 46 inches long by 22 inches wide by 15 inches high (see figure 16).

Type III - Drop-in units.

Class 1 - Tables.

Style A - Straight table, 24 inches long by 22 inches wide (see figure 17).
Style B - Corner table, 36 inches long by 36 inches wide (see figure 18).
Style C - Ell table, 35 inches by 35 inches (see figure 19).
Style D - Tee table, 48 inches by 35 inches (see figure 20).
Style E - Cross table, 48 inches by 48 inches (see figure 21).
Style F - Wedge table, 30 degree (see figure 22).

NOTE: The dimensions referenced above are to the nearest whole number representative of the exact unit dimensions. See the respective figure for the exact dimensions.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or proposal, form a part of the specification to the extent specified herein.

Federal Specifications:

L-P-508 - Plastic Sheet, Laminated, Decorative and Nondecorative.
L-T-0041 - Table Top and Furniture Assemblies.
V-T-276 - Thread, Cotton.
V-T-285 - Thread, Polyester.
QQ-C-320 - Chromium Plating (Electrodeposited).
QQ-N-290 - Nickel Plating (Electrodeposited).
QQ-R-571 - Rods, Welding, Copper and Nickel Alloys.
TT-L-57 - Lacquer, Rubbing, Clear (For Wood Furniture).
UU-P-268 - Paper, Kraft, Untreated, Wrapping.
CCC-A-680 - Artificial Leather, (Cloth Coated) Vinyl Resin, Expanded Layer (Upholstery).
CCC-A-700 - Artificial Leather, Cloth Coated Vinyl Resin (Upholstery).
CCC-C-446 - Cloth, Cotton, Muslin, Bleached and Unbleached.
CCC-C-00540 - Cloth, Upholstery.
PPP-B-636 - Box, Fiberboard.
PPP-F-320 - Fiberboard; Corrugated and Solid, Sheet Stock (Container grade), and Cut Shapes.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402 .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Auburn, Washington .

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies .)

Military Standards:

MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking of U. S. Military Property.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer .)

2.2 Other publications. The following documents form a part of the specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

U. S. Department of Commerce publications:

Product Standard PS 1-66 - Softwood Plywood.
Commercial Standard CS 35-61 - Hardwood Plywood.
Commercial Standard CS 236-66 - Mat-Formed Wood Particleboard.

(Copies of the Commercial Standards may be obtained upon application, accompanied by money order, coupon, or cash to Superintendent of Documents, Government Printing Office, Washington, D. C. 20402. Prices may be obtained from the Superintendent of Documents .)

American Society for Testing Materials publications:

ASTM Designation: D 751-647 - Tentative Methods of Testing Coated Fabrics.
ASTM Designation: D 1055-61 - Standard Specifications and Methods of Test for Latex Foam Rubbers.

(Copies of the ASTM publications may be obtained from American Society for Testing Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103 .)

American Iron and Steel Institute:

(Application for copies should be addressed to the American Iron and Steel Institute, 150 East Forth-second Street, New York, New York 10017 .)

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified, (see 6.2), before production is commenced, a sample of each type, class and style of the commodity under contract and each component part shall be submitted or made ready for the contracting officer or his authorized representatives to inspect and test to determine compliance with this specification. Approval of the preproduction sample authorizes the commencement of production, but does not relieve the contractor of responsibility of complying with all other applicable provisions of this specification. Production units shall not vary from the approved preproduction sample in design or construction without the written approval of the contracting officer.

3.2 Material.

3.2.1 Steel. The steel used for the frame members shall be AISI or SAE 1010-1020 cold rolled carbon steel. The sheet steel used shall be in accordance with commercial quality, or better, cold rolled steel referenced in Steel Products Manual, Carbon Steel Sheets. All steel shall be smooth, free of rust, scale, pits, scratches, laps, buckles, and imperfections affecting appearance or serviceability. The gage and size of the steel members shall be as hereinafter specified. The gage numbers specified are the manufacturers' standard gage for steel sheets and coils. The decimal equivalent shown for steel thicknesses are subject to the standard tolerances or ordering limits. The steel sheet shall withstand the test specified in 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.2.2 Lumber. The lumber used for the seat frames shall be of ash, beech, northern birch, hackberry, northern maple, oak or pecan, and shall be surfaced on four sides. The lumber used for the armrest shall be of walnut (Juglans nigra), beech, northern birch, or hackberry, and shall be surfaced and sanded on four sides. All lumber used shall be free of knots, cracks, splits, wane, or other imperfections affecting finished appearance or serviceability. The lumber shall be properly air dried before kiln drying, and the moisture content shall be not more than 10 percent at time of assembly.

3.2.3 Plywood. The plywood used for the back cushion bases and table tops shall be not less than 5-ply, and shall be equivalent to A-B interior grade, or better, of PS 1-66; or Sound grade, Type II bond, or better, of CS 35-61. The thickness shall be as hereinafter specified. The moisture content of the plywood used shall not exceed 10 percent.

3.2.4 Particleboard. The particleboard used for the table tops shall be in accordance with type 1, density A (high), class 1; type 1, density B (medium), class 2 with minimum average edge screw holding capacity of 325 pounds, and minimum average face screw holding capacity of 285 pounds; or type 2, density A (high), class 2 of CS 236-66. The thickness shall be as hereinafter specified. The moisture content of the particleboard used shall not exceed 10 percent.

3.2.5 Dowels. The dowels shall be of ash, beech, birch, hickory, or maple species. The dowels shall be 7/16 inch diameter, and the length shall be not less than four times the diameter. All dowels shall be longitudinally and spirally grooved, and dried to a moisture content not exceeding 5 percent at time of assembly.

3.2.6 Rubber webbing. The rubber webbing shall be 2 inches, plus or minus 1/8 inch, wide. It shall have a breaking strength of not less than 300 pounds and an elongation of not less than 35 percent when tested as specified in 4.4.4 and 4.4.5.

3.2.7 Latex foam rubber. The latex foam rubber for the back cushion shall conform to grade number RC 30, and the rubber for the seat cushion shall conform to grade number RC 50, of ASTM Specification D-1055-62. The cored latex foam rubber shall be banded on the four edges with latex foam rubber slab conforming to grade number RC 50 of ASTM Specification D-1055-62. The rubber shall be cored from both sides, with approximately 3/16 inch diameter cores. Alternatively, the latex foam rubber for the back and seat cushions may be molded latex foam of equivalent density to that of the cored latex foam rubber. Up to 50 percent of the cushions supplied with cored latex foam rubber, on one order may contain one vertical seam, provided the seam is not less than 5 inches from the end and the pieces are securely, evenly, and smoothly bonded together. The latex foam rubber for the back cushion shall cover the cushion base as specified in 3.4.3.11.

3.2.8 Muslin. The muslin used to cover the latex foam rubber shall be in accordance with Type 1, Class 1 of CCC-C-446.

3.2.9 Upholstery covering. The cushions shall be covered with one of the following materials, as specified by the ordering agency (see 6.2).

a. Artificial leather conforming to Class 4, treatments a(1), b and c of CCC-A-700.
b. Artificial leather, expanded layer, conforming to Class 2, treatments (a) 1, (b) and (c) of CCC-A-680.
c. Flat nylon conforming to Type VIII of CCC-C-00540.

Any of the above upholstery coverings shall be supplied for the respective cushion(s) specified (see 6.2). For example, flat nylon specified for back cushions, artificial leather specified for the seat cushions, or vice versa. The color of the covering shall be as specified (see 6.2).

3.2.10 Thread. The thread used shall be in accordance with Type I A3, ticket number 24, 4 ply of V-T-276, or Types I or X, Class 1, Size E of V-T-285. The color of the thread shall reasonably match the solid or background color of the upholstery covering.

3.2.11 Plastic laminate. The plastic laminate used for the top of the tables shall be in accordance with Style D, Type I, Grade HP, Class 1, Finish A of L-P-508. The nominal thickness of the decorative sheet shall be 0.062 inch. The backing sheet shall be in accordance with Style ND of L-P-508, and shall have a nominal thickness of 0.030 inch. The color and pattern of the plastic laminate shall be as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the currentversion before use.

3.2.12 Glide. The glides shall be adjustable, self-leveling type with a base diameter of 1 inch, plus or minus 1/8 inch. The diameter of the threaded stem shall be not less than 1/4 inch (diameter subject to screw thread tolerance). The threaded stem shall be cadmium, chromium, or zinc plated. The upper part of the glide base shall be a good quality steel and shall be satin chromium or satin nickel plated. The plated surfaces shall be free of blisters, pits, and discoloration. The lower part of the glide base that contacts the floor shall be of machined or molded nylon, phenolic plastic, or high impact styrene plastic. The plastic shall be securely contained by the steel upper part of the glide base.

3.2.13 Machine and tapping screws, lockwashers and nuts. The machine screws shall be a good quality binding, oval, pan, or round head type with cross recess drive, or hexagon head type as specified herein. The tapping screws shall be a good quality gimlet point, oval or round head type with cross recess drive. The lockwashers shall be a good quality internal or external tooth type of proper size for the machine screw or stud on which used. The nuts shall be a good quality hexagon shape, of corresponding size and thread pitch of the machine screw or studs for which intended. The size of the machine and tapping screws shall be as hereinafter specified. One lockwasher and nut shall be supplied with each machine screw that does not assembly with a tapped hole. The tee-nuts shall be a good quality, self-anchoring, flush-mounting type. The screws used for attaching the back cushion shall be chromium or cadmium plated. All other machine and tapping screws, lockwashers, and nuts shall be cadmium or zinc plated. Alternatively, the tee-nuts may have a lacquer finish.

3.2.14 Lacquer. The lacquer used for finishing the armrests shall be in accordance with Type I or Type II of TT-L-57.

3.3 Design. The design of the furniture units shall be as shown in Figures 1 thru 22. The figures illustrate the exterior appearance and typical features of construction required.

3.4 Construction. The furniture units shall be constructed so as to assemble by a combination of welding, bolting, or friction fitting as specified herein.

3.4.1 Welding. The parts joined by welding shall be by the process specified in 3.4.1.1 or 3.4.1.2 All welds shall be as hereinafter specified. Each weld shall be properly fused, sound, neatly accomplished, free of cracks, pits, flash and spatter. All exposed welds shall have a finished appearance, and the exposed butt joint welds shall be finished flush with the base metal.

3.4.1.1 Arc welding. Arc welding of joints shall be in accordance with an industry proven process of a group of arc welding processes wherein coalescence is produced by the heating with an electric arc or arcs, with or without the application of pressure and with or without the use of filler metal.

3.4.1.2 Torch brazing. The torch brazing shall be accomplished by a process wherein coalescence is produced by heating with a gas flame and by using a nonferrous filler metal having a melting point above 800 degrees Fahrenheit but below that of the base metal. The filler metal is distributed in the joint by capillary attraction. The brazing method shall employ oxygen-acetylene gases and a rod conforming to Type I, Class RCuZn-D of QQ-R-571. The rod shall have a minimum tensile strength of 70,000 pounds per square inch. Brazing shall not be applied over arc welding. All angle joints shall have a fillet weld with a throat depth (shortest distance from the root to the face) of not less than 3/16 inch.

3.4.2 Dimensions. The basic dimensions of the furniture units shall be as shown in Figures 1 thru 22. All other dimensions shall be as specified herein.

3.4.2.1 Tolerances. Unless otherwise specified, the following tolerances shall prevail for the dimensions appearing herein.

a. Overall height, width, and depth of the cushions and units - plus or minus 3/16 inch.
b. All other dimensions - plus or minus 1/16 inch.

These tolerances shall not be cumulative.

3.4.3 Component construction. The construction of the components shall be as specified herein. Any component constructed of rectangular tubing may have one inconspicuously located drainage hole, not larger than 3/16 inch diameter, to facilitate plating processes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.4.3.1 Legs and armrest support. The legs and armrest supports shall be of 16 gage (0.0598 inch) steel specified in 3.2.1, formed into 7/8 inch square, (subject to standard commercial tolerances), seamless or continuously welded seam tubing. The outside corners of the tubing shall have not less than a 1/32 inch nor more than a 1/16 inch radius. The radii shall be the same on all square tubing members. All visible or partially visible ends of the tubing shall be steel capped, brazed, or welded and finished smooth. A tapped glide attachment block, of not less than 5/16 inch thick steel shall be securely brazed, or welded, to the bottom inside walls of the legs. Alternatively, the glide mounting may be a durable insert that will securely attach to the inside walls of the legs. The insert shall not be hand removable and no part of it shall extend beyond the outer surfaces of the legs. The upper part of the leg, to which the back cushion is to be mounted, shall have a back cushion support of not less than 11 gage (0.1196 inch) steel. The support shall be as depicted in Figures 6 and 8. The support shall have a lug, not less than 5/8 inch long, that will insert into a slot in the leg. The slot shall position the support 15 degrees from vertical, to provide the proper slope for the back cushion. The support shall be securely welded or brazed to the leg. The support shall have 2 holes, spaced on 2-inch centers, plus or minus 1/64 inch, that are not more than 1/16 inch larger in diameter than the basic outside diameter of the screws to be used therein. The top and bottom walls of the armrest supports shall have not less than two holes to facilitate the attachment of the armrest. These holes shall be not more than 1/32 inch larger in diameter than the basic outside diameter of the screws used therein. The bottom wall of the support shall be indented around the holes to receive the heads of the screws. When a center-arm is required (see 1.2.1) it shall be an independent sub-assembly. The center-arm shall be a four sided, brazed or welded rigid frame, constructed of the same tubing specified for the legs and armrest supports. The bottom horizontal member of the center-arm shall have three holes to accommodate 1/4 inch diameter machine screws for attaching the center arm to the seat cushion frame. The centerline of two of the holes shall be located on this member not farther than 2 inches from the inside edge of the front and rear aprons, and one hole shall be approximately centered front-to-rear on this member. The diameter of the holes shall be not more than 1/32 inch larger than the basic outside diameter of the screws used therein. The top wall of the member shall be indented around the holes to receive the heads of the screws. Alternatively, the bottom member of the center-arm may contain three tapped inserts, located as stated above for the holes, to attach the arm to the seat cushion frame. The inserts shall be cylindrical shape, of not less than 1/2 inch outside diameter with sufficient length to seat on the inside of the top wall of the member when inserted thru a hole in the bottom wall and be approximately flush with the outside face of the bottom wall. The inserts shall be securely brazed or welded to the bottom wall of the bottom member, around the perimeter of the insert, and to the inside of the top wall, within the hole in the insert. The inserts shall be tapped to receive not less than 1/2 inch length of a 1/4-20 machine screw. Alternatively, the four sided center-arm frame, without holes and inserts in the bottom member, may have two bosses of identical tubing as used for arm frame, securely welded to the bottom face of the bottom member of the frame, for attaching the arm to the seat cushion frame. The bosses shall be perpendicular with the bottom member, and shall be of sufficient length to extend to approximately the bottom of the aprons. One boss shall be located at the front apron and one boss at the rear apron, and each boss shall engage a bracket, secured to the seat cushion frame, that will locate the arm perpendicular to the seat cushion frame. The arm shall securely attach to the seat cushion frame by 1/4-20 machine screws with lockwashers thru holes in the bosses into nuts, tapped openings, or weld nuts. The armrest support section of the center-arm shall have the same holes and indentations as specified above for the other armrest supports. The rear upright member of the center-arm frame shall be sloped to match the slope of the rear legs. The upper part of this member shall have a back cushion support, as specified above, welded to each side of it. The supports shall be in alignment with, and have the same attitude as the supports at the ends of the unit.

3.4.3.2 Side rail. The side rail shall be of 16 gage(0.0598 inch) steel as specified in 3.2.1, formed into a channel 2 inches high, plus or minus 1/32 inch, with 3/4 inch flanges. Alternatively, the side rail may be of 18 gage (0.0478 inch) steel specified in 3.2.1, formed into 3/4 inch by 2 inch, plus or minus 1/32 inch, seamless or continuously welded seam tubing. Two 14 gage (0.0747 inch) steel channels, or alternatively, two solid steel spacers for tubing side rail shall be brazed or welded to the side rail. These pieces shall be of sufficient size and location to provide for rigid attachment of the end frames to the base frame and create the slot for ganging, as specified in 3.4.3.9. The side rail shall be laterally centered with the front and rear legs, and shall be securely brazed or welded thereto.

3.4.3.3 End frames. The end frames shall consist of a combination of legs and armrest supports as specified in 3.4.3.1, and side rail as specified in 3.4.3.2. The end frames shall be as depicted in Figures 5 and 7. The respective components of the end frame shall be securely brazed or welded into a rigid sub-assembly. All visible or partially visible ends of tubing shall be steel capped, brazed, or welded, and finished smooth.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the currentversion before use.

3.4.3.4 Armrest. The armrest shall be of one piece, solid wood of the type specified in 3.2.2, and shall be 1-1/8 inches high by 1-5/8 inches wide by 16 inches long. The bottom shall have a laterally centered, full length groove, wide enough to neatly fit over the support, and deep enough to permit the armrest to extend 1/2 inch down the sides of the support. The top surface shall be flat and parallel with the bottom. The front and back shall have a 9/16 inch spherical radius from top to bottom. The top edges shall have a 1/8 inch, plus 1/16 inch, minus 0 inch, radius. The finish of the armrest shall be as specified in 3.5.3.

3.4.3.5 Seat cushion frame. The seat cushion frame shall be a fabricated sub-assembly, consisting of front and rear aprons extending between the legs of the end frames; side joining members; and 3 inch by 3 inch top and bottom corner gussets, or other sufficient corner reinforcements to insure adequate frame strength and rigidity. The joining of the parts shall be by brazing or welding. The aprons and side joining members shall be of 2 inch high channel with 3/4 inch flanges, constructed of 16 gage (0.0598 inch) steel specified in 3.2.1. Alternatively, the aprons and side joining members may be of 3/4 inch by 2 inch seamless or continuously welded seam tubing of 18 gage (0.0479 inch) steel specified in 3.2.1. The 2 inch dimension of the aprons and side joining members shall be held to plus or minus 1/32 inch tolerance. The tubing side joining members shall have a thimble or other substantial formation brazed or welded between the vertical walls, and shall provide a passageway for the 5/16 inch diameter machine screws used for attaching the end frames. The 3 inch by 3 inch corner gussets shall be of 14 gage (0.0478 inch) steel. Other corner reinforcements shall be of not less than 18 gage (0.0478 inch) steel, and each reinforcement shall have not less than two bends. All corner reinforcements shall be securely brazed or welded to the aprons and side joining members. Provisions for attaching the seat cushion(s) shall be in the top corner reinforcements. The double width seat cushion frames shall be constructed as specified for the single width frames, except a steel channel or rectangular tubing as specified for the apron and side joining member shall be located at the horizontal center of the frame. This member shall be located so that the center arm and the center back cushion support will laterally center with and attach to one flange of the channel or to the top of the tubing. The member shall be brazed or welded to the front and rear aprons. The corners created by the center front-to-rear member shall have the same corner reinforcements and seat cushion mounting provisions described above for the corners at the end of the frame. Alternatively, the double width frame may be constructed to utilize the alternate center-arm and the alternate center back cushion support. The frame shall be constructed as specified above, except the center front-to-rear member and the corner reinforcements attached thereto shall be omitted, and the brackets as specified in 3.4.3.1 shall be welded to the front and rear aprons so to position and provide support for the center-arm or the back cushion support. A bracket, with provisions for attaching the seat cushions, shall be welded to the front and the rear aprons. A bracket shall be located on each side of the center-arm or the back cushion support, at the front and the rear of the arm or support. The brackets shall extend between the top and bottom flanges of the aprons and shall be securely welded thereto. The brackets may or may not contribute to the support of the center-arm or the back cushion support. All double width units with back cushions and without center-arm, see 1.2.1, shall have a center back cushion support. The support shall be an ell-shape formation constructed of 7/8 inch square tubing specified for the arms and legs. The attitude of the horizontal and vertical pieces of the formation shall be identical to the attitude of the respective pieces of the center-arm. The horizontal piece shall terminate on the same forward point on the seat cushion frame as the center-arm. The top end of the vertical piece shall contain the back cushion supports, and be on the same elevation as the top end of the armless end frames. The ends of the tubing shall be steel capped. The pieces of the formation shall intersect with a mitred corner, and the forward faces of the pieces, at the corner, shall be joined by not less than a 3/16 inch continuous arc weld for the width of the tubing. The other faces of the pieces shall be joined by arc welds or brazing. The support shall have identical provisions for attaching to the seat cushion frame as the center-arm, and shall attach to the seat cushion frame as specified for the center-arm.

3.4.3.6 Bench frames. The seat cushion frames for type I and type II, class 5 benches shall be constructed as specified in 3.4.3.5, except double width frames shall be without the attachment provisions for the center-arm and the center back cushion support. The double width frames for Style E benches shall have a center, front-to-rear channel or tubing member, corner reinforcements, and seat cushion mounting provisions as specified in 3.4.3.5. The dimensions of the benches shall be as shown in figures 9 and 15. Type I, class 5 benches shall have right and left end frames constructed of legs and side rails as specified in 3.4.3.3. Type II, class 5 benches shall have the above-referenced end frame on one end and a ganging feature as specified in 3.4.3.9 on the opposite end.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.4.3.7 Table frames. The frames for type I, class 6 tables shall be constructed as specified in 3.4.3.6 for type I, class 5 benches. The dimensions of the type I, class 6 tables shall be as shown in figures 10 and 11. The frames for type II, class 6 tables shall be constructed as specified in 3.4.3.6 for type II, class 5 benches. The frames for type II, class 6, styles B and C tables may or may not have the center front-to-rear member as specified in 3.4.3.5. If a center member is used, it shall be as specified in 3.4.3.5, except the corner reinforcements may be omitted. The dimensions for the type II, class 6 tables shall be as shown in figure 16. The frames for the type III tables shall be constructed of channel or tubing as specified in 3.4.3.5. The frames shall have corner reinforcements as specified in 3.4.3.5. The required sides or ends shall have the ganging feature as specified for type III units in 3.4.3.9. Type III, class 1, styles B and C tables shall have a removable leg located as shown in figures 18 and 19. The leg shall be of tubing specified for other legs. The top end of the leg shall be steel capped, brazed, or welded and finished smooth. The dimensions of the type III units shall be as shown in figures 17 thru 22. The frames of all tables shall be additionally reinforced beyond the requirements specified herein where necessary to assure compliance with the provisions of the test specified in 4.4.7.

3.4.3.8 Table tops. The table top assemblies shall be in accordance with type II or type IV of L-T-0041, except as otherwise specified. The plywood shall be as specified in 3.2.3, and the particleboard shall be as specified in 3.2.4. The thickness of the plywood and particleboard shall be 3/4 inch. The plastic laminate shall be as specified in 3.2.11. The decorative plastic laminate sheet shall be applied to the side of the plywood that has the higher grade veneer. Each top assembly shall be self-edged with identical plastic laminate as used on the top surface. When plastic laminate with wood grain pattern is specified, the run of the grain shall be compatible with the longer dimensions of the top, or shall be compatible with the run of two opposite sides of the square tops. The length and width of the tops (exclusive of type I, class 6, style B unit) shall be plus 3/16 inch, minus 0 inch (per dimension) the length and width of the metal frame.

3.4.3.9 Ganging feature. Both ends of type I, classes 1 thru 5 units, and the ends with legs of type II, classes 1 thru 5 units shall have a 3/32 inch, plus or minus 1/64 inch, width slot. The slot shall be 12 inches long, plus 1/32 inch, minus 0 inch, and shall be centered front-to-rear. The slot shall be parallel with the side rail, and the outer edge of the slot shall be 3/4 inch from the outer face of the side rail. The legless ends of all type II units, and the two or more required sides or ends of type III units shall be provided with a 16 gage (0.0598 inch) steel angle, 11-31/32 inches, plus 0 inch, minus 1/32 inch, long. The angle shall be located on type III, class 1, style b units so that the front edge of the top is flush, plus or minus 1/16 inch, with the front face of the front leg of the adjacent unit. The angle shall be centered with the respective end or side on all other units. One leg of the angle shall be long enough to be securely brazed or welded to the seat cushion frame or table frame and extend sufficiently beyond the respective frame to allow the shorter leg to drop into the slot. The shorter leg of the angle shall be not less than 1/2 inch long, and the two corners shall have not less than a 1/4 inch radius. The bottom of the side or end members on type II and type III units, provided with the 16 gage angle, shall be provided with a clip formed of not less than 18 gage (0.0478 inch) steel. Alternatively, the clip may be of not less than 1/8 inch by 1/2 inch solid steel bar. The clip shall be centered front-to-rear and shall be secured to the bottom of the side or end member of the respective seat cushion frame or table frame. The clip shall be free of burrs, sharp corners, and edges. When the units are ganged, the clip shall slide or pivot snugly under the side rail of the adjoining unit to prevent unintentional separation of the ganged units. The clip shall engage and disengage manually without the aid of tools.

3.4.3.10 Back cushion adapter. A back cushion adapter shall be supplied with each type II, class 1, 2, 3 and 4 units. The adapter shall be of 11 gage (0.1196 inch) steel specified in 3.2.1, formed into a hat formation. The formation shall closely fit over the rear of the legs of types I and II units, and the legs of the formation shall be of sufficient size to cover the back cushion support attached to the back leg. The flanges of the adapter shall have holes compatible with the holes of the back cushion support. The two formed sides of the adapter shall be of different heights to compensate for the absence of the back cushion support on the unattached end of the back cushion on type II, class 1, 2, 3, and 4 units. Alternatively, the legs of the adapter may be in the same place and a spacer of size and thickness as the back cushion support may be supplied to compensate for the support (which is brazed or welded to the leg) upon which a leg of the adapter shall locate. The adapter, regardless of construction, shall attach to the adjoining units so that the attached cushions are in alignment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.4.3.11 Back cushion. The back cushion shall be 22 inches wide by 12 inches high by 2 inches thick, overall. The cushion thickness shall be determined by the measurement(s) taken from the bottom of the face welt to the outer face of the cushion base. The cushion shall be nonreversible, and nonremovable without the use of tools. The cushion base shall be of 1/2 inch thick plywood as specified in 3.2.3, and the latex foam rubber padding shall be as specified in 3.2.7. The foam rubber banding (see 3.2.7) shall be not less than 1/4 inch thick and shall lap the four sides of the base for the full thickness of the plywood. Not less than 1/4 inch thickness of the molded rubber padding shall lap the base as specified for the banding. The padding shall be secured to the cushion base by a suitable adhesive. The muslin specified in 3.2.8 and the upholstery covering specified in 3.2.9 shall encompass the top and four sides of the foam rubber padding, and shall lap the bottom of the base not less than 1-1/4 inches from each side. The muslin and upholstery covering shall be securely tacked or stapled to the bottom of the cushion base. The plywood base shall contain properly located tee-nuts as specified in 3.2.13 to receive the machine screws for mounting the cushion to the frames. The back of the cushion shall be covered with an upholstered panel, which shall be approximately the same size as the cushion base. The panel shall be of metal or durable pressboard, covered with identical upholstery covering as used on the back cushion. The covering shall lap the back of the panel, not less than 1 inch on each side, and shall be securely attached thereto. The upholstered panel shall be securely attached to the cushion base with concealed fasteners. The cushion shall be without crown and shall have filled out edges and corners that are square. The front face of the cushion shall have a welt continuously around the four sides. The welt and the sewing of the back cushion shall be as specified in 3.4.3.12 for the chair seat cushion.

3.4.3.12 Chair seat cushion. The seat cushions shall be the tight seat type. Each seat cushion shall be 22 inches wide by 23 inches deep by 5-1/2 inches thick at the front, tapered to 2-1/2 inches thick at the back. The measurement(s) shall be from the bottom of the face welt to the outer face of the base. The base shall be constructed of the lumber specified in 3.2.2, which shall be not less than 3/4 inches thick and not less than 2-3/4 inches wide. The corners shall be glued, double doweled and reinforced with corner blocks secured with glue and screws. The dowels shall be as specified in 3.2.5. The bottom outside edge of the four sides of the base shall be broken by a chamfer or radius. The base shall contain the provisions for mounting the cushion to the frame. The rubber webbing, as specified in 3.2.6, shall be secured to the top of the base with not less than 6 well spaced staples to each end of the rubber webbing. The staples shall be arranged in such a manner that each staple contributes to the securing of the webbing to the base. The strips of webbing shall be interwoven with not less than 4 strips in each direction. The strips shall be evenly spaced, and one strip shall be located not more than 2 inches from the inside edge of each side of the base. The staples shall have a crown width of not less than 3/8 inch, and legs not less than 1/2 inch long. The wire used for the staple shall be corrosion resistant steel or steel coated with a durable corrosion resistant material. The wire shall have cross-sectional dimensions of not less than 0.050 inch by 0.020 inch. The strips of rubber webbing shall not sag and each strip shall have approximately the same tension after being attached to the base. The cushion padding shall be as specified in 3.2.7, and shall be completely encased with muslin as specified in 3.2.8. The muslin shall neatly fit the contour of the foam rubber padding. The upholstery covering shall be in accordance with one of the materials specified in 3.2.9. The covering shall encompass the top and four sides, and shall lap the bottom of the base not less than 1-1/2 inches at each side. The covering shall be securely stapled or tacked to the bottom of the base. The cushion shall be without crown and shall have filled-out edges and corners that are square. The cushion shall have a self-welt sewn around jute welting cord, of not less than 1/8 inch or more than 3/16 inch, diameter. The welt shall be on the top face and run continuously around the four sides. The sewing of the artificial leathers shall be accomplished by machine using 5 to 8 stitches per inch, and the sewing of the flat nylon shall be by machine using 7 to 11 stitches per inch. The thread used shall comply to one of the threads specified in 3.2.10. The welts shall be straight and sewn without skips, twists, or blemishes.

3.4.3.13 Bench seat cushion. The bench seat cushion(s) shall be 22 inches wide by 21-5/8 inches deep by 2-1/2 inches thick on all sides. The construction of the cushion shall be as specified in 3.4.3.12 for the chair seat cushion.

3.5 Pretreatment and finishing.

3.5.1 Pretreatment. All metal parts shall be thoroughly cleaned to remove all rust, dirt, oil, grease, and other deleterious matter prior to the finishing.

3.5.2 Plating. Unless otherwise specified, all metal parts shall be chromium plated as specified in 3.5.2.1, or alternatively, all exposed metal parts shall be chromium plated as specified in 3.5.2.1, and all unexposed metal parts may be plated with not less than 0.0004 inch thickness of zinc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.5.2.1 Chromium plating. The chromium plating shall be in accordance with class 1 (decorative plating), type II (satin) of QQ-C-320, except the minimum thickness of the chromium shall be 0.00002 inch. The chromium plating shall have an electrodeposited undercoat of nickel plus copper in accordance with class 1, type III (KS) of QQ-N-290, or a nickel only undercoat in accordance with class 1, type I (DS) of QQ-N-290. The chromium plating shall be smooth, fine grained, and shall not crack, chip, or peel. The plating shall be free of: blisters, pits, modules, stain, powder film, color variation, excessive edge build-up, and areas of no deposit or areas with less than minimum deposit.

3.5.3 Walnut finish. The armrest shall be sanded smooth for finishing. The corners and edges shall be eased, and all surfaces thoroughly cleaned and finished as stated below:

1. Sap stain to equalize wood color.
2. Apply selected colorant to produce desired wood color.
3. Apply wash coat of adhesive sealer.
4. Scuff sand with sandpaper needed to produce proper surface.
5. Fill to the degree necessary to obtain proper surface.
6. Seal with adhesive sealer.
7. Sand with sandpaper needed to produce proper surface.
8. Shade to correct color variation, if necessary.
9. Coat with two individual coats of lacquer specified in 3.2.14.
10. Rub, steel wool, wax or polish finish as required to match the patina of the reference panel.

NOTE: Operation number 8 may be performed after operation number 5. The appearance of the finish shall conform to the standard finish reference panel adopted for office furniture by the Federal Supply Service, General Services Administration, as for color and patina.

3.6 Assembly. All mechanical and welded attachments shall produce rigid, secure joints with the components in proper position and alignment. All assembled units shall be rigid and of sufficient strength to withstand the test specified in 4.4.2 and 4.4.3. The assembly of any unit shall not produce a condition hazardous to the occupant, lessen the serviceability of the unit, or induce the loosening of any component. The sub-assemblies of the respective type, class, and style of furniture units shall assemble as specified herein. The end frames shall assemble to the seat cushion frames of types I and II, classes 1 thru 5 units, and to the similarly constructed table frames of types I and II, class 6 units by not less than four, uniformly distributed, 5/16-18 hexagon head, machine screws, lockwashers, and nuts. Stop nuts may be substituted for the standard lockwashers and nuts. The center line of two screws shall be located within 5/8 inch of the top and the bottom of the side joining members, and one screw shall be located not farther than 1-1/4 inches from each end of the member. Alternatively, weld-nuts that provide not less than three thread engagements may be brazed or welded to the frame for attachment by the above specified screws and lockwashers. The frames shall assemble so that the legs of the end frames butt the ends of the front and rear aprons. Each seat cushion shall be securely attached to the seat cushion frame by four, 1/4-20, threaded studs or screws with nuts and lockwashers, or stop nuts. The screws and studs shall be securely anchored to the cushion base to prevent loosening or turning during or after attachment. Alternatively, tee-nuts may be embedded into the wood base and the attachment made with 1/4-20 screws and lockwashers. The back cushion shall securely attach to the back cushion supports by four, 1/4-20, machine screws and lockwashers engaging tee-nuts embedded in the cushion base. The back cushion adapter shall attach to the back of the back cushion support and the unsupported end of the back cushions to type II, classes 1, 2, 3, and 4 units by the above mentioned 1/4-20, machine screws and lockwashers. The armrest shall be mounted to the armrest support so that the horizontal edge created by the 9/16 inch radius and the bottom of the groove is 1/8 inch forward of the top front edge of the metal support. The armrest shall be attached by not less than two, evenly distributed, No. 10, oval head wood screws or gimlet point tapping screws with cross recess drive. The center arm and the center back cushion support shall securely assemble to the seat cushion frame by three, oval head, cross recess drive, machine screws and lockwashers, nuts or stop nuts. When tapped inserts are incorporated, the attachment shall be by hexagon head machine screws with lockwashers engaging the tapped insert. The alternate center arm and center back cushion support shall securely attach to the seat cushion frame by four, 1/4-20, hexagon head, machine screws, lockwashers, and nuts. Alternatively, the attachment may be effected by the above stated machine screws and lockwashers engaging tapped holes which provide not less than three threads per hole. The table tops of types I and II units shall be assembled to the frames as specified for the seat cushion assemblies. Additionally, the attachment shall be by No. 10, gimlet point, tapping screws thru the top flanges of the channels or thru flat or angle lugs welded to the inside face of the rectangular tubing. One tapping screw shall be located not farther than 12 inches from the corner attachment, or from another tapping screw. Alternatively, the attachment of the top may be by No. 10, gimlet point, tapping screws thru the flanges or lugs specified above. The screws

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the current version before use.

shall be located not farther than 12 inches apart, and one screw located not farther than 2 inches from each corner. The tops for type III units shall be assembled to the frames by No. 10 gimlet point, tapping screws thru the corner reinforcements, top flanges or lugs specified above. The screws shall be located not farther than 12 inches apart, and one screw shall be located not farther than 2 inches from each corner. Alternatively, the attachment may be as specified for types I and II units. All tapping screws shall penetrate not less than 7/16 inch of the top, but shall not project thru, bulge, or deform the decorative plastic laminate sheet. One or more attachments shall be located on all center, front-to-rear members of all frames. All tops shall assemble to the frame without gap wider than 1/64 inch at any point on the perimeter of the frame. If necessary to achieve this, the bottom side of the top shall be relieved but only large and deep enough to snugly receive the angle(s) on types II and III units. The glides shall be screwed into place, full depth, in the square tubing legs.

3.7 Identification marking. Unless otherwise specified, each furniture unit shall be permanently and legibly marked in an inconspicuous place with the specification number, Federal stock number, contract number, month and year of manufacture and the manufacturer's name or trade-mark, so that the source of supply may be readily determined. When specified (see 6.2), the identification marking shall conform to MIL-STD-130.

3.8 Workmanship. A degree of workmanship shall be exercised to produce furniture units in accordance with the requirements of this specification and that will conform to the acceptable quality level specified herein. Special attention and care shall be given to the joining of parts, tailoring of the cushions, and the quality of the finishes. Brazed or welded joings should be accomplished with the aid of fixtures. All burrs and undersirable protruding edges or welds shall be removed, and all sharp edges shall be broken by a chamfer or radius. The furniture units shall be free of imperfections that affect appearance, life, or serviceability of the units.

4. QUALITY ASSURANCE PROVISIONS

4.1 Inspection responsibility. The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used are manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified, or if none, in accordance with this specification.

4.2 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.2.1 End item inspection.

4.2.1.1 Visual examination. Examination of the furniture units shall be in accordance with the classification of defects in table I and the inspection and acceptable quality levels (AQL's) specifie in table III. The lot size shall be expressed in units of any type and class furniture units delineated in 1.2.1 for the purpose of determining sample size in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects

Examine	Defect	Classification Major	Minor
Material	Metal components not of material or gage specified.	X	
	Wood components not of wood species, composition, or moisture content specified.	X	
	Padding, rubber webbing, upholstery covering, and thread not as specified.	X	
Design	Units not identical to the respective unit depicted in figures 1 thru 22.		X
Construction and Workmanship	Construction of components other than specified	X	
	Brazing or welding process used not providing suitable welds	X	
	Welds poorly fused, cracked, or insufficient weld deposit.	X	
	Exposed welds lack finished appearance or welds not neatly accomplished.		X
	Corners and joints not properly secured.		X
	Component missing, or more than one nut, screw, lockwasher, or tee-nut missing.	X	
	Missing screw, nut, lockwasher, or tee-nut.		X
	Fractured or malformed components.	X	
	Undesirable holes, tears, splits, or machine damaged components.		X
	Components out of alignment, or not in true position.		X
	Burrs, sharp edges, and undesirable protruding edges not removed.	X	
Finish	Metal surfaces not thoroughly cleaned.		X
	Plating other than specified, or evidence of separation, peeling or flaking.	X	
	Areas of no plating.	X	
	Areas of less plating that specified; presence of pits, nodules, stain, powder film, color variation, or excessive edge build-up.		X
	Wood finish not as specified.		X
Assembly	Components and sub-assemblies will not assemble easily.		X
	Types II and III units will not gang with type I units.	X	
	Units will not gang and disengage easily (without the use of tools).		X
	Assembled units are not rigid, or component(s) not firmly attached.	X	

4.2.1.1 Dimensional examination. Any dimension that is not within the specified tolerance shall be classified as a defect. The inspection and acceptable quality level shall be as shown in table III.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

4.2.2 Examination of preparation for delivery. An examination will be made to determine that the packaging, packing, and marking requirements of Section 5 of this specification are met. Defects will be scored in accordance with table II. The sample unit shall be one shipping container fully prepared for delivery, selected just prior to closure operations. Defects of closure listed shall be established by examination of shipping containers fully prepared for delivery. The lot size shall be the number of containers in the end item inspection lot. The inspection and acceptable quality level shall be as shown in table III.

TABLE II. Classification of preparation for delivery defects

Examine	Defect
Marking	Incorrect, illegible, of improper size, location, sequence or method of application.
Material	Any nonconforming components, component missing, damaged or otherwise defective affecting serviceability.
Workmanship	Inadequate application of components such as incomplete closure of shroud.
Contents	Not as specified.

4.3 Inspection levels and acceptable quality levels (AQL's). Inspection and acceptable quality levels expressed in defects per hundred units shall be as shown in table III.

TABLE III. Inspection and acceptable quality levels

	Inspection levels	Acceptable Quality Level Major	Total
For defects listed in 4.2.1.1	II	4.0	10.0
For defects listed in 4.2.1.2	S3		4.0
For defects listed in 4.2.2	S2		4.0

4.4 Tests. The following tests shall be performed using inspection level S-1 for the selection of the number of units to be tested from any lot. The inspection level S-1 for the tests specified in 4.4.1, 4.4.4, and 4.4.5 may be waived providing certification of the tests are available for each contractor's order of the material specified in the respective paragraphs. Failure of any unit to pass all the tests shall be sufficient cause to reject the lot from which the test sample was selected.

4.4.1 Bend test for steel sheets. A specimen of the steel sheets with less than 0.15 percent carbon used for parts to be formed shall withstand being bent 180 degrees onto itself, in any direction, at room temperature, without showing any cracks or fractures on the outside of the bend. A specimen of the steel sheets with more than 0.15 percent carbon used for parts to be formed shall withstand being bent, at room temperature, through 180 degrees in any direction around a diameter equal to the specimen thickness without showing any of the defects stated above.

4.4.2 Drop test for seating units. All assembled type I and type II units, without glides, shall be subjected to this test. Type II seating units shall be ganged with a type I unit before testing. A piece of plywood, 3/4 inch thick by plus 0 inch, minus 1 inch the length and width of the seat cushion shall be placed on each seat cushion. A weight of 300 pounds shall be subsequently free-dropped from a height of six inches onto the approximate center of the plywood. Each unit shall be examined after the last weight has been dropped, and evidence of permanent distortion of any part of the unit in excess of 1/8 inch; failure or fracture of any weld, metal, or component, or failure of the ganging feature to operate manually shall be cause for rejection of the unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

4.4.3 Drop test for tables. All types of table units shall be subjected to this test. Types II and III units shall be ganged with the required number of free standing units. The glides shall not be removed from any unit. A weight of 175 pounds shall be free-dropped from a height of 6 inches onto the approximate center of each table top and remain thereon for 10 minutes. A sheet of flexible material may be placed on the tops to prevent abrasion. Each unit shall be examined after the weight is removed and evidence of permanent distortion of any part of the unit in excess of 1/16 inch; fracture or failure of any weld, metal, or component; or failure of the ganging feature to operate manually shall be cause for rejection of the unit.

4.4.4 Breaking strength of rubber webbing. The specimen to be tested shall be 2 inches wide by 8 inches long. The test shall be in accordance with breaking strength Method B (cut strip Method) described in ASTM Designation D-751-64T except use 2 inch wide specimen in place of the specified one inch, 2 inch wide jaws in place of the specified jaws, and place the specimen in the machine under one pound initial load.

4.4.5 Ultimate elongation. Determine ultimate elongation at the same time that breaking strength is determined, using Elongation Method described in ASTM Designation D-751-64T except an initial load of one pound is used instead of 6 ounces.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Type I and II Chairs (Knocked-down).

5.1.1.1.1 Legs and armrest. The legs and armrest, when applicable, shall be removed and the attaching hardware replaced in the holes provided. All finished surfaces of the parts shall be protected with corrugated fiberboard separators or dividers. The part shall be packaged in a close-fitting box conforming to PPP-B-636, class domestic, minimum bursting strength not less than 200 p.s.i. The box shall be closed in accordance with the appendix to the box specification.

5.1.1.1.2 Backrest. The backrest shall be removed and attaching screws replaced in the holes provided. The backrest shall be protected with a kraft paper bag or wrap, basis weight not less than 30 pounds (24x36-500) and packaged in a close-fitting box conforming to PPP-b-636, class domestic, minimum bursting strength not less than 200 pounds p.s.i. The box shall be closed in accordance with the appendix to the box specification.

5.1.1.1.3 Seat and seatframe. The seat and seatframe attached, shall be completely wrapped in kraft paper, same as above, and packaged in a close-fitting box conforming to PPP-b-636, class domestic, minimum bursting strength not less than 200 p.s.i. The box shall be closed in accordance with the appendix to the box specification.

5.1.1.1.4 Assembly instructions. Assembly instructions shall be provided. The instructions shall be located within the shipping container.

5.1.1.1.5 Chairs. The complete chair, knocked-down, of like description and assembly instructions, shall be packaged in a close-fitting box conforming to PPP-b-636, class weather-resistant. The box shall be closed and waterproofed sealed in accordance with the appendix to the box specification.

5.1.1.2 Bench, class 5 (knocked-down).

5.1.1.2.1 Legs. The legs shall be removed and all hardware replaced in holes provided. All finished surfaces shall be protected with cushioning material conforming to PPP-b-291, type II, or a close fitting box conforming to PPP-B-636, class domestic. The box or cushioning shall be secured with pressure-sensitive adhesive tape.

5.1.1.2.2 Seat and seatframe. The seat, with seatframe, attached, shall be protected with built-up corrugated fiberboard, L-shaped corner pads and filler pads along each side and end of the metal seatframe. The seat and frame, shall be completely wrapped with at least two thicknesses of kraft paper, minimum basis weight 30 pounds (24x36-500), secured, with pressure-sensitive adhesive tape. The seat and frame shall be packaged in a close-fitting box conforming to PPP-B-636, class domestic. The box shall be closed in accordance with the appendix to the box specification.

5.1.1.2.3 Assembly instructions. Same as 5.1.1.1.4.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the currentversion before use.

5.1.1.2.4 Bench. The complete bench, knocked-down, of like description and assembly instructions shall be packaged in a close-fitting box conforming to PPP-B-636, class weather-resistant. The box shall be closed and waterproof sealed in accordance with the appendix to the box specification.

5.1.1.3 Tables. Each table, of like description, shall have the legs, when applicable, removed and the hardware replaced in the holes provided. The finished surfaces of each table leg, top and frame shall be protected. The leg or legs shall be wrapped, separately, with cushioning material conforming to PPP-P-211, type 1, and secured with pressure-sensitive adhesive tape, or a corrugated fiberboard sleeve or box shall be provided. The leg or legs shall be secured to the underside of the table with pressure-sensitive adhesive tape. The metal frame shall be protected with built-up corrugated fiberboard L-shaped corner pads, same thickness as the sides and end filler pads. Filler pads for the sides or ends shall be constructed of built-up corrugated fiberboard pads, the thickness of which shall provide protection for each joining member, where applicable. The edge of round tables, shall be protected with corrugated fiberboard clearance pads. Where the table edge comes in contact with the shipping container, not less than 3/4 inches of built-up corrugated fiberboard pads shall be provided. The clearance pads shall be secured to the table with pressure-sensitive adhesive tape or to each side of the shipping container with adhesive. Each table shall be completely wrapped in kraft paper, conforming to UU-P-268, grade B. The wrap shall be secured with pressure-sensitive adhesive tape. The table shall be packaged in a close-fitting box conforming to PPP-B-636, class weather-resistant. The box shall be closed and waterproof sealed in accordance with the appendix to the box specification.

5.1.1.3.1 Assembly instructions. Same as 5.1.1.1.4.

5.1.2 Level B.

5.1.2.1 Type I, II or III.

5.1.2.1.1 Classes 1, 2, 3, 4, 5 or 6. The chairs, benches, or tables, of like description shall be packaged as specified in 5.1.1, except that class domestic boxes shall be utilized and waterproof sealing will not be required.

5.1.3 Level C. The chairs, benches, or tables, of like description, shall be packaged in accordance with the suppliers commercial practice.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Type I, II or III.

5.2.1.1.1 Classes 1, 2, 3, 4, 5, or 6. Chairs, benches, or tables, of like description, packaged as specified in 5.1.1, shall be packed in a close-fitting box conforming to PPP-B-585, class 3; PPP-B-591, class II; PPP-B-601, overseas type; or PPP-B-621, class 2. The box shall be closed and strapped in accordance with the applicable specification or appendix thereto.

5.2.2 Level B.

5.2.2.1 Type I, II or III.

5.2.2.1.1 Classes 1, 2, 3, 4, 5, or 6. Chairs, benches or tables, packaged as specified, in 5.1.2, shall require no additional packing.

5.2.3 Level C. The chairs, benches, or tables, shall be packed to insure carrier acceptance and safe delivery at destination, at the lowest rates, in containers complying with the rules and regulations applicable to the mode of transportation.

5.3 Marking.

5.3.1 Civil agencies. In addition to markings required by the contract or order, the shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military agencies. In addition to markings required by the contract or order, the shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The furniture units covered by this specification are intended for lobby and reception room use. The modular design permits the free standing units to be used individually, or gang with the add-on or drop-in units to create correlated group arrangements, suitable to the user. All units supplied under this specification are intended to gang with one another, regardless of the source of supply.


6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents.

(a) Title, symbol, and date of this specification.
(b) Type, class, and style of furniture units required (see 1.2.1).
(c) When preproduction samples are not required (see 3.1).
(d) Type of identical upholstery covering required for the back and seat cushions (see 3.2.9).
(e) Types of upholstery covering required for the back cushion and the seat cushion, if not identical type (see 3.2.9).
(f) Color of upholstery covering required (see 3.2.9).
(g) Color and pattern of plastic laminate required (see 3.2.11).
(h) Whether special marking is required (see 3.7).
(i) Level of packaging and packing required (see 5.1 and 5.2).


6.3 Federal specification coverage. Federal specifications do not include all types, classes, and styles of the commodities indicated by the title of this specification or which are commercially available, but are intended to cover those commodities generally procured by the Federal government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Type I, Class 1, Style A

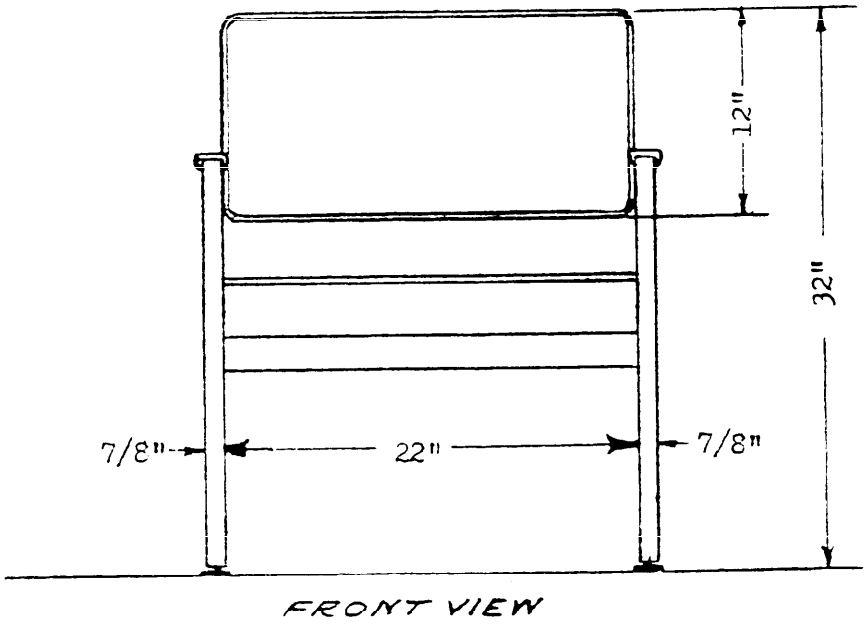

FRONT VIEW

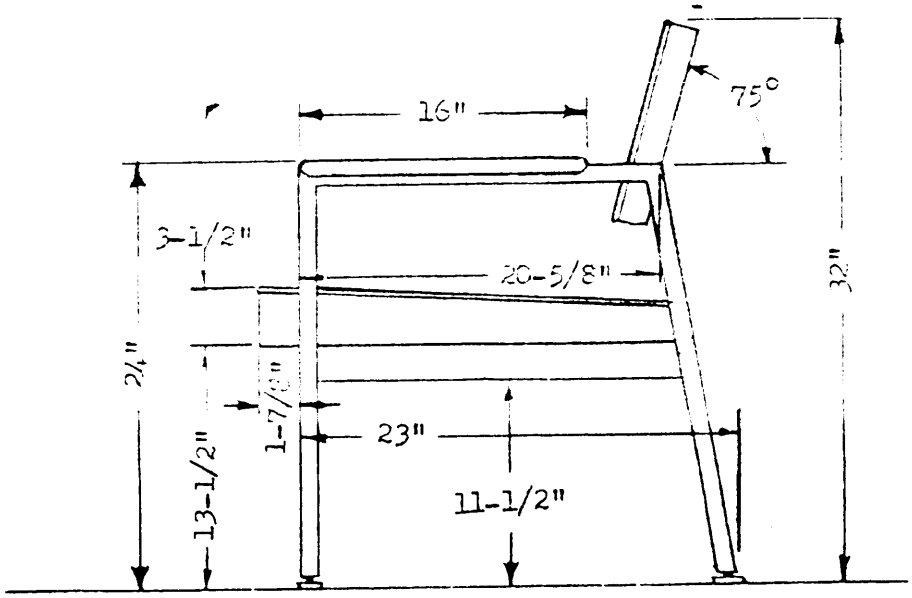


END VIEW


FIGURE 1. Chair, arm, single width.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Type I, Class 2

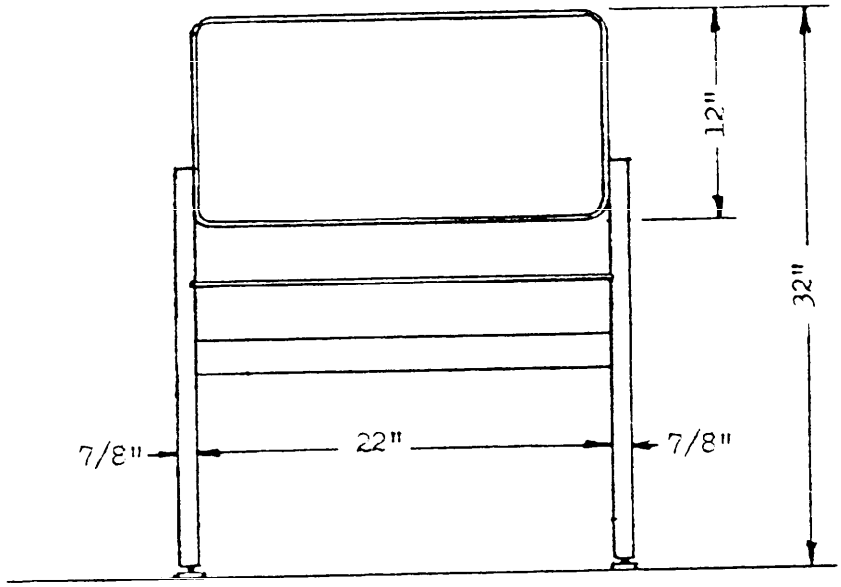

FRONT VIEW

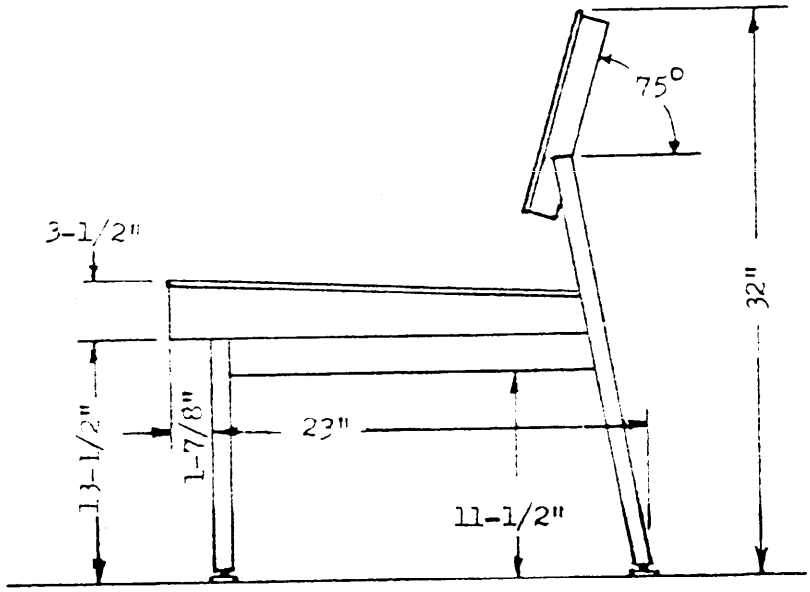


END VIEW


FIGURE 2. Chair, armless, single width.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

Type I, Class 3, Style B

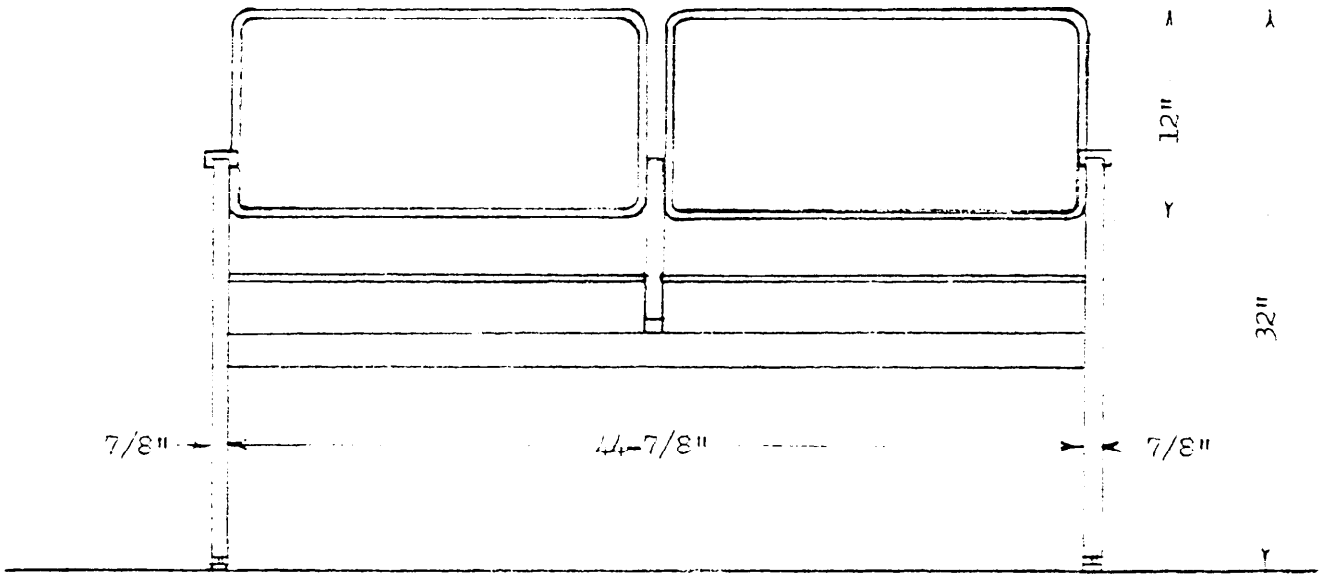

FRONT VIEW

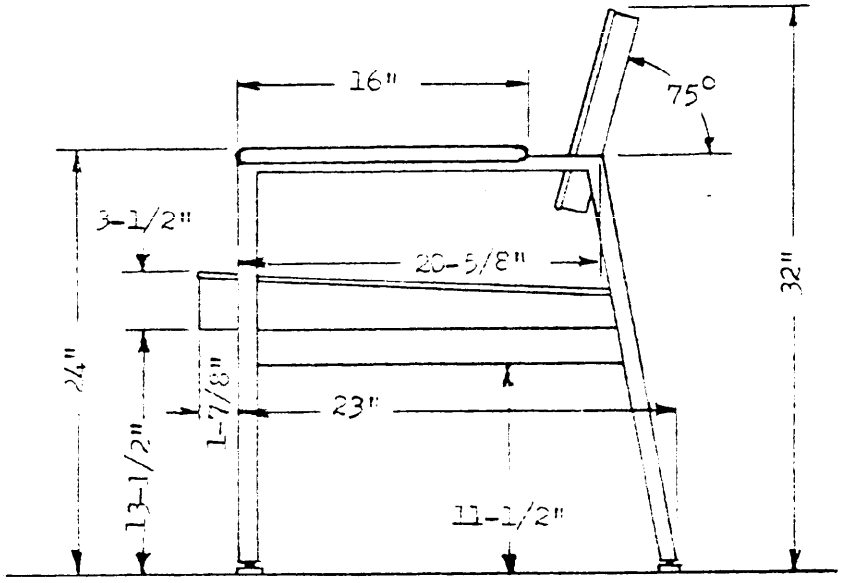


END VIEW


FIGURE 3. Chair, arm, double width.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the currentversion before use.

Type I, Class 4

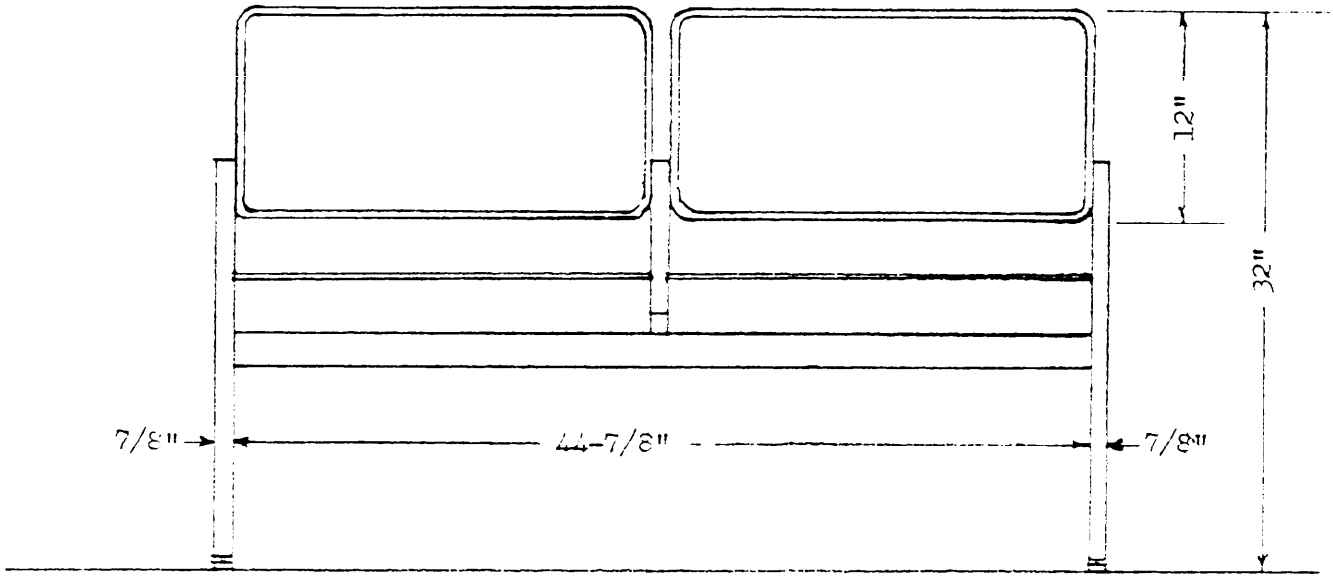

FRONT VIEW

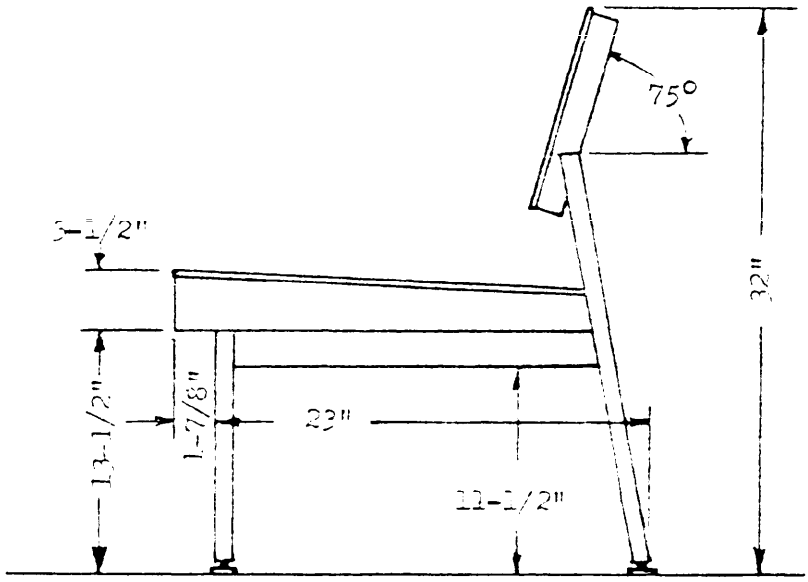

END VIEW

FIGURE 4. Chair, armless, double width.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

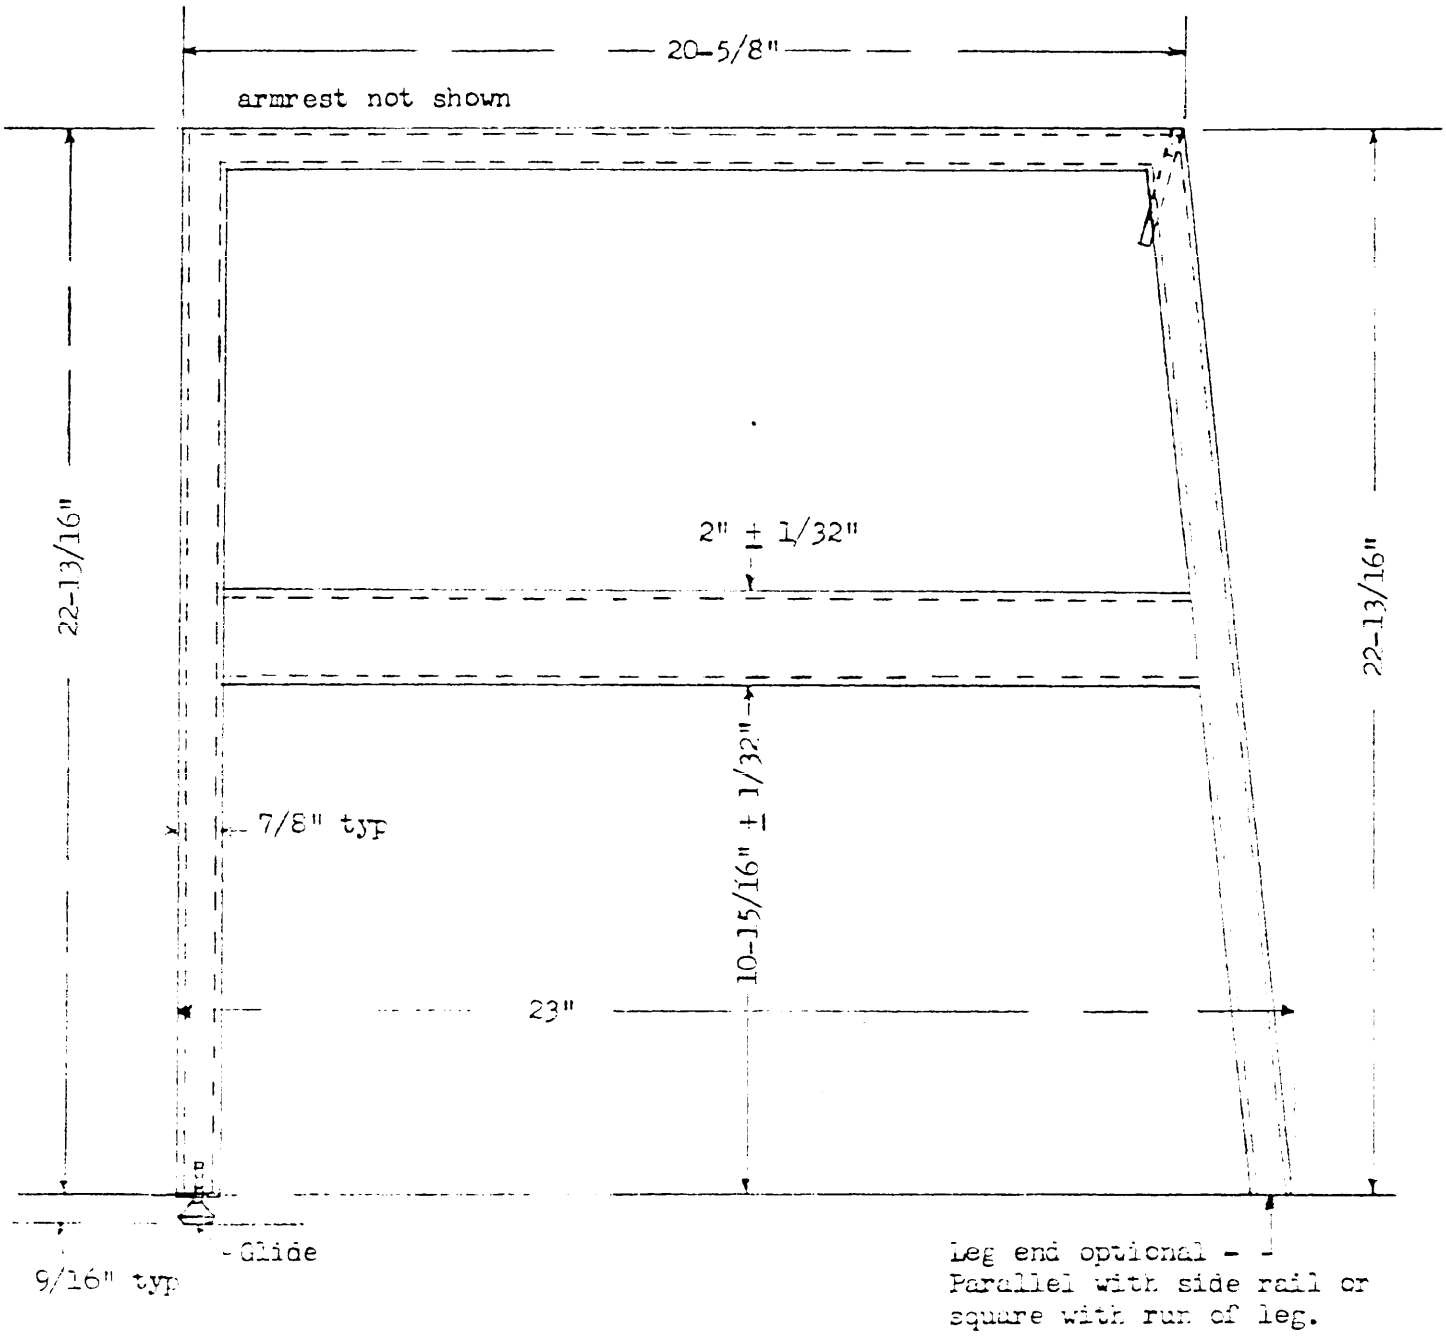
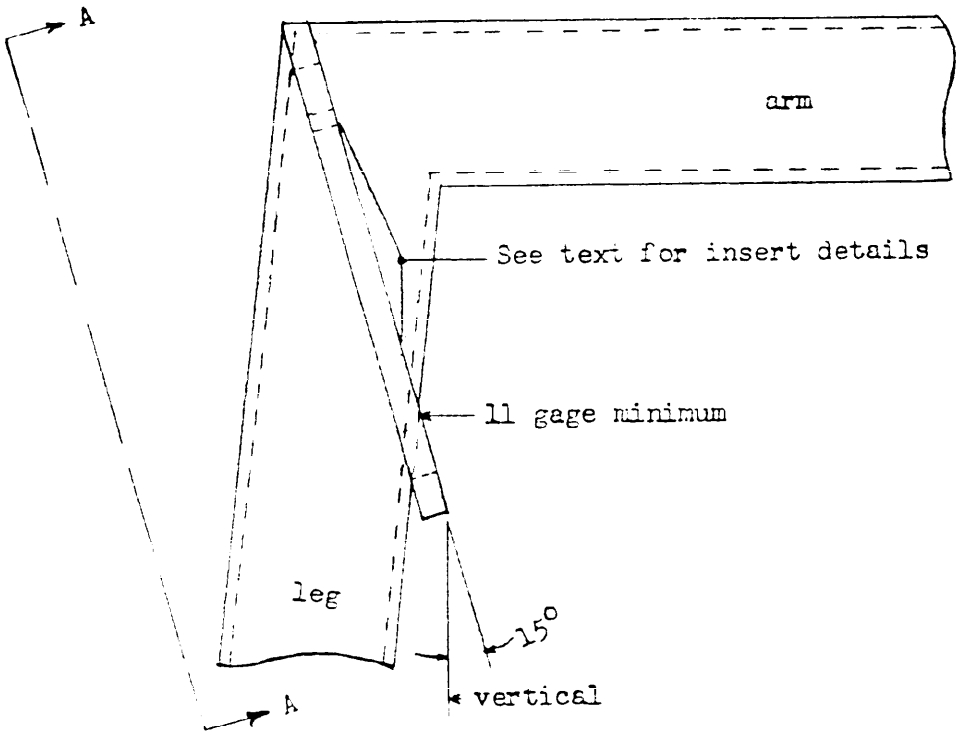


FIGURE 5. Left arm end frame detail.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.



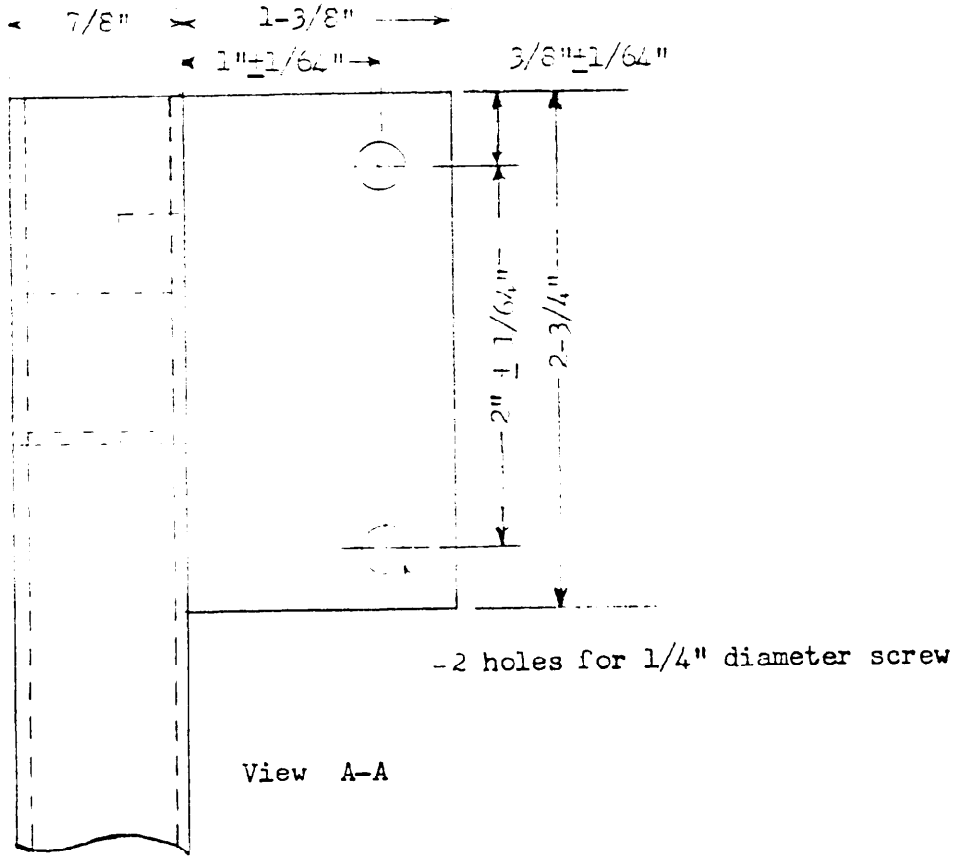


FIGURE 6. Left arm back cushion bracket detail.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the currentversion before use.

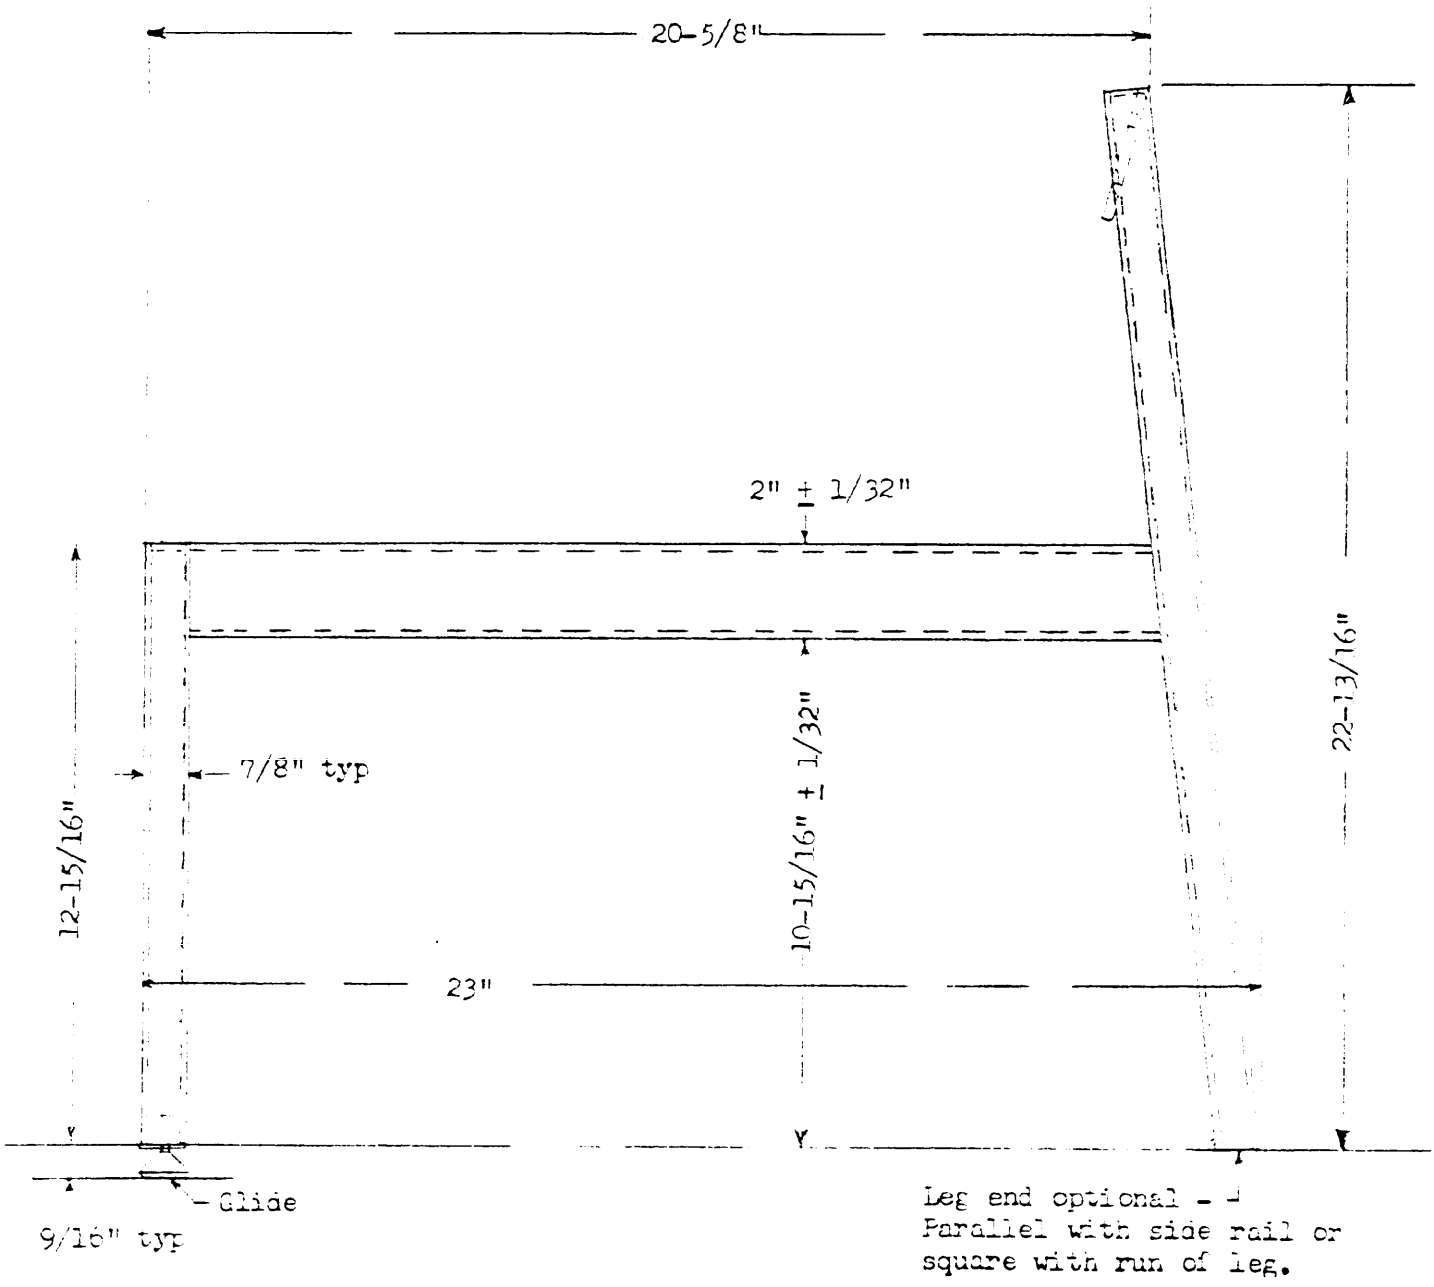


FIGURE 7. Left armless end frame detail.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.


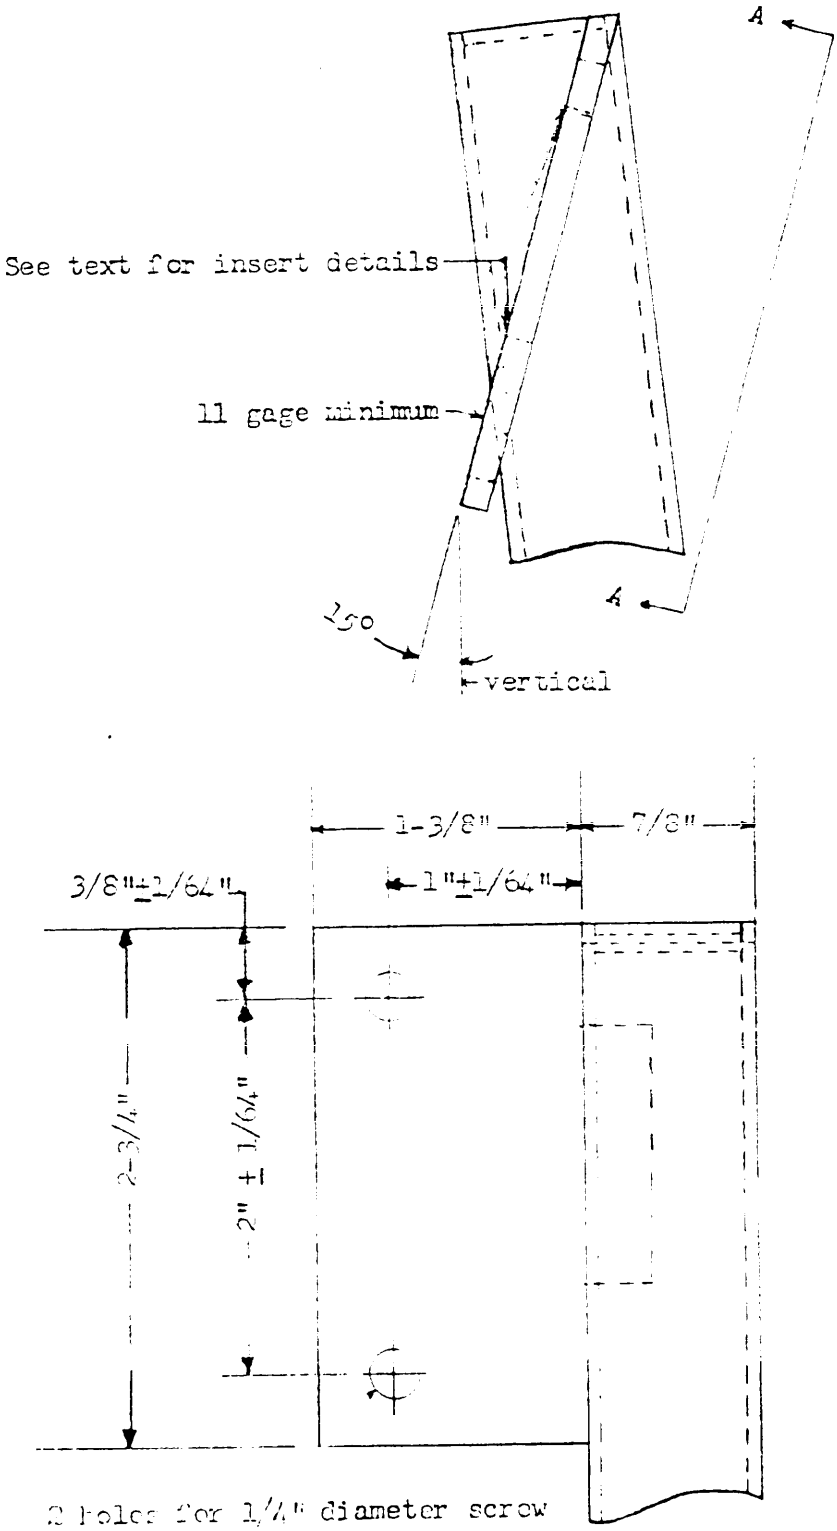



FIGURE 8. Right leg back cushion support detail.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

Type I, Class 5, Style A

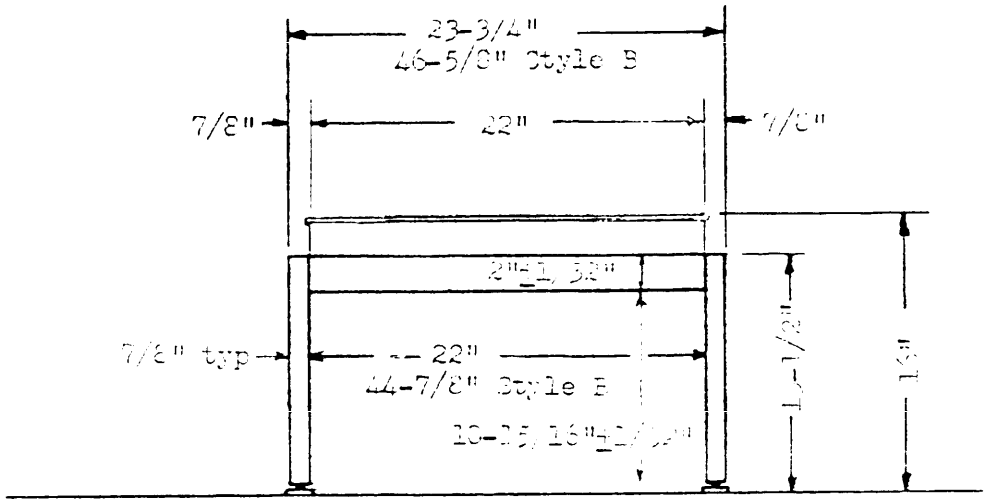

FRONT VIEW

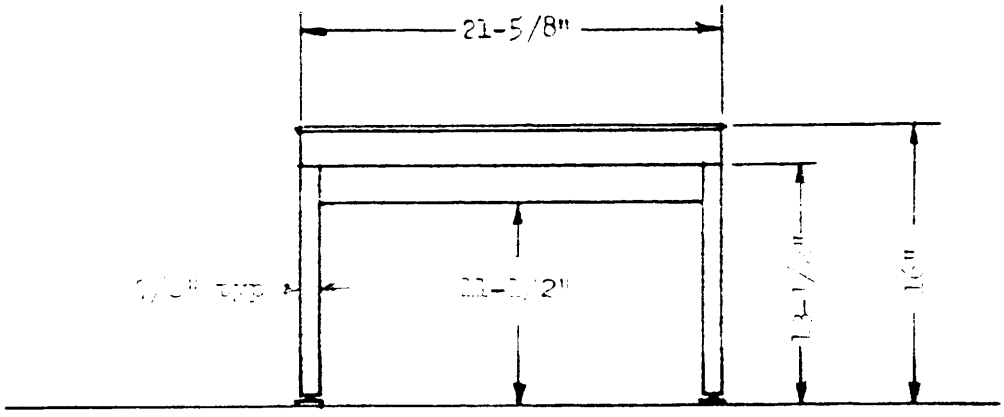


END VIEW


FIGURE 9. Bench, single width.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Type I, Class 6, Styles A and C

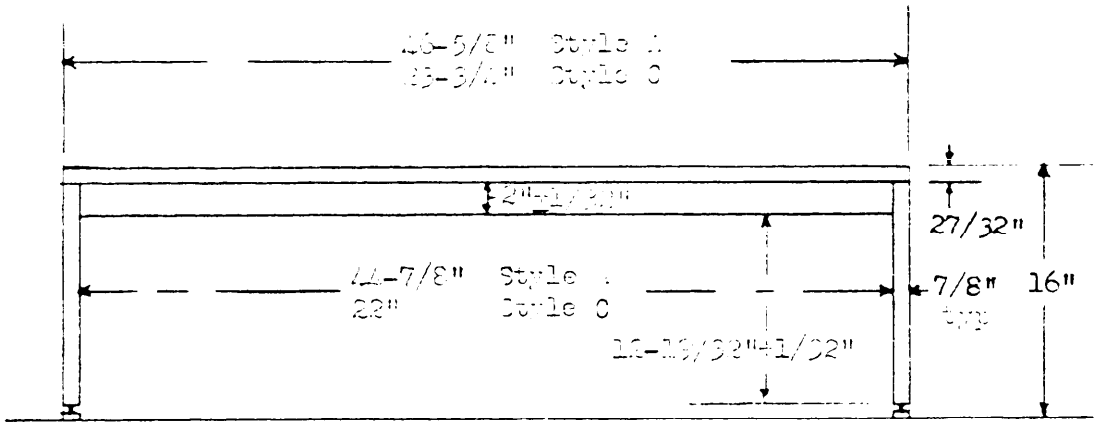

FRONT VIEW

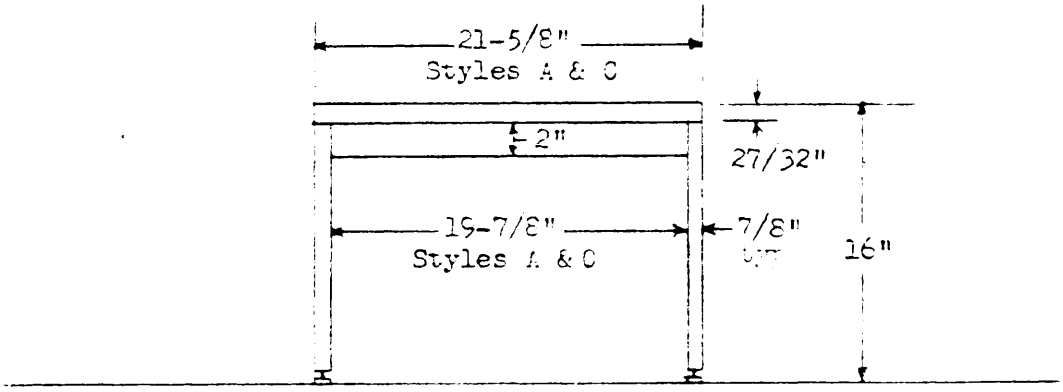

END VIEW

FIGURE 10. Tables, coffee and corner, rectangular.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the currentversion before use.

Type I, Class 6, Style B



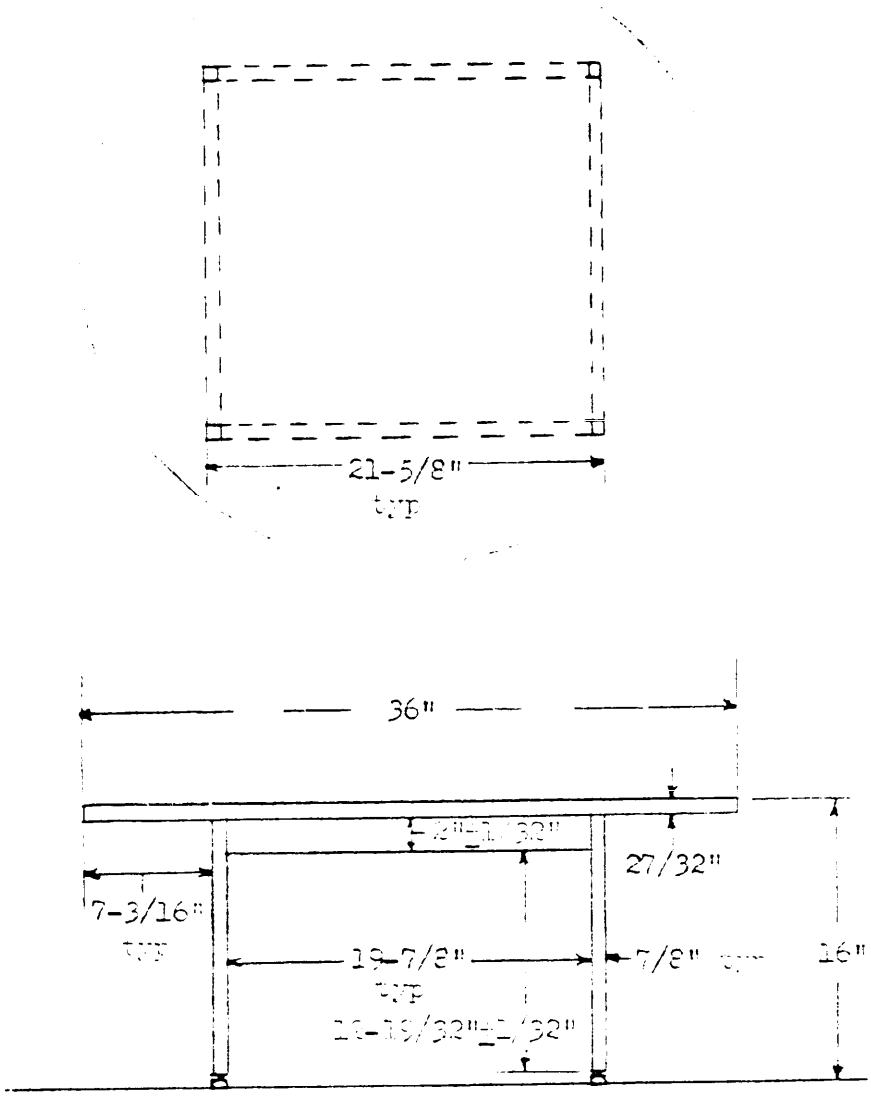


FIGURE 11. Table, coffee, round.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

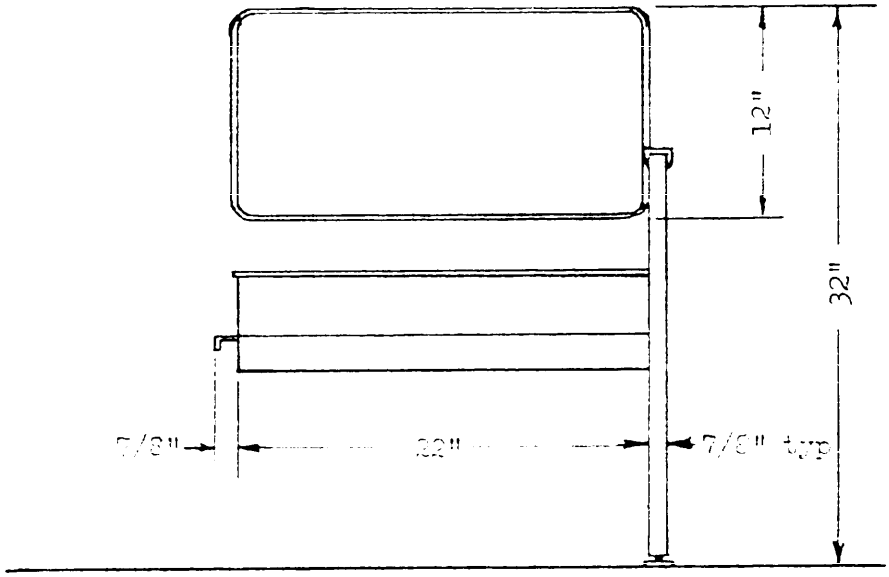

FRONT VIEW

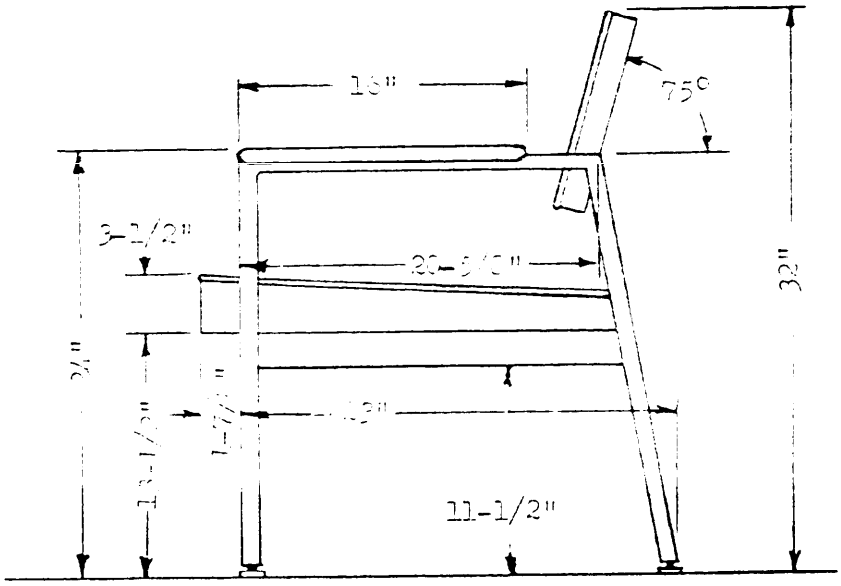


END VIEW

See Figures 5 and 6 for end frame details.


FIGURE 12. Chair, add-on, arm, single width.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Type II, Class 3, Style A

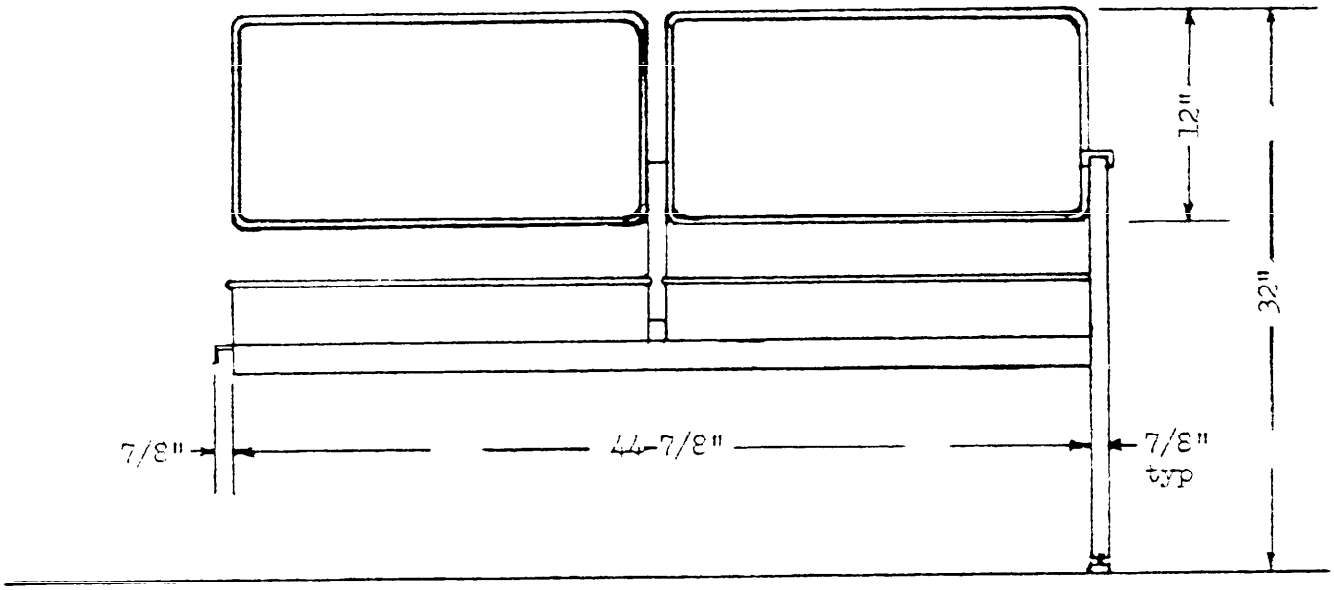

FRONT VIEW

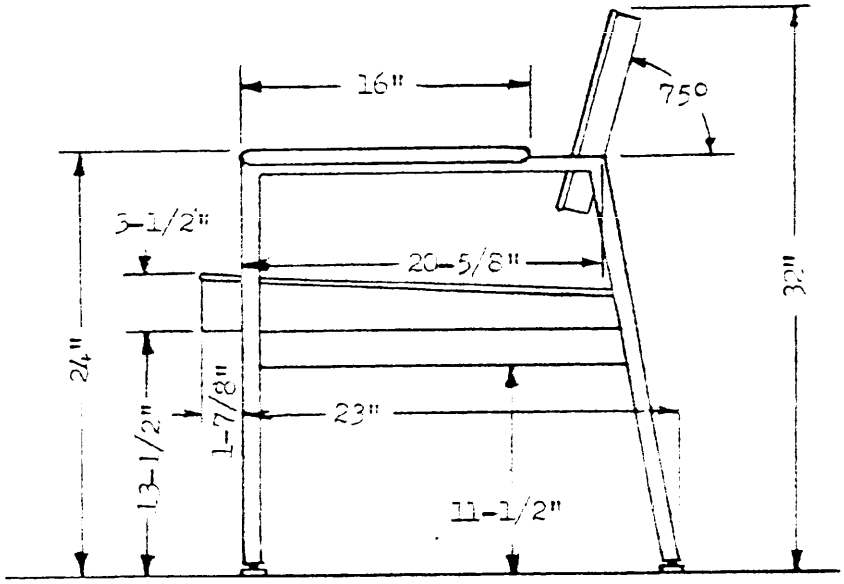


END VIEW

See Figures 5 and 6 for end frame details.


FIGURE 13. Chair, add-on, arm, double width.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

Type II, Class 4

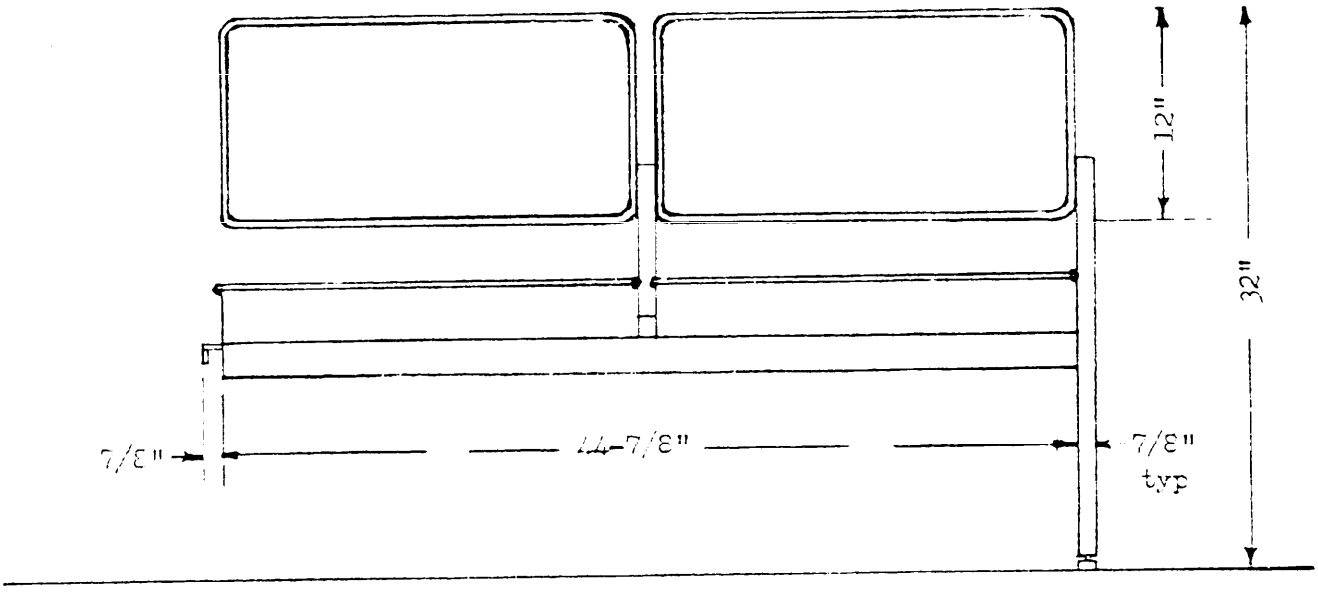

FRONT VIEW

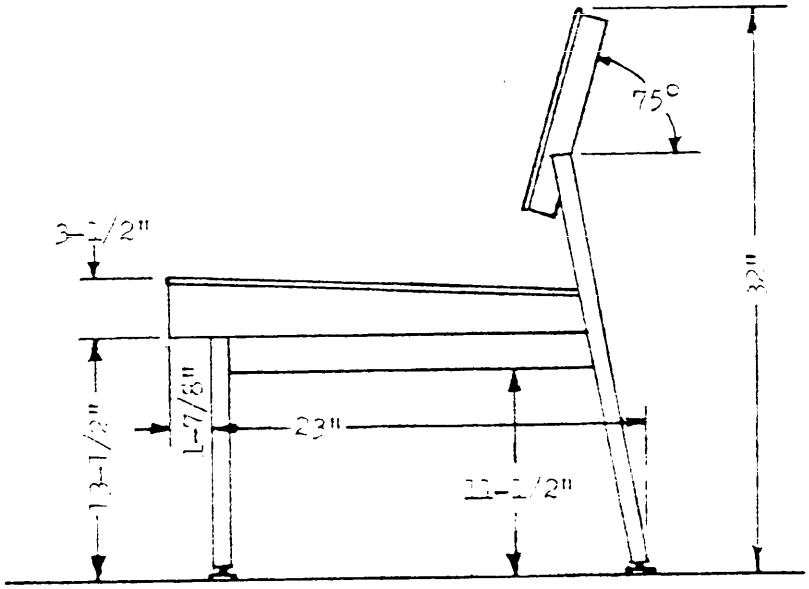


END VIEW

See Figures 7 and 8 for end frame details.

FIGURE 14. Chair, add-on, armless, double width.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

Type II, Class 5, Style B

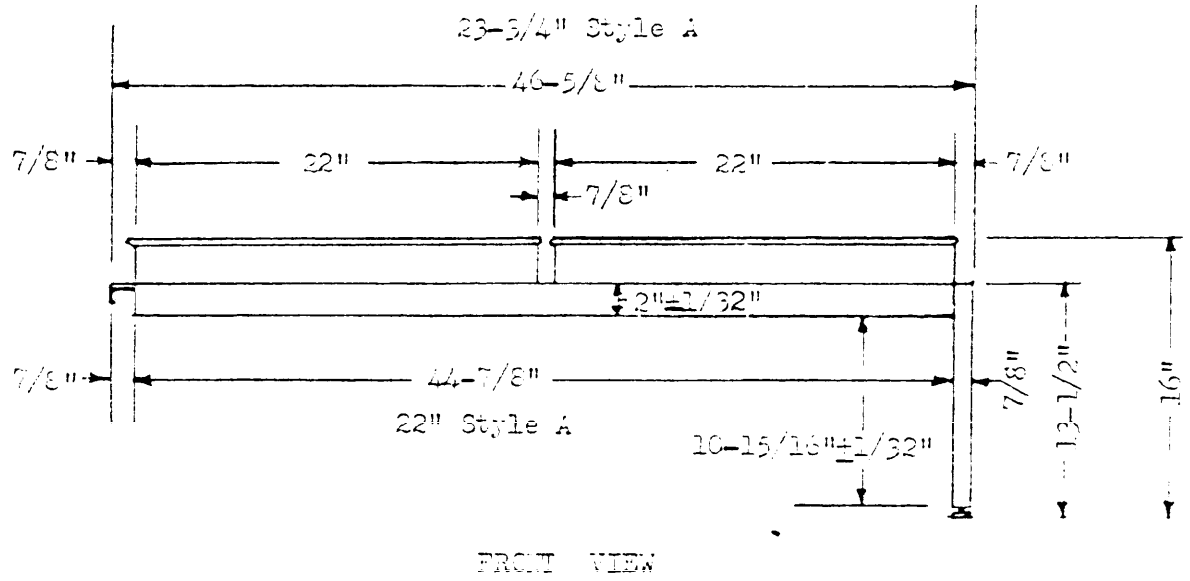

FRONT VIEW


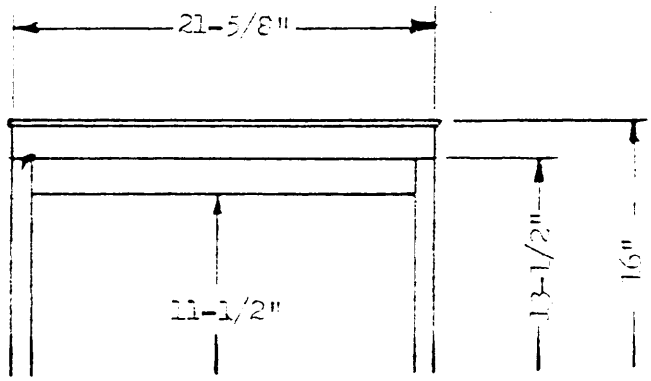



FIGURE 15. Bench, add-on, double width.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

Type II, Class 6, Styles A, B, and C

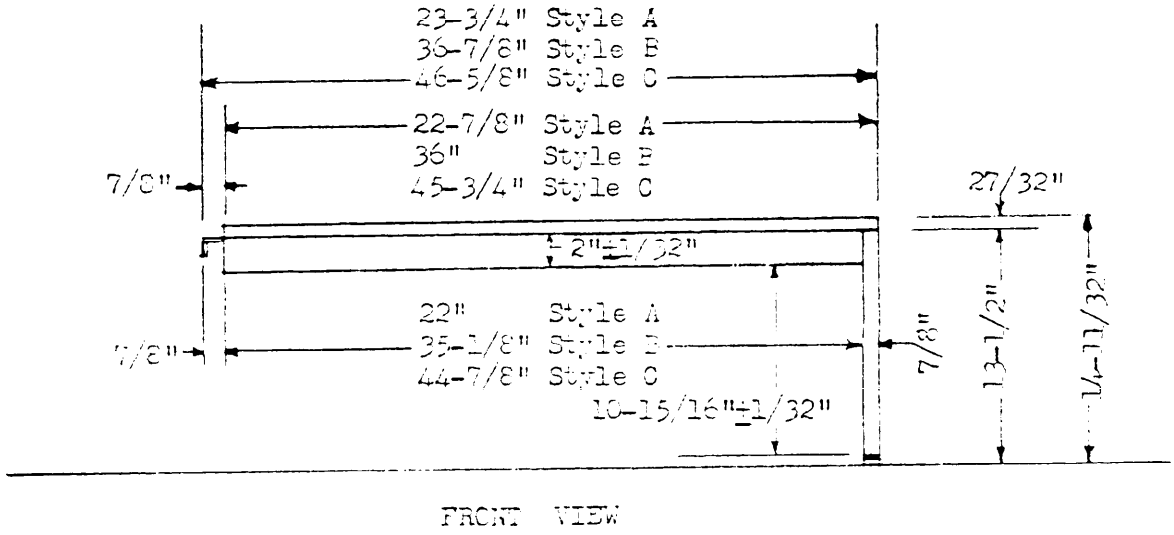

FRONT VIEW

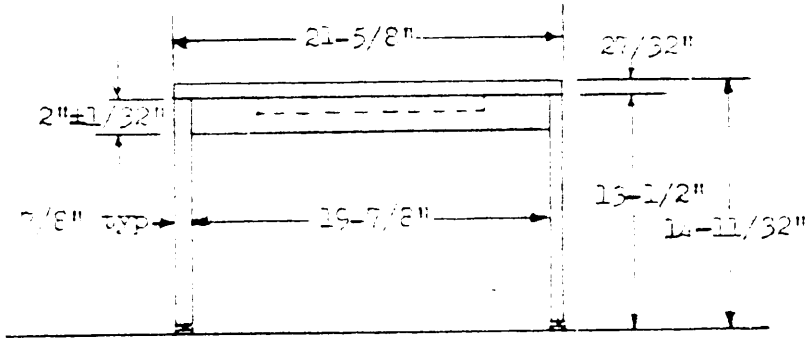

END VIEW

FIGURE 16. Tables, add-on, straight.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

Type III, Class 1, Style A

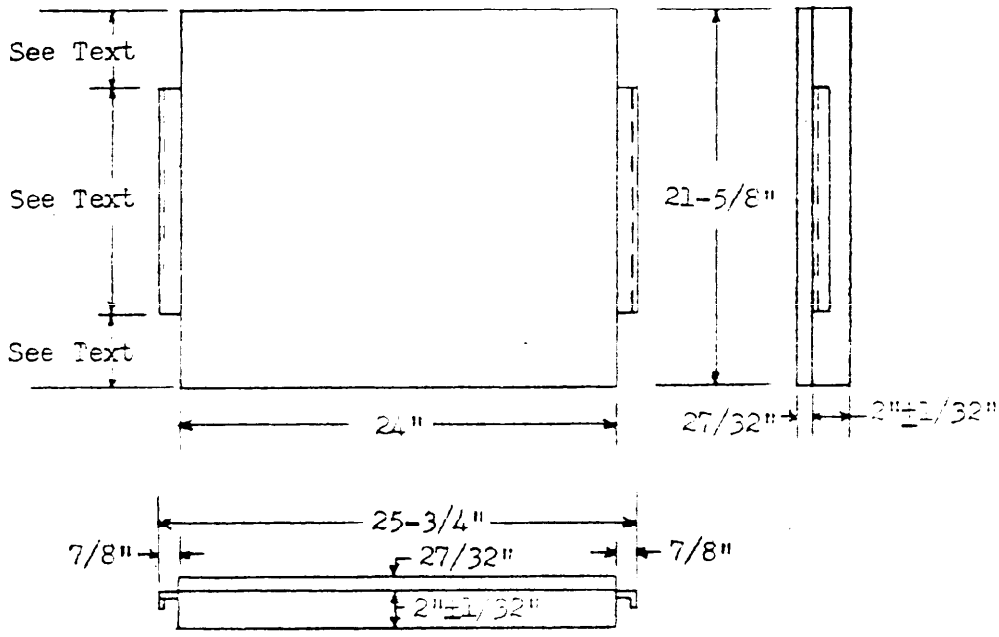


FIGURE 17. Table, drop-in, straight.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the currentversion before use.

Type III, Class 1, Style B

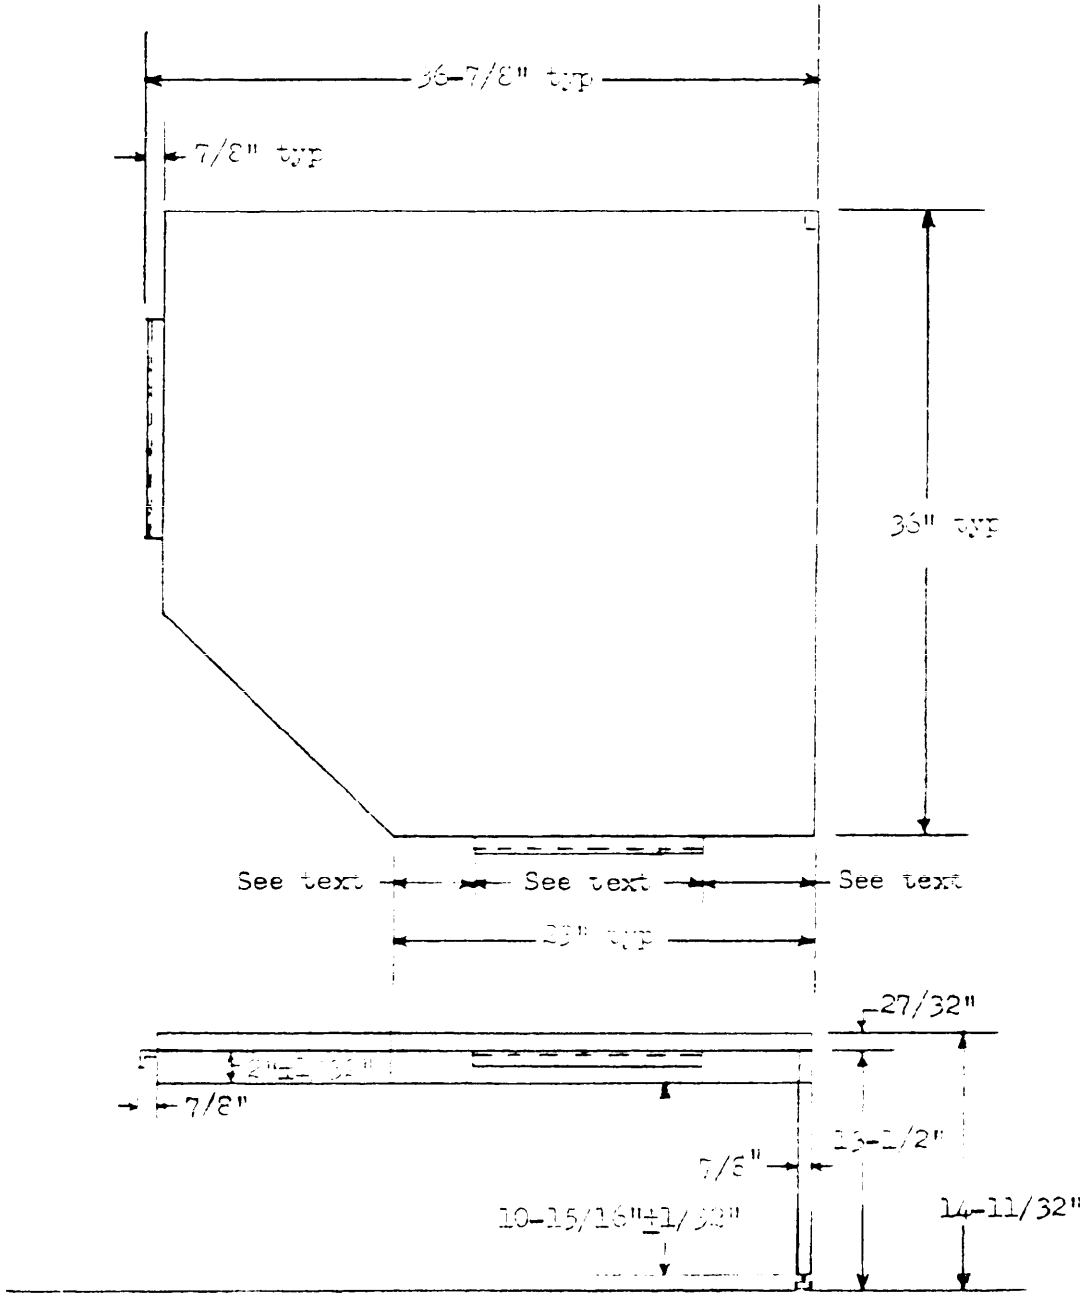


FIGURE 18. Table, drop-in, corner.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Type III, Class 1, Style C

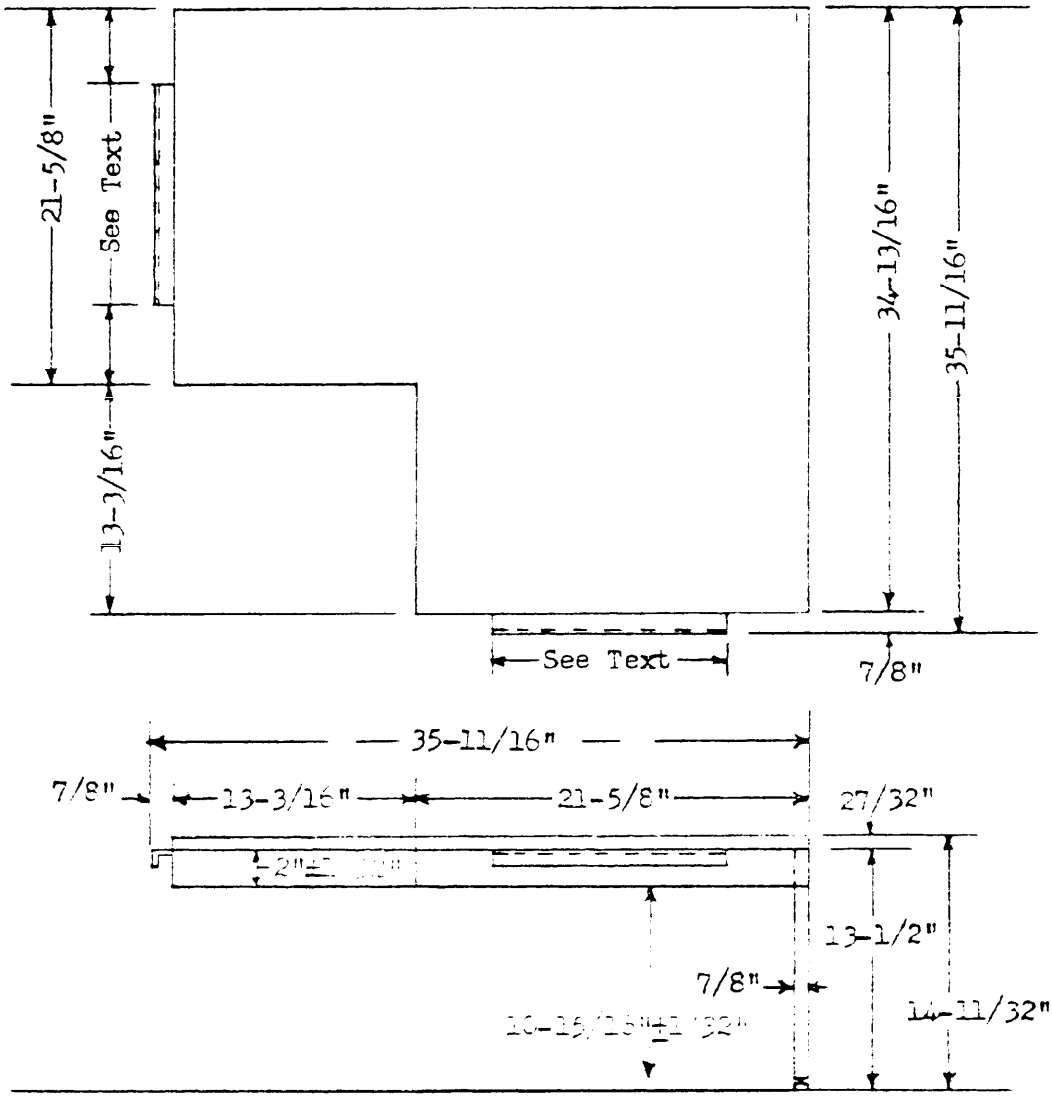


FIGURE 19. Table, drop-in, ell.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Type III, Class 1, Style D

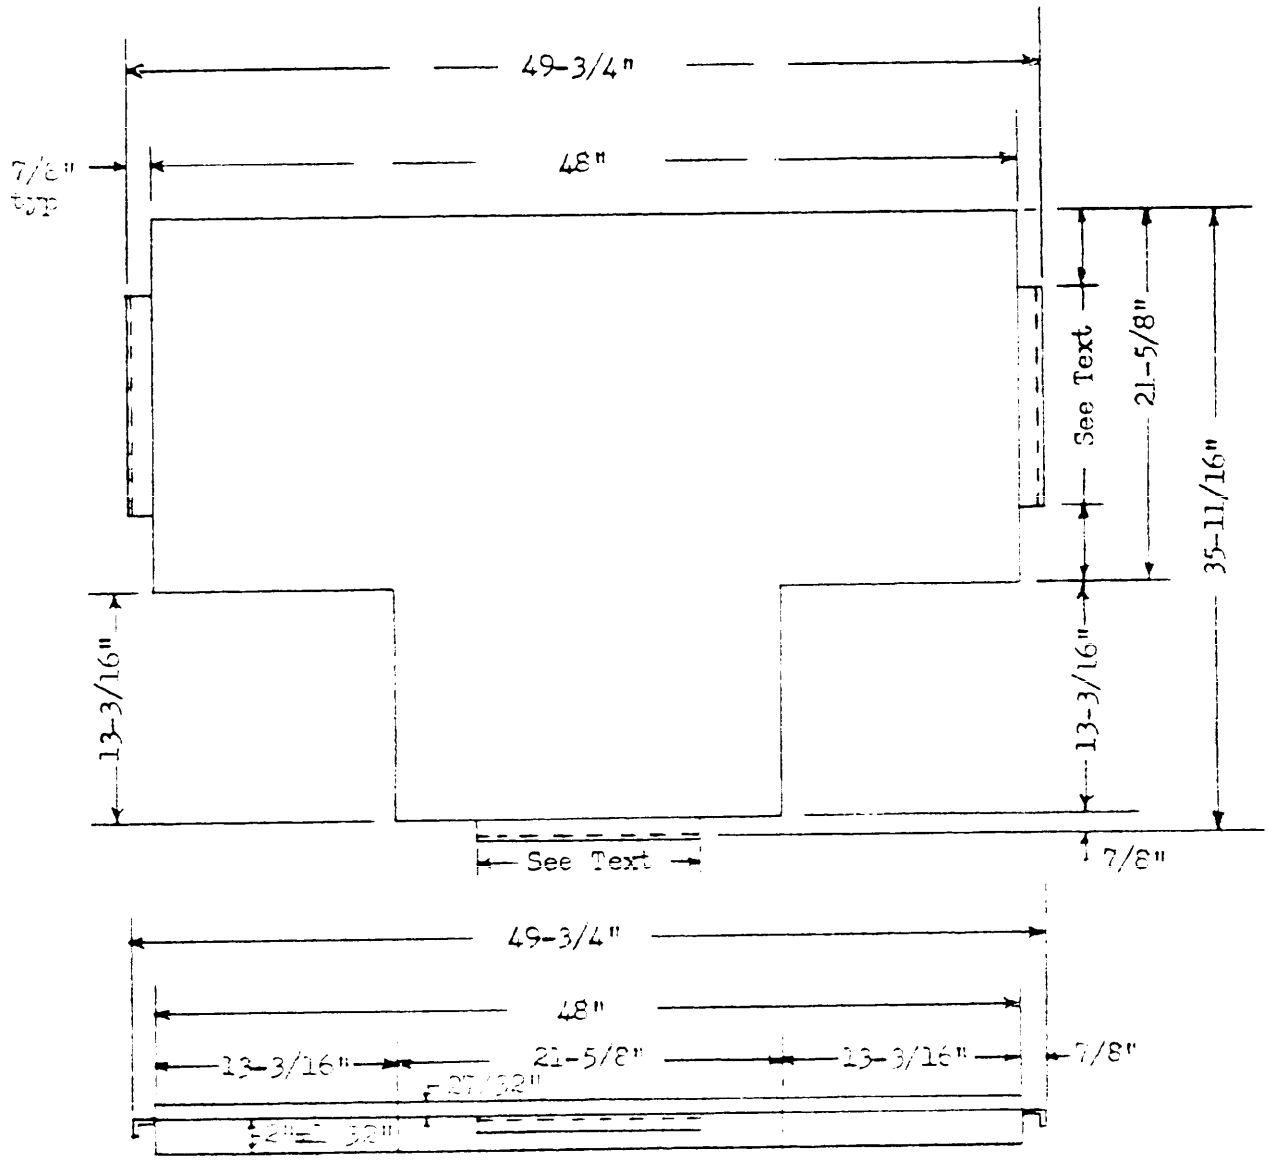


FIGURE 20. Table, drop-in, tee.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Type III, Class 1, Style E

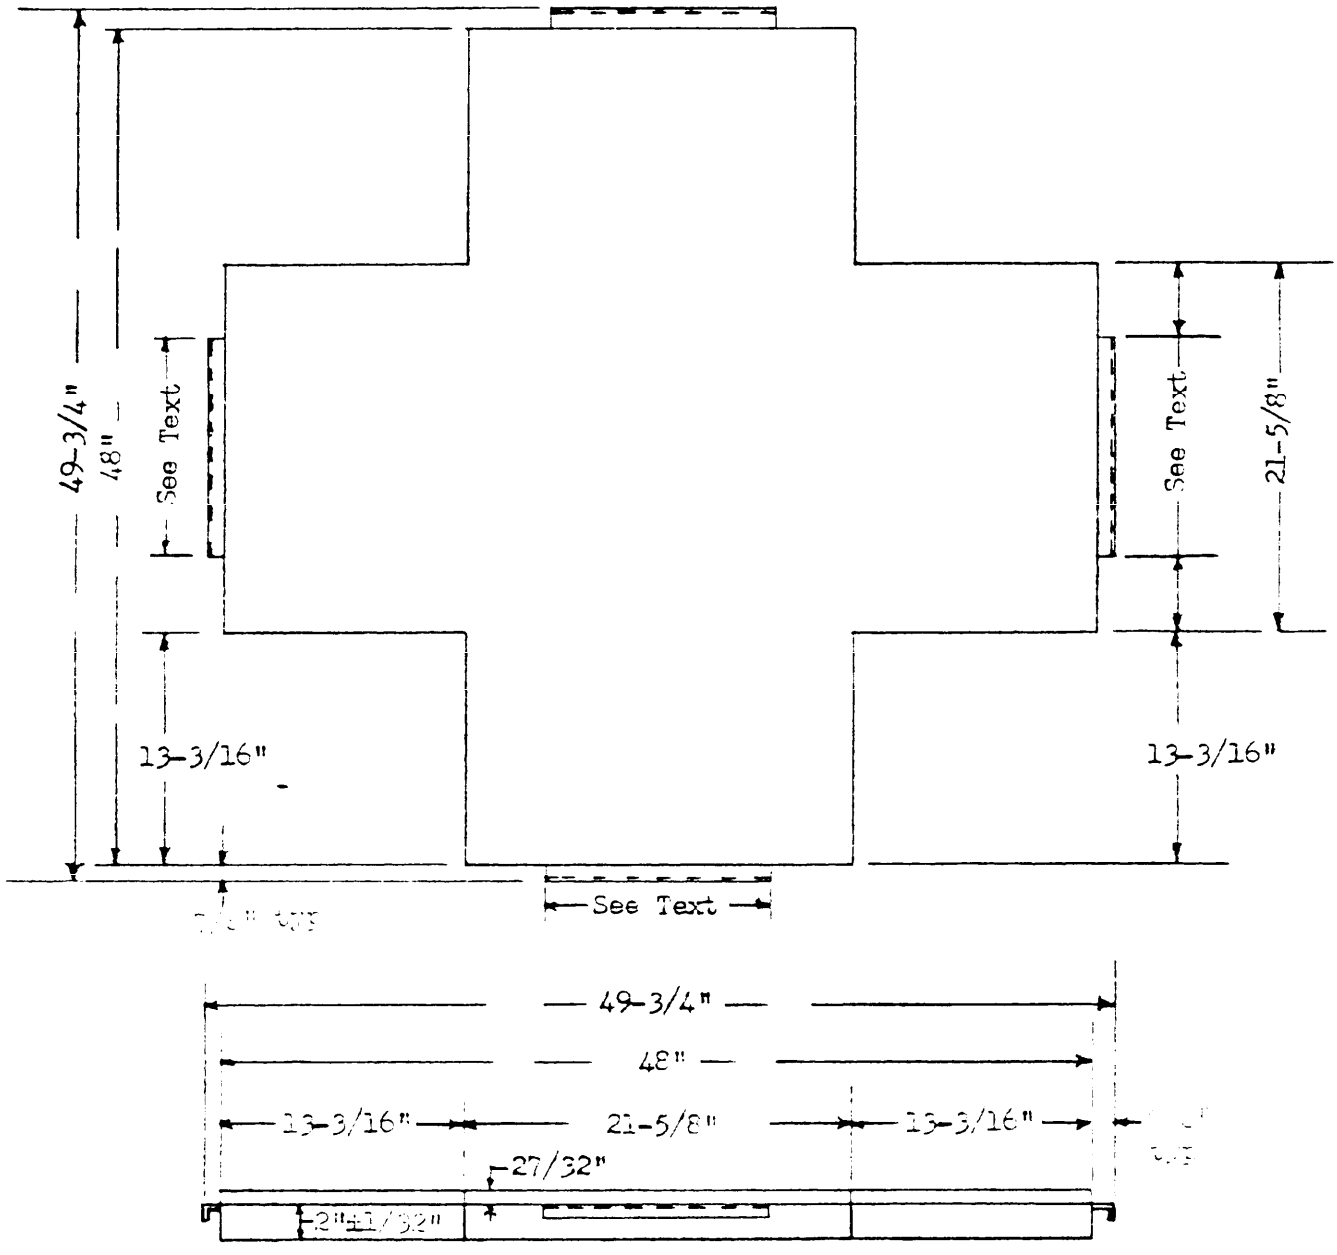


FIGURE 21. Table, drop-in, cross

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Type III, Class 1, Style F

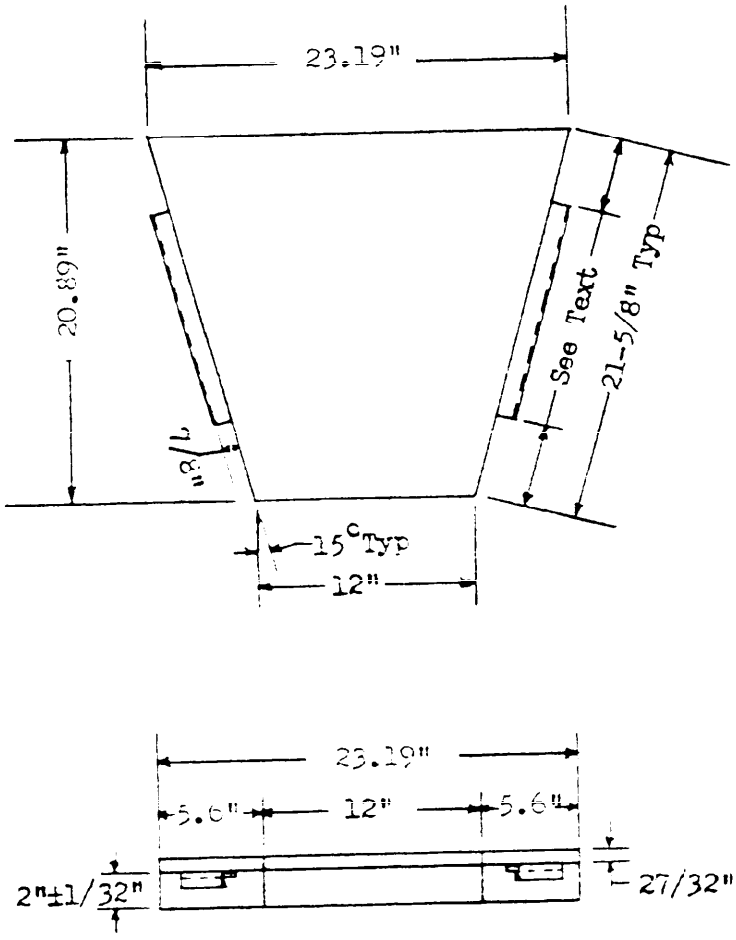


FIGURE 22. Table, drop-in, wedge.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

GENERAL SERVICES ADMINISTRATION - FEDERAL SUPPLY SERVICE

SPECIFICATION COMMENT SHEET

BUDGET BUREAU NO. 29-R0175

INSTRUCTIONS

This form provides a way for users of this specification to inform the originator of problems encountered in its use. It is not to be used to request changes to accommodate proprietary features. All comments will be considered and appreciated, but please do not expect a reply. To comment: detach, complete, and mail to: General Services Administration, FSS (FMSF) Washington, D. C. 20406.

NOTE: Comments on this form do not constitute or imply authorization to waive any part of the document or serve to amend contractual requirements.

1. SPECIFICATION

Furniture, Reception room and Lobby, Metal, Upholstered AA-F-00799A(GSA-FSS)

2. CONTRACT NO. *(If any)*	3. QUANTITY ON CONTRACT *(Optional)*	4. DOLLAR VALUE *(Optional)*

5. GENERAL NATURE OF PROBLEM *(e.g., inspection difficulties, manufacturers unable to meet tolerances, containers collapse under normal warehousing conditions, etc.)*

6. SPECIFIC REQUIREMENTS AFFECTED *(Include paragraph number and lines of wording)*

7. SPECIFIC PROBLEMS *(e.g., tests in 4.... will not assure that the battery will last required time; temperature ranges in table 2 do not conform to commercially available items.)*

8. RECOMMENDATIONS

9. NAME OF MANUFACTURER, ASSOCIATION, GOVT., AGENCY, ETC.	10. ADDRESS *(Number, Street, City, State and Zip Code)*

11. NAME AND TITLE OF SUBMITTER	12. DATE

FORM GSA FEB 69 2200

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the currentversion before use.