NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-14409/17
8 March 1983

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, VARIABLE (PISTON TYPE, TUBULAR TRIMMER), STYLE PC17

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-PRF-14409.

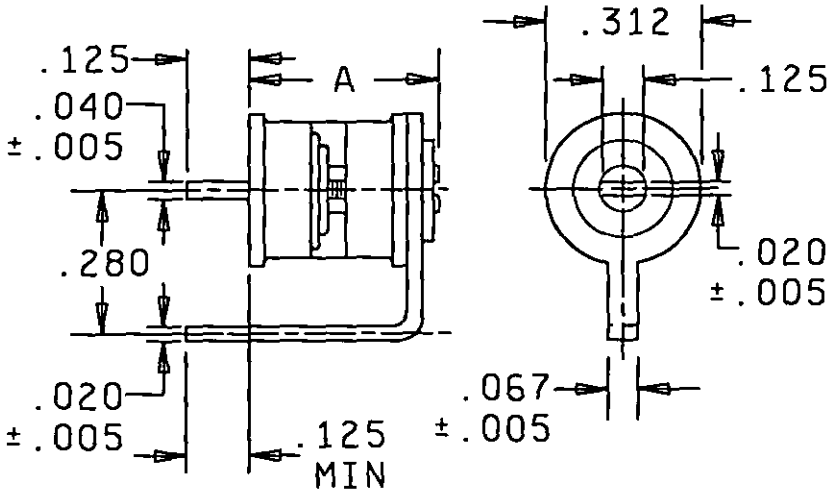

INCHES	MM	INCHES	MM
.005	.13	.067	1.70
.016	.41	.125	3.18
.020	.51	.280	7.11
.040	1.02	.312	7.92



CIRCUIT DIAGRAM

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are for information only.
3. Unless otherwise specified, tolerance is ±.016 (.41 mm).

FIGURE 1. Dimensions and configuration.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:16Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

DC voltage rating: 250 volts.

Construction: Glass, O-ring sealed.

Dielectric: Glass.

Capacitance range: See table I.

Insulation resistance: Shall be not less than 1,000,000 megohms at room ambient temperature and not less than 100,000 megohms at 125°C.

Test condition: 250 volts ±10 percent.

Quality factor (Q): See table I.

Driving torque: Greater than or equal to 0.5 and less than or equal to 5.0 ounce-inches from -55°C to +125°C.

Thermal shock: Method 107 of MIL-STD-202, test condition A, except step 3 temperature shall be +125°C ±5°C.

Immersion: Method 104 of MIL-STD-202, test condition A.

Resistance to soldering heat: In accordance with MIL-C-14409.

Seal: In accordance with MIL-C-14409.

TABLE I. Type designation and characteristics.

Type designation	Capacitance range		Q Minimum	Dimensions A ±.030
	Min	Max		
	pF	pF		
PC17J5R5	1.0	5.5	1,000	.390
PC17J8R5	1.0	8.5	650	.535
PC17G100	1.5	10	800	.340
PC17G200	1.5	20	800	.410
PC17G300	1.5	30	800	.490
PC17G400	1.5	40	800	.600

Custodians:
Army - ER
Navy - EC
Air Force - 11

Preparing activity:
Army - ER

(Project 5910-1442-1)

Review activities:
Navy - AS, OS
DLA - ES

User activities:
Navy - CG, MC

Agent:
DLA - ES

★ U.S. GOVERNMENT PRINTING OFFICE: 1982—605-034 1967 2-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:16Z
Check the source to verify that this is the current version before use.