INCH POUND
MIL-PRF-14409/17B
05 December 2006
SUPERSEDING
MIL-PRF-14409/17A
25 July 2001

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, VARIABLE (PISTON TYPE, TUBULAR TRIMMER), STYLE PC17

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the capacitors described herein shall consist of this document and the latest issue of specification MIL-PRF-14409.

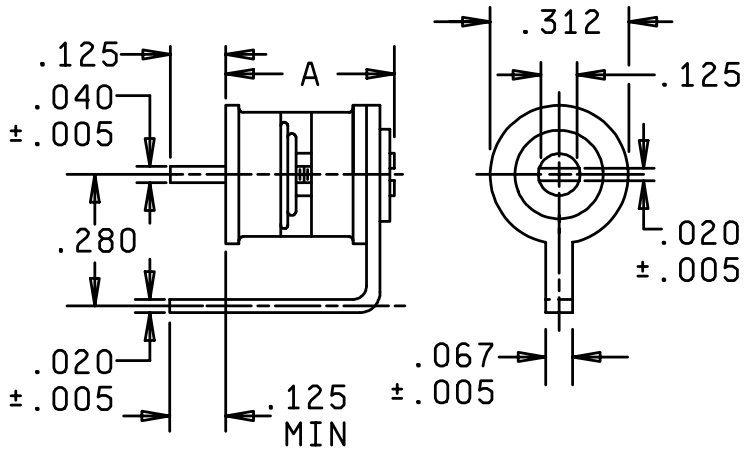



CIRCUIT DIAGRAM

Inches	mm	Inches	mm
.005	0.13	.067	1.70
.016	0.41	.125	3.18
.020	0.51	.280	7.11
.040	1.02	.312	7.92

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are for information only.
3. Unless otherwise specified, tolerance is ± .016 (0.41 mm).

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:16Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

DC voltage rating: 250 volts.

Construction: Glass, O-ring sealed.

Dielectric: Glass.

Capacitance range: See table I.

Insulation resistance: Shall be not less than 1,000,000 megohms at room ambient temperature and not less than 100,000 megohms at 125°C.

Test condition - 250 volts ±10 percent.

Quality factor (Q): See table I.

Driving torque: Greater than or equal to 0.5 and less than or equal to 5.0 ounce-inches from -55°C to +125°C.

Thermal shock: Method 107 of MIL-STD-202, test condition A, except step 3 temperature shall be 125° ±5°C.

Immersion: Method 104 of MIL-STD-202, test condition A.

Resistance to soldering heat: In accordance with MIL-PRF-14409.

Seal: In accordance with MIL-PRF-14409.

TABLE I. Type designation and characteristics.

Type designation	Capacitance range		Q minimum	Dimensions A ± .030
	Min	Max		
	pF	pF		
PC17J5R5	1.0	5.5	1000	.390
PC17J8R5	1.0	8.5	650	.535
PC17G100	1.5	10	800	.340
PC17G200	1.5	20	800	.410
PC17G300	1.5	30	800	.490
PC17G400	1.5	40	800	.600

Changes from previous issue: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents: In addition to MIL-PRF-14409, this document also references MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:16Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force – 11
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Navy - AS, MC, OS

(Project 5910-2006-058)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:16Z
Check the source to verify that this is the current version before use.