
INCH POUND
MIL-PRF-14409/17C
11 June 2010
SUPERSEDING
MIL-PRF-14409/17B
05 December 2006

PERFORMANCE SPECIFICATION SHEET

# CAPACITORS, VARIABLE (PISTON TYPE, TUBULAR TRIMMER), STYLE PC17

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the capacitors described herein shall consist of this specification sheet and MIL-PRF-14409.

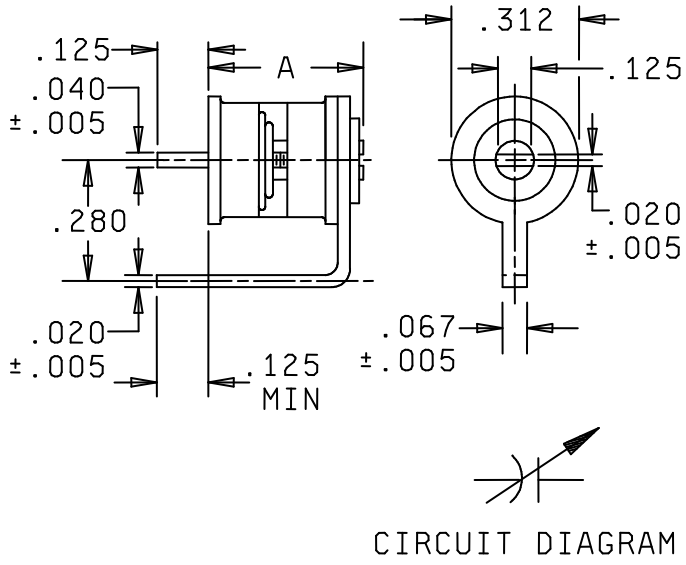


| Inches | mm | Inches | mm |
|---|---|---|---|
| .005 | 0.13 | .067 | 1.70 |
| .016 | 0.41 | .125 | 3.18 |
| .020 | 0.51 | .280 | 7.11 |
| .040 | 1.02 | .312 | 7.92 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are for information only.
3. Unless otherwise specified, tolerance is ± .016 (0.41 mm).

FIGURE 1. Dimensions and configuration.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:16Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

DC voltage rating: 250 volts.

Construction: Glass, O-ring sealed.

Dielectric: Glass.

Capacitance range: See table I.

Insulation resistance: Shall be not less than 1,000,000 megohms at room ambient temperature and not less than 100,000 megohms at +125°C.

Test condition: 250 volts ±10 percent.

Quality factor (Q): See table I.

Driving torque: Greater than or equal to 0.5 ounce-inches and less than or equal to 5.0 ounce-inches from -55°C to +125°C.

Thermal shock: Method 107 of MIL-STD-202, test condition A, except step 3 temperature shall be +125° ±5°C.

Immersion: Method 104 of MIL-STD-202, test condition A.

Resistance to soldering heat: In accordance with MIL-PRF-14409.

Seal: In accordance with MIL-PRF-14409.

TABLE I. Capacitor characteristics.

| Part or Indentifying Number (PIN) | Capacitance range | | Q minimum | Dimensions 1/ A ± .030 (0.76) |
|---|---|---|---|---|
| | Min | Max | | |
| | pF | pF | | |
| PC17J5R5 | 1.0 | 5.5 | 1000 | .390 (9.91) |
| PC17J8R5 | 1.0 | 8.5 | 650 | .535 (13.59) |
| PC17G100 | 1.5 | 10 | 800 | .340 (8.64) |
| PC17G200 | 1.5 | 20 | 800 | .410 (10.41) |
| PC17G300 | 1.5 | 30 | 800 | .490 (12.45) |
| PC17G400 | 1.5 | 40 | 800 | .600 (15.24) |

1/ Metric equivalents are shown in parentheses for information only.

Qualification inspection: Qualification inspection is not required. A manufacturer that is currently listed on the QPL for at least one other MIL-PRF-14409 style may supply PC17 parts by performing the group A and group B testing. A manufacturer that is not qualified to any MIL-PRF-14409 styles may produce these parts by performing the group A, group B, and group C testing on the product before delivery.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:16Z
Check the source to verify that this is the current version before use.

Changes from previous issue: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents: In addition to MIL-PRF-14409, this document also references MIL-STD-202.

Custodians:
Army - CR
Navy - EC
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Navy - AS, MC, OS
Air Force – 99

(Project 5910-2010-022)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:16Z
Check the source to verify that this is the current version before use.