
MILITARY SPECIFICATION SHEET

CAPACITORS, VARIABLE (PISTON TYPE, TUBULAR TRIMMER), STYLE PC19

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-C-14409.



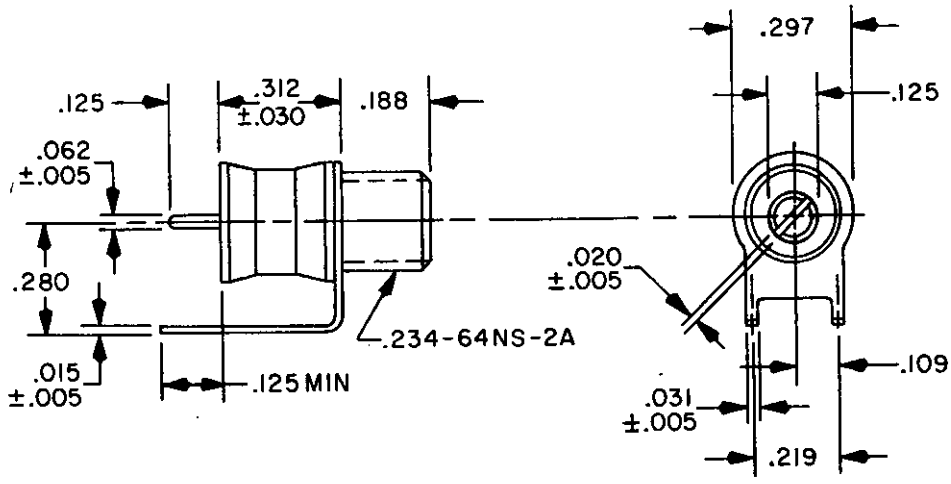

CIRCUIT DIAGRAM

INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	.031	.78	.219	5.56
.015	.38	.062	1.57	.234	5.94
.016	.41	.109	2.77	.280	7.11
.020	.51	.125	3.18	.297	7.54
.030	.76	.188	4.78	.312	7.92

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ±.016 (.41 mm).
4. Solder, if used, shall be high temperature solder having a melting point of 300°C +50, -5°C.

FIGURE 1. Dimensions and configuration.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:17Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

DC voltage rating: See table I.

Construction: Alumina ceramic, O-ring sealed.

Dielectric: Air.

Capacitance range: See table I.

Insulation resistance: Shall be not less than 1,000,000 megohms at room ambient temperature and not less than 100,000 megohms at 125°C.

Test condition: 250 volts ±10 percent.

Quality factor (Q): See table I, (measured at frequency of 100 ±10 MHz).

Driving torque: Greater than or equal to 0.5 and less than or equal to 5.0 ounce-inches from -55°C to +125°C.

Thermal shock: Method 107 of MIL-STD-202, test condition A, except step 3 temperature shall be +125°C ±5°C.

Immersion: Method 104 of MIL-STD-202, test condition A.

Resistance to soldering heat: In accordance with MIL-C-14409.

Seal: In accordance with MIL-C-14409.

TABLE I. Type designation and characteristics.

Type designation	Capacitance range		Voltage rating	Q minimum
	Min	Max		
	pF	pF		
PC19L100	0.8	10	250	5,000
PC19L140	0.8	14	125	3,000

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Navy - AS, OS
DLA - ES

User activities:
Navy - CG, MC

Agent:
DLA - ES

Preparing activity:
Army - ER

(Project 5910-1442-3)

★ U.S.GOVERNMENT PRINTING OFFICE: 1982—604-034/1969 Z-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:17Z
Check the source to verify that this is the current version before use.