NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND


MIL-PRF-14409/19B
11 January 1993
SUPERSEDING
MIL-C-14409/19A
25 October 1989

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, VARIABLE (PISTON TYPE, TUBULAR TRIMMER), STYLES PC19 AND PC47

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-PRF-14409.

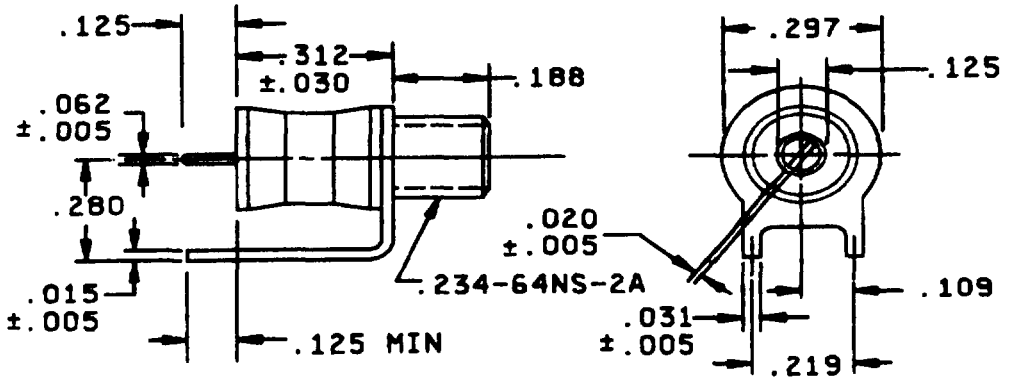

STYLE PC19




CIRCUIT DIAGRAM


FIGURE 1. Dimensions and configurations.

Ⓑ denotes changes

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:17Z
Check the source to verify that this is the current version before use.

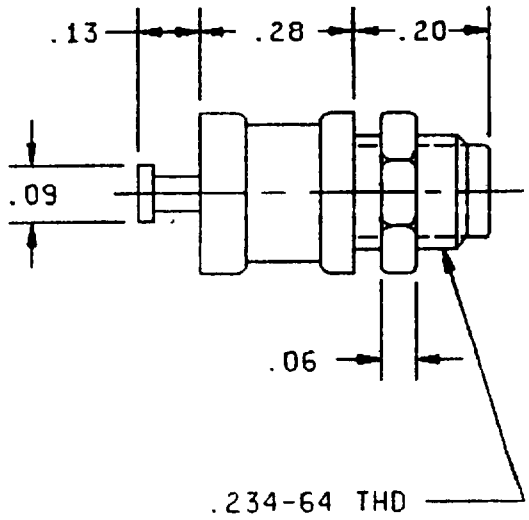



Inches	mm
.005	0.13
.015	0.38
.020	0.51
.030	0.76
.031	0.78
.06	1.5
.062	1.57
.09	2.3
.109	2.77
.125	3.18
.13	3.30
.188	4.78
.20	5.1
.219	5.56
.234	5.94
.280	7.11
.297	7.54
.312	7.92

STYLE PC47



CIRCUIT DIAGRAM

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ±.016 (0.41 mm).
4. Solder, if used, shall be high temperature solder having a melting point of 300°C +50°C, -5°C.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:17Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1 and table I.

DC voltage rating: See table I.

Construction: Alumina ceramic, O-ring sealed.

Dielectric: Air.

Capacitance range: See table I.

Insulation resistance: Shall be not less than 1,000,000 megohms at room ambient temperature and not less than 100,000 megohms at 125°C.

Test condition: 250 volts ±10 percent.

Quality factor (Q): See table I (measured at frequency of 100 ±10 MHz).

Driving torque: Greater than or equal to 0.5 and less than or equal to 5.0 ounce-inches from -55°C to +125°C.

Thermal shock: Method 107 of MIL-STD-202, test condition A, except step 3 temperature shall be +125°C ±5°C.

Immersion: Method 104 of MIL-STD-202, test condition A.

Resistance to soldering heat: In accordance with MIL-C-14409.

Seal: In accordance with MIL-C-14409.

B TABLE I. Type designation and characteristics.

PIN 1/	Capacitance range		Voltage rating	Q minimum
	Min	Max		
	pF	pF		
PC--L100	1.0	10	250	5,000
PC--L140	1.0	14	125	3,000

1/ Complete PIN shall include additional symbols to indicate style.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:17Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Navy - AS, OS
DLA - ES

User activities:
Navy - CG, MC

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5910-1833)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:17Z
Check the source to verify that this is the current version before use.