MIL-S-14487A(Ord)

30 April 1959

SUPERSEDING
MIL-S-14487(Ord)
13 March 1957

MILITARY SPECIFICATION

SIGHT, COMPUTING, M38, PACKAGING OF

1. SCOPE

1.1 This specification covers the packaging and packing of Computing Sight, M38, with or without equipment for each level of protection.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification.

SPECIFICATIONS

Federal

FF-B-571	Bolts, Nuts, Studs, and Tap Rivets (And Material for Same)
QQ-S-781	Strapping, Flat; Steel
UU-P-313	Paper, Lens, Tissue
UU-T-111	Tape; Paper, Gummed (Sealing and Securing)
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	Boxes, Fiber
PPP-B-676	Boxes, Set-Up, Paperboard
PPP-C-843	Cushioning Materials, Cellulosic
PPP-T-60	Tape, Pressure Sensitive, Adhesive, Waterproof - For Packaging and Sealing
PPP-T-76	Tape, Paper, Water Resistant Pressure Sensitive

Military

MIL-P-116	Preservation, Methods of
MIL-B-121	Barrier Material, Greaseproofed, Flexible (Waterproofed)

FSC 1220

Source: https://assist.dla.mil -- Downloaded: 202610-18T03:21Z
Check the source to verify that this is the current version before use.

MIL-B-131	Barrier Material; Water Vaporproof, Flexible
MIL-D-3464	Desiccants, Activated, Bagged, Packaging Use and Static Dehumidification
MIL-A-5092	Adhesive, Rubber (Synthetic and Reclaimed Rubber Base)
MIL-G-12803	Gasket Materials, Nonmetallic
MIL-P-14232	Parts, Equipment and Tools for Ordnance Materiel, Packaging Of

STANDARDS

Military

MIL-STD-105	Sampling for Inspection and Tests
MIL-STD-129	Marking for Shipment and Storage
MS 20003	Indicator-Humidity, Card, Three Spot Impregnated Areas

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material.- Material shall be as specified herein. Material not definitely specified shall be of good commercial quality, entirely suitable for the purpose. Material shall be free from defects and imperfections that might affect the serviceability of the finished preservation, packaging, and packing. Unless otherwise specified, the contractor shall provide the Government inspector certification of adherence to the requirements of material specifications.

3.2 Preparation for packaging.

3.2.1 Computing Sight, M38, without equipment.- The computing sight shall be partially disassembled and shall consist of the following items:

(a) 1 - Mount assembly	
6 Washers	BECX1 - 187174
6 Bolts	BCWX4.2 - 444270
(b) 1 - Shaft, Flexible, 7666427	
(c) 1 - Cover, 7676208	
(d) 1 - Sight, Reflex, M24C, 7648288	
1 Reflector (Day)	7642121
1 Reflector (Night)	7644136

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:21Z
Check the source to verify that this is the current version before use.

(e) 1 - Elevating drag link assembly

1 Pin	7665179
1 Chain	SDCX2-42-C-14155-1
1 Screw	BQMX1-145379
1 Pin	7666227
1 Coupling	SDCX3-583131
1 Bushing	7665182
1 Nut	BUNX.2-120369
1 Washer	BECX1-187174
1 Bushing	7665177
1 Nut	BUNX.2-120371
1 Washer	BECX1-187077

(f) 1 - Computer Assembly, 7665139

4 Bolts	BCWX3.454064
4 Washers, lock	BECX1-187174

3.2.2 Computing Sight, M38, with equipment.- The computing sight shall be partially disassembled and shall consist of the following items:

(a) All items listed in 3.2.1
(b) 1 - Cover, 7666511
(c) 2 - Sight, Rings, 7666236
(d) 1 - Sight, Peep, Assembly, 7665219
(e) 1 - Plate, 7665215
(f) 1 - Support, 7665204 with Bracket 7665213

4 Bolts	BCWX3.3-585642
4 Washers, lock	7666046

(g) 1 - Accessory chest w/o contents, 7665819
The following items shall be immobilized in the accessory chest:

1 Screwdriver	J17-41-S-1292-75
4 Reflectors (Day)	7642121
4 Reflectors (Night)	7644136
2 Sight, rings	7666236
1 Band, drive	7666228
1 Sight, Reflex, M24C	7648288
1 Sight, Peep, Assembly	7665219
1 Plate	7665215
1 Container, hardware w/o contents	7580910

The following items shall be immobilized in the hardware container prior to packing in the accessory chest:

4 Bolts (spares)	BCWX1.3-591074
1 Plug (spare)	7591402
1 Washer (spare)	BECX2-435862
1 Washer (spare)	7666135
11 Washers	BECX1-187174

Source: https://assist.dla.mil -- Downloaded: 202640-18T03:21Z
Check the source to verify that this is the current version before use.

1 Pin	7665179
1 Chain	SDCX2-42-C-14155-1
1 Screw	BCMX1-145379
1 Bushing	7665177
1 Nut	BBBX1-214267
1 Spring (spare)	7587476
4 Bolts	BCWX3.3-454064
4 Bolts	BCWX3.3-585642
1 Bolt (spare)	1025102
2 Screws (Spares)	BCOX1.11-422642
1 Spring (spare)	7587475
4 Washers (spares)	BECX2-582949
2 Washers (spares)	7591406
6 Bolts	BCWX3.4-454063
1 Pin	7666227
1 Coupling	SDCX3-583131
1 Bushing	7665182
1 Nut	BBBX1-225831
1 Washer	BECX1-187077
4 Washers, lock	7666046

3.3 Preservation and packaging.

3.3.1 Level A.

3.3.1.1 Computing sight, with equipment.

3.3.1.1.1 Cleaning.- All items, except the reflex sight, listed in 3.2.2, shall be cleaned by Process C-1 of Specification MIL-P-116. The reflex sight, including reflectors, shall be cleaned and wrapped as specified for optical elements in Specification MIL-P-14232.

3.3.1.1.2 Drying.- Cleaned items shall be dried to remove cleaning solutions and residual moisture, in accordance with Specification MIL-P-116.

3.3.1.1.3 Preservative application.- Immediately after cleaning and drying, the exposed unpainted surfaces of the following items shall be coated with preservative conforming to type P-2 of Specification MIL-P-116:

(a) Mount assembly
(b) Support 7665204 with Bracket 7665213
(c) Elevating drag link assembly

The spare drive band shall be coated with preservative conforming to type P-7 of Specification MIL-P-116.

3.3.1.1.4 Unit packaging.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:21Z
Check the source to verify that this is the current version before use.

3.3.1.1.4.1 Preserved items.- The preserved surfaces of components specified in 3.3.1.1.3 and the couplings of the flexible shaft, shall be covered with barrrier material conforming to type I or II, grade A of Specification MIL-B-121. The coverings shall be secured with pressure sensitive tape conforming to Specification PPP-T-60.

3.3.1.1.4.2 Accessory chest w/contents.- Unit protection shall be Method IIb of Specification MIL-P-116.

3.3.1.1.4.2.1 Desiccant.- Desiccant shall conform to Specification MIL-D-3464. The required units of desiccant shall be determined by Formula I of Specification MIL-P-116.

3.3.1.1.4.2.2 Inner fiberboard container.- The accessory chest shall be immobilized in a fiberboard container conforming to style RSC, type I, class 1 of Specification PPP-B-636. The container shall be closed by covering all seams including the manufacturer's joint with gummed tape conforming to Specification UU-T-111. The corners of the container shall be blunted to prevent rupture or abrasion of the water vaporproof barrier.

3.3.1.1.4.2.3 Water vaporproof barrier.- The inner fiberboard container shall be placed inside a water vaporproof barrier fabricated of material conforming to class I of Specification MIL-B-131. Sufficient barrier material shall be provided at the opening to allow for two additional seals as required in Specification MIL-P-116. Entrapped air shall be exhausted prior to final closure. The time lapse between securing the desiccant and the closure of the barrier shall be held to an absolute minimum.

3.3.1.1.4.2.4 Outer fiberboard container.- The prepackaged chest shall be immobilized in a fiberboard container conforming to class 2, grade W5c, style RSC of Specification PPP-B-636. To prevent rupture to the barrier, the manufacturer's joint on the interior of the container shall be covered with pressure sensitive tape. The container shall be closed by applying pressure sensitive tape conforming to Specification PPP-T-76 to all seams, including the manufacturer's joint.

3.3.1.1.4.3 Computer assembly.- The unit protection shall be method IIa of Specification MIL-P-116. The knobs of the assembly shall be set at 700 with the bail set at maximum dive. The Cover Assembly 7676208, shall be collapsed and secured to the top of the computer assembly. The joint assembly shall be covered with barrier material specified in 3.3.1.1.4.1 and secured with pressure sensitive tape conforming to Specification PPP-T-60; also, the assembly shall be cushioned and secured within the computer housing. The flexible shaft shall be wound around the computer assembly and secured with pressure sensitive tape conforming to Specification PPP-T-60. The bottom surface of the computer housing, the mounting surface and the adapter for the flexible shaft shall be covered with barrier material specified in 3.3.1.1.4.1.

Source: https://assist.dla.mil -- Downloaded: 202610-18T03:21Z
Check the source to verify that this is the current version before use.

3.3.1.1.4.3.1 Wood base.- A base shall be constructed as shown on Figure 1. The lumber shall conform to group I or II of Specification PPP-B-621. Four bolts 1/2 inch diameter by 5 inches long conforming to Specification FF-B-571, shall be placed through the appropriate holes in the base as shown in Figure 2.

3.3.1.1.4.3.2 Gaskets.- Gaskets shall be positioned over the bolts and on the 2 x 4 inch board, as shown in Figure 2; also, gaskets shall be positioned inside the barrier as shown in Figure 4. Gasket material shall conform to type 1, group 2, grade 2, any class of Specification MIL-G-12803. Adhesive conforming to Specification MIL-A-5092 shall be applied to both sides of the gaskets in the vicinity of the bolt holes.

3.3.1.1.4.3.3 Water vaporproof barrier.- Barrier material specified in 3.3.1.1.4.2.3 shall be positioned on the base as shown in Figure 4.

3.3.1.1.4.3.4 Support block.- A support block constructed as shown in Figure 3, shall be positioned on the barrier material as shown in Figure 4.

3.3.1.1.4.3.5 Securing computer assembly to base.- The computer assembly shall be secured to the base by means of bolts and a metal clamp as shown in Figure 5. Both flat and lock washers shall be used under each nut. The exposed threads above the nuts shall be coated with unthinned paint to prevent nuts from backing off.

3.3.1.1.4.3.6 Cushioning.- The projecting surfaces of the computer assembly and the exposed threads which may rupture or abrade the water vaporproof barrier or desiccant shall be covered with cellulosic cushioning material conforming totype III, class B of Specification PPP-C-843 minimum 1/2 inch thickness as shown in Figure 6.

3.3.1.1.4.3.7 Desiccant.- Desiccant shall conform to Specification MIL-D-3464. The required units of desiccant shall be determined by Formula I of Specification MIL-P-116. Secure desiccant to assembly as shown in Figure 6.

3.3.1.1.4.3.8 Humidity indicator.- A humidity indicator conforming to Standard MS 20003 shall be secured to the unit, as far as possible from the nearest unit of desiccant.

3.3.1.1.4.3.9 Closure of barrier.- Final closure of water vaporproof barrier shall be as specified in 3.3.1.1.4.2.3 and as shown in Figure 7.

3.3.1.2 Computing sight, without equipment.

3.3.1.2.1 Cleaning.- All items listed in 3.2.1 shall be cleaned as specified in 3.3.1.1.1.

Source: https://assist.dla.mil -- Downloaded: 20261O-18T03:21Z
Check the source to verify that this is the current version before use.

3.3.1.2.2 Drying.- Drying shall be as specified in 3.3.1.1.2.

3.3.1.2.3 Preservative application.- The exposed surfaces of the mount assembly, the elevation drag link assembly, and the disassembled hardware shall be preserved as specified in 3.3.1.1.3.

3.3.1.2.4 Unit packaging.

3.3.1.2.4.1 Preserved items.- The preserved surfaces shall be covered with barrier material conforming to type I or II, grade A of Specification MIL-B-121. The packaged hardware shall be secured to the mount assembly with pressure sensitive tape conforming to Specification PPP-T-60.

3.3.1.2.4.2 Computer assembly.- The computer assembly shall be packaged as specified in 3.3.1.1.4.3 thru 3.3.1.1.4.3.9.

3.3.1.2.4.3 Reflex sight.- The unit protection shall be Method IIc of Specification MIL-P-116. The covered glass surfaces of the sight shall be surmounted with cellulosic cushioning material conforming to type III, class B of Specification PPP-C-843 after which the sight shall be completely wrapped with neutral lens tissue conforming to Specification UU-P-313.

3.3.1.2.4.3.1 Reflectors.- The cleaned and wrapped reflectors shall be individually overwrapped with a minimum 1/4 inch cellulosic cushioning material conforming to type III, class B of Specification PPP-C-843. Both reflectors shall be immobilized in one set-up box, conforming to Specification PPP-B-676. The packaged reflectors shall be secured to the wrapped sight with pressure sensitive tape.

3.3.1.2.4.3.2 Cushioning material.- The sight shall be overwrapped with a minimum of 1/2 inch thick cellulosic cushioning material conforming to type III, class B of Specification PPP-C-843.

3.3.1.2.4.3.3 Desiccant.- Desiccant shall conform to Specification MIL-D-3464. The required units of desiccant shall be determined by Formula I of Specification MIL-P-116. Secure desiccant to cushioned wrapped sight.

3.3.1.2.4.3.4 Water vaporproof barrier.- The sight shall be placed inside a barrier as specified in 3.3.1.1.4.2.3. Closure of the barrier shall be as specified in 3.3.1.1.4.2.3.

3.3.1.2.4.3.5 Fiberboard container.- The bagged reflex sight shall be immobilized in a fiberboard container specified in 3.3.1.1.4.2.4. Closure of the container shall be as specified in 3.3.1.1.4.2.4.

3.3.2 Level C.- Cleaning, drying, preservative application and packaging shall be in accordance with the manufacturer's commercial practice, when adequate, except the computer assembly shall be packaged

Source: https://assist.dla.mil -- Downloaded: 20260-18T03:21Z
Check the source to verify that this is the current version before use.

Method III of Specification MIL-P-116 and as specified in 3.3.1.1.4.3, 3.3.1.1.4.3.1, 3.3.1.1.4.3.4 and 3.3.1.1.4.3.5.

3.4 Packing.

3.4.1 Level A, B, C.

3.4.1.1 Computing sight, with equipment.

3.4.1.1.1 Elevating drag link assembly.- The rod assembly shall be secured to the base as shown in Figure 7, with steel strapping.

3.4.1.1.2 Support 7665204 with Bracket 7665213.- The support and bracket shall be secured to the base as shown in Figure 7, with metal clamps.

3.4.1.1.3 Mount assembly.- Four step bolts 1/2 inch diameter by 5 inches long, shall be placed through the remaining holes in the base. Grade A barrier material specified in 3.3.1.1.4.1 shall be placed over the bolts on the base and the mount shall be positioned as shown in Figure 8. Auxiliary support blocks shall be constructed as shown in Figure 9. The support blocks shall be nailed to the base and the mount assembly shall be secured as indicated in Figure 10. Both flat and lock washers shall be used under each nut. The exposed threads above the nuts shall be coated with unthinned paint to prevent nuts from backing off.

3.4.1.1.4 Cover.- Cover specified in 3.2.2(b), shall be secured to the mount assembly.

3.4.1.1.5 Accessory chest.- The packaged accessory chest shall be blocked on the base as indicated in Figure 11.

3.4.1.1.6 Shipping container.- The sides, ends and top of shipping container shall be constructed and assembled to the base as shown in Figures 11, 12, 13, 14 and 15 using lumber specified in 3.3.1.1.4.3.1. The top shall be nailed in position so that the protruding cleat will press firmly against the accessory chest package. The container shall be strapped as shown in Figure 15, with flat steel strapping 3/4 inch by .023 inches, conforming to type I, class A or B of Specification QQ-S-781. Strapping shall be stapled in accordance with Appendix of Specification PPP-B-621.

3.4.1.2 Computing sight, without equipment.- The computing sight, without equipment shall be packed as specified in 3.4.1.1.1, 3.4.1.1.3 and 3.4.1.1.6. The packaged reflex sight shall be secured to the base with steel strapping.

3.5 Marking.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:21Z
Check the source to verify that this is the current version before use.

3.5.1 Normal markings.- Unit packages and shipping containers shall be marked in accordance with the requirements of Standard MIL-STD-129. The serial number of the computing sight shall appear with the basic marking applied to the shipping container.

3.6 Pilot pack.- Prior to quantity packaging production, a pilot pack, consisting of a complete and packed shipping container, shall be submitted to the Government inspector to determine conformance with the requirements of this specification.

3.7 Workmanship.- Adequate controls shall be utilized to check for contamination of cleaning solvents and preservatives. Wraps shall be neat, conforming and firmly secured. Tape shall be uniformly applied to interior boxes and shall completely cover and adhere to all joints and seams. Shipping containers shall be free of protruding staples, screws, nails, etc. Strapping shall be applied perpendicular to the sides of the container just prior to shipment and shall not cover any container marking. Irrelevant marking shall be neatly obliterated. Visual observation shall indicate that the application of specified materials and methods are practical and will not result in packaging or packing deficiencies.

4. QUALITY ASSURANCE PROVISIONS

4.1 General quality assurance provisions.

4.1.1 Unless otherwise specified herein, the supplier is responsible for the performance of all inspection requirements prior to submission for Government inspection and acceptance. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. Inspection records of the examinations and tests shall be kept complete and available to the Government as specified in the contract or order.

4.1.2 Contractor quality assurance system.- The contractor shall provide and maintain an effective quality assurance system acceptable to the Government covering the supplies under this contract. A current written description of the system shall be submitted to the contracting officer prior to initiation of production. The written descritpion will be considered acceptable when, as a minimum, it provides the quality assurance required by the specification and other documents referenced in this specification. The contractor will not be restricted to the inspection station or to the method of inspection listed provided that the substitute procedures will provide, as a minimum, the quality assurance required in the contractual documents. In cases of dispute as to whether certain procedures of the system provide equal assurance, the comparable procedure of this specification shall be used. The contractor shall notify the Government of, and obtain approval for, any change to the written procedure that affects the degree of assurance required by this specification or other documents referenced therein.

Source: https://assist.dla.mil -- Downloaded: 202610-18T03:21Z
Check the source to verify that this is the current version before use.

4.1.3 Government verification.- All quality assurance operations performed by the contractor will be subject to Government verification at unscheduled intervals. Verification will consist of surveillance of the operations to determine whether the practices, methods, and procedures of the written inspection plan are being properly applied, and Government product inspection, when deemed necessary by the Government to measure quality product offered for acceptance. Deviation from the prescribed or agreed-upon procedures, or instances of poor practices which might have an affect upon the quality of the product will immediately be called to the attention of the contractor. Failure of the contractor to promptly correct deficiencies discovered will be cause for suspension of acceptance until correction has been made or until conformance of product to prescribed criteria has been demonstrated. To avoid interference with operations, the contractor will designate a responsible official or officials to whom the Government inspector will report such instances.

4.2 Inspection provisions.

4.2.1 Control of materials.- Materials shall be tested to determine conformance to contractually applicable specifications. Such tests may be conducted in the prime contractor's or subcontractor's facilities, or in other suitably equipped laboratories. The test results shall be available to the Government inspector for review. Certified test reports, identifiable with the material, may be accepted in lieu of repeated tests. The Government reserves the right, in any case, to require retests to assure that the materials are acceptable.

4.2.2 Lot formation.- Unless otherwise specified by the contracting officer, or his representative, inspection lot sizes and lot formation shall be in accordance with Standard MIL-STD-105.

4.3.2 Examination.- The applicable classification of defects listed in the following tables shall constitute the minimum inspection requirements to be performed prior to acceptance.

4.2.3.1 All rejected lots shall be screened for all defective characteristics. After corrections have been made and the Government inspector informed of the corrected action taken, the lot shall be resubmitted for acceptance inspection as outlined in Standard MIL-STD-105.

TABLE I - CLASSIFICATION OF DEFECTS

Sight, Computing M38 w/Equipment

(Use Inspection Level II, and Sampling Plan Table IV-A of Standard MIL-STD-105)

(Use Inspection Level L7, and Sampling Plan Table IV-A of Standard MIL-STD-105 for Reduced Inspection)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:21Z
Check the source to verify that this is the current version before use.

Major	AQL 2.5	Req. Par.	Test Method
1.	Improper disassembly of Computing Sight M38	3.2.2	Visual
2.	Improper cleaning	3.3.1.1.1	Visual
3.	Improper preservative application of mount assembly, support with bracket, elevation drag link assembly and the spare drive band	3.3.1.1.3	Visual
4.	Improper covering of components with barrier material. Improper securing of barrier material	3.3.1.1.4.1	Visual
5.	Improper unit protection of chest	3.3.1.1.4.2	Visual
6.	Improper quantity of desiccant	3.3.1.1.4.2.1	Visual
7.	Chest not immobilized; improper closing of container; container corners not blunted; improper container	3.3.1.1.4.2.2	Visual
8.	Improper water-vaporproof barrier; excessive air not removed; insufficient material	3.3.1.1.4.2.3	Visual
9.	Pre-packaged chest not immobilized in outer container; improper sealing of interior joints and exterior seams; improper container	3.3.1.1.4.2.4	Visual
10.	Improper unit protection of computer assembly; improper setting of dials and bail; securing of cover; improper securing of cushioning; improper covering of joint assembly, adapter and housing with barrier material	3.3.1.1.4.3	Visual
11.	Improper fabrication of base	3.3.1.1.4.3.1	SME-Visual
12.	Gaskets not positioned properly; improper application of adhesive to gasket	3.3.1.1.4.3.2	Visual
13.	Improper positioning of barrier material on base; improper fabrication of barrier; excessive air not removed	3.3.1.1.4.3.3	Visual
14.	Improper securing of computer to base; washers missing; improper coating of exposed threads	3.3.1.1.4.3.5	Visual

Source: https://assist.dla.mil -- Downloaded: 202610-18T03:21Z
Check the source to verify that this is the current version before use.

Major	AQL 2.5 (cont'd)	Req. Par.	Test Method
15.	Improper cushioning of exposed threads; improper thickness of cushioning	3.3.1.1.4.3.6	Visual
16.	Improper quantity of desiccant; improper securing of desiccant	3.3.1.1.4.3.7	Visual
17.	Improper positioning of humidity indicator	3.3.1.1.4.3.8	Visual
18.	Improper closure of barrier	3.3.1.1.4.3.9	Visual
19.	Elevation drag link improperly secured	3.4.1.1.1	Visual
20.	Support with bracket improperly secured	3.4.1.1.2	Visual
21.	Improper step bolts; barrier material missing; missing washers; improper securing of support blocks to base; exposed threads not coated	3.4.1.1.3	Visual
22.	Improper securing of cover to mount	3.4.1.1.4	Visual
23.	Improper fabrication of shipping container; improper strapping; improper stapling	3.4.1.1.6	Visual
24.	Improper marking	3.5.1	Visual
Minor	AQL 4.0		
41.	Improper support blocks	3.3.1.1.4.3.4	Visual
42.	Improper blocking of packaged accessory chest	3.4.1.1.5	Visual
43.	Workmanship	3.7	Visual

SPECIAL CHARACTERISTICS

All materials	Certification

TABLE II - CLASSIFICATION OF DEFECTS

Sight, Computing M38 w/o Equipment

(Use Inspection Level II, and Sampling Plan Table IV-A of Standard MIL-STD-105)

(Use Inspection Level L7 and Sampling Plan Table IV-A of Standard MIL-STD-105 for Reduced Inspection)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:21Z
Check the source to verify that this is the current version before use.

Major AQL 2.5		Req. Par.	Test Method
1.	Improper disassembly of Computing Sight M38	3.2.1	Visual
2.	Improper cleaning	3.3.1.2.1	Visual
3.	Improper preservative application of mount assembly, elevating drag link and disassembled hardward	3.3.1.2.3	Visual
4.	Improper barrier covering of preserved items; improper securing of hardware to mount assembly	3.3.1.2.4.1	Visual
5.	Improper unit protection of computer assembly, (Classification of Defects 11 to 18 inclusive of Table I applicable)	3.3.1.2.4.2	Visual
6.	Improper unit protection; improper application of lens tissue; improperly cushioned	3.3.1.2.4.3	Visual
7.	Improper cushioning not immobilized; improper securing of packaged reflectors to wrapped sight	3.3.1.2.4.3.1	Visual
8.	Improper cushioning thickness	3.3.1.2.4.3.2	Visual
9.	Improper desiccant quantity; improper securing of dessicant	3.3.1.2.4.3.3	Visual
10.	Improper fabrication of vapor-proof barrier; improper positioning of sight in barrier; excessive air not removed	3.3.1.2.4.3.4	Visual
11.	Sight Reflex not immobilized; improper sealing of interior joints and exterior seams	3.3.1.2.4.3.5	Visual
12.	Elevation drag link improperly secured	3.4.1.1.1	Visual
13.	Improper step bolts; missing barrier material and washers; improper securing of support blocks to base; exposed threads not coated	3.4.1.1.3	Visual
14.	Improper fabrication of shipping container; improper strapping and stapling	3.4.1.1.6	Visual
15.	Improper marking	3.5.1	Visual
Minor	**AQL 4.0**		
41.	Improper support block	3.3.1.1.4.3.4	SMR-Visual
42.	Workmanship	3.7	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:21Z
Check the source to verify that this is the current version before use.

SPECIAL CHARACTERISTICS

All materials	Certification

4.3 Level "C" cleaning, drying, preservation, and packaging.- Due to the variance of cleaning, drying, preservation, and packaging that would conform to this level of cleaning, drying, preservation, and packaging, the contractor must submit his intended cleaning, drying, preservation, and packaging methods and inspection procedures to the procuring activity for approval, and for the preparation of classification of defects (CD's) and acceptable quality levels (AQL's).

4.4 Test methods and procedures.

4.4.1 Pilot pack.- Pilot pack shall be subjected to the following test and also to the applicable test outlined in Table I or II. The inspection for these tests will be performed by the contractor and witnessed by the Government to determine conformance with applicable requirements of this specification.

SPECIAL CHARACTERISTICS FOR PILOT PACK ONLY

Quick leak	Test methods of MIL-P-116
Heat sealing	Test methods of MIL-P-116

4.4.2 Pilot pack failure.- Should the pilot pack fail to pass the Government acceptance inspection, production of those components causing rejection, will cease until the defective characteristic(s) have been corrected in the process used to produce the pilot pack. When corrections have been made in the process, a new pilot pack shall be submitted for acceptance inspection. All rejected pilot packs shall be corrected by the contractor and resubmitted as part of the first production lot submitted for inspection after acceptance of a pilot pack.

5. PREPARATION FOR DELIVERY

There are no applicable requirements.

6. NOTES

6.1 Ordering data.- Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Applicable stock number.
c. Selection of applicable levels of preservation and packaging, and packing.

6.2 Definitions.

Source: https://assist.dla.mil -- Downloaded: 202640-18T03:21Z
Check the source to verify that this is the current version before use.

6.2.1 Standard measuring equipment (SME).- Standard measuring equipment (SME) includes the common, hand-type measuring devices which are usually stocked by commercial supply houses for ready supply (shelf items), and which are normally used by an inspector to perform dimensional inspection of items under procurement. This category also includes commercial testing equipment.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder, or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any invention that may in any way be related thereto.


Custodian:

Army - Ordnance Corps

Preparing Activity:

Army - Ordnance Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:21Z
Check the source to verify that this is the current version before use.

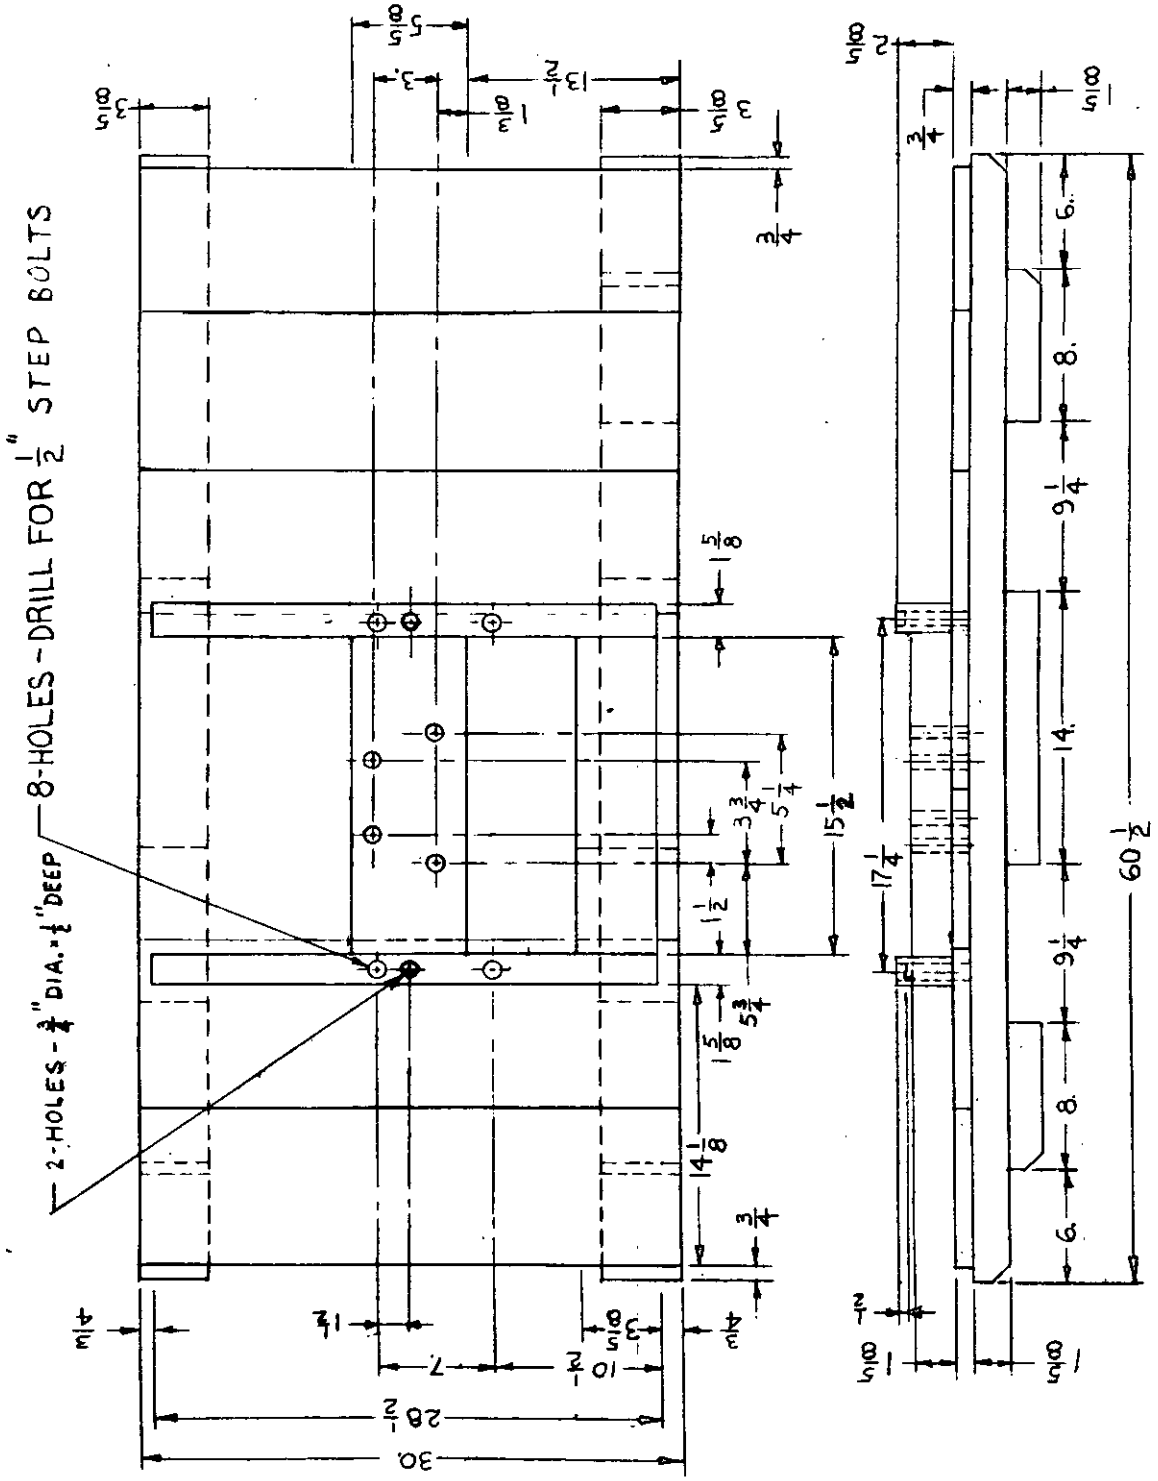

ORD CORPS

FRANKFORD ARSENAL

FIGURE 1

BASE.

Source: https://assist.dla.mil -- Downloaded: 202610-18T03:21Z
Check the source to verify that this is the current version before use.


ORD. CORPS

FRANKFORD ARSENAL

GASKETS AND BOLTS FOR COMPUTER ASSEMBLY POSITIONED ON BASE.

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 202640-18T03:21Z
Check the source to verify that this is the currentversion before use.

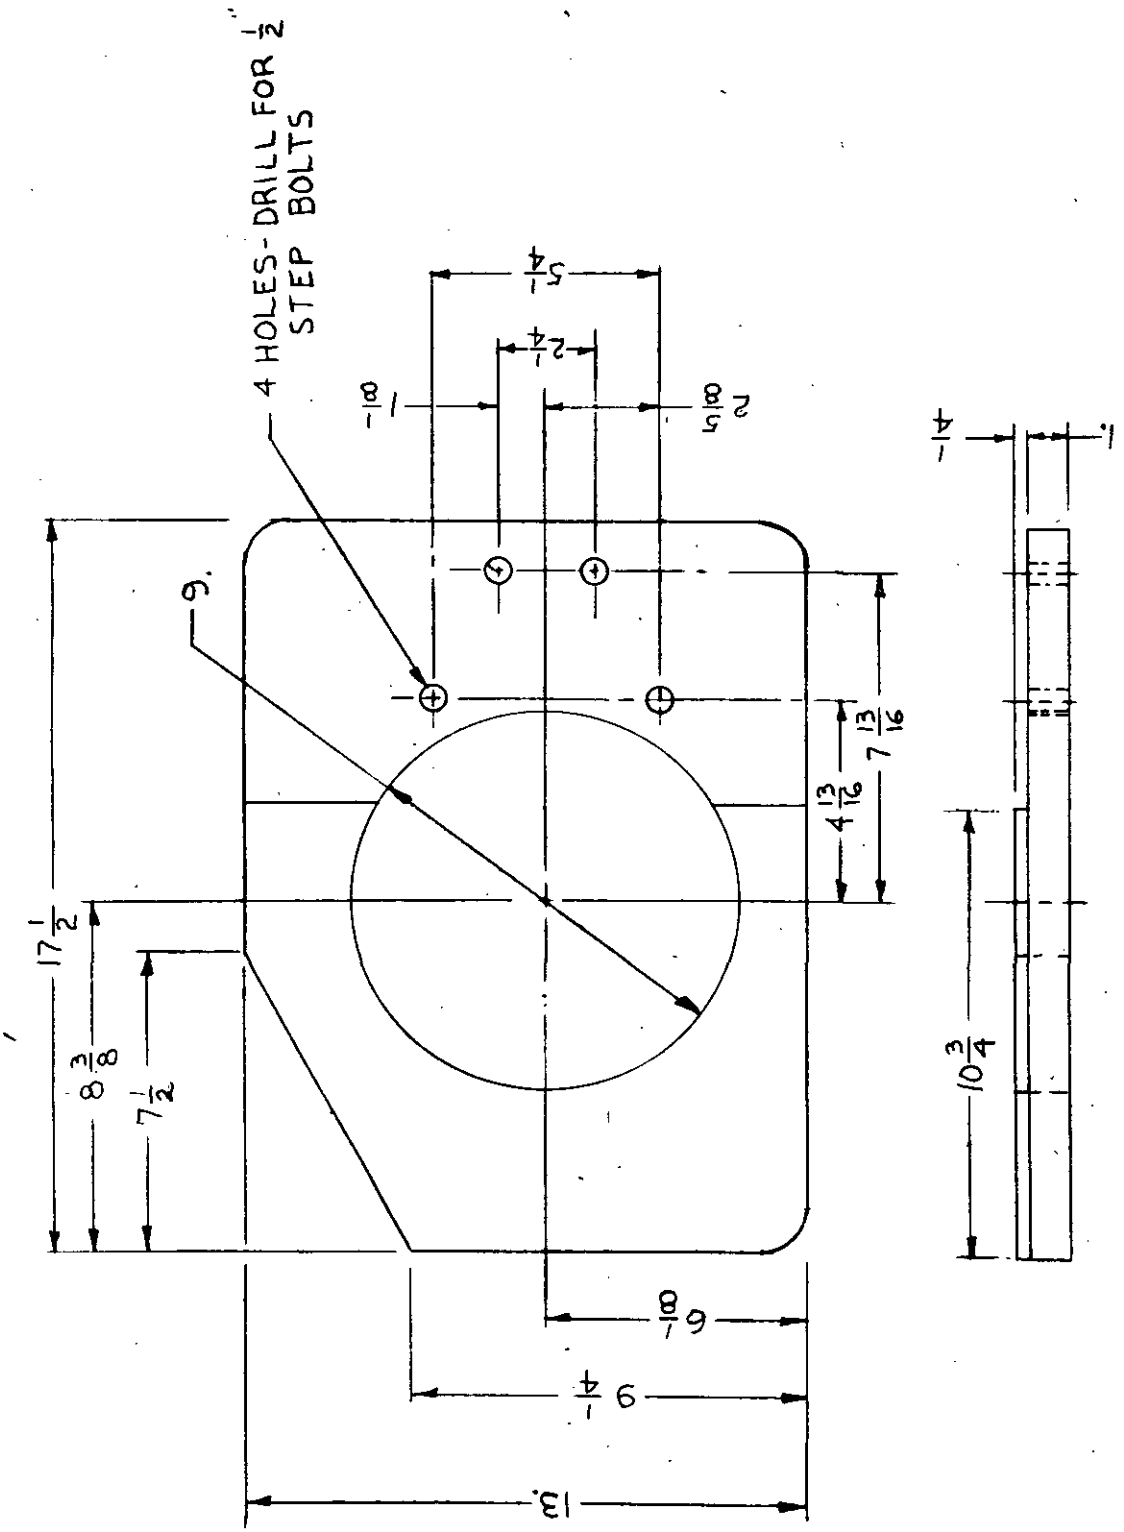


SUPPORT BLOCK FOR COMPUTER ASSEMBLY

FRANKFORD ARSENAL

ORD CORPS

FIGURE 3


Source: https://assist.dla.mil -- Downloaded: 202640-18T03:21Z
Check the source to verify that this is the current version before use.

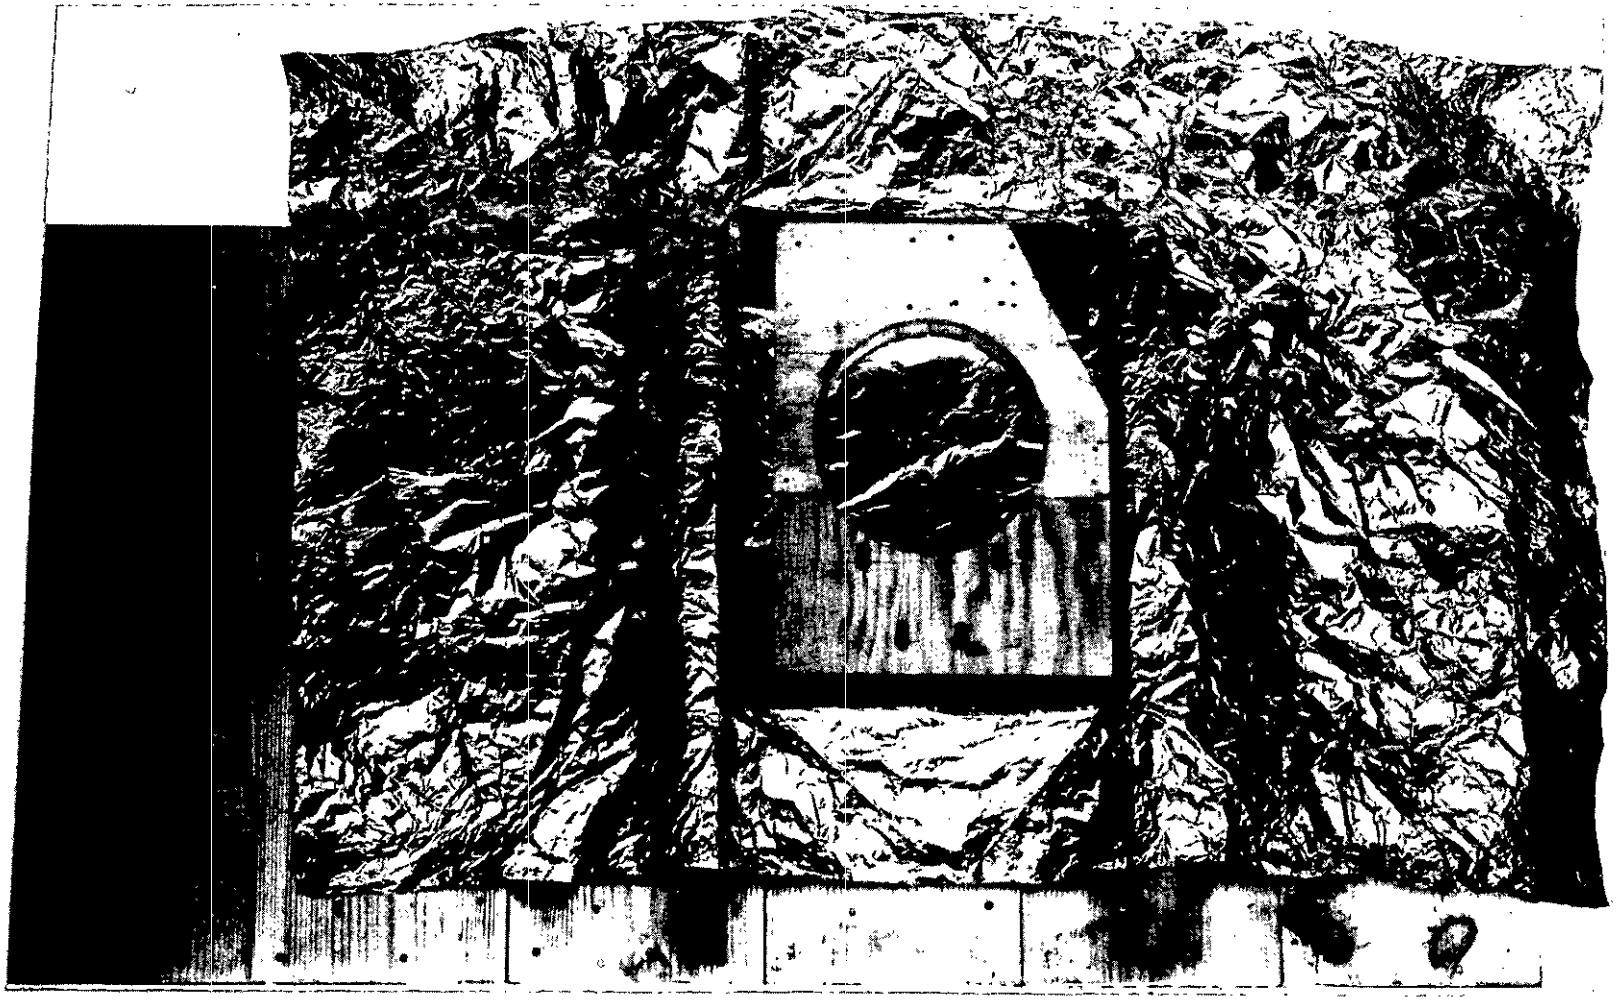

FRANKFORD ARSENAL ORD. CORPS

BARRIER, GASKETS, AND SUPPORT BLOCK FOR COMPUTER ASSEMBLY POSITIONED ON THE BASE.
FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:21Z
Check the source to verify that this is the current version before use.

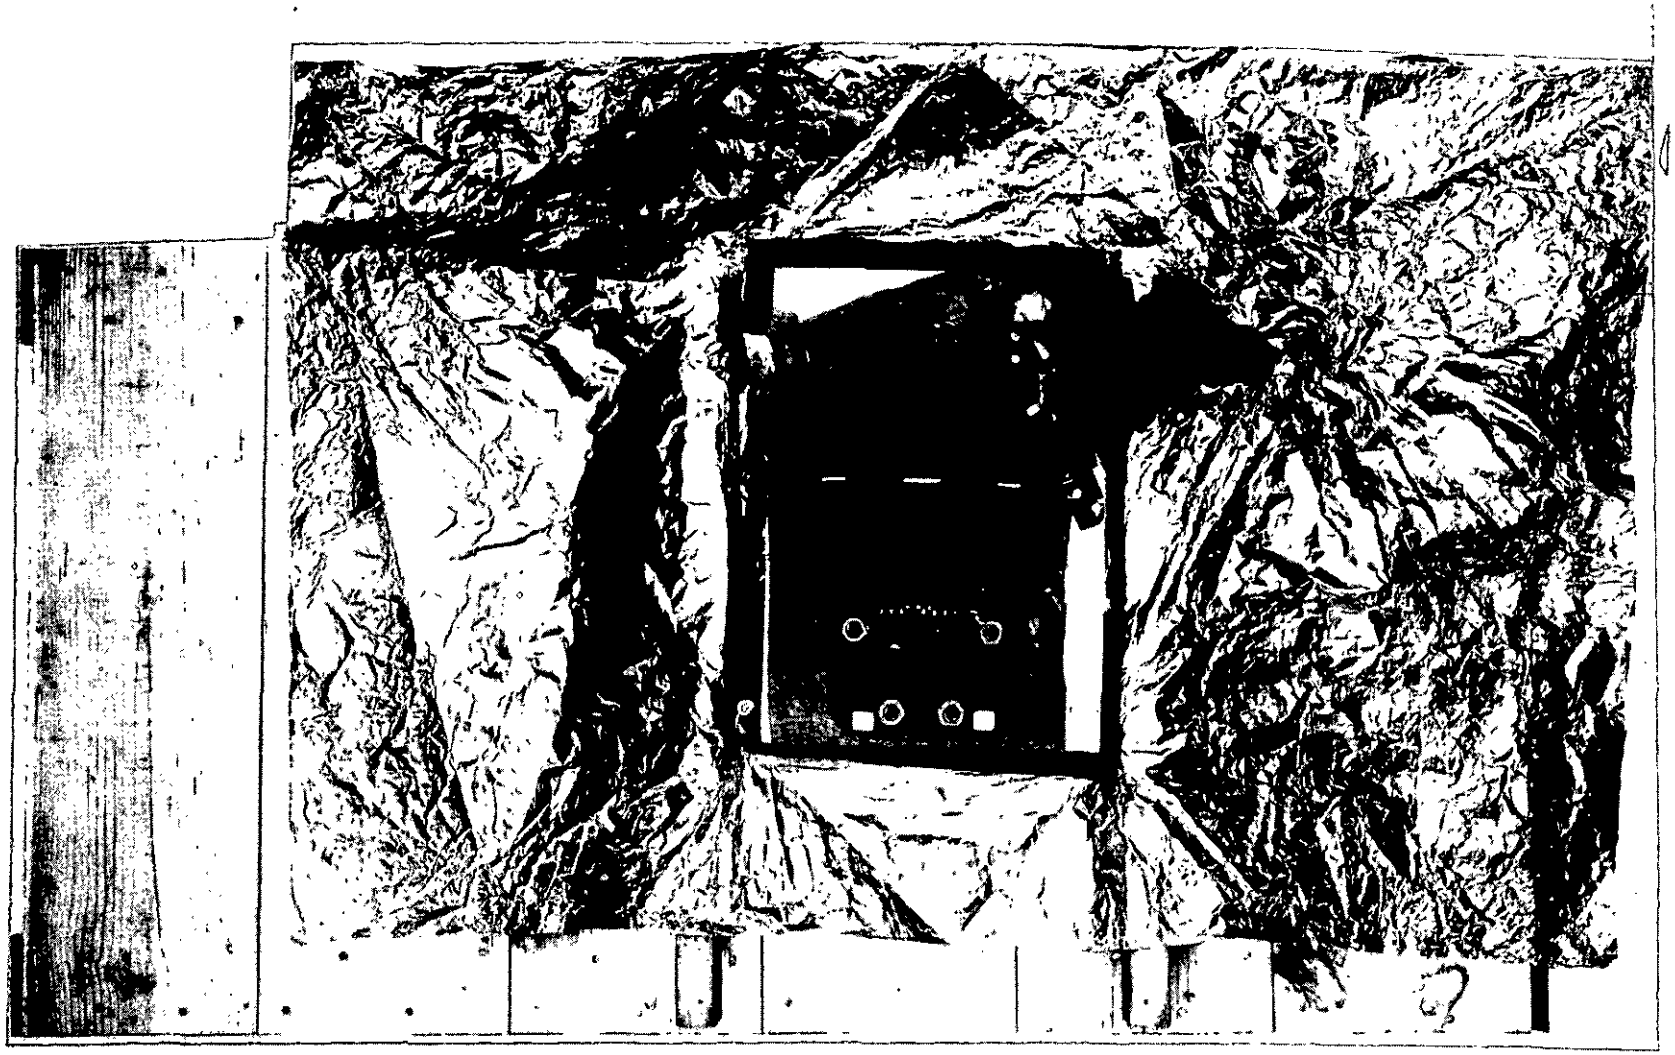

FRANKFORD ARSENAL ORD. CORPS

COMPUTER ASSEMBLY SECURED TO BASE.

FIGURE 5


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:21Z
Check the source to verify that this is the current version before use.

ORD. CORPS

FRANKFORD ARSENAL

DESICCANT SECURED AND PROJECTING SURFACES OF THE COMPUTER ASSEMBLY CUSHIONED.
FIGURE 6


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:21Z
Check the source to verify that this is the current version before use.

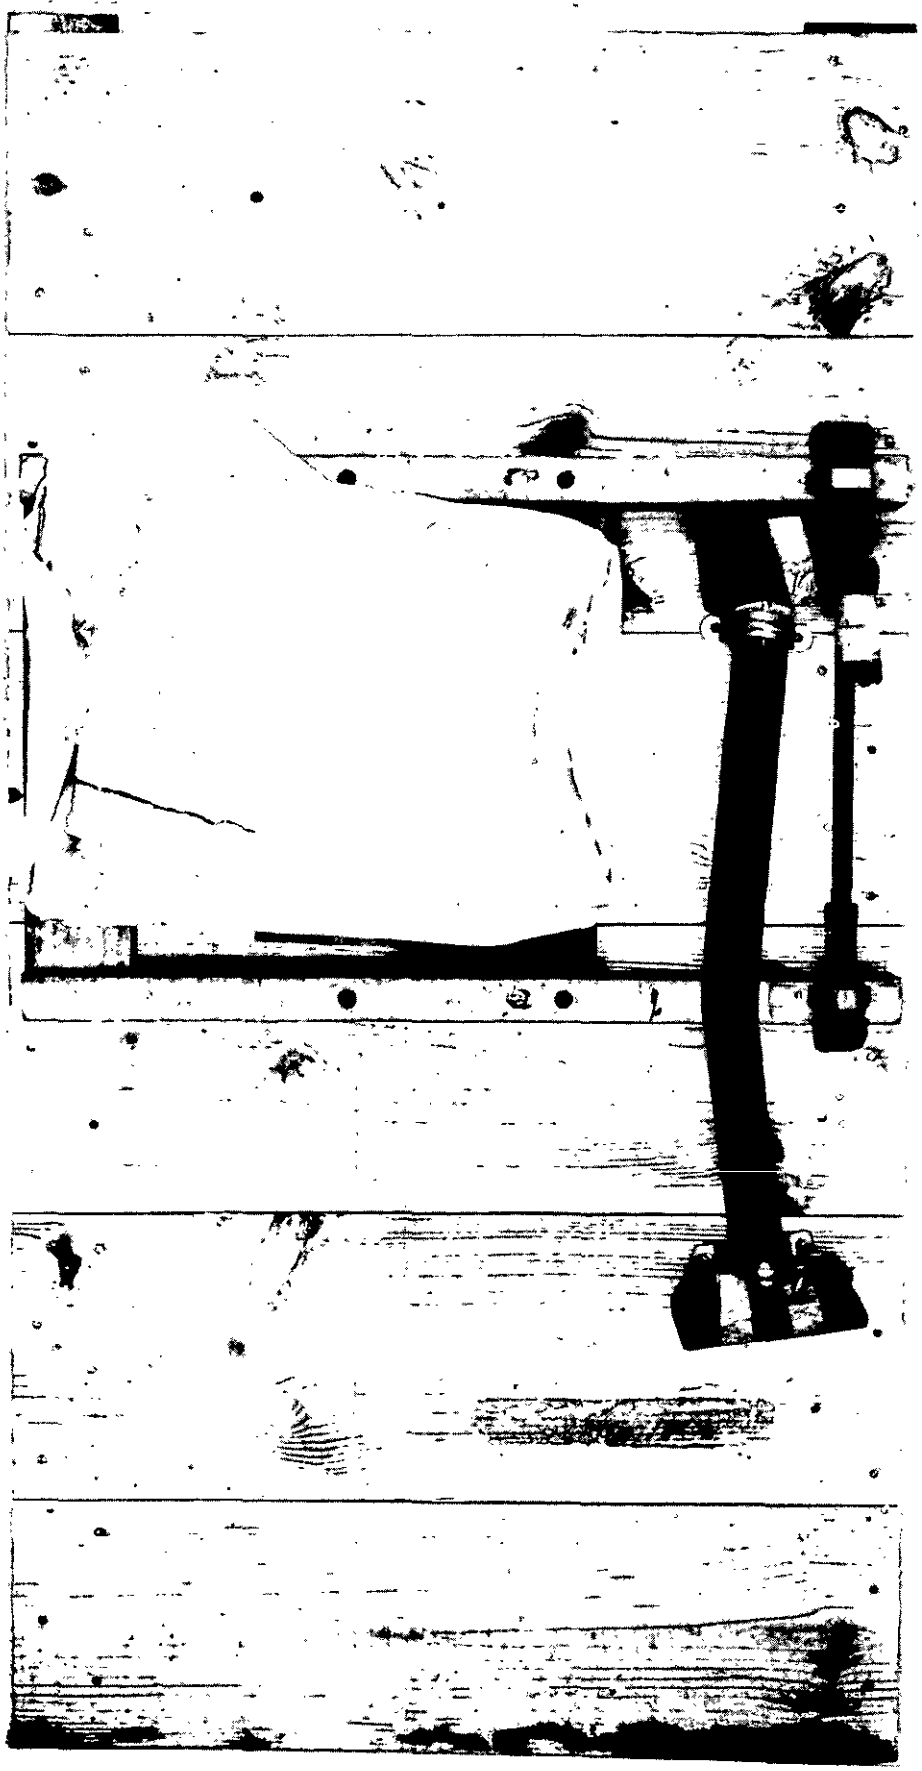

FRANKFORD ARSENAL ORD. CORPS

BARRIER SEALED; ALSO, SUPPORT ASSEMBLY WITH BRACKET, AND ROD ASSEMBLY SECURED TO BASE.
FIGURE 7

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:21Z
Check the source to verify that this is the current version before use.

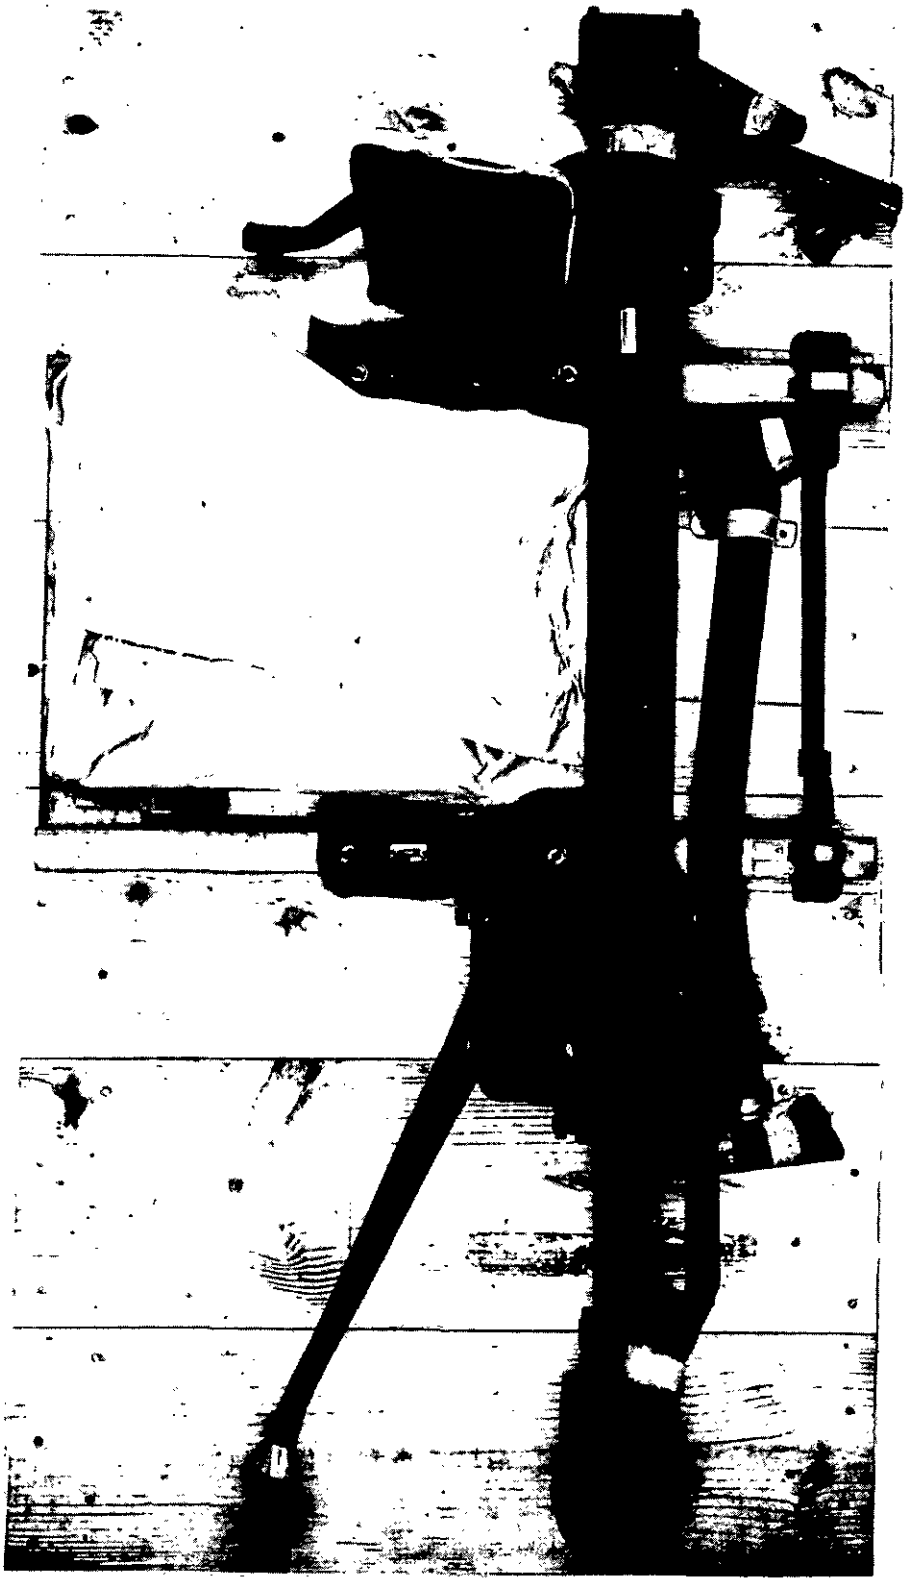


COMPUTING SIGHT POSITIONED ON BASE.

FRANKFORD ARSENAL ORD. CORPS

FIGURE 8

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:21Z
Check the source to verify that this is the current version before use.

NOTE: AUXILIARY SUPPORT BLOCKS SHALL BE NAILED IN POSITION AS INDICATED IN FIGURE 10 .

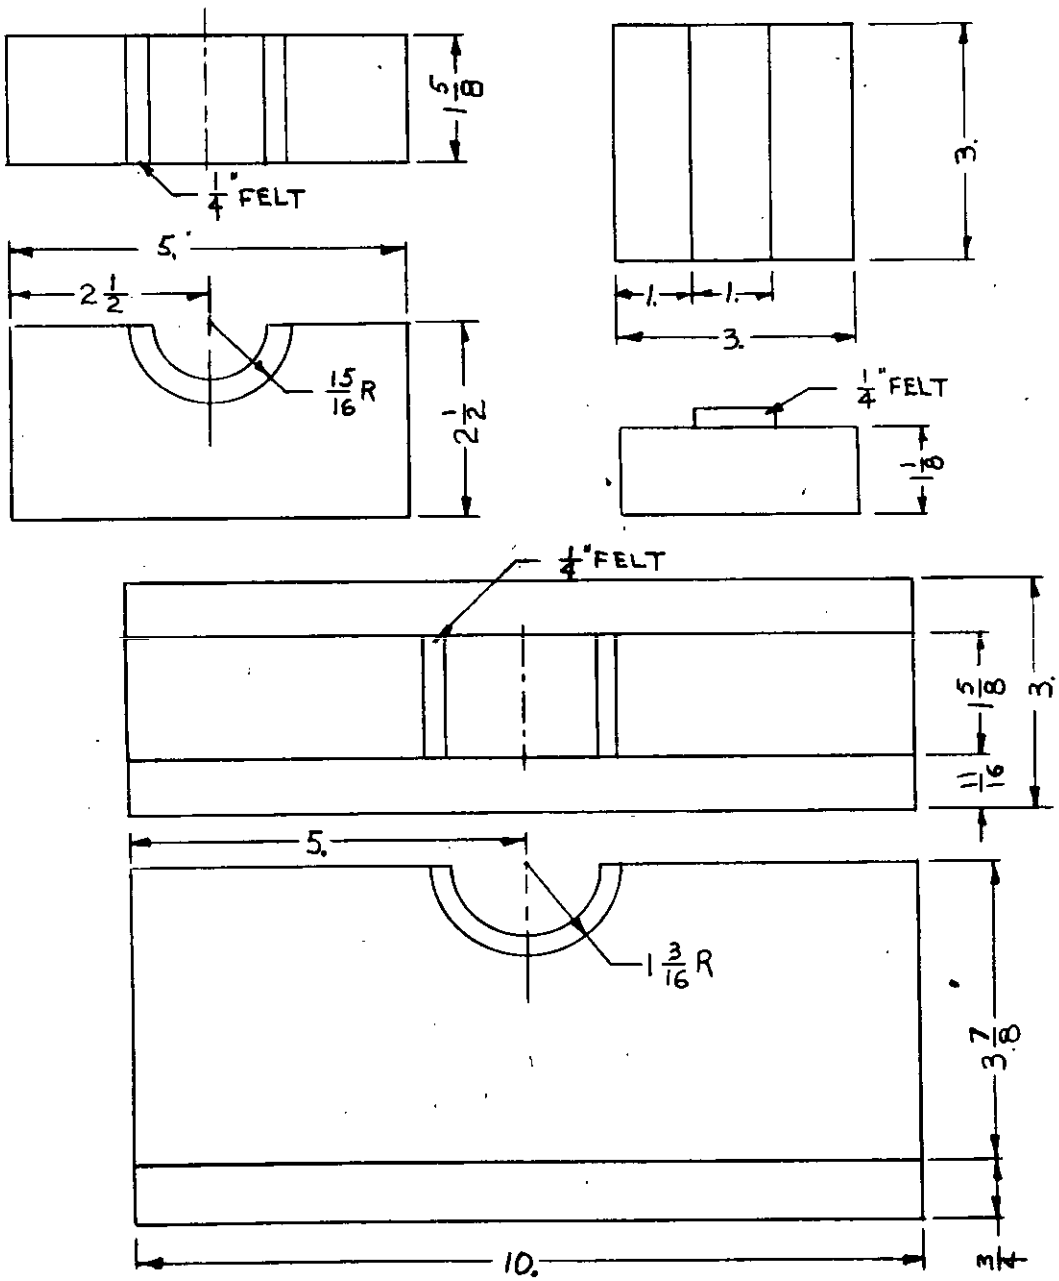


FRANKFORD ARSENAL ORD CORPS

AUXILIARY SUPPORT BLOCKS

FIGURE 9

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:21Z
Check the source to verify that this is the current version before use.

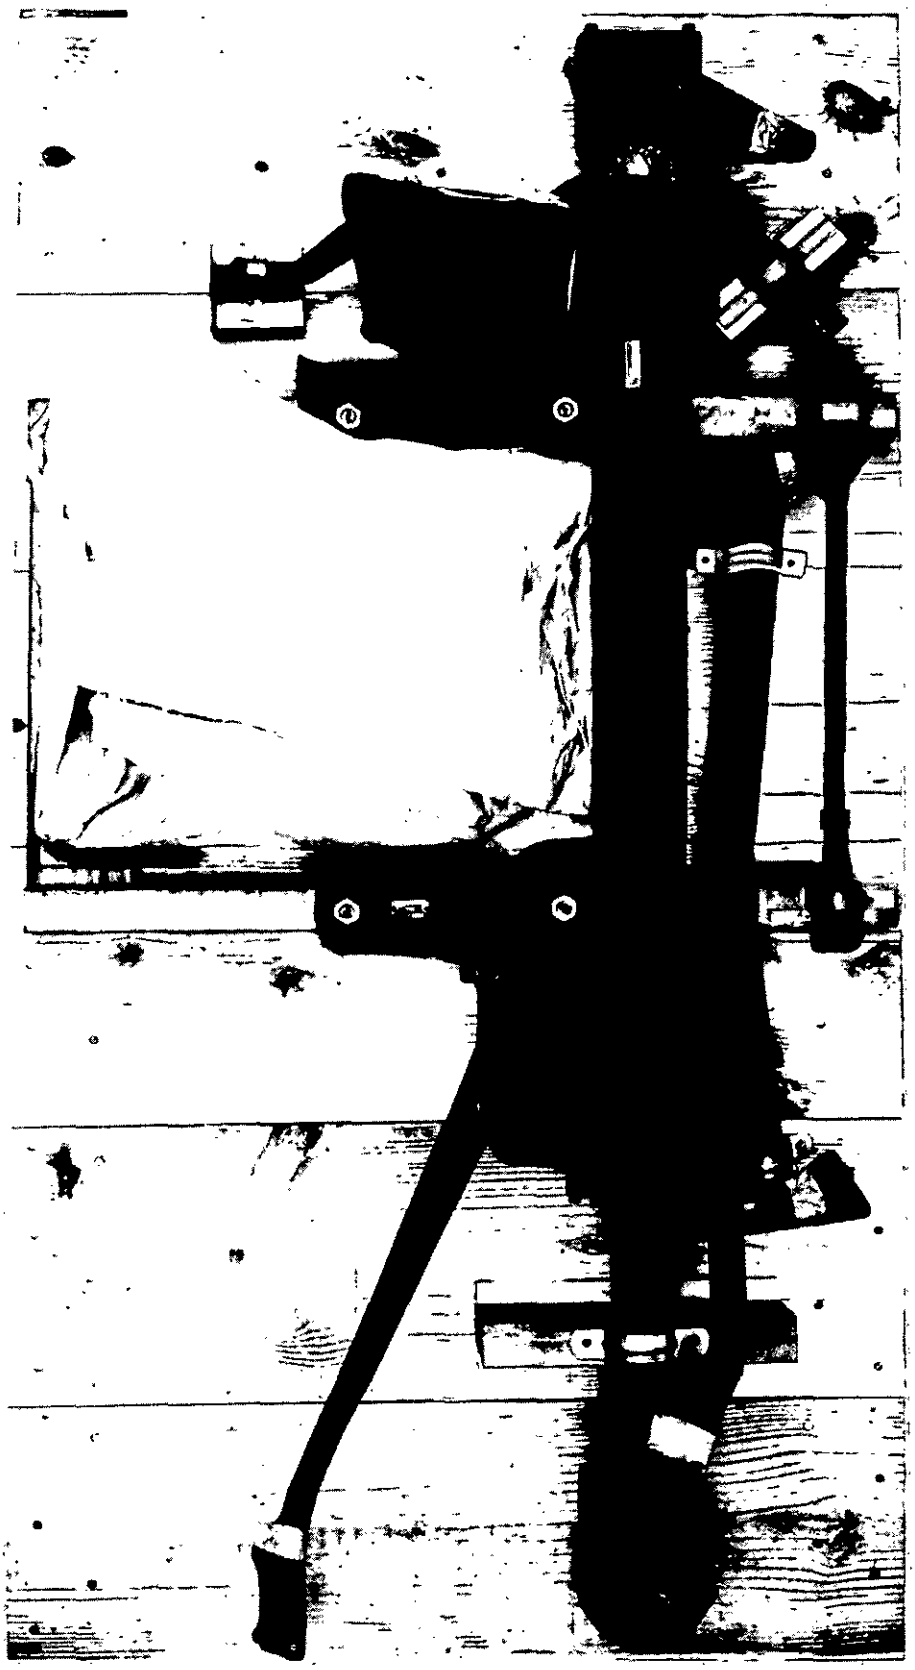


FRANKFORD ARSENAL ORD. CORPS

FIGURE 10

COMPUTING SIGHT SECURED TO BASE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:21Z
Check the source to verify that this is the current version before use.

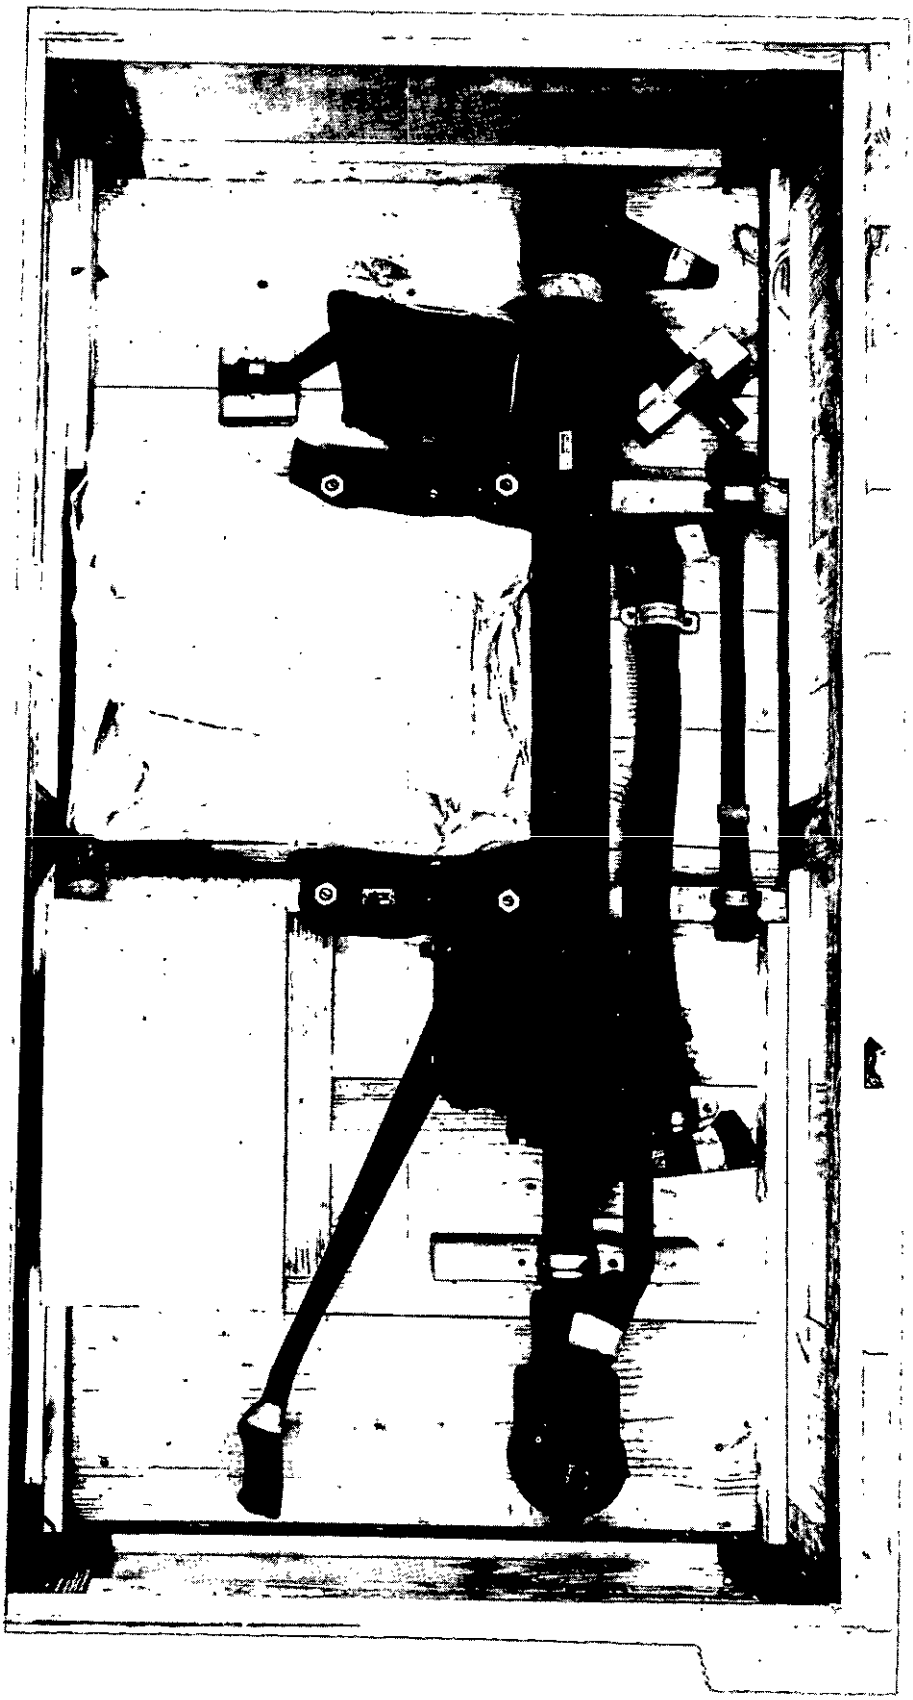


ACCESSORY CHEST PACKAGE BLOCKED ON BASE AND SHIPPING CONTAINER SIDES AND ENDS SECURED.
FIGURE 11

FRANKFORD ARSENAL ORD. CORPS

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:21Z
Check the source to verify that this is the current version before use.

NOTE: ALL SHEATHING SHALL BE NOMINAL 1 INCH. ALL CLEATS SHALL BE NOMINAL 1 X 3 INCH LUMBER

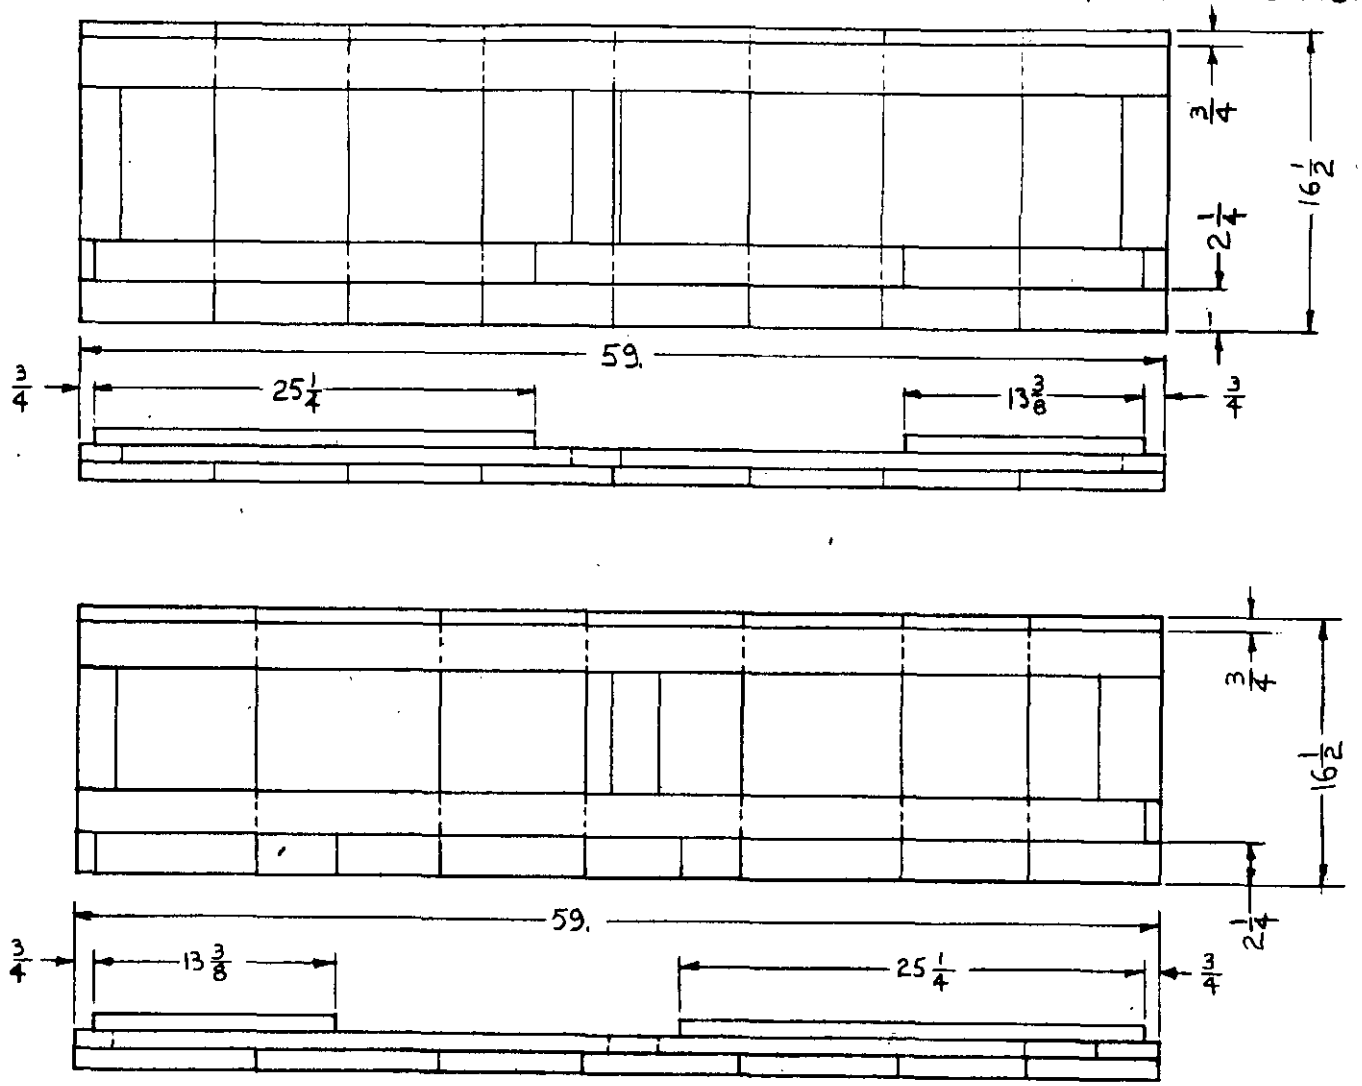

FRANKFORD ARSENAL ORD CORPS

SIDES

FIGURE 12

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:21Z
Check the source to verify that this is the current version before use.

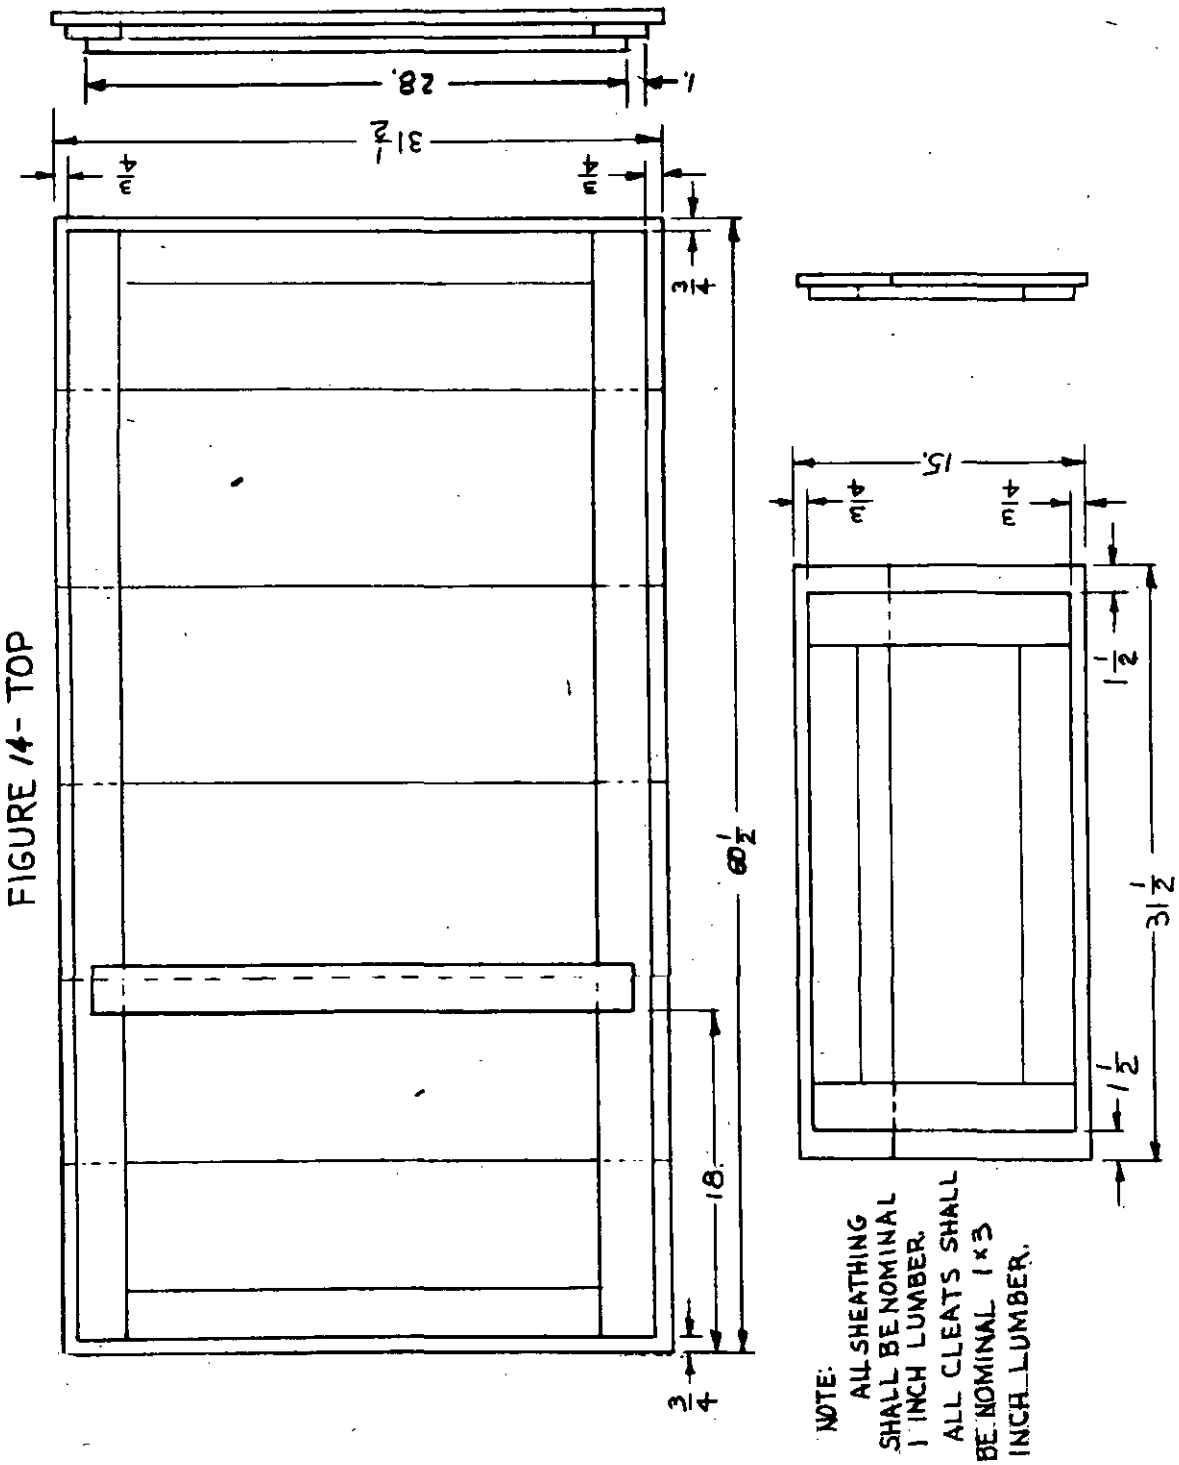


FIGURE 14- TOP

ORD CORPS

FRANKFORD ARSENAL

FIGURE 13

ENDS

Source: https://assist.dla.mil -- Downloaded: 202610-18T03:21Z
Check the source to verify that this is the current version before use.

ORD. CORPS

FRANKFORD ARSENAL

TOP NAILED IN POSITION AND CONTAINER STRAPPED AND STAPLED.
FIGURE 15

GLO 876316

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:21Z
Check the source to verify that this is the current version before use.