
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

NOTICE: When Government drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all concurrent standard drawings for the product and shall become effective for the procurement of aeronautical supplies, or for use in new designs, not later than 6 months after the latest date of approval shown.

FED. SUP CLASS. 5315

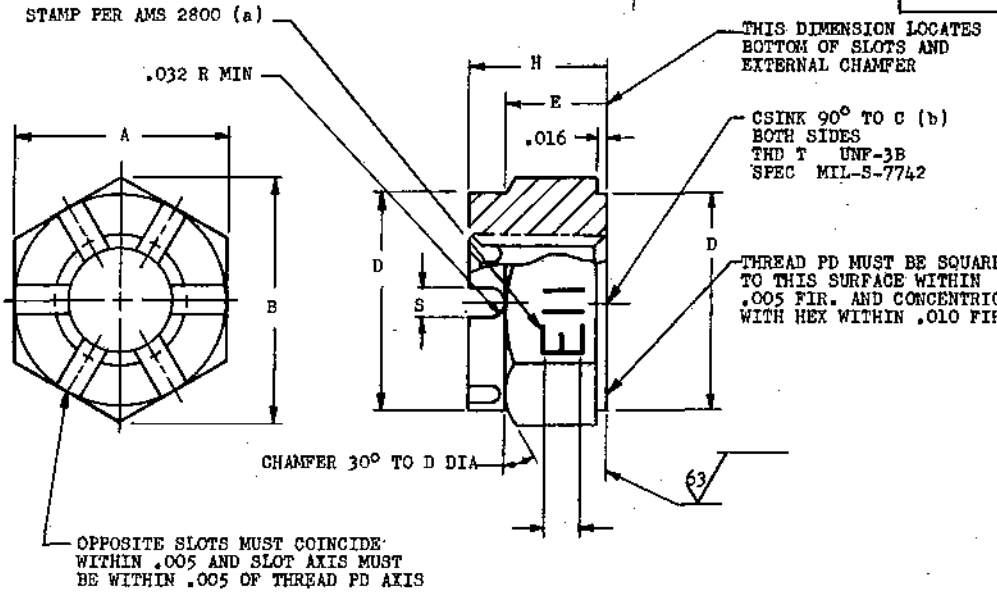

THD T	A		B	C	D	E	F	H	S	APPROX WT LBS/100	PART NO.
	MIN	MAX	MIN								
.190(no-10)-32	.367	.376	.419	.200	.375	.156	.060 ±.020	.250	.078 +.010 -.005	0.50	AN121551
.250-28	.430	.439	.491	.260	.438	.188	.060 ±.020	.282	.078 +.010 -.005	0.80	AN121552
.3125-24	.492	.502	.561	.322	.500	.234	.120 ±.030	.328	.078 +.010 -.005	1.20	AN121553
.375-24	.553	.564	.631	.385	.562	.281	.120 ±.030	.406	.125	1.70	AN121554
(c).4375-20	.616	.627	.703	.448	.625	.328	.120 ±.030	.454	.125	2.30	AN121555
.500-20	.741	.752	.846	.510	.750	.375	.120 ±.030	.562	.125	4.20	AN121556
.5625-18	.865	.877	.987	.572	.875	.422	.120 ±.030	.610	.156	6.50	AN121557
.625-18	.928	.940	1.059	.635	.938	.468	.120 ±.030	.718	.156	8.30	AN121558
.750-16	1.052	1.064	1.200	.760	1.062	.562	.120 ±.030	.812	.156	11.50	AN121559
.875-14	1.239	1.252	1.414	.885	1.250	.656	.120 ±.030	.906	.156	14.30	AN121560
1.000-12	1.427	1.440	1.628	1.010	1.438	.750	.120 ±.030	1.000	.156	17.30	AN121561
.4375-20	.679	.690	.775	.448	.688	.328	.120 ±.030	.454	.125	2.20	AN121562

(a) IN MULTIPLE MARKING OF BAR STOCK, DUPLICATION OF WHOLE OR PART OF SYMBOL OR OFFSET OF SYMBOL SUCH THAT UPPER PORTION APPEARS BELOW LOWER PORTION ON FINISHED PART IS PERMISSABLE PROVIDED POSITIVE IDENTIFICATION IS BELOW. PARTS MUST BE MARKED FOR THREADING.
(b) FOR SIZES .3125-24 AND SMALLER C DRILL "C" DIA FROM OPPOSITE END TO DEPTH OF SLOT.

MATERIAL: STEEL AMS 6322

SURFACE ROUGHNESS: AS 107

HARDNESS: ROCKWELL C19-26. PARTS MUST BE HARDENED (OIL QUENCHED) AND TEMPERED BEFORE THREADING.

FINISH: CADMIUM PLATE AMS 2400

(2) INSPECTION: ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640.

BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSION ±.010. ANGULAR DIMENSIONS ±5°.

DO NOT USE UNASSIGNED PART NUMBERS.

(b) **PART NO. AN121505 INACTIVE FOR DESIGN AFTER 25 MARCH 55. USE AN 121512**

(c)
For definition and application of drawing status notes see ANA Bulletin No. 337.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER STANDARD PARTS COMMITTEE OF THE SAE.

APPROVED 8 Jun 49 REVISED (1) 25 Mar 55 (2) 30 June 1986

PA 11
CUST: AV, AS
11

AIR FORCE-NAVY AERONAUTICAL STANDARD

NUT, CASTLE

AN121551 THRU AN121575

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T14:26Z
Check the source to verify that this is the current version before use.