PROCUREMENT SPECIFICATION
MIL-S-6150


AIR FORCE-NAVY AERONAUTICAL STANDARD

STARTER-AIRCRAFT, DIRECT CRANKING, 28 V DC

AN4116

SHEET 1 OF 3

Proj. No. 2925-0027

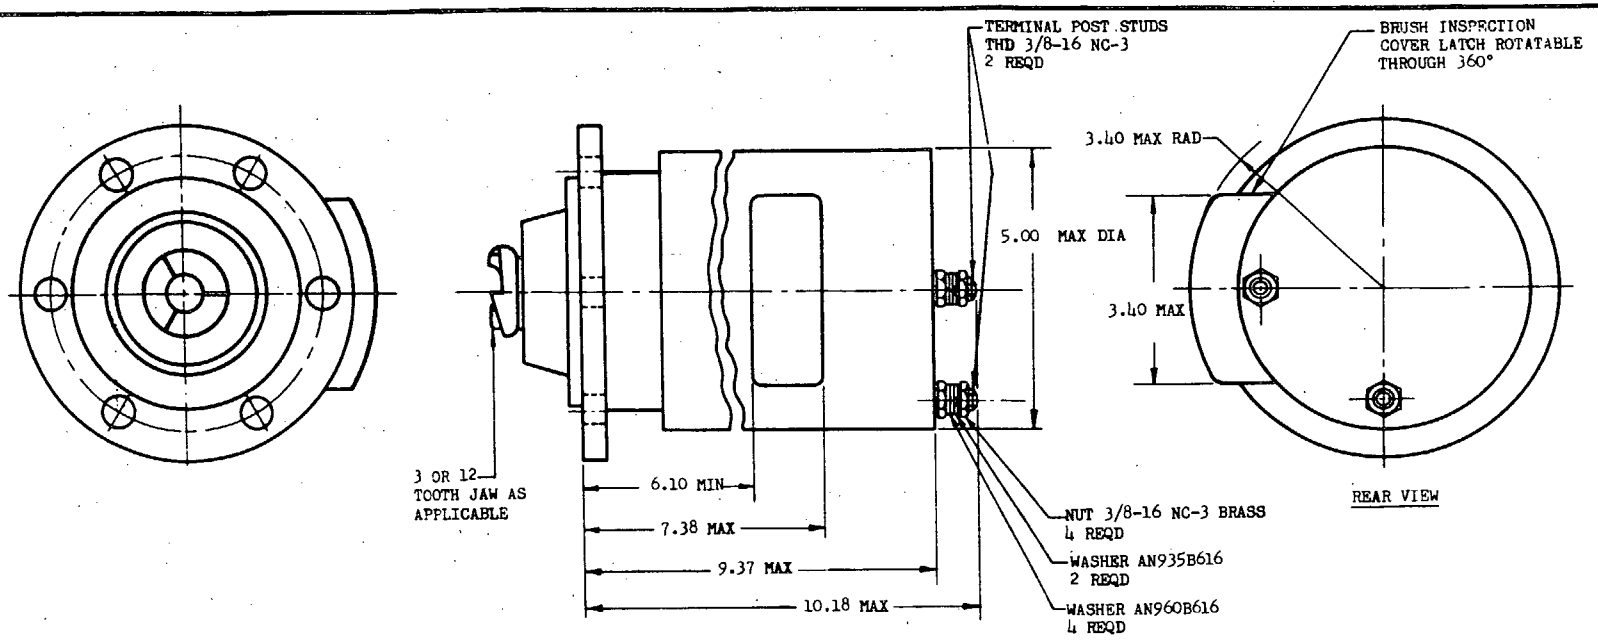

AN PART NO.	CLASS	(a) DIRECTION OF ROTATION	TYPE NUMBERS SUITABLE FOR USE ON DRIVE AND20000A
AN4116R1A	A	RIGHT HAND	XIV-A
AN4116L1A	A	LEFT HAND	XIV-A
⑥ (b) ~~AN4116R2A~~	~~A~~	~~RIGHT HAND~~	~~XIV-E~~
⑥ (b) ~~AN4116L2A~~	~~A~~	~~LEFT HAND~~	~~XIV-E~~
⑥ AN4116R1A1	A (1)	RIGHT HAND	XIV-A

⑥ (b) CANCELED AFTER 31 OCTOBER 1967. NO LONGER USED.
(a) AS VIEWED FROM END OPPOSITE MOUNTING PAD.
⑥ ~~(b) PREVIOUS PART NUMBERS AN4116R1, L1, R2, L2, INACTIVE FOR DESIGN AFTER 17 MARCH 1952. PART NUMBERS AN4116R1A, L1A, R2A, L2A, REPLACE AND ARE INTERCHANGEABLE WITH PART NUMBERS AN4116R1, L1, R2 AND L2, RESPECTIVELY.~~
FOR DEFINTION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 337.
RELATIONSHIP TO FLANGE MOUNTING HOLES SHALL BE AS INDICATED.
HARDNESS OF ALL STARTER JAWS SHALL BE ROCKWELL C-42-54.
FOR DETAILS OF MOUNTING FLANGE, DRIVE, AND WRENCH CLEARANCES, SEE PROCUREMENT SPECIFICATION.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: TWO-PLACE DECIMALS ±.02, THREE-PLACE DECIMALS ±.010, ANGLES ±2°.
THE AIRPLANE AND ENGINE MANUFACTURER SHALL ALLOW CLEARANCE FOR THE MAXIMUM DIMENSIONS SHOWN ON THIS DRAWING FOR INSTALLATIONS.
SHEETS 2 AND 3 ADDED.

⑥ FOR CHANGES SEE SHEETS 1, 2 & 3.

FSC 2925

APPROVED 31 Jan 45 REVISED (1) 23 Apr 46 (2) 20 Dec 46 (3) 10 Nov 48 (4) 17 Mar 52 (5) 26 Nov 54 (6) 31 Oct 67

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.


PROCUREMENT SPECIFICATION
MIL-S-6150

AIR FORCE-NAVY AERONAUTICAL STANDARD

STARTER-AIRCRAFT, DIRECT CRANKING, 28 V DC

AN4116

SHEET 3

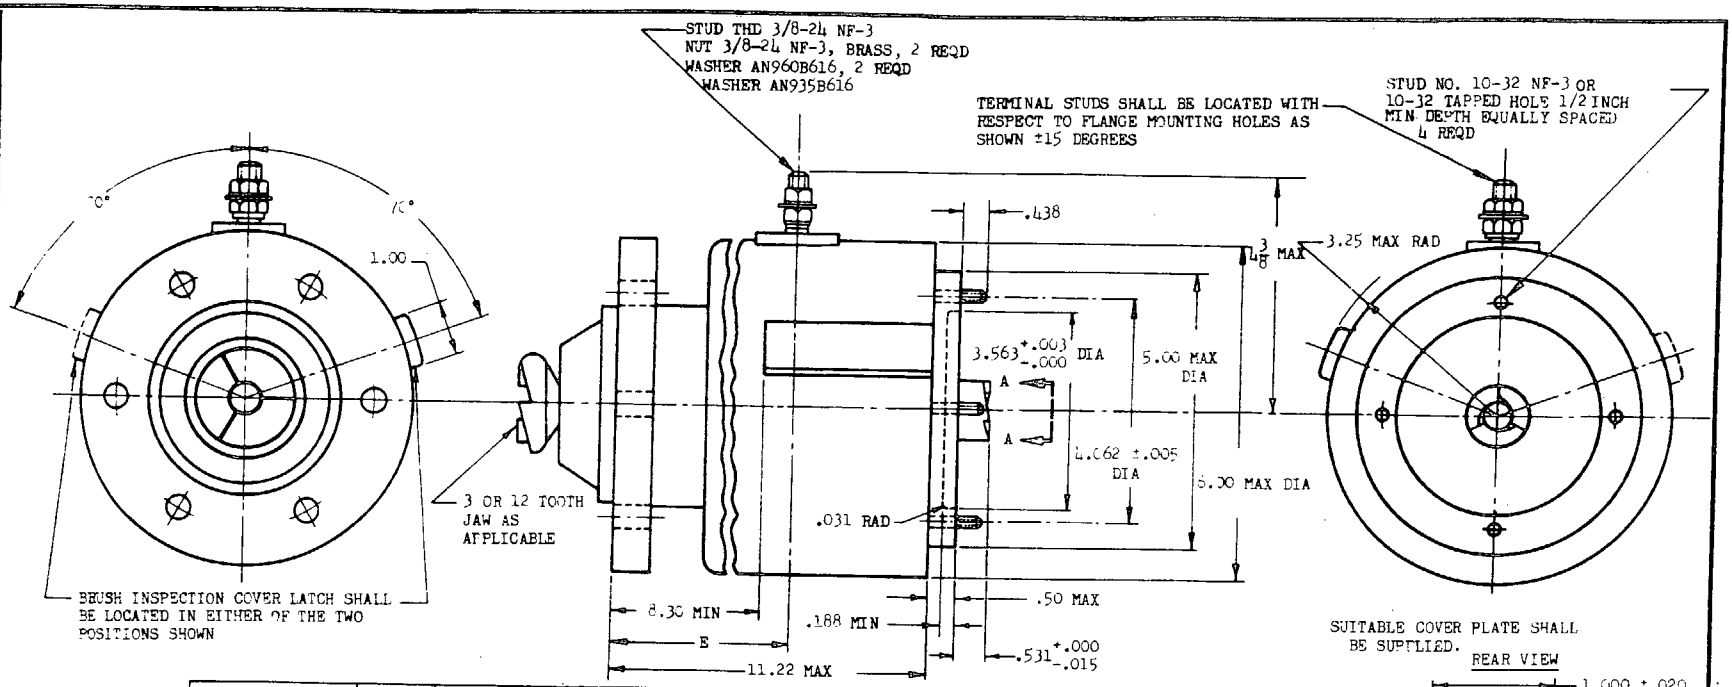

AN PART NO. SIDE TERMINAL	CLASS	(a) DIRECTION OF ROTATION	TYPE NO. SUITABLE FOR USE ON MOUNTING PAD IN ACCORDANCE WITH AND20004	E
AN4116R3FA	B	RIGHT HAND	XIV-A	8.58 ±.24
AN4116L3FA	B	LEFT HAND	XIV-A	
AN4116R4FA	B	RIGHT HAND	XIV-E	
(6) ~~(b) AN4116L4FA~~	B	~~LEFT HAND~~	XIV-E	
(6) ~~(b) AN4116R5FA~~	D	~~RIGHT HAND~~	XIV-B	8.41 ±.41 (6)
(6) ~~(b) AN4116L5FA~~	D	~~LEFT HAND~~	XIV-B	
AN4116R6FA	C	RIGHT HAND	XIV-D	8.58 ±.24
(6) ~~(b) AN4116L6FA~~	C	~~LEFT HAND~~	XIV-D	

(6) (b) CANCELED AFTER 31 OCTOBER 1967. NO LONGER USED.
(a) AS VIEWED FROM END OPPOSITE MOUNTING PAD.

(6) ~~(b) PREVIOUS PART NUMBERS AN4116R3F THRU AN4116L6F INACTIVE FOR DESIGN AFTER 17 MARCH 1952. PART NUMBERS AN4116R3FA THRU AN4116L6FA, REPLACE AND ARE INTERCHANGEABLE WITH PART NUMBERS AN4116R3F THRU AN4116L6F, RESPECTIVELY.~~

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 337.
RELATIONSHIPS TO FLANGE MOUNTING HOLES SHALL BE AS INDICATED.
HARDNESS OF ALL STARTER JAWS SHALL BE ROCKWELL C-42-54.
FOR DETAILS OF MOUNTING FLANGE, DRIVE, AND WRENCH CLEARANCES, SEE DRAWING AND10264 AND THE PROCUREMENT SPECIFICATION.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: TWO-PLACE DECIMALS ±.02, THREE-PLACE DECIMALS ±.010, ANGLES ±2°.
THE AIRPLANE AND ENGINE MANUFACTURER SHALL ALLOW CLEARANCE FOR THE MAXIMUM DIMENSIONS SHOWN ON THIS DRAWING FOR INSTALLATIONS.

FSC 2925

APPROVED 10 Nov 48 REVISED (1) 17 Mar 52 (2) 26 Nov 54 (6) FOR CHANGES SEE SHEETS 1,2 AND 3.

* U.S. GOVERNMENT PRINTING OFFICE: 1967-301-337/2405
Proj. No. 2925-0027

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.

PROCUREMENT SPECIFICATION
MIL-S-4150


AIR FORCE-NAVY AERONAUTICAL STANDARD

STARTER-AIRCRAFT, DIRECT CRANKING, 28 V DC

AN4116

SHEET 3

Proj. No. 2925-0027

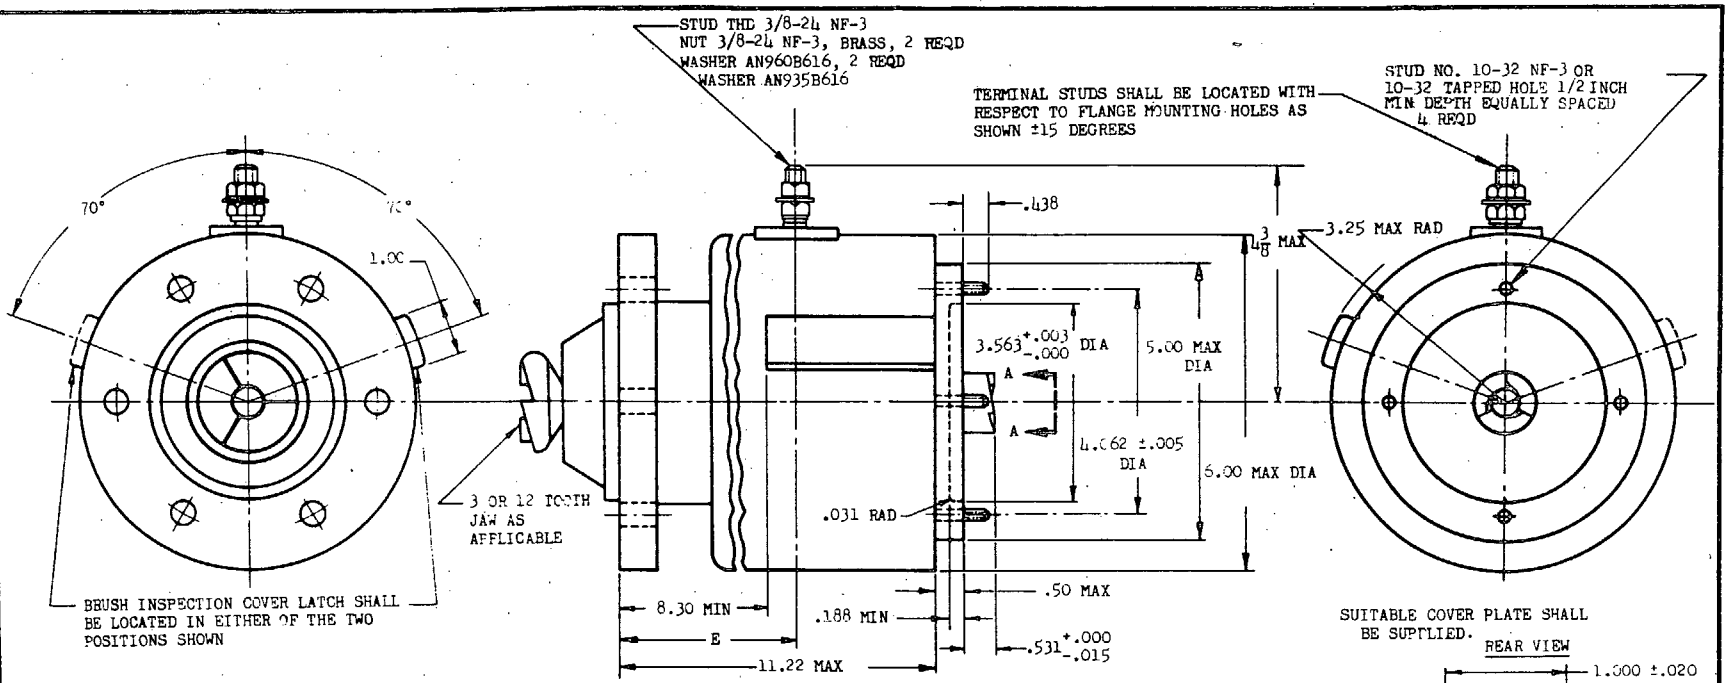

AN PART NO. SIDE TERMINAL	CLASS	(a) DIRECTION OF ROTATION	TYPE NO. SUITABLE FOR USE ON MOUNTING PAD IN ACCORDANCE WITH AND20004	E
AN4116R3FA	B	RIGHT HAND	XIV-A	8.58 ±.24
AN4116L3FA	B	LEFT HAND	XIV-A	
AN4116R4FA	B	RIGHT HAND	XIV-E	
(6) (b) ~~AN4116L4FA~~	B	LEFT HAND	XIV-E	
(6) (6) ~~(a) AN4116R5FA~~	D	RIGHT HAND	XIV-B	8.41 ±.41 (6)
(6) ~~(b) AN4116L5FA~~	D	LEFT HAND	XIV-B	
AN4116R6FA	C	RIGHT HAND	XIV-D	8.58 ±.24
(5) ~~(b) AN4116L6FA~~	C	LEFT HAND	XIV-D	

(6) (b) CANCELED AFTER 31 OCTOBER 1967. NO LONGER USED.
(a) AS VIEWED FROM END OPPOSITE MOUNTING PAD.

(6) ~~(b) PREVIOUS PART NUMBERS AN4116F3F THRU AN4116L6F INACTIVE FOR DESIGN AFTER 17 MARCH 1952. PART NUMBERS AN4116R3FA THRU AN4116L6FA, RESPECTIVELY, REPLACE AND ARE INTERCHANGEABLE WITH PART NUMBERS AN4116R3F THRU AN4116L6F, RESPECTIVELY.~~

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 337.
RELATIONSHIPS TO FLANGE MOUNTING HOLES SHALL BE AS INDICATED.
HARDNESS OF ALL STARTER JAWS SHALL BE ROCKWELL C-42-54.
FOR DETAILS OF MOUNTING FLANGE, DRIVE, AND WRENCH CLEARANCES, SEE DRAWING AND10264 AND THE PROCUREMENT SPECIFICATION.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: TWO-PLACE DECIMALS ±.02, THREE-PLACE DECIMALS ±.010, ANGLES ±2°.
THE AIRPLANE AND ENGINE MANUFACTURER SHALL ALLOW CLEARANCE FOR THE MAXIMUM DIMENSIONS SHOWN ON THIS DRAWING FOR INSTALLATIONS.

FSC 2925

APPROVED 10 Nov 48 REVISED (1) 17 Mar 52 (2) 26 Nov 54 (6) FOR CHANGES SEE SHEETS 1,2 AND 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.