

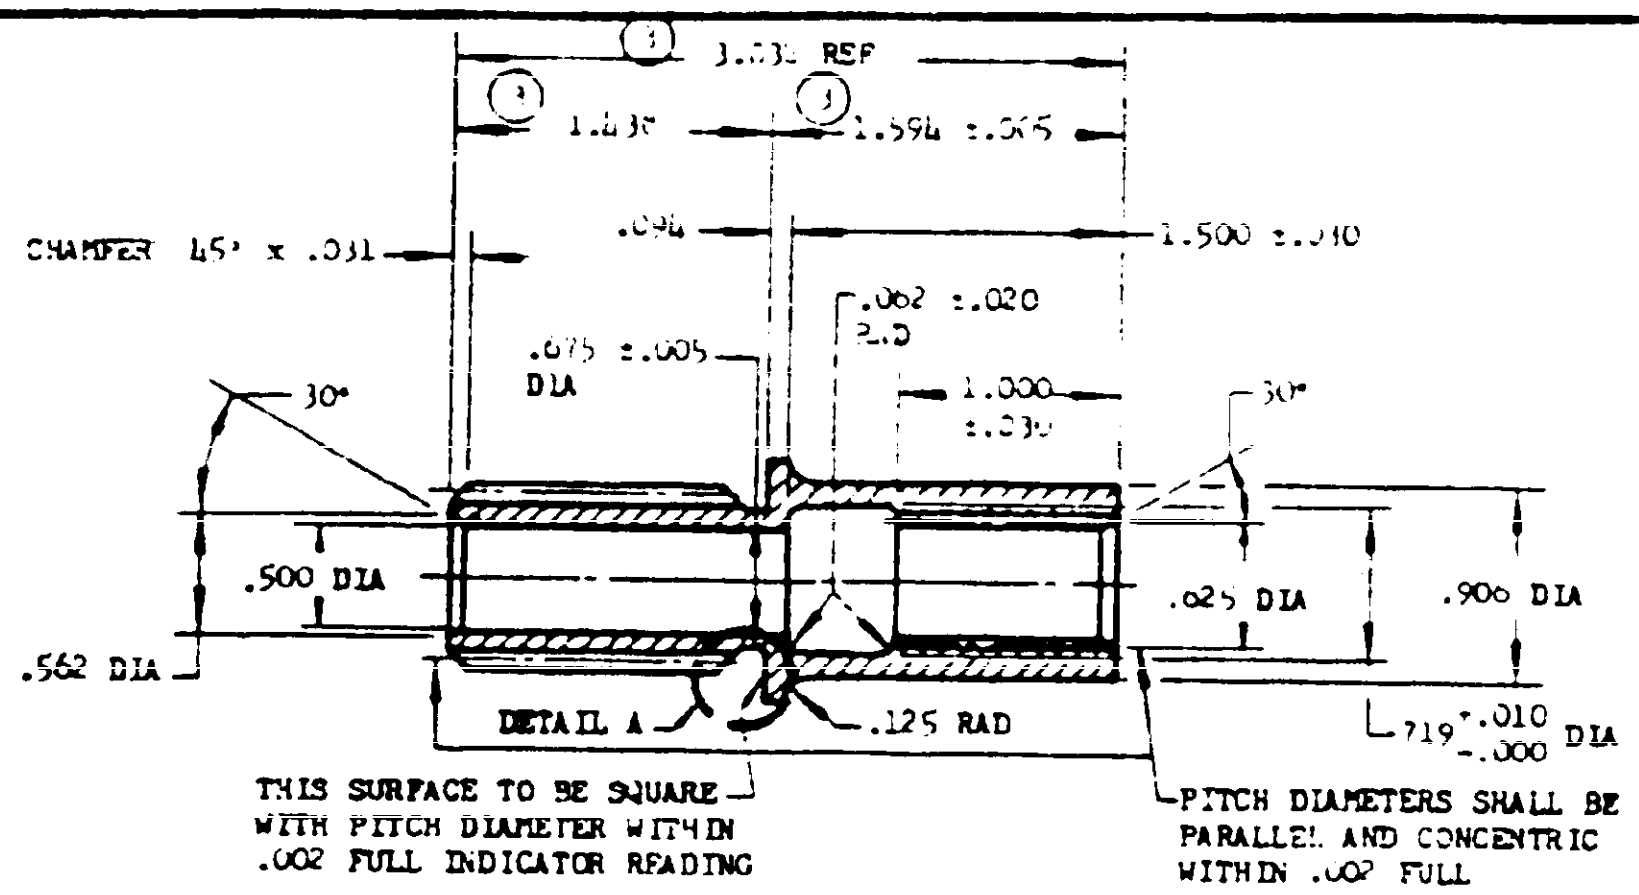



DETAIL A

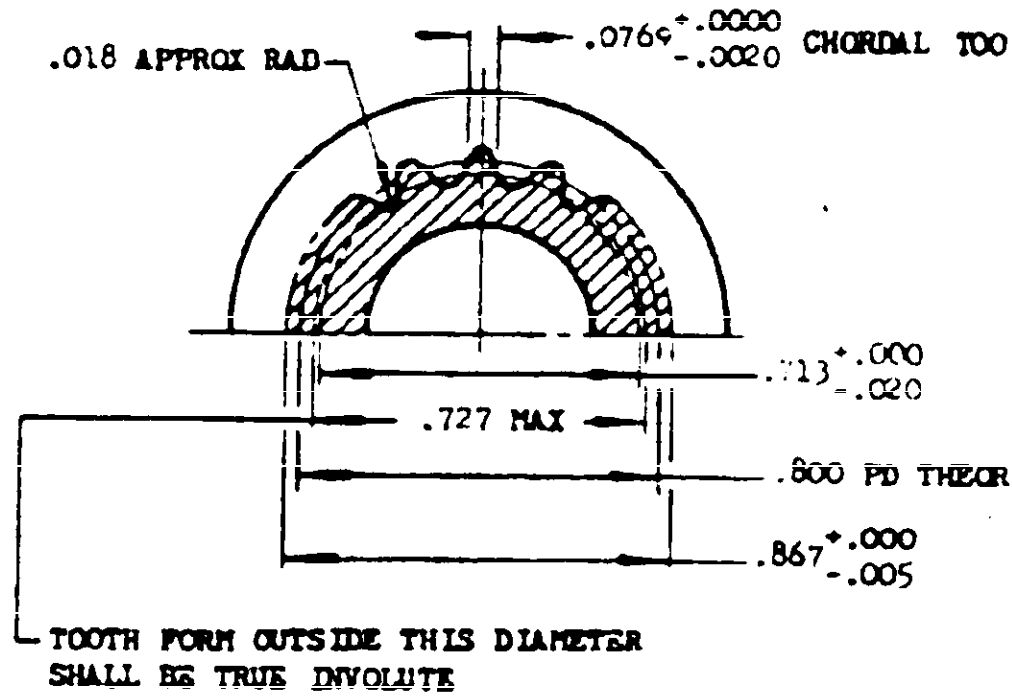

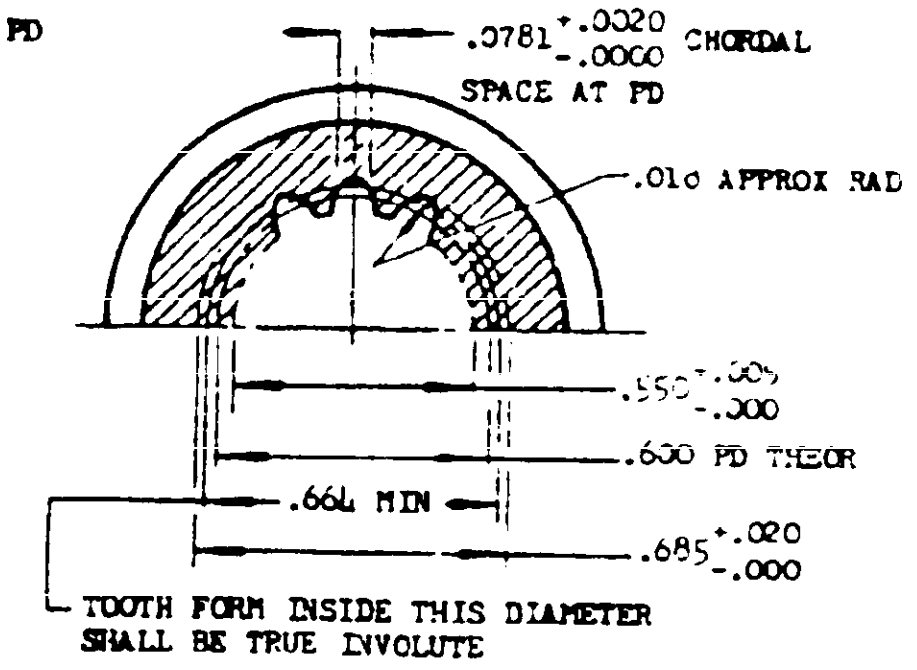

EXTERNAL SPLINE DETAIL

SPLINE DATA:
16 TEETH
20/30 PITCH
30° PRESSURE ANGLE

INTERNAL SPLINE DETAIL

SPLINE DATA:
12 TEETH
20/40 PITCH
30° PRESSURE ANGLE

③

AN PART NO.	TYPE DRIVE
(a) ~~AN4141-1~~	~~XII-J~~
AN4141-2	XII-J

③ (a) PART NO. AN4141-1 CANCELLED 5 AUGUST 1949. PART NO. AN4141-2 REPLACES PART NO. AN4141-1.

③ FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTE SEE ANA BULLETIN NO. 337.

③ MATERIAL: STEEL; AN-S-13, AMS6260 OR EQUIVALENT STEELS HAVING SAME PHYSICAL PROPERTIES.
CASE HARDNESS, ROCKWELL C58 MINIMUM OR EQUIVALENT.
CORE HARDNESS, ROCKWELL C30 MINIMUM.
STEEL; AN-S-19, COMPOSITION A, OR EQUIVALENT STEELS HAVING SAME PHYSICAL PROPERTIES.
CASE HARDNESS, ROCKWELL C64 MINIMUM OR EQUIVALENT.
CORE HARDNESS, ROCKWELL C22 MINIMUM.

CASE HARDENING OF SURFACES OTHER THAN SPLINE IS OPTIONAL.

MINIMUM DEPTH OF EFFECTIVE CASE .010.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±2°.

③ THIS SPLINE ADAPTER USED WHEN FLANGE ADAPTER AN4138-1A IS PROVIDED FOR CONVERTING TYPE XII-J DRIVE TO A TYPE XI DRIVE.

③ ALL DIAMETERS MUST BE CONCENTRIC WITHIN .010 FULL INDICATOR READING UNLESS OTHERWISE SPECIFIED.

③ SHEET 2 ADDED.

APPROVED 14 Nov 46 REVISED ① 27 May 47 ② 18 Sep 47 ③ 5 Aug 49

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all subsidiary standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	③
NONE	③ ADAPTER—TYPE XII-J AND TYPE XII-K DRIVE SPLINE	AN4141 SHEET 1 OF 2 SHEETS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all extant standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

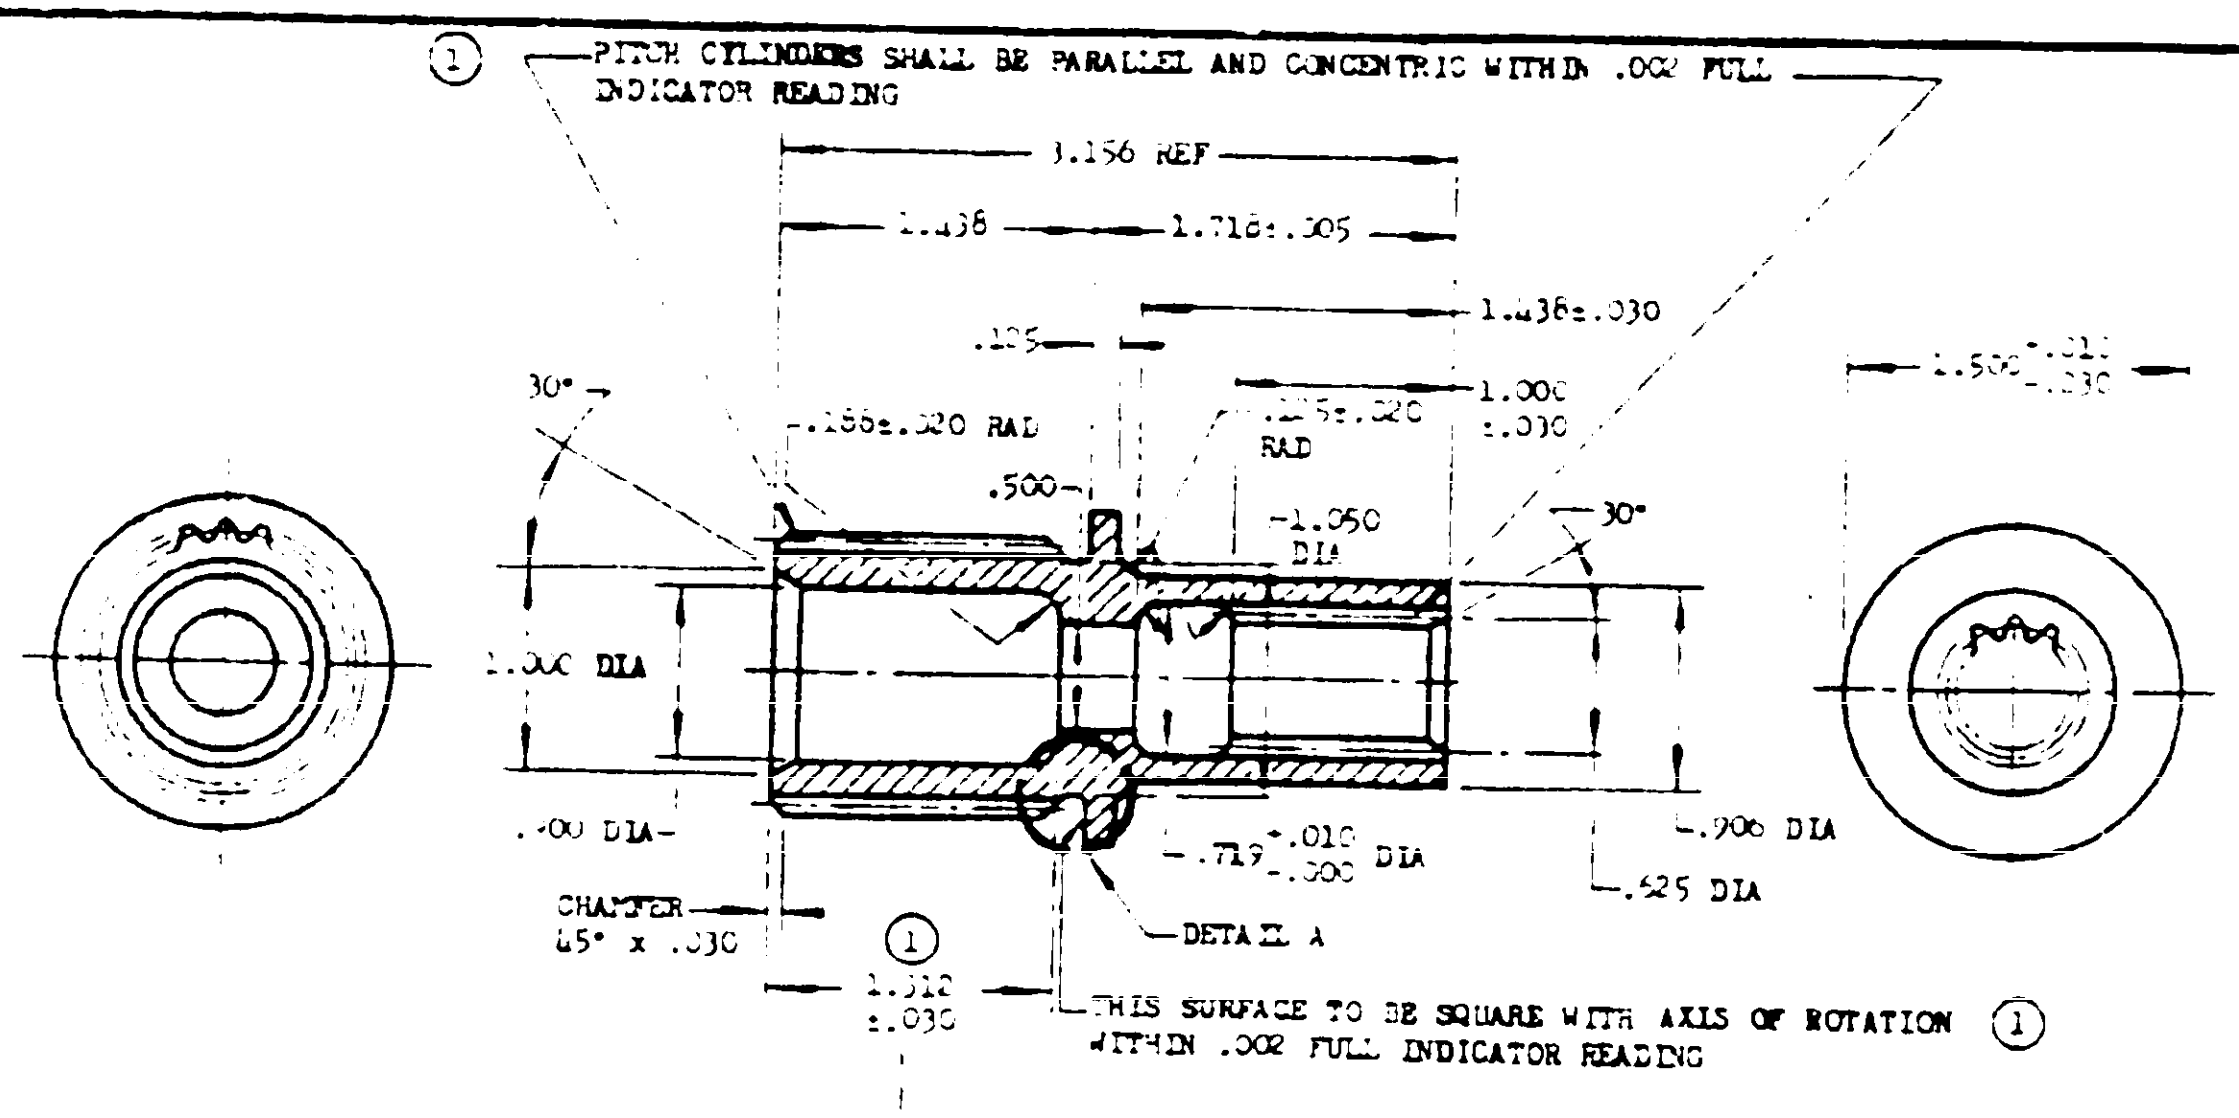



UNDERCUT SHALL NOT BE HARDENED

DETAIL A

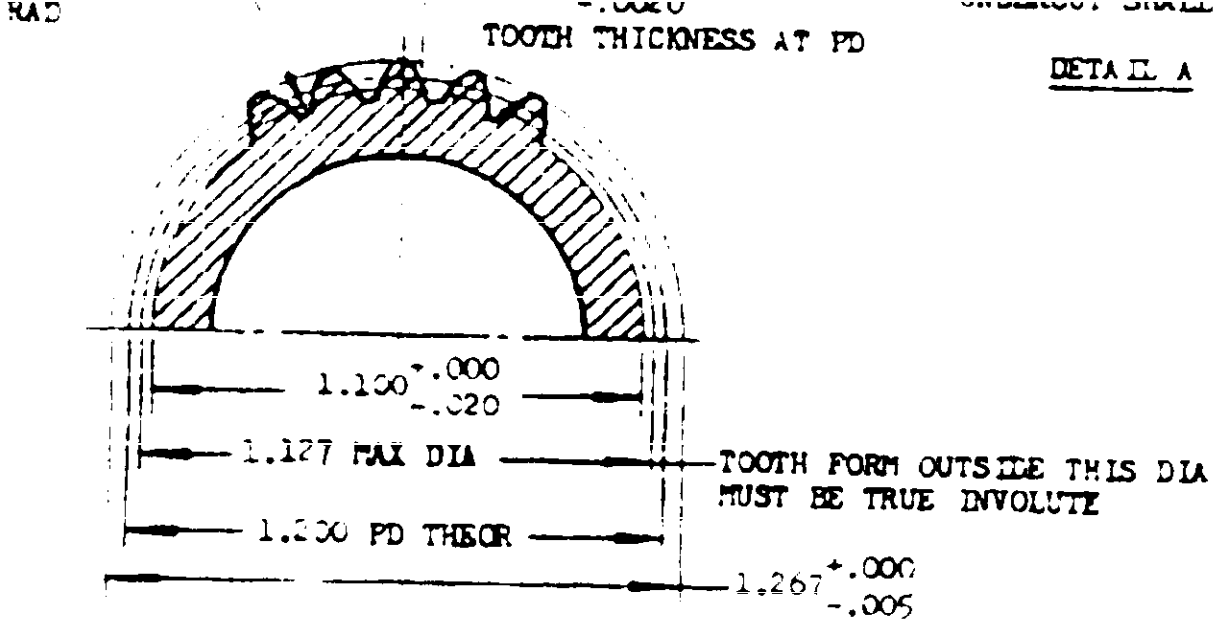
.018 APPROX RAD
.0700 +.0000 -.0020 CHORDAL TOOTH THICKNESS AT PD
1.100 +.000 -.020
1.127 MAX DIA
TOOTH FORM OUTSIDE THIS DIA MUST BE TRUE INVOLUTE
1.200 PD THEOR
1.267 +.000 -.005

EXTERNAL SPLINE DETAIL

SPLINE DATA:
24 TEETH
20/30 PITCH
30° PRESSURE ANGLE

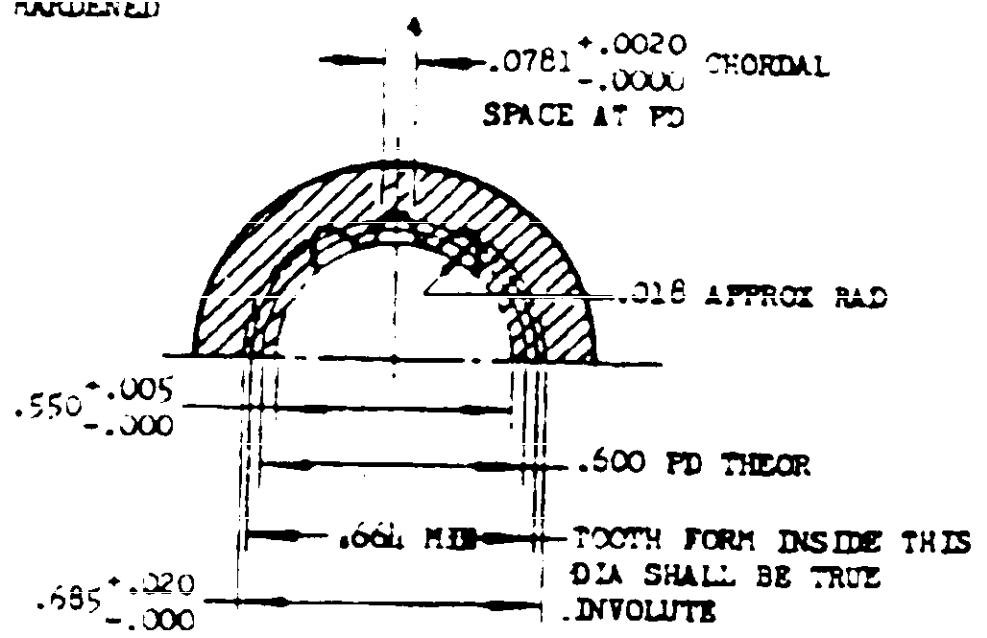
.0781 +.0020 -.0000 CHORDAL SPACE AT PD
.018 APPROX RAD
.550 +.005 -.000
.600 PD THEOR
.664 MIN
TOOTH FORM INSIDE THIS DIA SHALL BE TRUE INVOLUTE
.685 +.020 -.000

INTERNAL SPLINE DETAIL

SPLINE DATA:
12 TEETH
20/40 PITCH
30° PRESSURE ANGLE

AN PART NO.	TYPE DRIVE
AN4141-3	XII-K

MATERIAL: STEEL: AN-S-13, AMS6260 OR EQUIVALENT STEELS HAVING SAME PHYSICAL PROPERTIES.
CASE HARDNESS, ROCKWELL C58 MINIMUM OR EQUIVALENT.
CORE HARDNESS, ROCKWELL C30 MINIMUM.
STEEL: MIL-S-6709, COMPOSITION A, OR EQUIVALENT STEELS HAVING SAME PHYSICAL PROPERTIES.
CASE HARDNESS, ROCKWELL C64 MINIMUM OR EQUIVALENT.
CORE HARDNESS, ROCKWELL C22 MINIMUM.

CASE HARDENING OF SURFACES OTHER THAN SPLINE IS OPTIONAL.

MIN DEPTH OF EFFECTIVE CASE .010.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±2°.

THIS SPLINE ADAPTER USED WHEN FLANGE ADAPTER AN4138-1A IS PROVIDED, FOR CONVERTING TYPE XII-K DRIVE TO A TYPE XI DRIVE.

ALL DIAMETERS MUST BE CONCENTRIC WITHIN .010 FULL INDICATOR READING UNLESS OTHERWISE SPECIFIED.

APPROVED 5 Aug 49 REVISED ① 10 Nov 50

PROCUREMENT SPECIFICATION

NONE

AIR FORCE-NAVY AERONAUTICAL STANDARD

ADAPTER - TYPE XII-J AND TYPE XII-K DRIVE SPLINE

AN4141

SHEET 2 OF 2 SHEETS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.