
NAVAER 10ADA (Rev 5-51)

FSC 5306

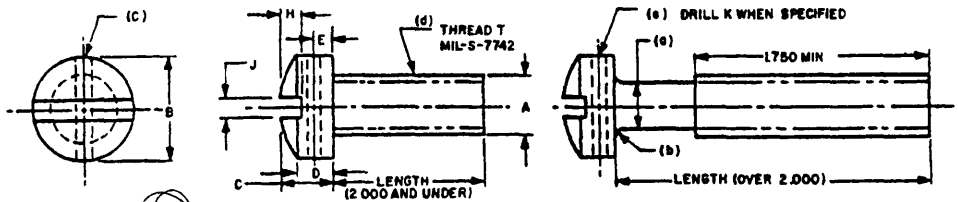

THREAD T UNF-2	A MAX DIA	B MAX	B MIN	C MAX	C MIN	D MAX	D MIN	(f) E REF	H MAX	H MIN	J MAX	J MIN	K DRILL + .004 - .001
~~NO. 0-80~~	~~.0600~~	~~.096~~	~~.083~~	~~.054~~	~~.045~~	~~.070~~	~~.029~~		~~.026~~	~~.014~~	~~.031~~	~~.020~~	
~~NO. 1-72~~	~~.0730~~	~~.118~~	~~.103~~	~~.066~~	~~.057~~	~~.046~~	~~.037~~		~~.029~~	~~.019~~	~~.033~~	~~.022~~	
~~NO 2-64~~	~~.0860~~	~~.140~~	~~.124~~	~~.083~~	~~.070~~	~~.062~~	~~.055~~	~~.026~~	~~.030~~	~~.022~~	~~.031~~	~~.025~~	~~.031~~
~~NO 3-56~~	~~.0990~~	~~.161~~	~~.145~~	~~.095~~	~~.082~~	~~.070~~	~~.064~~	~~.030~~	~~.034~~	~~.026~~	~~.035~~	~~.027~~	~~.037~~
~~NO. 4-48~~	~~.1120~~	~~.182~~	~~.166~~	~~.107~~	~~.094~~	~~.079~~	~~.072~~	~~.035~~	~~.038~~	~~.030~~	~~.039~~	~~.031~~	~~.037~~
~~NO. 5-44~~	~~.1250~~	~~.205~~	~~.187~~	~~.130~~	~~.106~~	~~.088~~	~~.081~~	~~.038~~	~~.042~~	~~.033~~	~~.043~~	~~.035~~	~~.046~~
~~NO 6-40~~	~~.1380~~	~~.226~~	~~.208~~	~~.132~~	~~.118~~	~~.096~~	~~.089~~	~~.043~~	~~.045~~	~~.035~~	~~.048~~	~~.039~~	~~.046~~
~~NO 8-36~~	~~.1640~~	~~.270~~	~~.250~~	~~.156~~	~~.141~~	~~.113~~	~~.106~~	~~.043~~	~~.065~~	~~.054~~	~~.054~~	~~.045~~	~~.046~~
NO 10-32	.1900	.313	.292	.180	.165	130	.123	.043	075	064	060	050	046
1/4-28	2500	.414	.389	.237	.219	.170	.161	.062	.102	.087	075	064	062
5/16-24	.3125	.518	490	295	.276	.211	.201	078	130	110	084	.072	.070
3/8-24	.3750	622	.590	.355	.333	.253	.242	094	.154	134	094	081	.070

(e)

DASH NUMBERS FOR UNDRILLED CARBON STEEL SCREWS

LENGTH		NO 0-80	NO 1-72	NO 2-64	NO 3-56	NO 4-48	NO 5-44	NO 6-40	NO 8-36	NO 10-32 (5)	1/4-28 (5)	5/16-24 (5)	3/8-24 (5)
1/8		~~0-2~~	1-2										
3/16		0-3	1-3	2-3	3-3	4-3	5-3						
1/4		0-4	1-4	2-4	3-4	4-4	5-4	6-4	8-4	10-4			
5/16		0-5	1-5	2-5	3-5	4-5	5-5	6-5	8-5	10-5	416-5		
3/8	+0	0-6	1-6	2-6	3-6	4-6	5-6	6-6	8-6	10-6	416-6		
7/16	-1/32	0-7	1-7	2-7	3-7	4-7	5-7	6-7	8-7	10-7	416-7		
1/2		0-8	1-8	2-8	3-8	4-8	5-8	6-8	8-8	10-8	416-8	516-8	616-8
5/8		0-10	1-10	2-10	3-10	4-10	5-10	6-10	8-10	10-10	416-10	516-10	616-10
3/4		0-12	1-12	2-12	3-12	4-12	5-12	6-12	8-12	10-12	416-12	516-12	616-12
7/8		0-14	1-14	2-14	3-14	4-14	5-14	6-14	8-14	10-14	416-14	516-14	616-14
1		0-16	1-16	2-16	3-16	4-16	5-16	6-16	8-16	10-16	416-16	516-16	616-16
1-1/8						4-18	5-18	6-18	8-18	⊠ 10-18	⊠ 416-18	⊠ 516-18	⊠ 616-18
1-1/4						4-20	5-20	6-20	8-20	10-20	416-20	516-20	616-20
1-3/8	+0					4-22	5-22	6-22	8-22	⊠ 10-22	⊠ 416-22	⊠ 516-22	⊠ 616-22
1-1/2	-1/16					4-24	5-24	6-24	8-24	10-24	416-24	516-24	616-24
1-3/4						4-28	5-28	6-28	8-28	10-28	416-28	516-28	616-28
2						4-32	5-32	6-32	8-32	10-32	416-32	516-32	616-32
2-1/2	+0									10-40	416-40	516-40	616-40
3	-3/32									10-48	416-48	516-48	616-48

(a) THE DIAMETER OF THE UNTHREADED PORTION SHALL NOT BE LESS THAN THE MINIMUM PITCH DIAMETER NOR MORE THAN THE MAXIMUM MAJOR DIAMETER OF THE THREAD

(b) THE RADIUS OF THE FILLET AT THE BASE OF THE HEAD SHALL NOT EXCEED ONE-HALF THE PITCH OF THE SCREW THREAD

(c) DRILLED HOLE TO BE ON CENTER APPROXIMATELY AT RIGHT ANGLES TO THE SLOT BUT MUST NOT BREAK THROUGH THE BASE OR TOP (SPHERICAL PORTION) OF THE HEAD

(d) FOR MACHINE SCREWS 2 INCHES LONG AND SHORTER, THE COMPLETE THREADS SHALL EXTEND TO WITHIN TWO THREADS OF THE BEARING SURFACE OF THE HEAD OR CLOSER IF PRACTICABLE SCREWS OF LONGER LENGTH SHALL HAVE A MINIMUM COMPLETE THREAD LENGTH OF 1-3/4 INCHES

(e) ALL FILLISTER HEAD SCREWS WITH UNDRILLED HEADS, AND SIZES NO 0-80 THRU NO 8-36 INACTIVE FOR DESIGN AFTER 12 MAY 1950. FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE DOD-D-1000

(f) REFERENCE DIMENSIONS ARE FOR DESIGN PURPOSES ONLY AND ARE NOT AN INSPECTION REQUIREMENT.

(5) (g) AN501D SCREWS CAN UNIVERSALLY REPLACE AN501C SCREWS OF LIKE THREAD SIZE AND LENGTH, BUT THE AN501C SCREWS CANNOT UNIVERSALLY REPLACE THE AN501D SCREWS

(5) ~~(h) PARTS MARKED (h) NOT COVERED ON SUPERSEDING MS DOCUMENTS~~

(5) ~~CANCELED AND INACTIVE FOR DESIGN AFTER 29 NOVEMBER 1965~~
~~USE MS35266, MS35274 AND MS35276~~

(5) ~~INTERCHANGEABILITY RELATIONSHIP~~ ~~MS35266, MS35274 AND MS35276 PARTS CAN BE UNIVERSALLY SUBSTITUTED IN ACCORDANCE WITH THE INTERCHANGEABILITY TABLES OF MS35266, MS35274 AND MS35276 FOR AN501 PARTS EXCEPT AS NOTED IN (h) ABOVE~~

(5) SHEET 2 ADDED

(5) FOR CHANGES SEE SHEETS 1 AND 2

(6) REINSTATED AS OF 12 NOV 1980.

DIMENSIONS IN INCHES
IN CASE OF CONFLICT, THE REQUIREMENTS SPECIFIED HEREON SHALL TAKE PRECEDENCE OVER THE REQUIREMENTS SPECIFIED IN FF-S-92

APPROVED 12 APP 44 REVISED (5) 29 NOV 65 (6) 12 NOV 80

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN501
FF-S-92	SCREW, MACHINE, FILLISTER HEAD, FINE THREAD	SHEET 1 OF 2

SUPERSEDES USAF DRAWING 501 AND SUPERSEDES NAF DRAWING 1164 FOR BRASS ONLY

NOTICE: When Government drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design not later than 6 months after the latest date of approval shown.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26 7:45:19
Check the source to verify that this is the current version before use.

FSC 5306

MATERIAL: CARBON STEEL, QQ-S-637 TYPE FS1010, 60,000 PSI MINIMUM TENSILE STRENGTH OR OTHER STEEL MEETING THE SAME PHYSICAL REQUIREMENTS
~~CORROSION RESISTANT STEEL, QQ-S-763, CLASS IV, MIL-S-7720, COMPOSITION FM OR G FOR COLD UPSETTING PROCESS, OR NON-MAGNETIC EQUIVALENT~~
CORROSION RESISTANT STEEL, FEDERAL STANDARD NO. 66, TYPE 302, 304, 316, AND 303 SE
BRASS, COMMERCIAL, 55,000 PSI MINIMUM ULTIMATE TENSILE STRENGTH

FINISH: CARBON STEEL, CADMIUM PLATE, QQ-P-416, TYPE I, CLASS 3. CORROSION RESISTANT STEEL, PASSIVATE. BRASS, NONE

PLAIN DASH NUMBER INDICATES CARBON STEEL
ADD A BEFORE FIRST DASH NUMBER FOR DRILLED HEAD.
ADD B BEFORE FIRST DASH NUMBER FOR BRASS
~~ADD C BEFORE FIRST DASH NUMBER FOR CORROSION RESISTANT STEEL.~~ NOT TO BE USED FOR NEW DESIGN.
ADD D BEFORE FIRST DASH NUMBER FOR CORROSION RESISTANT STEEL.

EXAMPLES OF PART NUMBERS (a) ~~AN501-6-8 = NO. 6-40 UNDRILLED CARBON STEEL, SCREW, 1/2 INCH LONG~~
AN501A10-8 = NO. 10-32 DRILLED CARBON STEEL SCREW, 1/2 INCH LONG
AN501AB10-8 = NO 10-32 DRILLED BRASS SCREW, 1/2 INCH LONG.
(c) ~~AN501B6-8 = NO. 6-40 UNDRILLED BRASS SCREW, 1/2 INCH LONG~~
~~AN501AC10-8 = NO. 10-32 DRILLED CORROSION RESISTANT STEEL SCREW, 1/2 INCH LONG~~
AN501AD10-8 = NO 10-32 DRILLED CORROSION RESISTANT STEEL SCREW, 1/2 INCH LONG

SCREWS SHALL BE FREE OF ALL LOOSE OR HANGING BURRS OR SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE

APPROVED 12 APR 44 REVISED (5) 29 NOV 65 (6) 12 NOV 80

NOTICE: When Government drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design not later than 6 months after the latest date of approval shown.

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN501
FF-S-92	SCREW, MACHINE, FILLISTER HEAD, FINE THREAD	SHEET 2 OF 2

SUPERSEDES USAF DRAWING 501 AND SUPERSEDES NAF DRAWING 1164 FOR BRASS ONLY

Source: https://assist.dla.mil -- Downloaded: 202610-26T14:15Z
Check the source to verify that this is the current version before use.