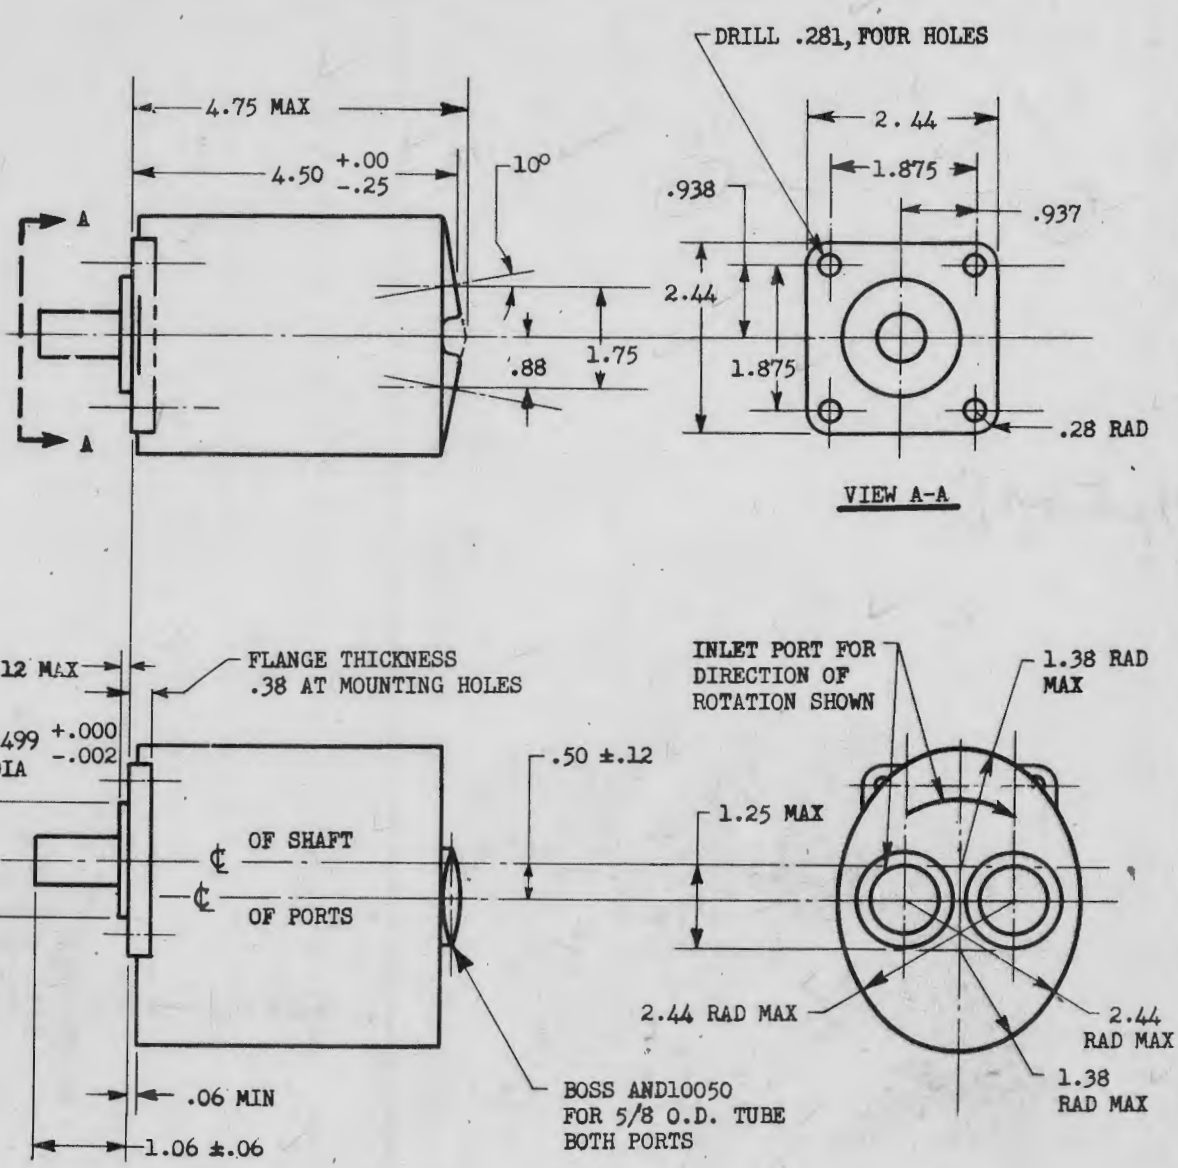



| AN PART NO. | DESCRIPTION |
|---|---|
| AN6250-1 | TYPE I - MTG. PAD |
| AN6250-2 | TYPE II - MTG. PAD (SEE SHEET 2) |
| | |

REMOVE ALL BURRS AND SHARP EDGES.

CLEARANCE FOR INSTALLATION OF MOUNTING NUTS SHALL BE PROVIDED.

DIMENSIONS IN INCHES. TOLERANCES: TWO-PLACE DECIMALS ±.02; THREE-PLACE DECIMALS ±.005; ANGLES ±1/2°, UNLESS OTHERWISE SPECIFIED.

THIS DRAWING AND THE SPECIFICATION COMPLEMENT ONE ANOTHER, AND, TOGETHER, COMPLETELY DEFINE THIS PRODUCT.

APPROVED 2 Dec 43 REVISED


NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the War and Navy Departments as the Army-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than six months after the latest date of approval shown. It may be put into effect, however, at an earlier date after promulgation.

| PROCUREMENT SPECIFICATION | ARMY-NAVY AERONAUTICAL STANDARD | AN6250 |
|---|---|---|
| AN-P-11 | PUMP - 1 G.P.M. AT 1500 P.S.I. ENGINE DRIVEN HYDRAULIC | SHEET 1 OF 2 SHEETS |

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:22Z
Check the source to verify that this is the current version before use.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

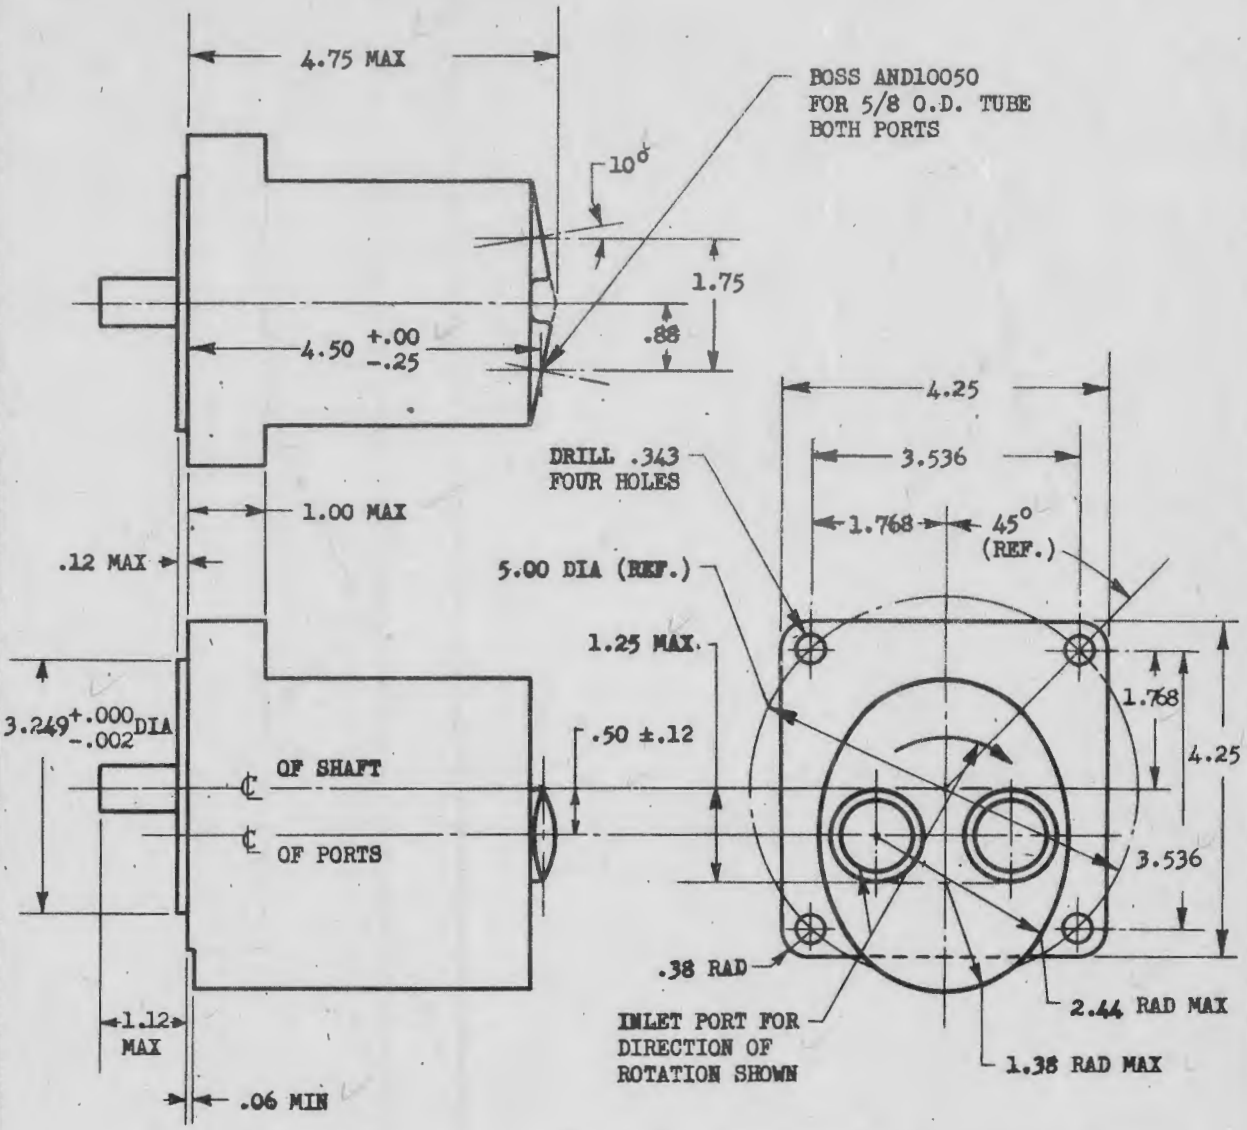


| AN PART NO. | DESCRIPTION |
|---|---|
| AN6250-1 | TYPE I MTG. PAD (SEE SHEET 1) |
| AN6250-2 | TYPE II MTG. PAD |
| | |

FLANGE THICKNESS .38 AT MOUNTING HOLES.
REMOVE ALL BURRS AND SHARP EDGES.
CLEARANCE FOR INSTALLATION OF MOUNTING NUTS SHALL BE PROVIDED.
DIMENSIONS IN INCHES. TOLERANCES: TWO-PLACE DECIMALS ±.02; THREE-PLACE DECIMALS ±.005; ANGLES ±1/2° UNLESS OTHERWISE SPECIFIED.
THIS DRAWING AND THE SPECIFICATION COMPLEMENT ONE ANOTHER, AND, TOGETHER, COMPLETELY DEFINE THIS PRODUCT.

APPROVED 2 Dec 43 REVISED

NOTE: This drawing was approved by joint action of the War and Navy Departments as the Army-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than six months after the latest date of approval shown. It may be put into effect, however, at an earlier date after promulgation.

| PROCUREMENT SPECIFICATION | ARMY-NAVY AERONAUTICAL STANDARD | AN6250 |
|---|---|---|
| AN-P-11 | PUMP – 1 G.P.M. AT 1500 P.S.I. ENGINE DRIVEN HYDRAULIC | SHEET 2 of 2 SHEETS |

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:22:22Z
Check the source to verify that this is the current version before use.