
FED. SUP CLASS
1650

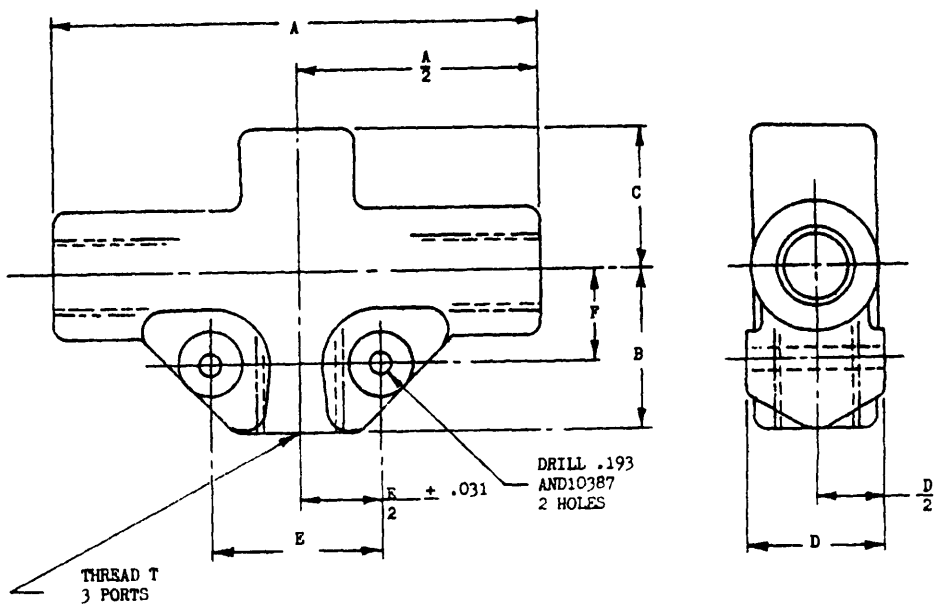

NOTE: ALL PORTS IN ACCORDANCE WITH SHEET 2

AN PART NO.	TUBE OD	THREAD T	A ± 1/32	B ± 1/32	C MAX	D + 0 − 1/4	E ± .005	F ± .031	RATED FLOW CAP. GPM
AN6277-4	1/4	7/16-20 NF-3	3 - 3/4	1	15/16	1	.875	.750	1.2
AN6277-5	5/16	1/2 - 20NF-3	3 - 3/4	1	15/16	1	.875	.750	2.3
AN6277-6	3/8	9/16-18 NF-3	3 - 7/8	1	1	1-1/4	1.125	.750	3.5
AN6277-8	1/2	3/4-16 NF-3	4 - 3/16	1 -5/32	1-1/16	1-1/2	1.125	.813	6.0
AN6277-10	5/8	7/8 - 14 NF-3	4 - 3/4	1 -5/16	1-1/4	1-3/4	1.375	.938	10.5

DIMENSIONS IN INCHES

OUTLINE AS SHOWN IS MAXIMUM AND NOT RESTRICTIVE AS TO DESIGN BUT LOCATION OF PORTS AND MOUNTING HOLES AND MOUNTING SURFACES MUST BE MAINTAINED.

(4) INACTIVE FOR NEW DESIGN. USE MS 28767 AFTER 15 APR. 1981

APPROVED 29 August 1947 REVISED (1) 25 Nov 47 (2) 16 Sep 70 (3) 6 Jul 71 (4) 15 Apr. 81

P.A. 99 Other Cust AF - 99	TITLE VALVE - HYDRAULIC SHUTTLE, 3000 PSI (INTERNATIONAL THREAD TUBE FITTING OUTLET)	MILITARY STANDARD
	ARMY-NAVY AERONAUTICAL STANDARD	AN6277
PROCUREMENT SPECIFICATION MIL-V-5530	SUPERSEDES:	SHEET 1 OF 2


1650 - 50B8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:23Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
1650

SURFACE OF BOSS SHALL BE SPOT-FACED, DIAMETER F, SURFACE FINISH 64

SQUARENESS BETWEEN THREAD AND FACE OF BOSS WHEN MEASURED AT DIAMETER G SHALL NOT EXCEED .005 INCH FOR TUBE SIZES UP TO AND INCLUDING 5/8, and .008 FOR SIZES 3/4 AND ABOVE

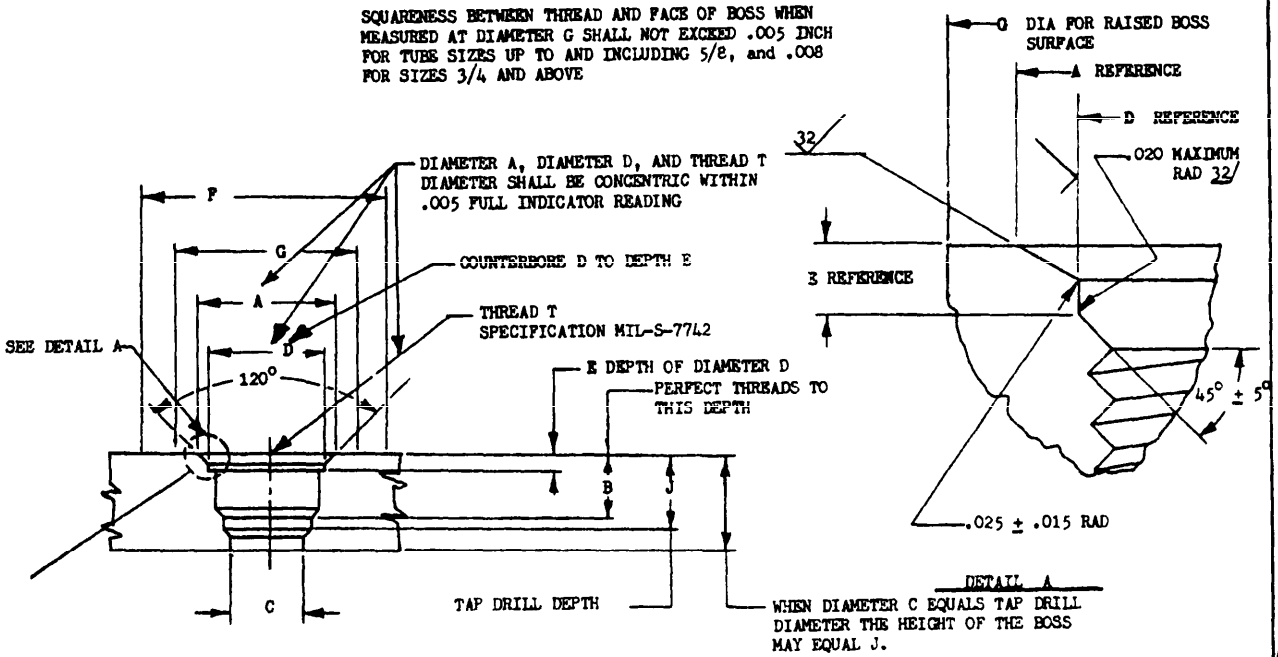

NOTE: CLEARANCE SHALL BE PROVIDED FOR USE OF A STANDARD WRENCH

EQUIVALENT TUBE SIZE DASH NO.	TUBING OD	THREAD T	A +.015 -.000 DIA	B MIN	C MIN DIA	D +.005 -.000 DIA	E +.015 -.000	F MIN DIA	G MIN DIA	J MIN
2	1/8	5/16-24 UNF-3B	.438	.375	.062	.328	.063	.672	.562	.500
3	3/16	3/8 -24 UNF-3B	.500	.406	.125	.390	.063	.750	.625	.500
4	1/4	7/16-20 UNF-3B	.562	.438	.172	.454	.075	.828	.688	.594
5	5/16	1/2 -20 UNF-3B	.625	.438	.234	.517	.075	.906	.750	.594
6	3/8	9/16-18 UNF-3B	.688	.469	.297	.580	.083	.969	.812	.594
8	1/2	3/4 -16 UNF-3B	.875	.562	.391	.769	.094	1.188	1.032	.718
10	5/8	7/8 -14 UNF-3B	1.000	.625	.484	.896	.107	1.344	1.157	.781
12	3/4	1-1/16-12 UN-3B	1.234	.688	.609	1.086	.125	1.625	1.406	.906
16	1	1-5/16-12 UN-3B	1.487	.688	.844	1.336	.125	1.910	1.656	.938
20	1 -1/4	1-5/8 -12 N-3B	1.800	.688	1.078	1.648	.125	2.270	1.969	.984
24	1 -1/2	1-7/8 -12 N-3B	2.050	.750	1.312	1.898	.125	2.560	2.219	1.125
28	1 -3/4	2-1/4 -12 UN-3B	2.425	.812	1.547	2.273	.125	3.010	2.594	1.250
32	2	2-1/2 -12 UN-3B	2.675	.938	1.781	2.524	.125	3.480	2.844	1.375

FINISH: FOR SURFACE ROUGHNESS, SEE ASA B46.1
THE COUNTERSINK TO DIAMETER A AND COUNTERBORE TO DIAMETER D SHALL BE FREE FROM LONGITUDINAL AND SPIRAL TOOL MARKS. BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: ANGLES ± 1/2°.

APPROVED 29 August 1947 REVISED (1) 25 Nov 47 (2) 16 Sep 70 (3) 6 Jul 71 (4) 15 Apr. 81

P.A. 99 Other Cust AF -99	TITLE VALVE - HYDRAULIC SHUTTLE, 3000 PSI (INTERNATIONAL THREAD TUBE FITTING OUTLET)	MILITARY STANDARD AN 6277
PROCUREMENT SPECIFICATION MIL-V-5530	SUPERSEDES: ARMY-NAVY AERONAUTICAL STANDARD	SHEET 2 OF 2

Source: https://assist.dla.mil - Downloaded: 2026-10-26T14:23Z
Check the source to verify that this is the current version before use.