FED. SUP CLASS
4730

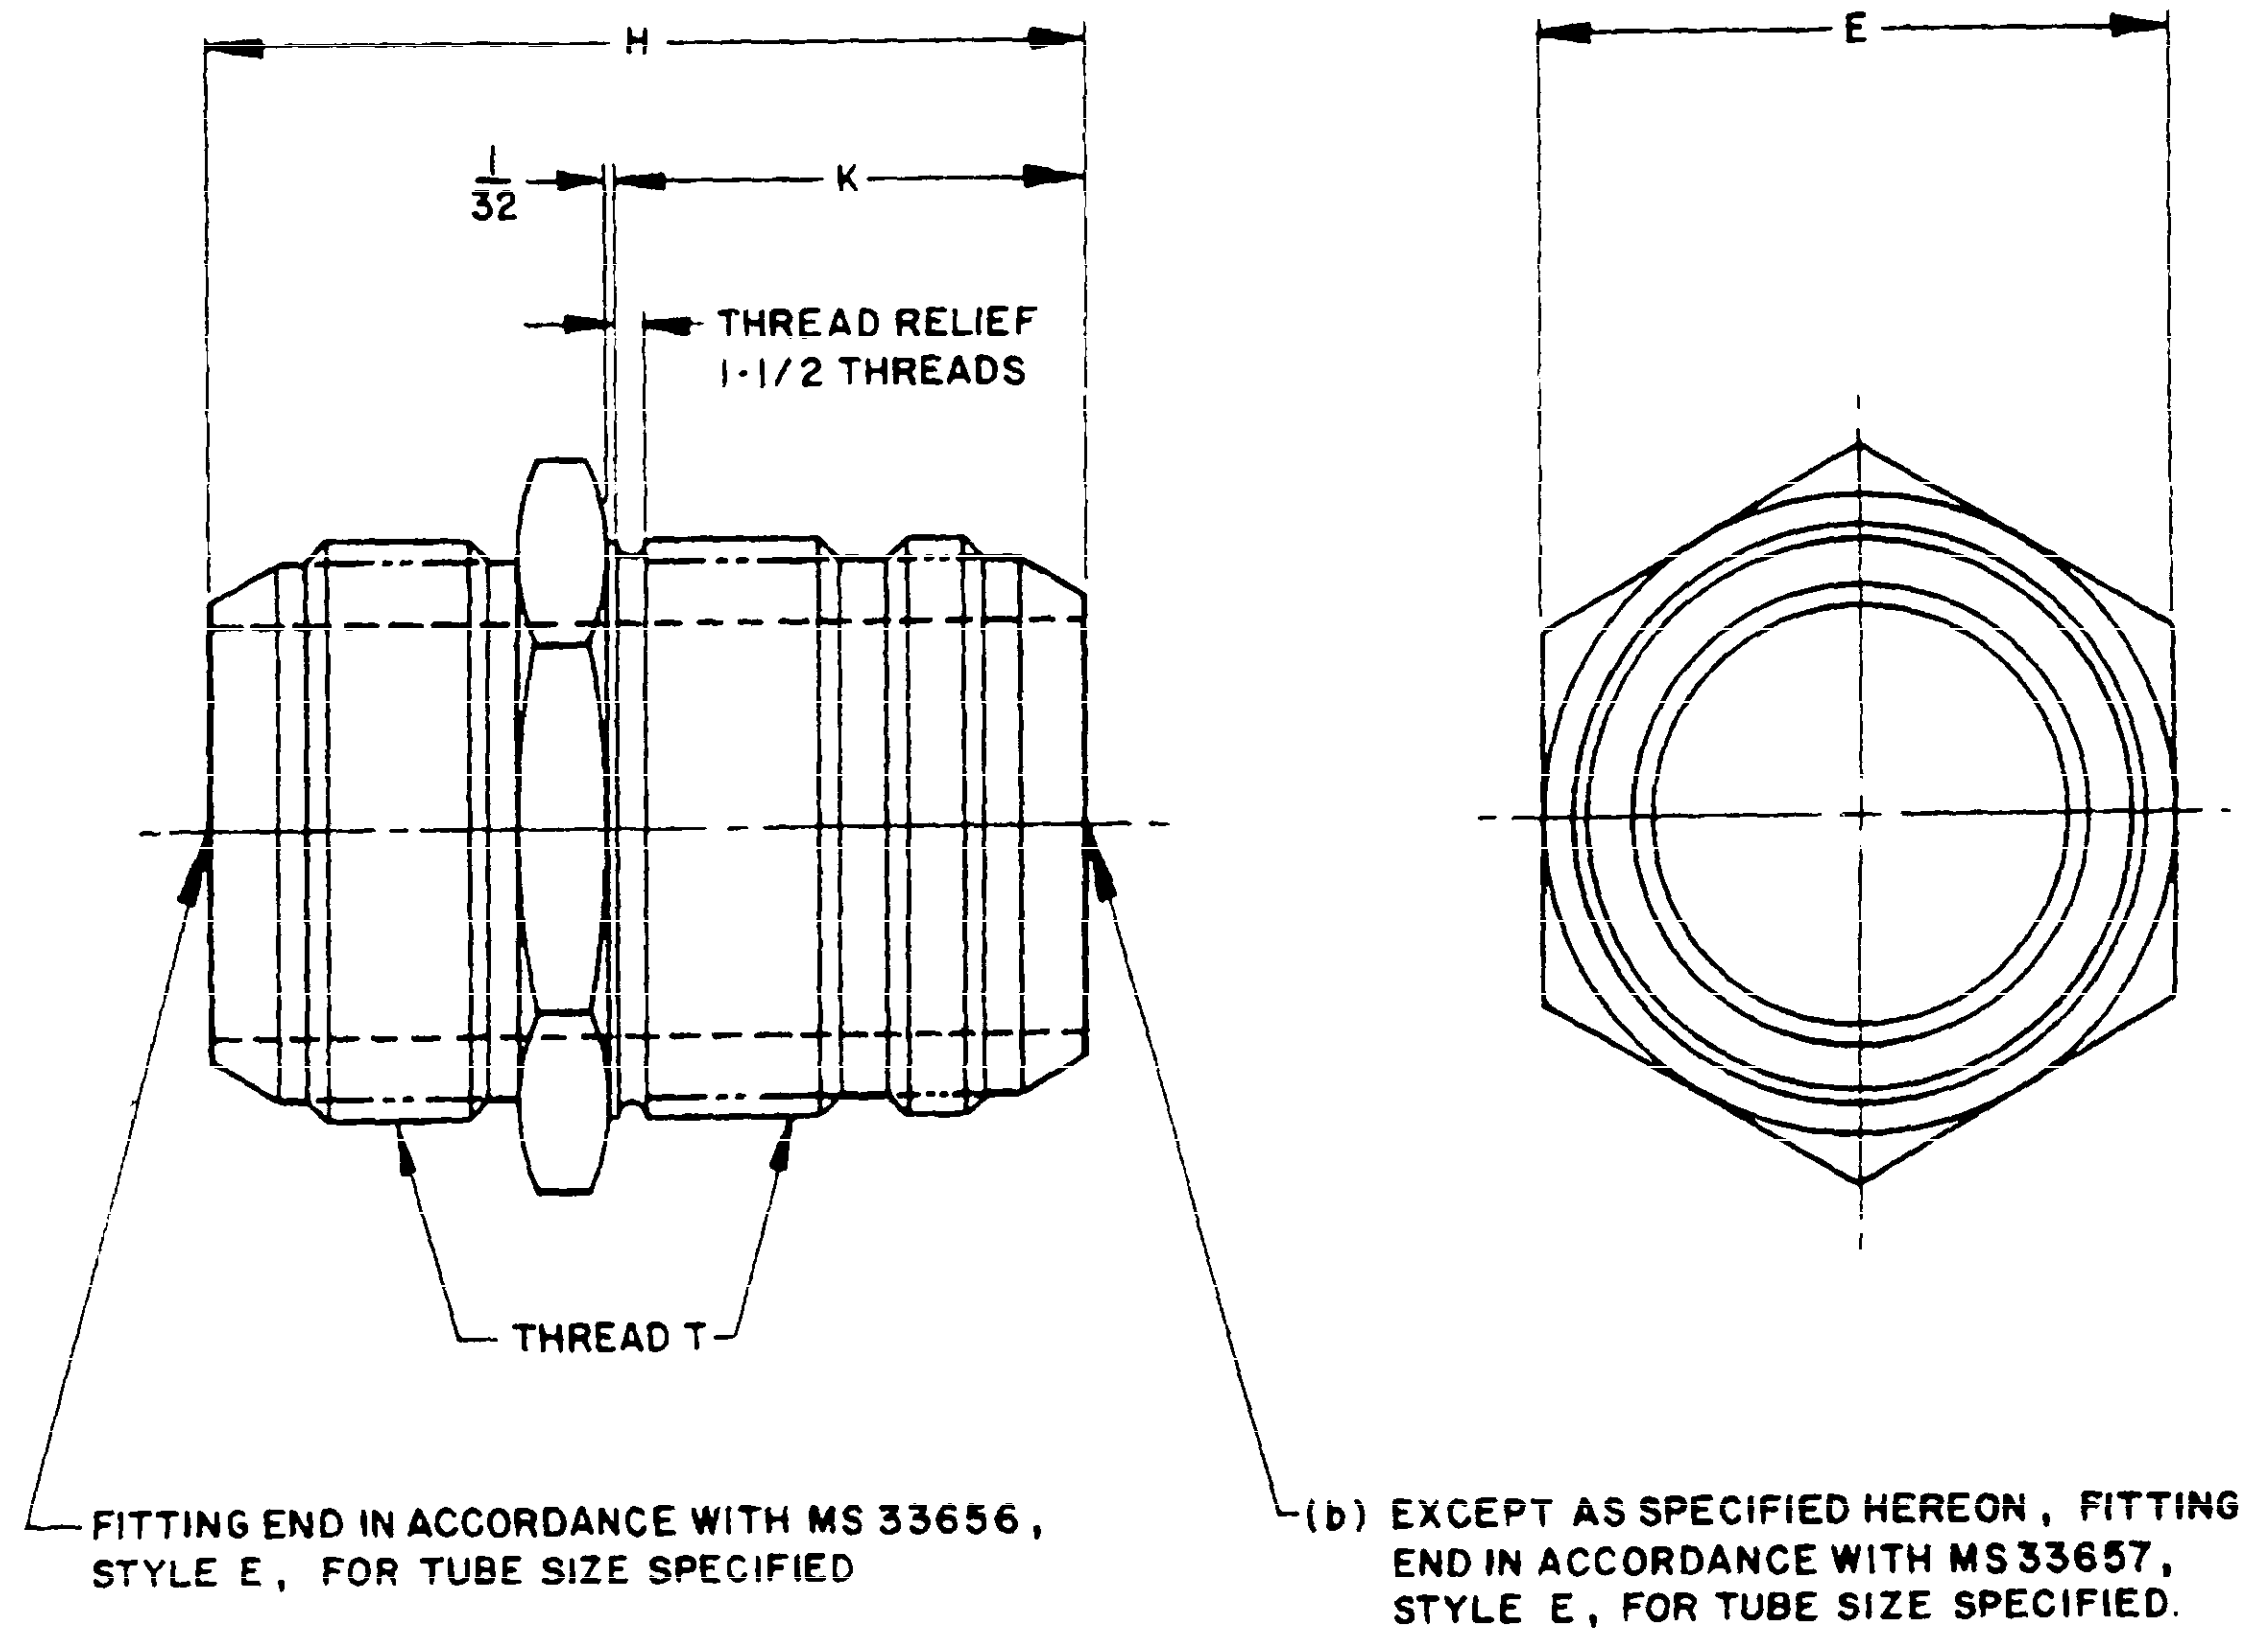
H
1/32
K
THREAD RELIEF
1-1/2 THREADS
E
THREAD T
FITTING END IN ACCORDANCE WITH MS 33656, STYLE E, FOR TUBE SIZE SPECIFIED
(b) EXCEPT AS SPECIFIED HEREON, FITTING END IN ACCORDANCE WITH MS33657, STYLE E, FOR TUBE SIZE SPECIFIED.

(a) FOR HEX DIMENSIONS AND TOLERANCES SEE MS33656.

(b) THE K DIMENSIONS ON THIS DRAWING ARE 3/16 GREATER THAN SPECIFIED ON MS33657. THE THREAD PORTION ADJACENT TO THE HEX, THEREFORE, IS 3/16 GREATER THAN THAT ON MS33657. THIS IS TO PERMIT USE OF THE FITTING THRU ARMOR PLATE. (SEE AND10064 FOR USAGE).

MATERIAL: STEEL - BARS, SHAPES. TITANIUM ALLOY - BARS, SHAPES OR FORGINGS.
ALUMINUM ALLOY - BARS, SHAPES OR FORGINGS.
CORROSION RESISTANT STEEL - BARS, SHAPES OR FORGINGS.
SEE PROCUREMENT SPECIFICATION.

FINISH: SEE PROCUREMENT SPECIFICATION.

NO CODE LETTER IN PART NUMBER FOR STEEL.
ADD D AFTER DASH NUMBER FOR ALUMINUM ALLOY (EXCEPT 7075-T73)
ADD J AFTER DASH NUMBER FOR CORROSION RESISTANT STEEL, TYPE 304.
ADD K AFTER DASH NUMBER FOR CORROSION RESISTANT STEEL, TYPE 316.
ADD S AFTER DASH NUMBER FOR CORROSION RESISTANT STEEL, TYPE 347.
ADD T AFTER DASH NUMBER FOR TITANIUM.
ADD W AFTER DASH NUMBER FOR 7075-T73.

EXAMPLE OF PART NUMBERS:
AN832-8 - UNION, 1/2 TUBING, STEEL.
AN832-8D - UNION, 1/2 TUBING ALUMINUM ALLOY (EXCEPT 7075-T73).
AN832-8J - UNION, 1/2 TUBING CORROSION RESISTANT STEEL, 304.
AN832-8K - UNION, 1/2 TUBING CORROSION RESISTANT STEEL, 316.
AN832-8S - UNION, 1/2 TUBING CORROSION RESISTANT STEEL, 347.
AN832-8T - UNION, 1/2 TUBING TITANIUM.
AN832-8W - UINON, 1/2 TUBING 7075-T73.

TITANIUM NOT TO BE USED IN OXYGEN SYSTEMS.
BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS THAT MIGHT BECOME DISLODGED UNDER USAGE.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64.

(8) ENTIRE STANDARD REVISED

APPROVED 9 MAY 42 REVISED (7) 16 APRIL 82 (8) 2 Aug 8

USER ACTIVITIES

REVIEWER ACTIVITIES DLA-CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P. A. AIR FORCE - 82 Other Cust ARMY - AV NAVY - AS AIR FORCE-99	INTERNATIONAL INTEREST	AIR FORCE-NAVY AERONAUTICAL STANDARD UNION - FLARED TUBE, 3/8 BULKHEAD AND UNIVERSAL	AN832
PROCUREMENT SPECIFICATION MIL-F-5509	SUPERSEDES:		SHEET 1 OF 2

DD FORM 672-1 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:16Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

DASH NO.	TUBING OD	THREAD T (REF)	(a) E REF	H	K
AN832-2	1/8	5/16-24UNJF-3A	.563	1-53/64	1- 7/64
AN832-3	3/16	3/8 -24UNJF-3A	.625	1-55/64	
AN832-4	1/4	7/16-20UNJF-3A	.688	2- 3/64	1-13/64
AN832-5	5/16	1/2 -20UNJF-3A	.750		
AN832-6	3/8	9/16-18UNJF-3A	.813	2- 7/32	1- 9/32
AN832-8	1/2	3/4 -16UNJF-3A	1.000	2-29/64	1- 7/16
AN832-10	5/8	7/8 -14UNJF-3A	1.125	2-23/32	1-37/64
AN832-12	3/4	1-1/16-12UNJ -3A	1.375	3- 1/32	1- 3/4
AN832-16	1	1-5/16-12UNJ -3A	1.625	3- 5/64	
AN832-20	1-1/4	1-5/8 -12UNJ -3A	1.875	3- 5/32	1-51/64
AN832-24	1-1/2	1-7/8 -12UNJ -3A	2.125	3- 5/16	1-13/16
AN832-28	1-3/4	2-1/4 -12UNJ -3A	2.500	3-37/64	1-31/32
AN832-32	2	2-1/2 -12UNJ -3A	2.750	3-53/64	2- 3/32

USER ACTIVITIES

REVIEWER ACTIVITIES DLA-CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

APPROVED 9 MAY 42 REVISED (8) FOR CHANGES SEE PAGES 1 & 2

(8) ENTIRE STANDARD REVISED

P. A. AIR FORCE-82 Other Cust ARMY - AV NAVY - AS AIR FORCE-99	INTERNATIONAL INTEREST	AIR FORCE-NAVY AERONAUTICAL STANDARD UNION - FLARED TUBE, 3/8 BULKHEAD AND UNIVERSAL	AN832
PROCUREMENT SPECIFICATION MIL-F-5509	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-26T14:16Z
Check the source to verify that this is the current version before use.