INCH-POUND

AN848 Rev 13
w/AMENDMENT 1
20 February 2020
SUPERSEDING
AN848 Rev 13
10 March 2015


DETAIL SPECIFICATION SHEET

ELBOW, HOSE, 90 DEGREE

Reinstated after 7 June 2011. Inactive for new design.
For new design, use SAE-AS5188.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and SAE-AS4843.

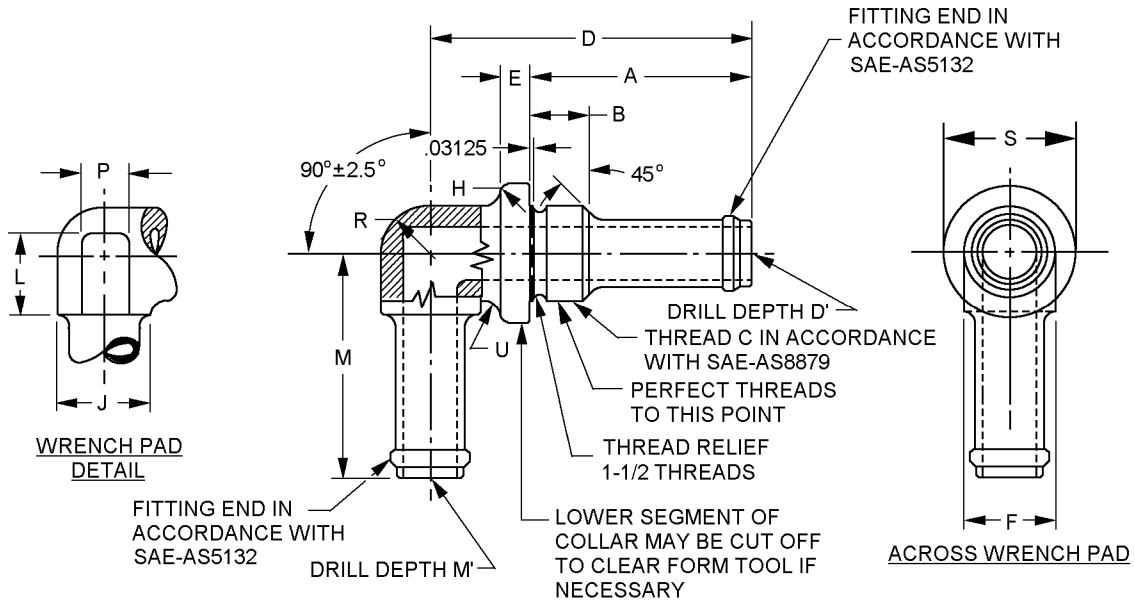


| Inch | mm |
|---|---|
| .01325 | 0.337 |

See notes at end of figure.

FIGURE 1. 90° elbow dimensions and configuration.

AMSC N/A

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.

| Dash number | Hose ID inches (mm) | A inches (mm) | B inches (mm) | Thread C Ref SAE-AS8879 | D +.047 (1.19) -.000 inches (mm) |
|---|---|---|---|---|---|
| -4 | .250 (6.35) | 1.938 (49.23) | .438 (11.13) | .4375-20UNJF-3A | 2.063 (52.40) |
| -6 | .375 (9.53) | 1.969 (50.01) | .469 (11.91) | .5625-18UNJF-3A | 2.625 (66.68) |
| -8 | .500 (12.70) | 2.000 (50.80) | .500 (12.70) | .7500-16UNJF-3A | 2.781 (70.64) |
| -10 | .675 (17.15) | 2.031 (51.59) | .531 (13.49) | 1.875 -12UNJ-3A | 2.969 (75.41) |
| -12 | .750 (19.05) | 2.063 (52.40) | .563 (14.30) | 1.0625 -12UNJ-3A | 3.094 (78.59) |
| -16 | 1.000 (25.40) | 2.063 (52.40) | .563 (14.30) | 1.3125-12UNJ-3A | 3.219 (81.76) |
| -20 | 1.250 (31.75) | 2.063 (52.40) | .563 (14.30) | 1.6250-12UNJ-3A | 3.531 (89.69) |
| -24 | 1.500 (38.10) | 2.063 (52.40) | .563 (14.30) | 1.8750-12UNJ-3A | 3.656 (92.86) |

| Dash number | D' +.047 (1.19) -.000 inches (mm) | E inches (mm) | F inches (mm) | H Radius inches (mm) | J Diameter inches (mm) | L Approx. inches (mm) |
|---|---|---|---|---|---|---|
| -4 | 2.500 (63.50) | .156 (3.96) | .438 (11.13) | .063 (1.60) | .438 (11.13) | .313 (7.95) |
| -6 | 2.672 (67.87) | .188 (4.78) | .563 (14.30) | .063 (1.60) | .563 (14.30) | .500 (12.70) |
| -8 | 2.844 (72.24) | .219 (5.56) | .750 (19.05) | .094 (2.39) | .750 (19.05) | .625 (15.88) |
| -10 | 3.094 (78.59) | .250 (6.35) | .875 (22.23) | .094 (2.39) | .875 (22.23) | .750 (19.05) |
| -12 | 3.219 (81.76) | .250 (6.35) | 1.063 (27.00) | .094 (2.39) | 1.063 (27.00) | .938 (23.83) |
| -16 | 3.344 (84.94) | .250 (6.35) | 1.313 (33.35) | .125 (3.18) | 1.313 (33.35) | 1.000 (25.40) |
| -20 | 3.656 (92.86) | .281 (7.14) | 1.625 (41.28) | .125 (3.18) | 1.625 (41.28) | 1.125 (28.58) |
| -24 | 3.781 (96.04) | .281 (7.14) | 1.875 (47.63) | .125 (3.18) | 1.875 (47.63) | 1.500 (38.10) |

| Dash number | M +.047 (1.19) -.000 inches (mm) | M' +.047 (1.19) -.000 inches(mm) | P Approx inches(mm) | R Radius inches (mm) | S Diameter inches (mm) | U Radius inches (mm) |
|---|---|---|---|---|---|---|
| -4 | 1.781 (45.24) | 1.828 (46.43) | .250 (6.35) | .219 (5.56) | .625 (15.88) | .063 (1.60) |
| -6 | 1.875 (47.63) | 1.923 (48.84) | .313 (7.95) | .281 (7.14) | .813 (20.65) | .094 (2.39) |
| -8 | 1.969 (50.01) | 2.031 (51.59) | .438 (11.13) | .375 (9.53) | 1.000 (25.40) | .094 (2.39) |
| -10 | 2.063 (52.40) | 2.188 (55.58) | .438 (11.13) | .438 (11.13) | 1.250 (31.75) | .125 (3.18) |
| -12 | 2.156 (54.76) | 2.281 (57.94) | .500 (12.70) | .531 (13.49) | 1.438 (36.53) | .125 (3.18) |
| -16 | 2.281 (57.94) | 2.406 (61.11) | .563 (14.30) | .656 (16.66) | 1.688 (42.88) | .125 (3.18) |
| -20 | 2.500 (63.50) | 2.625 (66.68) | .563 (14.30) | .813 (20.65) | 2.063 (52.40) | .188 (4.48) |
| -24 | 2.625 (66.68) | 2.750 (69.85) | .625 (15.88) | .938 (23.83) | 2.375 (60.33) | .188 (4.48) |

| Max weight lbs (kg) | | | |
|---|---|---|---|
| Copper | Al | CRES | Ti |
| .120 (0.05) | .040 (0.02) | .120 (0.05) | .066 (0.03) |
| .180 (0.08) | .060 (0.03) | .180 (0.08) | .100 (0.05) |
| .300 (0.14) | .100 (0.05) | .300 (0.14) | .165 (0.07) |
| .390 (0.17) | .130 (0.06) | .389 (0.18) | .215 (0.10) |
| .600 (0.27) | .200 (0.09 | .599 (0.27) | .331 (0.15) |
| .870 (0.39) | .290 (0.13) | .868 (0.39) | .479 (0.22) |
| 1.500 (0.68) | .500 (0.23) | 1.497 (0.68) | .827 (0.38) |
| 2.100 (0.95) | .700 (0.32) | 2.096 (0.95) | 1.157 (0.52) |

See notes at end of figure.

FIGURE 1. 90° elbow dimensions and configuration - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified tolerances are ±.016 inch (0.41 mm).
4. Break sharp edges .and remove all hanging burrs and slivers
5. Machined surfaces shall be finished to 125µ in Ra, forged surfaces shall be 250µ inches Ra, unless otherwise specified on the figures. Surface finish shall be in accordance with ASME B46.1.
6. For design features purposes, this standard takes precedence over documents referenced herein.
7. Referenced documents shall be of the issue in effect on date of invitation for bid.

FIGURE 1. 90° elbow dimensions and configuration - Continued.

REQUIREMENTS:

Dimensions and configuration shall be in accordance with figure 1.

Materials and finishes shall be in accordance with SAE-AS4843, see table I for material code.

TABLE I. Material and finish code letters.

| Material and finish code | Material | Protective chemical finish |
|---|---|---|
| B 1/ | Copper alloy, type 377 forging in accordance with ASTM B124/B124M or half hard forging or bar in accordance with ASTM B138/B138M or bar in accordance with SAE-AMS4614. | No finish. |
| BC 1/ 3/ | Copper alloy, type 377 forging in accordance with ASTM B124/B124M or half hard forging or bar in accordance with ASTM B138/B138M or bar in accordance with SAE-AMS4614. | Cadmium in accordance with SAE-AMS-QQ-P-416, type II, class 3. |
| D 2/ | Aluminum alloy forging in accordance with SAE-AMS-QQ-A-367 alloy 2014-T6. Aluminum alloy bar in accordance with SAE-AMS-QQ-A-225/6 alloy 2024-T6, or aluminum alloy bar in accordance with SAE-AMS-QQ-A-225/6 or SAE-AMS4339 alloy 2024-T851. | Anodize in accordance with SAE-AMS2472 or MIL-A-8625, type II, class 2, dye blue, duplex seal in accordance with procurement specification. |
| DV 2/ | Aluminum alloy forging in accordance with SAE-AMS-QQ-A-367 alloy 2014-T6. Aluminum alloy bar in accordance with SAE-AMS-QQ-A-225/6 alloy 2024-T6, or aluminum alloy bar in accordance with SAE-AMS-QQ-A-225/6 or SAE-AMS4339 alloy 2024-T851. | High purity aluminum in accordance with MIL-DTL-83488, class 3, type II with maximum coating thickness of .0005 inch. Glass bead peen pressure shall be 25 psi (1.72 bar) maximum. |

See notes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.

TABLE I. Material and finish code - Continued.

| Material and finish code | Material | Protective chemical finish |
|---|---|---|
| J | Type 304 corrosion resistant steel forging or bar in accordance with SAE-AMS-QQ-S-763 or SAE-AMS5639. | Passivate in accordance with SAE-AMS2700, method 1, type 6 or 7. |
| K | Type 316 corrosion resistant steel forging or bar in accordance with SAE-AMS-QQ-S-763 or SAE-AMS5648. | Passivate in accordance with SAE-AMS2700, method 1, type 6 or 7. |
| R | Type 321 corrosion resistant steel forging or bar in accordance with SAE-AMS-QQ-S-763 or SAE-AMS5645. | Passivate in accordance with SAE-AMS2700, method 1, type 6 or 7. |
| T 3/ | Titanium in accordance with SAE-AMS4928 alloy 6Al-4V annealed or SAE-AMS4965 | Anodize in accordance with SAE-AMS2488, type 2. 4/ |
| TF 3/ | Titanium in accordance with SAE-AMS4928 alloy 6Al-4V annealed. | Fluoride phosphate in accordance with SAE-AMS2486. 4/ |
| W 2/ | Aluminum alloy forging in accordance with SAE-AMS-QQ-A-367 alloy 7075-T73 or aluminum alloy bar in accordance with SAE-AMS-QQ-A-225/9 or SAE-AMS4124, alloy 7075-T7351 or 7075-T73. | Anodize in accordance with SAE-AMS2472 or MIL-A-8625, type II, class 2, dye brown similar to color 10080 in accordance with SAE-AMS-STD-595, duplex seal in accordance with procurement specification. |
| WV 2/ | Aluminum alloy forging in accordance with SAE-AMS-QQ-A-367 alloy 7075-T73 or aluminum alloy bar in accordance with SAE-AMS-QQ-A-225/9 or SAE-AMS4124, alloy 7075-T7351 or 7075-T73. | High purity aluminum in accordance with MIL-DTL-83488, class 3, type II with maximum coating thickness of .0005 inch. Glass bead peen pressure shall be 25 psi (1.72 bar) maximum. |

1/ Material code was dash on previous revisions, changed to agree with SAE-ARP1590.
2/ Inactive for new design, for new design use aluminum alloy 7075, code W, to improve stress corrosion resistance and tensile strength.
3/ Cadmium and titanium shall not be used in potable water or oxygen systems.
4/ A pretreatment, a modification of the fluoride treatment, or a post treatment shall be applied so the final color of the fittings shall be similar to SAE-AMS-STD-595 colors 36076 through 36293.




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.

Parts for use in oxygen systems ($O_2$) shall be identified in the Part or Identifying Number (PIN) as code "A" and shall be furnished cleaned, packaged, and labeled in accordance with SAE-AS611 to a process approved by the user.

Users are cautioned that the 90° elbow should be evaluated to their cleanliness requirements before installing in any equipment. Only qualified technical personnel with knowledge for the selection of cleaning methods for oxygen rich environments should make the determination as to what cleanliness level is acceptable for their application.

PIN: The PIN consists of the prefix "AN" the specification sheet number, a dash number for hose and pipe thread size, material code and finish code letter, and oxygen code if applicable. Unassigned PIN's shall not be used.

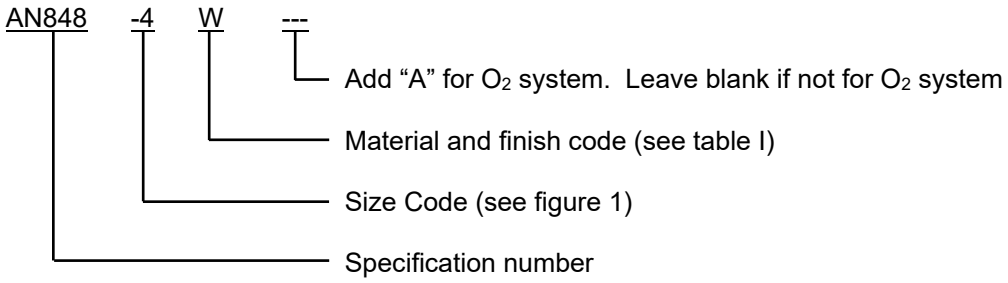


PIN examples:

AN848-8W indicates a 90° elbow hose to hose .500 inch (12.70 mm) hose to .375 inch (9.53 mm) pipe, aluminum alloy 7075-T73.

A848-8WV indicates a 90° elbow hose to hose .500 inch (12.70 mm) hose to .375 inch (9.53 mm) pipe, aluminum alloy 7075-T73 finish with high purity aluminum.

AN848-12WA indicates a 90° elbow hose to hose .750 inch (19.05 mm) hose to .750 inch (19.05 mm) pipe, aluminum alloy 7075-T73 for use in oxygen systems.

Guidance on use of alternative parts with less hazardous or non-hazardous materials. This specification provides for a number of alternative plating materials via the PIN. Users should select the PIN with the least hazardous material that meets the form, fit, and function requirements of their application.

Marking: Part shall be permanently marked with the AN PIN, and include the manufacturers CAGE, name, or trademark.

Inactive AN PIN and superseding AN PIN see table II.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.

TABLE II. Superseding AN PIN.

| Inactive AN PIN | Hose Size | Superseding AN PIN Inactive part |
|---|---|---|
| AN848-4 | 0.250 | AN848-4B |
| AN848-4 | 0.250 | AN848-4BC |
| AN848-4D | 0.250 | AN848-4W |
| AN848-4DV | 0.250 | AN848-4WV |
| AN848-6 | 0.375 | AN848-6B |
| AN848-6 | 0.375 | AN848-6BC |
| AN848-6D | 0.375 | AN848-6W |
| AN848-6DV | 0.375 | AN848-6WV |
| AN848-8 | 0.500 | AN848-8B |
| AN848-8 | 0.500 | AN848-8BC |
| AN848-8D | 0.500 | AN848-8W |
| AN848-8DV | 0.500 | AN848-8WV |
| AN848-10 | 0.625 | AN848-10B |
| AN848-10 | 0.625 | AN848-10BC |
| AN848-10D | 0.625 | AN848-10W |
| AN848-10DV | 0.625 | AN848-10WV |
| AN848-12 | 0.750 | AN848-12B |
| AN848-12 | 0.750 | AN848-12BC |
| AN848-12D | 0.750 | AN848-12W |
| AN848-12DV | 0.750 | AN848-12WV |
| AN848-16 | 1.000 | AN848-16B |
| AN848-16 | 1.000 | AN848-16BC |
| AN848-16D | 1.000 | AN848-16W |
| AN848-16DV | 1.000 | AN848-16WV |
| AN848-20 | 1.250 | AN848-20B |
| AN848-20 | 1.250 | AN848-20BC |
| AN848-20 | 1.250 | AN848-20W |
| AN848-20 | 1.250 | AN848-20WV |
| AN848-24 | 1.500 | AN848-24B |
| AN848-24 | 1.500 | AN848-24BC |
| AN848-24D | 1.500 | AN848-24W |
| AN848-24DV | 1.500 | AN848-24WV |

Table III provides a detailed cross-reference of AN848 PINs and replacement SAE-AS5188 PINs. Users are cautioned to evaluate replacements for their particular application.

Cross reference data: SAE-AS5188 replacement numbers may be substituted for AN848 PINs, see table III. AN848-4 parts are .375 inch (9.53 mm) shorter than the SAE replacement and may not be substituted for SAE-AS5188*04 parts.

CAUTION: The superseding information is valid as of the date of this specification and may be superseded by subsequent revisions of the superseding document.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.

TABLE III. Cross-reference data. 1/

| AN PIN Inactive part | Hose Size | AS PIN Active part | New design |
|---|---|---|---|
| AN848-4 | 0.250 | AS5188B04 2/ | |
| AN848-4BC | 0.250 | AS5188B04 2/ | |
| AN848-4D | 0.250 | AS5188W04 | AS5188W04 |
| AN848-4DV | 0.250 | None | |
| AN848-4J | 0.250 | AS5188J04 | |
| AN848-4K | 0.250 | AS5188K04 | |
| AN848-4R | 0.250 | AS5188R04 | |
| AN848-4S | 0.250 | AS5188R04 | AS5188R04 |
| AN848-4T | 0.250 | None | |
| AN848-4TF | 0.250 | None | |
| AN848-4W | 0.250 | AS5188W04 | |
| AN848-4WV | 0.250 | None | |
| | | | |
| AN848-6 | 0.375 | AS5188B06 2/ | |
| AN848-6BC | 0.375 | AS5188B06 2/ | |
| AN848-6D | 0.375 | AS5188W06 | AS5188W06 |
| AN848-6DV | 0.375 | None | |
| AN848-6J | 0.375 | AS5188J06 | |
| AN848-6K | 0.375 | AS5188K06 | |
| AN848-6R | 0.375 | AS5188R06 | |
| AN848-6S | 0.375 | AS5188R06 | AS5188R06 |
| AN848-6T | 0.375 | None | |
| AN848-6TF | 0.375 | None | |
| AN848-6W | 0.375 | AS5188W06 | |
| AN848-6WV | 0.375 | None | |
| | | | |
| AN848-8 | 0.500 | AS5188B08 2/ | |
| AN848-8BC | 0.500 | AS5188B08 2/ | |
| AN848-8D | 0.500 | AS5188W08 | AS5188W08 |
| AN848-8DV | 0.500 | None | |
| AN848-8J | 0.500 | AS5188J08 | |
| AN848-8K | 0.500 | AS5188K08 | |
| AN848-8R | 0.500 | AS5188R08 | |
| AN848-8S | 0.500 | AS5188R08 | AS5188R08 |
| AN848-8T | 0.500 | None | |
| AN848-8TF | 0.500 | None | |
| AN848-8W | 0.500 | AS5188W08 | |
| AN848-8W | 0.500 | None | |

See notes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.

TABLE III. Cross-reference data - Continued. 1/

| AN PIN Inactive part | Hose Size | AS PIN Active part | New design |
|---|---|---|---|
| AN848-10 | 0.625 | AS5188B10 2/ | |
| AN848-10BC | 0.625 | AS5188B10 2/ | |
| AN848-10D | 0.625 | AS5188W10 | AS5188W10 |
| AN848-10DV | 0.625 | None | |
| AN848-10J | 0.625 | AS5188J10 | |
| AN848-10K | 0.625 | AS5188K10 | |
| AN848-10R | 0.625 | AS5188R10 | |
| AN848-10S | 0.625 | AS5188R10 | AS5188R10 |
| AN848-10T | 0.625 | None | |
| AN848-10TF | 0.625 | None | |
| AN848-10W | 0.625 | AS5188W10 | |
| AN848-10WV | 0.625 | None | |
| | | | |
| AN848-12 | 0.750 | AS5188B12 2/ | |
| AN848-12BC | 0.750 | AS5188B12 2/ | |
| AN848-12D | 0.750 | AS5188W12 | AS5188W12 |
| AN848-12DV | 0.750 | None | |
| AN848-12J | 0.750 | AS5188J12 | |
| AN848-12K | 0.750 | AS5188K12 | |
| AN848-12R | 0.750 | AS5188R12 | |
| AN848-12S | 0.750 | AS5188R12 | AS5188R12 |
| AN848-12T | 0.750 | None | |
| AN848-12TF | 0.750 | None | |
| AN848-12W | 0.750 | AS5188W12 | |
| AN848-12WV | 0.750 | None | |
| | | | |
| AN848-16 | 1.000 | AN5188B16 2/ | |
| AN848-16BC | 1.000 | AN5188B16 2/ | |
| AN848-16D | 1.000 | AS5188W16 | AS5188W16 |
| AN848-16DV | 1.000 | None | |
| AN848-16J | 1.000 | AS5188J16 | |
| AN848-16K | 1.000 | AS5188K16 | |
| AN848-16R | 1.000 | AS5188R16 | |
| AN848-16S | 1.000 | AS5188R16 | AS5188R16 |
| AN848-16T | 1.000 | None | |
| AN848-16TF | 1.000 | None | |
| AN848-16W | 1.000 | AS5188W16 | |
| AN848-16WV | 1.000 | None | |

See notes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.

TABLE III. Cross-reference data - Continued. 1/

| AN PIN Inactive part | Hose Size | AS PIN Active part | New design |
|---|---|---|---|
| AN848-20 | 1.250 | AS5188B20 2/ | |
| AN848-20BC | 1.250 | AS5188B20 2/ | |
| AN848-20D | 1.250 | AS5188W20 | AS5188W20 |
| AN848-20DV | 1.250 | None | |
| AN848-20J | 1.250 | AS5188J20 | |
| AN848-20K | 1.250 | AS5188K20 | |
| AN848-20R | 1.250 | AS5188R20 | |
| AN848-20S | 1.250 | AS5188R20 | AS5188R20 |
| AN848-20T | 1.250 | None | |
| AN848-20TF | 1.250 | None | |
| AN848-20W | 1.250 | AS5188W20 | |
| AN848-20WV | 1.250 | None | |
| | | | |
| AN848-24 | 1.500 | AS5188B24 2/ | |
| AN848-24BC | 1.500 | AS5188B24 2/ | |
| AN848-24D | 1.500 | AS5188W24 | AS5188W24 |
| AN848-24D | 1.500 | None | |
| AN848-24J | 1.500 | AS5188J24 | |
| AN848-24K | 1.500 | AS5188K24 | |
| AN848-24R | 1.500 | AS5188R24 | |
| AN848-24S | 1.500 | AS5188R24 | AS5188R24 |
| AN848-24T | 1.500 | None | |
| AN848-24TF | 1.500 | None | |
| AN848-24W | 1.500 | AS5188W24 | |
| AN848-24WV | 1.500 | None | |

1/ For new design use material designators R or W.

2/ SAE “B” designator for copper alloy parts can be either no finish or cadmium plate.

Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Referenced documents shall be of the issue in effect on date of invitations for bid.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to SAE-AS4843, this document references the following:

| | | |
|---|---|---|
| MIL-A-8625 | SAE-AMS-STD-595/36176 | SAE-AMS2700 |
| MIL-DTL-83488 | SAE-AMS-STD-595/36231 | SAE-AMS4124 |
| ASME B46.1 | SAE-AMS-STD-595/36251 | SAE-AMS4339 |
| ASTM B124/B124M | SAE-AMS-STD-595/36270 | SAE-AMS4614 |
| ASTM B138/B138M | SAE-AMS-STD-595/36280 | SAE-AMS4928 |
| SAE-AMS-STD-595/10080 | SAE-AMS-STD-595/36293 | SAE-AMS4965 |
| SAE-AMS-STD-595/36076 | SAE-AMS-QQ-A-225/6 | SAE-AMS5639 |
| SAE-AMS-STD-595/36081 | SAE-AMS-QQ-A-225/9 | SAE-AMS5645 |
| SAE-AMS-STD-595/36099 | SAE-AMS-QQ-A-367 | SAE-AMS5648 |
| SAE-AMS-STD-595/36118 | SAE-AMS-QQ-P-416 | SAE-ARP1590 |
| SAE-AMS-STD-595/36134 | SAE-AMS-QQ-S-763 | SAE-AS611 |
| SAE-AMS-STD-595/36152 | SAE-AMS2472 | SAE-AS5132 |
| SAE-AMS-STD-595/36170 | SAE-AMS2486 | SAE-AS5188 |
| SAE-AMS-STD-595/36173 | SAE-AMS2488 | SAE-AS8879 |

CONCLUDING MATERIAL

Custodians:
Army - AV
Navy - AS
Air Force - 71
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2020-025)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.